


HK

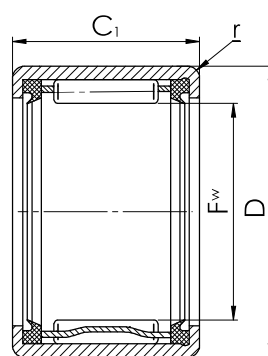

HK-2RS

ISO	Dimensions (mm)				Basic Load Ratings (N)		Limiting speed (r/min)	Weight (kg)
	d	Fw	D	C	Dyn. C	Stat. Cg		
NA6916	80	90	110	54	109600	238400	3520	1,530
NA6917	85	100	120	63	135200	320000	3200	2,250
NA6918	90	105	125	63	140000	340000	3040	2,440
NA6919	95	110	130	63	141600	352000	2880	2,630
NA6901 2RS	12	16	23	24	12720	16640	9600	0,0455
NA6902 2RS	15	20	24	28	15040	22080	7600	0,0625
NA6903 2RS	17	22	24	30	16160	24960	6800	0,0685
NA6904 2RS	20	25	31	37	26960	36320	6000	0,137
NA69/22 2RS	22	28	31	39	27600	42400	5600	0,153
NA6905 2RS	25	30	31	42	32000	47840	5200	0,162
NA69/28 2RS	28	32	31	45	31760	48240	4800	0,177
NA6906 2RS	30	35	31	47	32720	51440	4400	0,185
NA69/32 2RS	32	40	37	52	41040	72080	4000	0,300
NA6907 2RS	35	42	37	55	42080	75520	3600	0,320
NA6908 2RS	40	48	41	62	52000	95200	3200	0,440
NA6909 2RS	45	52	41	68	54400	103200	2800	0,520
NA6910 2RS	50	58	41	72	57760	116000	2800	0,530
NA6911 2RS	55	63	46	80	72960	140000	2400	0,730
NA6912 2RS	60	68	46	85	76240	151200	2400	0,785
NA6913 2RS	65	72	46	90	79520	163200	2000	0,845
NA6914 2RS	70	80	55	100	100800	229600	2000	1,400
NA6915 2RS	75	85	55	105	104000	244000	1600	1,480
NA6916 2RS	80	90	55	110	108000	258400	1600	1,570
NA6917 2RS	85	100	64	120	136800	364800	1520	2,360
NA6918 2RS	90	105	64	125	140800	384000	1440	2,480
NA6919 2RS	95	110	64	130	144000	402400	1360	2,600

ISO	Dimensions (mm)			Basic Load Ratings (N)		Limiting speed (r/min)	Weight (kg)
	Fw	D	C	Dyn. C	Stat. Cg		
HK0306	3	6,5	6	984	672	36800	0,0010
HK0408	4	8	8	1424	1048	32800	0,0020
HK0509	5	9	9	1920	1592	30400	0,0020
HK0608	6	10	8	1624	1320	28000	0,0021
HK0609	6	10	9	2280	2080	28000	0,0025
HK0709	7	11	9	2480	2360	24800	0,0026
HK0808	8	12	8	2200	2080	22400	0,0027
HK0810	8	12	10	3040	3160	22400	0,0030
HK0908	9	13	8	2840	3000	20000	0,0030
HK0910	9	13	10	3400	3720	20000	0,0040
HK0912	9	13	12	4240	5040	20000	0,0046
HK1010	10	14	10	3520	4080	18400	0,0041
HK1012	10	14	12	4400	5440	18400	0,0048

ISO	Dimensions (mm)			Basic Load Ratings (N)		Limiting speed (r/min)	Weight (kg)
	Fw	D	C	Dyn. C	Stat. Cg		
HK1015	10	14	15	5440	7040	18400	0,0060
HK1210	12	16	10	3960	4960	16000	0,0046
HK1212	12	18	12	5200	5840	15200	0,0090
HK1312	13	19	12	5440	6320	14400	0,0100
HK1412	14	20	12	5680	6800	12800	0,0105
HK1512	15	21	12	6320	7520	12800	0,0110
HK1516	15	21	16	8400	11520	12800	0,0150
HK1612	16	22	12	6080	7760	12000	0,0120
HK1616	16	22	16	8720	12240	12000	0,0160
HK1712	17	23	12	6320	8240	11200	0,0120
HK1812	18	24	12	6480	8720	10400	0,0130
HK1816	18	24	16	9280	13840	10400	0,0180
HK2010	20	26	10	5120	6560	9600	0,0120
HK2012	20	26	12	6880	9680	9600	0,0140
HK2016	20	26	16	10160	16080	9600	0,0190
HK2020	20	26	20	12560	20800	9600	0,0240
HK2210	22	28	10	6000	8400	8800	0,0130
HK2212	22	28	12	7280	10720	8800	0,0150
HK2216	22	28	16	10720	17680	8800	0,0210
HK2220	22	28	20	13200	23200	8800	0,0260
HK2512	25	32	12	8800	12160	8000	0,0200
HK2516	25	32	16	12480	19200	8000	0,0270
HK2520	25	32	20	15920	26400	8000	0,0330
HK2526	25	32	26	20400	36000	8000	0,0440
HK2816	28	35	16	13120	21200	7200	0,0290
HK2820	28	35	20	16720	28800	7200	0,0360
HK3012	30	37	12	9680	14560	6800	0,0230
HK3016	30	37	16	13760	23200	6800	0,0310
HK3020	30	37	20	17600	31600	6800	0,0390
HK3026	30	37	26	22400	43200	6800	0,0510
HK3512	35	42	12	10480	17040	6000	0,0270
HK3516	35	42	16	14960	26800	6000	0,0360
HK3520	35	42	20	19040	36800	6000	0,0440
HK0812 2RS	8	12	12	2200	2080	16000	0,0033
HK1014 2RS	10	14	14	3520	4080	13600	0,0046
HK1216 2RS	12	18	16	5200	5840	11200	0,0110
HK1416 2RS	14	20	16	5680	6800	9600	0,0130
HK1516 2RS	15	21	16	6240	7840	8800	0,0150
HK1520 2RS	15	21	20	8400	11520	8800	0,0180
HK1616 2RS	16	22	16	6080	7760	8800	0,0140
HK1620 2RS	16	22	20	8720	12240	8800	0,0180
HK1816 2RS	18	24	16	6480	8720	7600	0,0150
HK2016 2RS	20	26	16	6880	9680	6800	0,0180
HK2020 2RS	20	26	20	10160	16080	6800	0,0230
HK2216 2RS	22	28	16	7280	10720	6400	0,0180
HK2220 2RS	22	28	20	10120	17680	6400	0,0260
HK2516 2RS	25	32	16	8800	12160	5600	0,0270
HK2520 2RS	25	32	20	12480	19200	5600	0,0310
HK2524 2RS	25	32	24	15920	26400	5600	0,0400
HK2530 2RS	25	32	30	20400	36000	5600	0,0470
HK2820 2RS	28	35	20	13120	21200	4800	0,0340
HK3016 2RS	30	37	16	9680	14560	4800	0,0310
HK3020 2RS	30	37	20	13760	23200	4800	0,0360
HK3024 2RS	30	37	24	17600	31600	4800	0,0440
HK3516 2RS	35	42	16	10480	17040	4000	0,0320
HK3520 2RS	35	42	20	14960	26800	4000	0,0410
HK4016 2RS	40	47	16	11200	19440	3600	0,0370
HK4020 2RS	40	47	20	16000	30800	3600	0,0480
HK4520 2RS	45	52	20	17040	34400	3600	0,0540
HK5024 2RS	50	58	24	24800	50400	2880	0,0810