



DISC HARROW BEARINGS FIRST GENERATION HEXAGONAL BORE

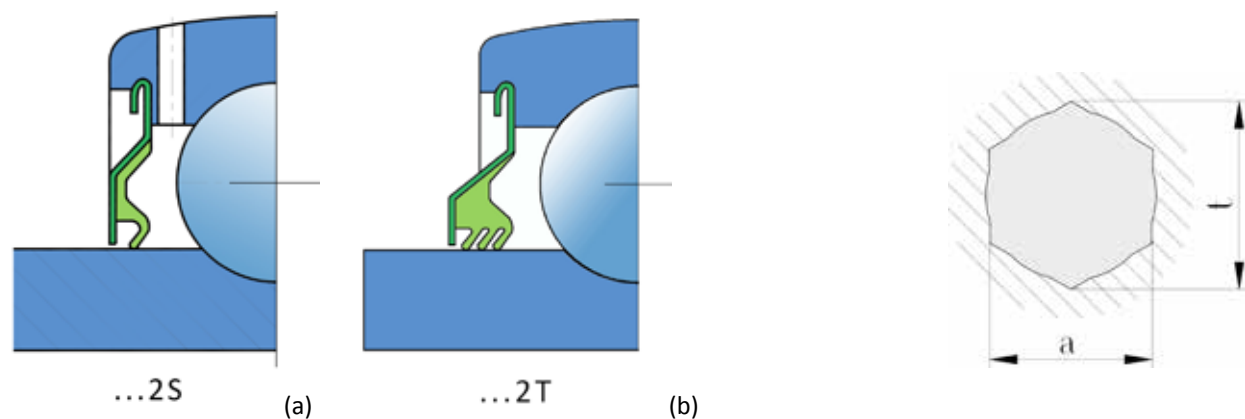

Dimesions (mm)													
Shaft	a		t min.		D		B		C		d ₁		E
inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
7/8	0,876	22,25	1,010	25,65	2,0472	52	1	25,4	0,591	15	1,323	33,6	
1	1,001	25,43	1,152	29,26	2,4409	62	0,945	24	0,630	16	1,563	39,7	
1 1/4	1,251	31,77	1,443	36,35	2,8346	72	1,484	37,7	0,669	17	1,815	46,1	
1 1/4	1,251	31,77	1,443	36,35			0,984	25					
1 1/8	1,126	28,6	1,298	32,97			1,484	37,7					
1 1/8	1,126	28,6	1,298	32,97			0,984	25					
1 1/4	1,251	31,77	1,443	36,35			0,984	25					
1 1/4	1,251	31,77	1,443	36,35			0,984	25					
1 1/4	1,251	31,77	1,443	36,65	3,1496	80	1,438	36,53	0,709	18	2,047	52	
1 1/2	1,501	38,12	1,730	43,94	3,3456	85	1,181	30	0,748	19	2,228	56,6	
1	1,001	25,43	1,152	29,26	2,4409	62	0,945	24	0,709	18	1,563	39,7	0,201 5,1
1 1/8	1,126	28,60	1,298	32,97	2,8346	72	1,484	37,7	0,748	19	1,815	46,1	0,220 5,6
1 1/4	1,251	31,77	1,443	36,65	3,1496	80	1,438	36,53	0,827	21	2,047	52	0,236 6
1 1/4	1,255	31,88	1,447	36,75									

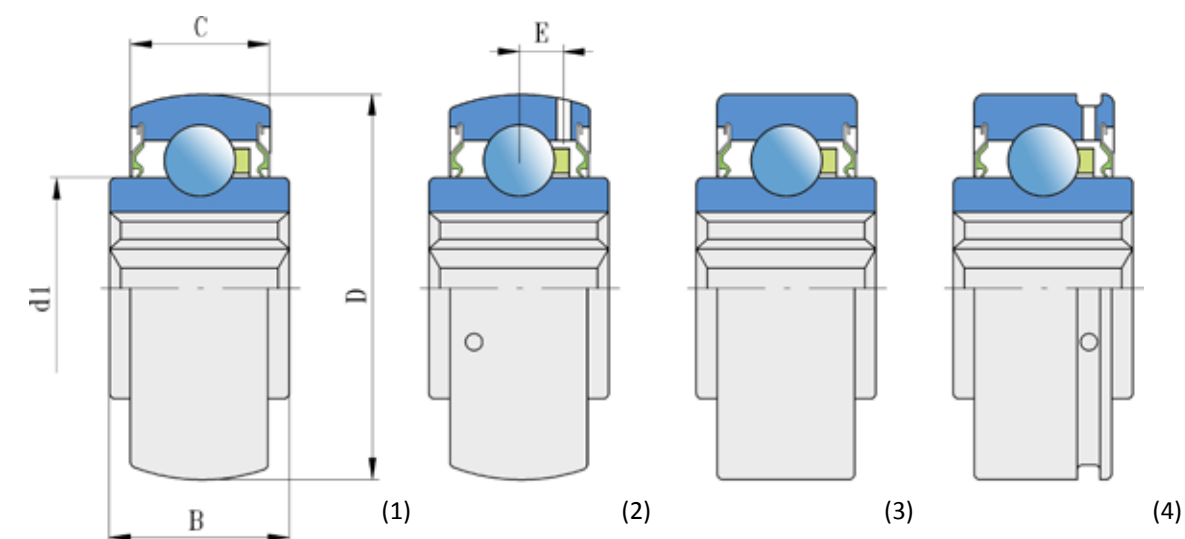

Load ratings						NON RELUBRICATABLE TYPE			
C		C ₀		Mass		Designation			
lbs.	kN	lbs.	kN	lbs.	kg	Seal Fig.a	Type	Seal Fig.b	Type
3100	14,0	1700	7,8	0,44	0,20	205KRR2	3		
				0,44	0,20	205KRRB2	1		
				0,44	0,20			205PPB13	
4400	19,5	2500	11,3	0,76	0,35			206KPP3	3
				0,76	0,35			206KPPB3	1
				0,75	0,34	206KRR6	3		
				0,75	0,34	206KRRB6	1		
5700	25,5	3400	15,3	1,00	0,45	207KPP3	3		
				0,87	0,40	207KPPB3	1		
				1,00	0,45	207KRRB9	1		
				0,87	0,40	207KRRB12	1		
				0,87	0,40	207KRR17	3		
				0,87	0,40	207KRRB17	1		
7300	32,5	4400	19,8	1,45	0,66			W208PPB16	1
				1,45	0,66	W208KRR8	3		
7300	32,5	4600	20,4	1,27	0,58	209KRRB2	1		
RELUBRICATABLE TYPE									
4400	19,5	2500	11,3	0,62	0,28			G206KPP4	4
				0,61	0,28			G206KPPB4	2
				0,59	0,27	G206KRRB6	2		
5700	25,5	3400	15,3	1,00	0,45			G207KPPB2	2
7300	32,5	4400	19,8	1,40	0,64	GW208KRRB5	2		
				1,50	0,68			GW208PPB22	2