


CAST-IRON FOUR-BOLT FLANGED UNITS

UCF INDUSTRIAL SERIES

- UCF four-bolt flanged units are suggested for industrial applications where normal loads are encountered.
- Each unit comes assembled and ready for mounting, using bolts through the flange.
- These units use wide inner ring ball bearings with self-aligning spherical outside diameters that compensate for shaft misalignment.
- Bolt-hole spacing dimensions and shaft center location are interchangeable with competitive units.
- Timken UCF-series set screw flanged units feature the Timken UC bearing insert.
- Bearing prelubricated and ready for immediate installation.
- Grease fitting supplied for relubrication.
- The bonded seal design is well-suited for applications involving wet or dirty environments.
- Housing designed for ease of bearing replacement.

Shaft Dia. d		Four-Bolt Flange Designation	Bearing Designation	Basic Load Ratings		Dimensions									Bolt Size	Weight
				Dynamic	Static											
				C _r	C _{0r}	L	J	A1	A	A0	S	B	A2	N		
mm	in.			kN lbs.	kN lbs.	mm in.	mm in.	mm in.	mm in.	mm in.	mm in.	mm in.	mm in.	mm in.	mm in.	kg lbs.
12		UCF201	UC201	12.8 2878	6.65 1495	86 3 3⁄8	64 2 33⁄64	11 7⁄16	25.5 1	33.3 1 5⁄16	12.7 0.500	31 1.220	15 19⁄32	12 15⁄32	M10 3⁄8	0.6 1.4
	1⁄2	UCF201-8	UC201-8													
15		UCF202	UC202													
	5⁄8	UCF202-10	UC202-10													
17		UCF203	UC203													
	3⁄4	UCF-204-12	UC204-12													
20		UCF-204	UC204	14.0 3147	7.85 1765	95 3 3⁄4	70 2 3⁄4	13 1⁄2	27 1 1⁄16	35.8 1 13⁄32	14.3 0.563	34.1 1.343	16 5⁄8	12 15⁄32	M10 3⁄8	0.8 1.8
	7⁄8	UCF205-14	UC205-14													
	15⁄16	UCF205-15	UC205-15													
25		UCF205	UC205													
	1	UCF205-16	UC205-16													
	1 1⁄8	UCF206-18	UC206-18													
30		UCF206	UC206	19.5 4384	11.3 2540	108 4 1⁄4	83 3 17⁄64	13 1⁄2	31 1 7⁄32	40.2 1 19⁄32	15.9 0.626	38.1 1.500	18 45⁄64	12 15⁄32	M10 3⁄8	1.2 2.6
	1 3⁄16	UCF206-19	UC206-19													
	1 1⁄4	UCF206-20	UC206-20													
	1 1⁄4	UCF207-20	UC207-20													
	1 5⁄16	UCF207-21	UC207-21													
	1 3⁄8	UCF207-22	UC207-22													
35		UCF207	UC207	25.7 5778	15.4 3462	117 4 19⁄32	92 3 5⁄8	15 19⁄32	34 1 11⁄32	44.4 1 3⁄4	17.5 0.689	42.9 1.689	19 3⁄4	14 35⁄64	M12 7⁄16	1.5 3.3
	1 7⁄16	UCF207-23	UC207-23													
	1 1⁄2	UCF208-24	UC208-24													
	1 9⁄16	UCF208-25	UC208-25													
40		UCF208	UC208													
	1 5⁄8	UCF209-26	UC209-26													
	1 11⁄16	UCF209-27	UC209-27	34.1 7666	21.3 4788	137 5 13⁄32	105 4 9⁄64	16 5⁄8	38 1 1⁄2	52.2 2 1⁄16	19 0.748	49.2 1.937	22 55⁄64	16 5⁄8	M14 1⁄2	2.2 4.9
	1 3⁄4	UCF209-28	UC209-28													
45		UCF209	UC209													

Continued on next page.

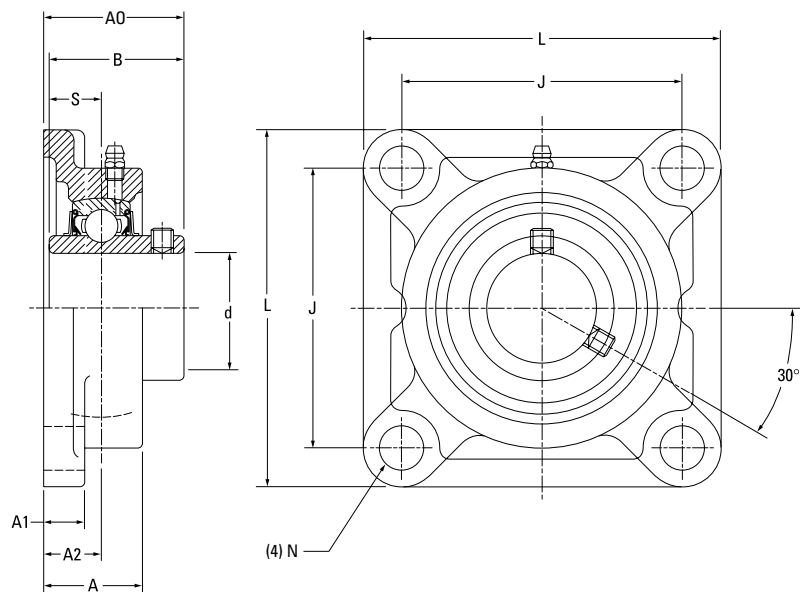

Continued from previous page.

Shaft Dia. d		Four-Bolt Flange Designation	Bearing Designation	Basic Load Ratings		Dimensions									Bolt Size	Weight
				Dynamic C _r	Static C _{0r}	L	J	A1	A	A0	S	B	A2	N		
mm	in.			kN lbs.	kN lbs.	mm in.	mm in.	mm in.	mm in.	mm in.	mm in.	mm in.	mm in.	mm in.	mm in.	kg lbs.
50	1 7/8	UCF210-30	UC210-30	35.1 7891	23.3 5238	143 5 5/8	111 4 3/8	16 5/8	40 1 9/16	54.6 2 5/32	19 0.748	51.6 2.031	22 55/64	16 5/8	M14 1/2	2.5 5.5
	1 15/16	UCF210-31	UC210-31													
		UCF210	UC210													
	2	UCF210-32	UC210-32													
55	2	UCF211-32	UC211-32	43.4 9757	29.4 6609	162 6 3/8	130 5 1/8	18 23/32	43 1 11/16	58.4 2 5/16	22.2 0.874	55.6 2.189	25 63/64	19 3/4	M16 5/8	3.4 7.5
	2 1/8	UCF211-34	UC211-34													
		UCF211	UC211													
	2 3/16	UCF211-35	UC211-35													
60	2 1/4	UCF212-36	UC212-36	52.4 11780	36.2 8138	175 6 7/8	143 5 5/8	18 23/32	48 1 7/8	68.7 2 23/32	25.4 1.000	65.1 2.563	29 1 9/64	19 3/4	M16 5/8	4.2 9.3
		UCF212	UC212													
	2 3/8	UCF212-38	UC212-38													
	2 7/16	UCF212-39	UC212-39													
65	2 1/2	UCF213-40	UC213-40	57.2 12859	40.1 9015	187 7 3/8	149 5 55/64	22 7/8	50 1 31/32	69.7 2 3/4	25.4 1.000	65.1 2.563	30 1 3/16	19 3/4	M16 5/8	5.2 11.5
		UCF213	UC213													
	2 3/4	UCF214-44	UC214-44													
		UCF214	UC214													
70		UCF215	UC215	62.2 13983	44.1 9914	193 7 19/32	152 5 63/64	22 7/8	54 2 1/8	75.4 2 31/32	30.2 1.189	74.6 2.937	31 1 7/32	19 3/4	M16 5/8	5.9 13.0
75		UCF215	UC215	67.4 15152	48.3 10858	200 7 7/8	159 6 17/64	22 7/8	56 2 7/32	78.5 3 3/32	33.3 1.311	77.8 3.0603	34 1 11/32	19 3/4	M16 5/8	6.4 14.1
80	2 15/16	UCF215-47	UC215-47													
	3	UCF215-48	UC215-48													
	3 1/8	UCF216-50	UC216-50													
85		UCF216	UC216	72.7 16344	53.0 11915	208 8 3/16	165 6 1/2	22 7/8	58 2 9/32	83.3 3 9/32	33.3 1.311	82.6 3.252	34 1 11/32	23 29/32	M20 3/4	7.3 16.1
	3 1/4	UCF217-52	UC217-52	84.0 18884	61.9 13916	220 8 21/32	175 6 57/64	24 15/16	63 2 15/32	87.6 3 7/16	34.1 1.343	85.7 3.374	36 1 13/32	23 29/32	M20 3/4	8.9 19.6
		UCF217	UC217													
	3 1/2	UCF218-56	UC218-56													
90		UCF218	UC218	96.1 21604	71.5 16074	235 9 1/4	187 7 23/64	25 31/32	68 2 11/16	96.3 3 25/32	39.7 1.563	96 3.780	40 1 9/16	23 29/32	M20 3/4	11.4 25.1