KS TOOLS®

HAND TOOLS

1 SPANNERS
2 SOCKETS AND ACCESSORIES
3 TORQUE TOOLS
4 BITS
5 ALLEN KEYS
6 SCREWDRIVERS
7 PLIERS
8 PRECISION TOOLS
9 MEASURING AND TESTING EQUIPMENT
10 PULLERS
11 VIDEOSCOPE TECHNOLOGY
12 PNEUMATIC TOOLS
13 CORDLESS BATTERY TOOLS
14 LIGHTING TOOLS
15 WORKSHOP EQUIPMENT
16 TOOL CABINETS / FOAM TOOL ASSORTMENTS
17 MACHINING TOOLS / BRUSHES AND FILES
18 CUTTING AND SCARPING TOOLS
19 HAMMERS
20 STRIKING TOOLS
21 INDUSRIAL SAFETY / WORKWEAR
22 DIN AND VARIOUS CONSUMABLE ASSORTMENTS
i INDEX

PAGE 24 - 63 1

PAGE 64 - 145 2

PAGE 146 - 181 3

PAGE 182 - 209 4

PAGE 210 - 225 5

PAGE 226 - 241 6

PAGE 242 - 275 7

PAGE 276 - 291 8

PAGE 292 - 307 9



PAGE 308 - 357 10

PAGE 358 - 367 11

PAGE 368 - 391 12

PAGE 392 - 401 13

PAGE 402 - 413 14

PAGE4 14 - 431 15

PAGE 432 - 495 16

PAGE 496 - 535 17

PAGE 536 - 547 18

PAGE 548 - 559 19

PAGE 560 - 577 20

PAGE 578 - 595 21

PAGE 596 - 613 22

PAGE 614 - 673 i

Innovation is
our mission!

PREMIUM QUALITY

WHICH CONVINCES INTERNATIONALLY

We thank the long-term loyalty and satisfaction of our global customers for our fast-paced success story. Now for 23 years KS Tools, a modern tool supplier, has been offering solutions to current problems and intelligent tools for the continuously growing challenges in our high-tech everyday lives .

The countless users of our tools appreciate that even when developing our tools we set great store by innovation, ergonomics, high load capacity, long service life and everyday practicality – premium quality at a special price/performance ratio.

With our logistics centre we guarantee the most reliable delivery capability with a global quick service. This means our customers gain time and receive additional benefi s. More than 230 employees work in our central administration building on 2000 m² of the most modern offi e space and our high rack logistics centre with more than 9000 m² warehouse space and ensure every day that our customers are supplied with over 32,000 products from a single source. Currently we employ more than 350 people globally.

The signs of growth continue, more and more specialised trade partners could be gained and now enjoy the benefi s of our comprehensive programme. In the process the range of services is redefined almo t every day. We're precisely where you need us – today we export to more than 110 countries. The global market for professional mechanics of the automotive and commercial vehicle industry and after sales market is served through retailers with premium quality tools and workshop solutions. Together with specialised trade we delight discerning customers worldwide.
Lasting partnership-based relationships are therefore of special importance to us.

Through our ongoing customer retention we experience more about customer requests and the desired trends of tomorrow today. In order to continue to follow our development we have signifi antly increased the variety of our programme and optimised it in a user-oriented way. We present you with the K15 Catalogue for hand tools in a modern design on more than 650 pages and more than 12,000 selected articles from our overall programme of more than 32,000 products from our world of premium tools for the automotive and commercial vehicle industry with a large range of classic, modern and innovative hand tools of all types.
Our customers can always rely on the highest level of service and delivery quality.

Our further refined a ticle outline single-handedly takes you even faster to the tool group you're searching for. We have set exceptionally high store by the depth of technical information and descriptions. In this way you will also always find he optimum tool matching your specialist application even in the case of unusual requirements. Also, with the help of the comprehensive subject index in the annex you will find he desired quality tool quickly.

Whilst we are pleased at the rapid development, we do not forget who we need to thank for this success. You, our customers and partners, have encouraged us and our employees to continue to expand our range with your confiden e and your willingness to cooperate as a partner.

We would also like to continue to live up to this confiden e – as according to our motto

KS — competence and service at its best.

KS TOOLS

CENTRAL ADMINISTRATION AND LOGISTICS CENTRE

KSTOOLS®

Innovation is our mission!

three administration buildings with **2000m²** offi e area

9000m²
warehouse and logistics centre

230 highly qualified e ployees

22 apprentices in different occupations

Werkzeuge-Maschinen GmbH
Seligenstädter Grund 10 - 12
D- 63150 Heusenstamm

DEUTSCHLAND

Tel.: +49 6104 4974-0
Fax: +49 6104 4974-11
e-mail: kstools@kstools.de
URL: www.kstools.de

HISTORY / DEVELOPMENT

KS TOOLS®

Innovation is our mission!

1992

KS Tools was founded by Mr. Peter Kühne and Mr. Stephan Schott in Offenbach as a commercial enterprise for quality tools.

1996

KS Tools moves premises to in Obertshausen with 20 employees.

1998

Premises extended with now 38 employees.

2001

New offi e and central warehouse with 62 employees in Heusenstamm.

2006

Following the growth of the business, KS Tools expands to 110 employees, with warehouse space of 5000 m² and offi e space of 1800 m².

2008 / 2009

Extension of our warehouse about 4000 m².
Building of a new training center and extension of the offi e space.

2009

Commissioning of the training centre.

2013

KS Tools is now expanding to 205 employees.

2014

Expansion of the goods range to 32,000 articles.

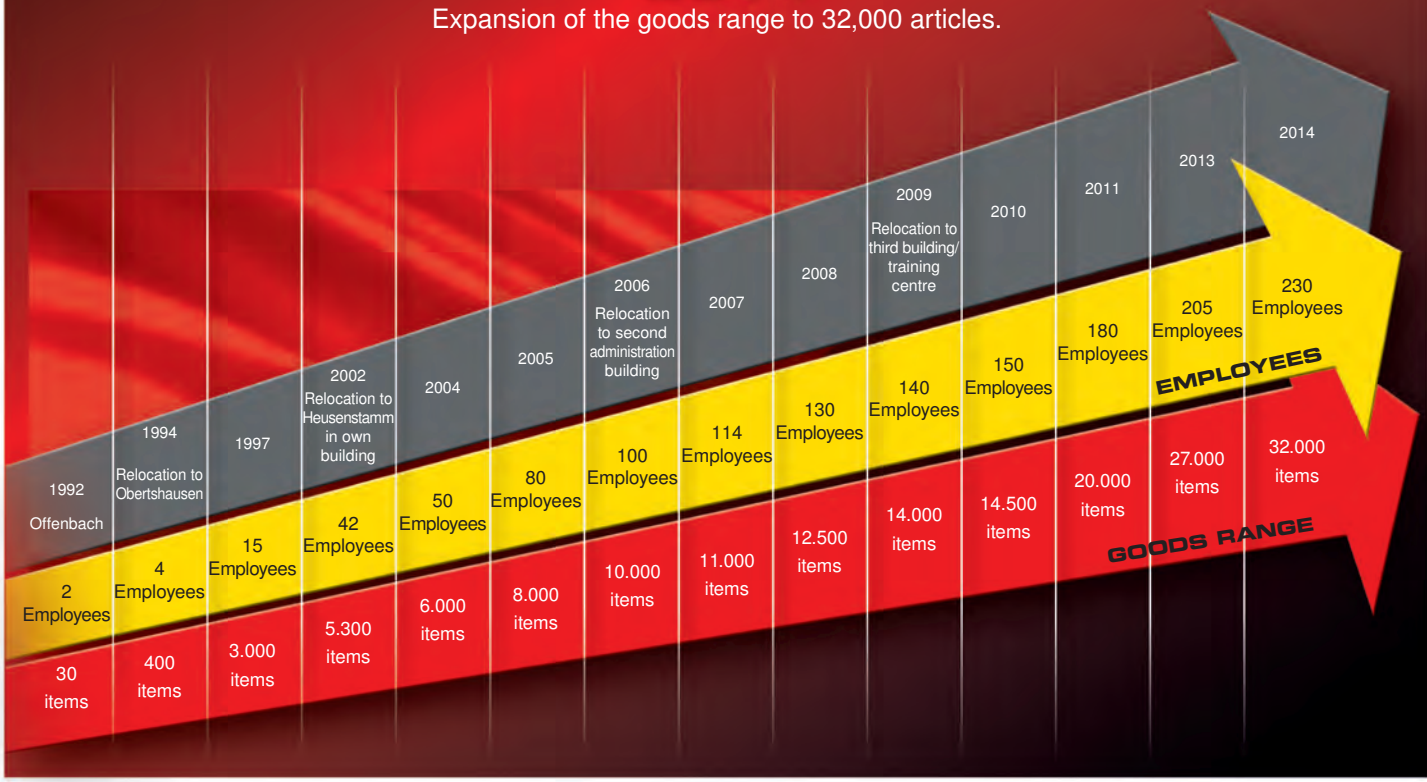

DESIGN AND BRAND PATENTS

KS TOOLS®

Innovation is our mission!

KS TOOLS®

is known and renowned
worldwide for its innovative strength.
Over the past few years
this has led
to numerous protective rights,
on a national
and a global level.

WE ARE THERE FOR YOU — IF YOU NEED US

KS TOOLS®

Innovation is our mission!

LIGHTNING LOGISTICS — GLOBAL QUICK SERVICE

Gain time and additional benefi s from our reliable shipping logistics.

Warehouse floor area

1: 5.000 m²

2: 4.000 m²

Total: 9.000 m²

Working hours:

24

24 hours in 3 shifts

Euro-pallets storage:

8.280

Small parts storage:

8.000

Monthly pick position:

> 100.000 Positions

Monthly shipping capacity:

> 24.000 UPS packages

> 2.800 Euro-pallets

SALES AND DISTRIBUTION WORLDWIDE

KS TOOLS®

Innovation is our mission!

KS TOOLS®

PREMIUM QUALITY TOOLS

Available in more than 110 countries worldwide.

EXHIBITIONS & FAIRS

KS Tools is present at more than 40 national and international fairs / exhibitions throughout the year. Use the opportunity to visit us and see fi st hand the quality and service which KS Tools has to offer.

KS TOOLS
Innovation is our mission!
Tools and more
BREMSE
BRAKE SYSTEM
ACHSE
AXLE
WALKER
We will be in your area soon and look forward to seeing you

Technical**Times**

KS TOOLS

Innovation is our mission!

Twice a year we have our special promotion for the motor industry on at least 32 pages with a very large range of classic, modern and innovative hand tools and special tools of outstanding quality at a very good price/performance ratio.

Highly topical, problem solving solutions, and valuable usage tips - that is the TechnicalTimes!

www.toolchannel.com
Moving pictures say more than words ...
KSTOOLS
Innovation is our mission!
TOOL
KSTOOLS HDV
CHANNEL
YouTube
YouTube

www.kstools.com
Herzlich Willkommen
Welcome
Bienvenido!
欢迎！
Witamy
Welkom!
ようこそ！
bem vindos!
Benvenuti !
Velkommen
добро пожаловать
Bine ați venit
Bi xêr hatî
Καλώς ηρθατε!
Tervetuloa!
добро пошли
Bienvenue
HOŞGELDİNİZ!
Vítáme vás!
bem vindos!

TRAINING CENTRE

Modern, intelligent tool systems require a high technical knowledge in order to communicate the advantages and the problem solving potential of these products to the user.
At the end of August 2009 our new

TECHNICAL TRAINING CENTRE

was handed over to his task.

On over approx. 600 square metres of presentation everything can be found for our customers, distribution partners and colleagues, as we say „all from one hand"

Core areas are

10 product islands.

The special tools are available at the same time as the relevant working ares for example chassis, brakes, engine or also the Video-scope program. These give the visitors an overview of all solutions offered by us as well as concepts.

Impressive and practical the use of the KS special tools can be demonstrated on

work station areas

or even can be used by customers.

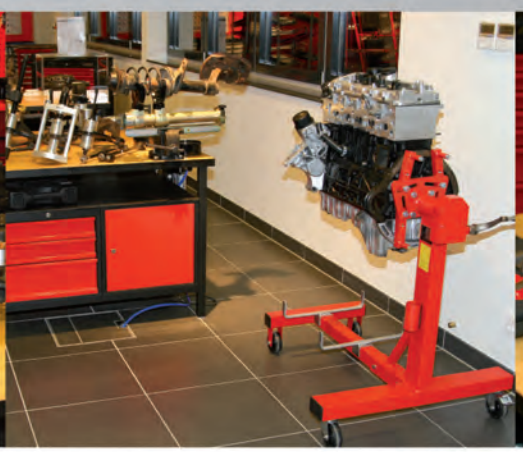

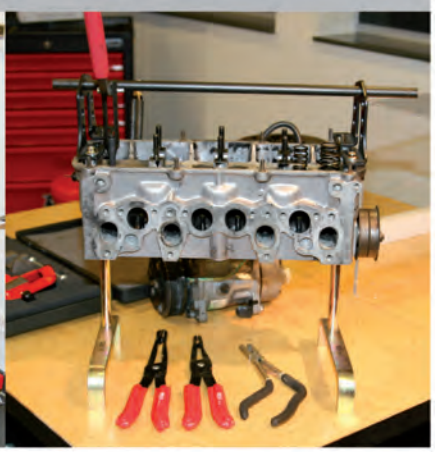

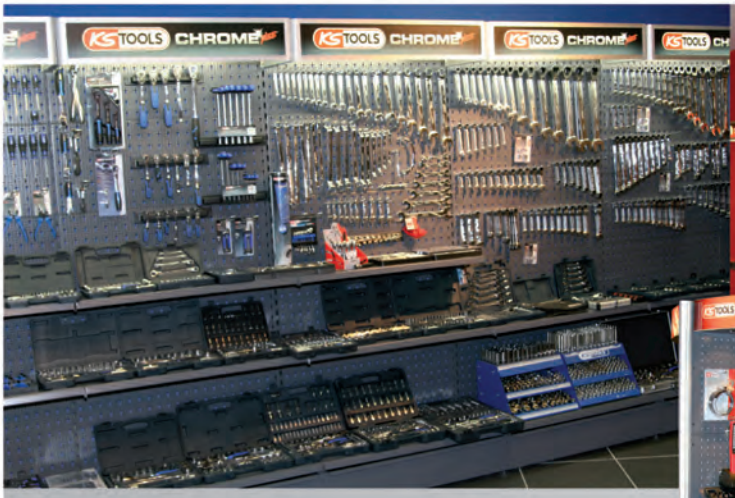

On **30 m display wall**
all essential product areas are found such as standard tools and special tools, e.g. the torque tool and puller program.

We are especially proud of our modern
conference room
with modern multimedia technology.
It has so much to offer as a place for interesting training and conferences.

Every workstation is equipped with a terminal computer, which enables interactive training and multimedia demonstrations.

Taken into account the permanently changing challenges in our marketplace the training and education of our employees is one of our major duties.
In our own KS-academy many workshops such as for professional business administration, the latest computer applications take place regularly.
The program within the academy has also included two foreign language courses with external instructors which enriches this offer of advanced education.

For our customers and trade partners there are regularly monthly product trainings for all product lines and novelties as well. We look forward to welcome you in our premises.
Simply ask about our training plan.
For larger groups or single firm , we are able to offer tailor made and

individually designed product trainings combined with the use of our meeting facilities.

SERVICE VAN

We optimize your KS Tools - shop presentation!
Our very own team will arrange an appointment to visit our trade partners to set up and decorate display boards, show cases etc. on the spot. On board of the fully equipped service mobile we carry all accessories and items to attractively present KS Tools products.

We have a large catalogue with our presentation systems, whether on small or large area we offer tailor made solution to you in order to increase the attraction of the presentation of our range of tools and machines. Your local area manager will be able to provide more details on the available possibilities.

Twelve highly qualified echnicians are selected to visit

together with our excellent trade partners

automotive repair shops. By this way we can not only clarify particular special applications and needs of our customers, but we can also carry out technical training on the various tools available at the same time.

Our mobile information fle t represents a selective cross section over all product lines with a main focus on the automotive sector, since these products require an intensive amount of explanation and demonstration and most of all: the users can try out the products themselves.

In case you are interested in a product demonstration, talk to us! Our regional representatives will more than welcome your request and will assist you.

Needless to mention that this service and opportunity is for free. Arrange an appointment with your regional representative and discover the world of tools and get convinced of this opportunity and the benefi s.

THE FLEET OF INFORMATION VANS

KS TOOLS®

Innovation is our mission!

12 demo vehicles and demo trucks come along our fle t.
We are proud to present three 12.5 t event vehicles!

Equipped with 10 fully configu ed tool trolleys, we present on more than 54 m² display space the complete program of special tools for the mechanic.
These trucks are extremely desired and supporting as our “Show of Tools” on wheels - unique in Europe.

KS TOOLS
RACING
Innovation is our mission!
2014 DAKAR
ARGENTINA
BOLIVIA
CHILE
KS TOOLS
2009 • 2010 • 2011 • 2012 • 2013 • 2014
DAKAR
Official e
tool supplier to the
2012 + 2013 +
KS TOOLS PREMI
RELIABLE UNDER EXTREME
324
337
TOTAL
Branca Unico
BMW Diesel Power
Argentina

PARTNERSHIPS

KS TOOLS

Innovation is our mission!

KS Tools tools and repair systems can be introduced well in the world of rally sport. Numerous teams use our tools and equipment at events such as the “U.A.E. Desert Challenge” in Dubai or the world famous, legendary “DAKAR” rally. In the hardest motorsport in the world not only the speed of the vehicle and the crew counts to the criteria decisive for success, but above all the reliability of the material and the service equipment.
We pose ourselves this challenge with pride.
The “2drive Racing” team and the “X-Raid” team only use tools and equipment from KS Tools.

The ultimate endurance test!

exclusive
Dakar rally winners
+ 2014 + 2015

UM TOOLS

E OPERATING CONDITIONS!

SERVICE CENTRE

KS TOOLS®

Innovation is our mission!

The KS SERVICE CENTRE is your direct contact and co-ordinator for all kind of service related to all our products.

We guarantee short reaction times and economical repairs in our specially established SERVICE CENTRE.

The KS Service Centre offers the following benefits

- Repair, adjustment, calibration and certifi ation of KS Tools torque wrenches
- Monitoring service for testing tools for torque wrenches
- Our economical calibration service and torque testing laboratory provides certifi ates in accordance to all existing norms and standards as per DIN EN ISO 9000.

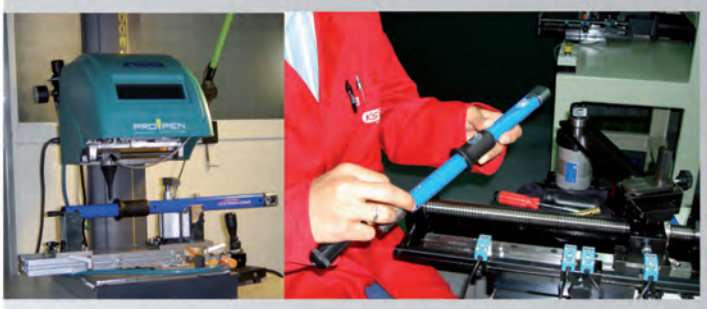

PREMIUM SERVICE

When it comes to maintenance or replacement part procurement or even repairs we are always available with advice and support. Our service employees are also available after purchase with our all-round premium service.

Further more we offer examination and economical repairs for our entire catalogue range.

QUALITY / GUARANTEE

Management System ISO 9001:2008
TÜVRheinland ZERTIFIZIERT
www.tuv.com ID 9105033220

Quality guaranteed through systematic quality assurance in accordance to DIN EN ISO 9001:2008

Our company is certified in a cordance to ISO 9001:2008 and is subject to permanent monitoring by TÜV Rheinland GmbH. Our constant drive for innovate products and the increased quality awareness of our customers demand for continuous improvement of the product quality and productivity.

All employees of our company are committed to exercise the maximum possible diligence and permanent controls and checks at all levels in order to ensure the highest level of quality.

This means for our customers:

Guaranteed quality and controlled safety at the highest stage!

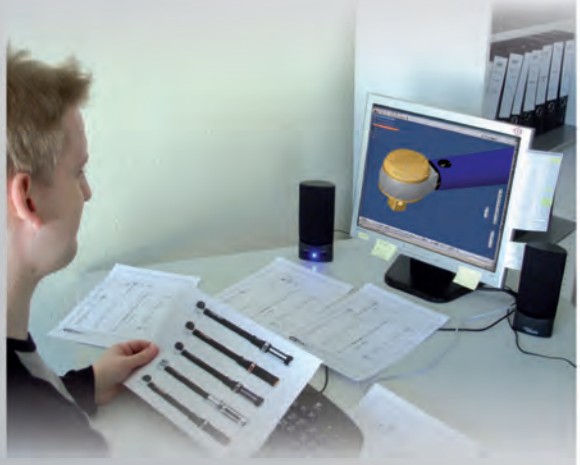

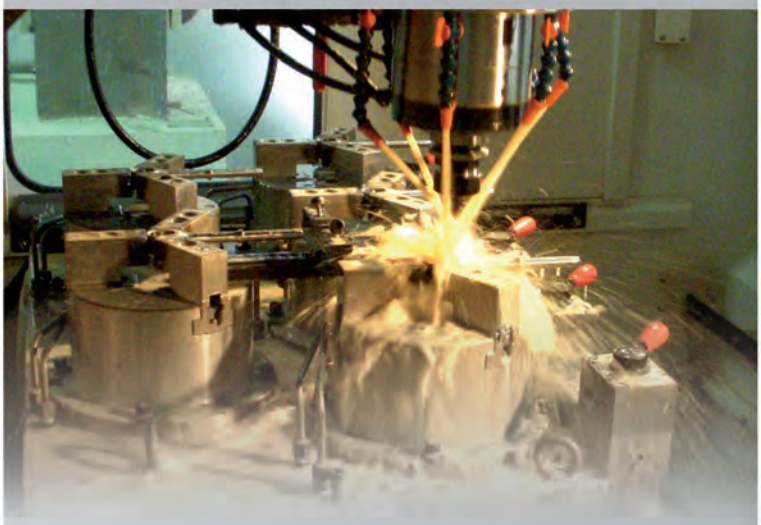

Certificate

Standard: ISO 9001:2008
Certificate Registr. No.: 01 100 054054

Certificate Holder:

KS TOOLS Werkzeuge-Maschinen GmbH
Seligenstädter Grund 10-12 • D - 63150 Heusenstamm

including the location

KS TOOLS PDA Region de Brumath
1 rue de Londres • F - 67670 Mommenheim

Scope: Import, export and distribution of all kind of tools

Proof has been furnished by means of an audit that the requirements of ISO 9001:2008 are met.

The due date for all future audits is 12-15.

Validity: The certificate is valid from 2015-02-09 until 2018-02-08.
First certification 2006

2015-02-12

www.tuv.com

TÜVRheinland Precisely Right.

KS Tools equipment is manufactured to the highest quality standards and from the very best material.

However if any of our products show a lack of quality due to material failure or manufacturing fault we guarantee free replacement.

That we guarantee!

KS TOOLS ONLINE

ALFA ROMEO | BMW | CHRYSLER | FIAT | FORD | HYUNDAI | JAGUAR | LANCIA | LAND ROVER | MAZDA | MERCEDES-BENZ
MITSHUBISHI | PEUGEOT | ROVER | CITROËN | RENAULT | SAAB | VAUXHALL | OPEL | VOLKSWAGEN AUDI GROUP | VOLVO

KS TOOLS

www.toolchannel.com

kstools.com

www.ks-portal.com

www.kstools.com

Loyalty to specialised trade

Expert advice

Sales support

CATALOGUE LAYOUT

Signifi ant product photographs

Coloured index for quick navigation

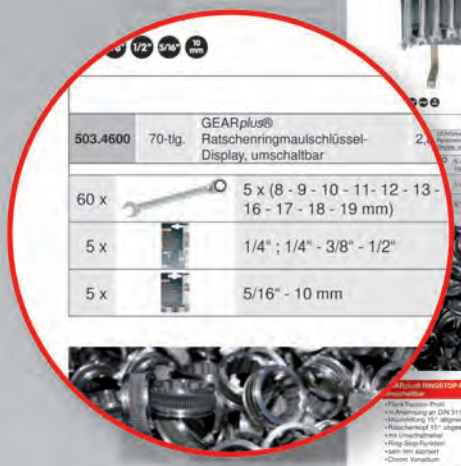

Clear specifi ation of the set contents

Extensive description of the product specifi ations

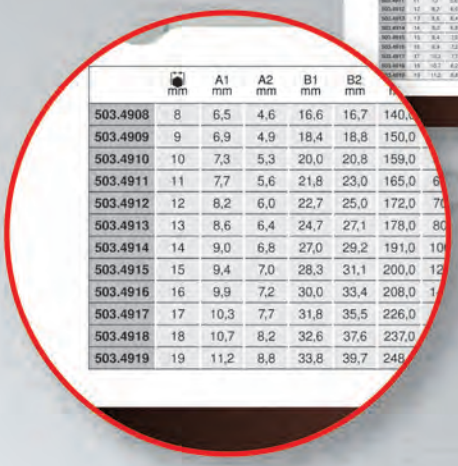

	mm	A1 mm	A2 mm	B1 mm	B2 mm
503.4908	8	6,5	4,6	16,6	16,7
503.4909	9	6,9	4,9	18,4	18,8
503.4910	10	7,3	5,3	20,0	20,8
503.4911	11	7,7	5,6	21,8	23,0
503.4912	12	8,2	6,0	22,7	25,0
503.4913	13	8,6	6,4	24,7	27,1
503.4914	14	9,0	6,8	27,0	29,2
503.4915	15	9,4	7,0	28,3	31,1
503.4916	16	9,9	7,2	30,0	33,4
503.4917	17	10,3	7,7	31,8	35,5
503.4918	18	10,7	8,2	32,6	37,6
503.4919	19	11,2	8,8	33,8	39,7

Tabular clear view of the technical features

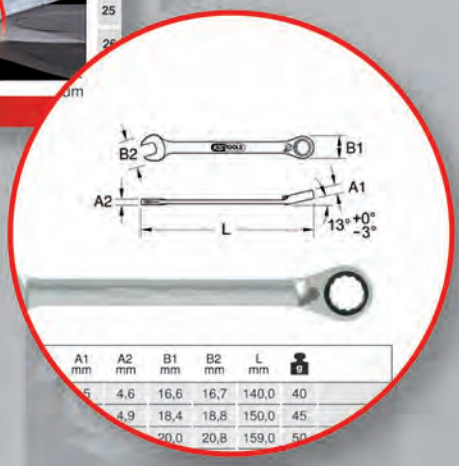

A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
	4,6	16,6	16,7	140,0	40
	4,9	18,4	18,8	150,0	45
		20,0	20,8	159,0	50

Technical drawing with all measurement dimensions

THE NEW SPECIAL TOOL CATALOGUE FOR PASSENGER CARS & LIGHT COMMERCIAL VEHICLES

ONE STOP SHOP

26 SECTIONS
489 PRODUCT GROUPS
750 PAGES
>10.000 ARTICLES

www.kstools.com

1 SPANNERS

KS TOOLS®

Innovation is our mission!

	PAGE
MINI COMBINATION SPANNERS	28
COMBINATION SPANNERS	28 - 34
FLEXIBLE COMBINATION SPANNERS	34 - 36
COMBINATION SPANNERS, EXTRA LONG	36 - 37
OPEN ENDED SPANNERS	37 - 38
DOUBLE OPEN ENDED SPANNERS	38 - 39
SINGLE RING ENDED SPANNER	39 - 40
OPEN DOUBLE RING SPANNERS	41
OPEN DOUBLE RING SPANNERS WITH FLEXIBLE JOINT	41
OPEN RATCHET DOUBLE RING SPANNER SET WITH FLEXIBLE JOINT	41
DOUBLE RING SPANNERS	42 - 43
OPEN DOUBLE RING SPANNERS, EXTRA LONG	43
OPEN DOUBLE RING SPANNERS, OFFSET	43 - 45
DOUBLE RING SPANNERS FOR TX E PROFILE	45 - 46
FLEXIBLE SPANNERS	46 - 47
BOX SPANNERS	47 - 49
T-HANDLE FLEXIBLE WRENCH	49
HOOK WRENCH	49 - 50
SLOGGING SPANNER	50 - 51
SINGLE RING ENDED SPANNER	51
GEAR*plus*® MINI REVERSIBLE COMBINATION SPANNER	54
GEAR*plus*® COMBINATION SPANNER	54 - 55
GEAR*plus*® XXL COMBINATION SPANNER	55 - 56
GEAR*plus*® REVERSIBLE COMBINATION SPANNER	56 - 57
DUO GEAR*plus*® COMBINATION RATCHETING SPANNER	57
GEAR*plus*® RING STOP COMBINATION SPANNER	58
GEAR*plus*® FLEXIBLE COMBINATION RATCHETING SPANNER	58 - 59
GEAR*plus*® FLEXIBLE LOCKING COMBINATION RATCHETING SPANNER	59 - 60
GEAR*plus*® DOUBLE RING SPANNER	60 - 61
GEAR*plus*® 4 IN 1 DOUBLE RING SPANNER	61
GEAR*plus*® REVERSIBLE DOUBLE RING SPANNER	61
GEAR*plus*® TX DOUBLE RING SPANNER	61 - 62
GEAR*plus*® UNIVERSAL DOUBLE RING SPANNER SETS	62
GEAR*plus*® ACCESSORIES	62

SPANNERS

Manufacturing and fabrication steps

Raw material blank cutting

Amti slip ground

Raw material blank cutting

Stamping of the spanner shaft

Forging of the spanner blank

Hardening and tempering

Spanner blank

Galvanizing preprocessing

Jaw head milling

Nickel plating and chromium plating

Ring head broaching

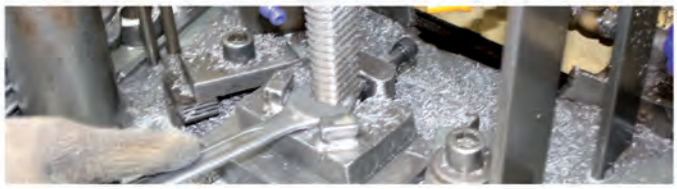

Surfaces

Phosphate

- Phosphating = chemical / electro chemical process
- Dip coating or injection method
- Intention is the generation of phosphate layer, which is immovable on the base metal
- The surface receives a very good absorption capacity for oil and wax.
- Reliable corrosion protection
- Posphated tools require regular oiling

Matt chrome



- Chrome layer is manufactured by electroplating in a electrolytic bath process
- Several steps e.g. degrease / nickel plating and chrome plating
- Matt = matt nickel layer shines through chrome layer - Resulting in matt finis
- Ideal corrosion and wear and tear protection

Chrome plated and mirror polished

- Chrome layer is manufactured by electroplating in an electrolytic bath process
- Several steps e.g. degrease / nickel plating and chrome plating
- Mirror polished = shining nickel layer - Resulting in a mirror polished finish
- Ideal corrosion and wear and tear protection

Very fine ma t satin chrome

- Chrome layer is manufactured by electroplating in an electrolytic bath process
- Several steps e.g. degrease / nickel plating and chrome plating
- Ideal corrosion and wear and tear protection

Spanner-Profil

CLASSIC

- Matt chrome
- Chrome vanadium steel
- High corrosion and wear protection
- FlankTraction 12-point profil

CHROME plus®

- Chrome plated and mirror polished
- Chrome vanadium steel
- High corrosion and wear protection
- FlankTraction 12-point profil

ULTIMATE PLUS

- Matt satin chrome
- Chrome vanadium steel
- High corrosion and wear protection
- FlankTraction 12-point profil

GEARplus®

- Matt satin chrome
- With fine oothed ratchet ring technique
- Chrome vanadium steel
- High corrosion and wear protection
- FlankTraction 12-point profil



The GEARplus® ratchet ring spanner offers all the advantages of a ratchet and much more ...

Design of the ultra slim ring side allows working in the narrowest areas, even where, conventional ratchets and sockets cannot be used.
With a speed not normally possible the spanner allows diffi ult couplings to be loosened and tightened.

Profil

FlankTraction 12 point

- Perfect grip even on screws and nuts which are not true to size or damaged
- Larger contact area for better pressure distribution
- Avoids damage of head of screws
- Perfect torque transfer to the flan s of nuts and bolts

E-TX

- This profile is onsidered as a further development of Phillips and hexagonal heads
- The six notched star form with rounded tip is typical
- No cam distortion effect due to vertical driving force
- Optimal power transmission
- T = Internal profil
- E = Outer profile external)

MINI COMBINATION SPANNERS

CHROME*plus*® combination spanner, stubby

- FlankTraction profile 12 point)
- Jaw 15° offset
- Ring head 15° offset
- Chrome plated and mirror polished
- Chrome vanadium



	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
518.0010	10	7.5	5.8	16.1	22.2	95.0	37
518.0011	11	7.8	6.1	17.9	23.9	100.0	45
518.0012	12	7.8	6.6	19.1	25.5	104.0	51
518.0013	13	9.1	7.0	19.9	27.1	109.0	54
518.0014	14	9.4	7.6	21.8	29.2	114.0	71
518.0015	15	9.6	7.8	22.5	30.1	120.0	76
518.0016	16	9.8	7.9	24.1	32.8	124.0	88
518.0017	17	10.8	8.7	26.1	35.8	130.0	115
518.0018	18	11.0	9.1	27.0	36.7	134.0	118
518.0019	19	11.9	9.9	28.6	38.1	140.0	148

CHROME*plus*® combination spanner set, stubby

- FlankTraction profile 12 point)
- Jaw 15° offset
- Ring head 15° offset
- Chrome plated and mirror polished
- Chrome vanadium

			g
518.0040	7 pcs	10 - 11 - 12 - 13 - 14 - 17 - 19 mm	600

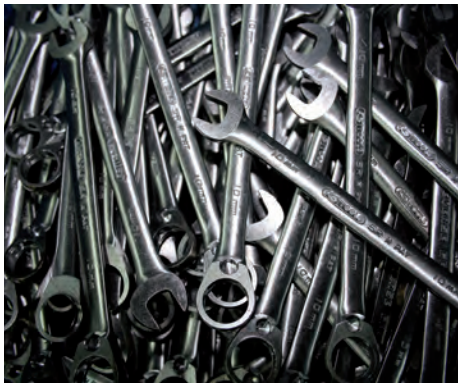

GEAR*plus*® combination ratcheting spanner, stubby

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- With reverse lever
- High quality finis
- Chrome vanadium

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4631	8	6.5	4.0	16.6	16.7	90.0	30
503.4632	9	6.9	4.4	18.4	18.8	93.0	40
503.4633	10	7.3	4.8	20.0	20.8	95.0	45
503.4634	11	7.7	5.2	21.8	23.0	103.0	50
503.4635	12	8.2	5.5	22.7	25.0	106.0	55
503.4636	13	8.6	5.8	24.7	27.1	108.0	60
503.4637	14	9.0	6.2	27.0	29.2	115.0	70
503.4638	15	9.4	6.5	28.3	31.3	119.0	90
503.4639	16	9.9	6.8	30.0	33.4	123.0	100
503.4640	17	10.3	7.2	31.8	35.5	127.0	110
503.4641	18	10.7	7.7	32.6	37.6	131.0	120
503.4642	19	11.2	8.2	33.8	39.7	139.0	150

GEAR*plus*® combination ratcheting spanner set, stubby

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- With reverse lever
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg
503.4652	12 pcs	GEAR*plus*® combination ratcheting spanner set, stubby	1.08

12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm

GEAR*plus*® combination ratcheting spanner set, stubby

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- With reverse lever
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4653	16 pcs	GEAR*plus*® combination ratcheting spanner set, stubby	1.35

12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
1 x		1/4“
3 x		1/4“ - 3/8“ - 1/2“

COMBINATION SPANNERS

CLASSIC combination spanners, offset

- FlankTraction Profil
- DIN 3113 Form A / ISO 3318 / ISO 7738
- Jaw 15° offset
- Ring head 15° offset
- Polished heads
- Matt finis
- Chrome vanadium



	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
517.0606	6		4.7	4.0	10.1	15.5	100.0	10
517.0607	7		5.0	4.0	11.5	17.0	110.0	15
517.0608	8		5.5	4.5	12.8	19.2	120.0	20
517.0609	9		5.9	4.5	14.2	21.2	130.0	30
517.0610	10		6.5	5.0	15.6	23.2	140.0	40
517.0611	11		6.9	5.4	16.9	25.3	150.0	45
517.0612	12		7.3	5.5	18.3	27.2	160.0	60
517.0613	13		7.8	5.9	19.7	29.4	170.0	60
517.0614	14		8.3	6.2	21.2	31.5	180.0	80
517.0615	15		8.6	6.4	22.5	33.2	190.0	90
517.0616	16		8.9	6.7	24.0	34.7	200.0	100
517.0617	17		9.3	6.9	25.3	36.5	210.0	120
517.0618	18		9.9	7.2	26.8	38.7	220.0	140
517.0619	19		10.5	7.4	28.1	40.7	230.0	170

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
517.0620	20		10.9	7.7	29.7	43.1	240.0	190
517.0621	21		11.3	8.0	31.3	44.5	250.0	210
517.0622	22		11.5	8.2	32.6	46.9	260.0	230
517.0623	23		13.5	7.6	33.0	49.5	270.0	245
517.0624	24		14.0	8.0	35.5	50.4	280.0	320
517.0625	25		14.5	8.2	36.0	54.5	290.0	340
517.0626	26		15.0	8.5	37.0	56.5	300.0	350
517.0627	27		15.5	8.8	39.6	59.5	310.0	420
517.0628	28		16.0	9.0	40.0	60.0	320.0	440
517.0629	29		16.5	9.5	41.5	61.5	330.0	470
517.0630	30		17.0	10.1	43.7	61.8	340.0	500
517.0632	32		18.0	10.4	46.4	65.8	360.0	530
517.0634	34		20.0	10.0	49.7	66.0	420.0	675
517.0636	36		19.5	11.0	51.5	77.0	380.0	690
517.0638	38		21.5	13.0	56.0	76.0	450.0	1000
517.0641	41		22.0	11.0	58.5	87.0	440.0	750
517.0646	46		25.0	15.2	71.5	93.0	506.0	1640
517.0650	50		26.4	16.4	75.6	102.0	540.0	2200
517.1901		1/4"	5.0	3.9	9.8	15.7	100.0	20
517.1902		5/16"	5.9	4.4	12.7	19.0	120.0	22
517.1903		3/8"	6.4	4.5	14.1	20.9	130.0	34
517.1904		7/16"	7.4	5.2	16.9	25.4	150.0	45
517.1951		1/2"	8.4	5.8	19.7	29.3	170.0	55
517.1906		9/16"	8.9	6.1	21.1	31.2	180.0	78
517.1907		5/8"	9.8	6.6	24.0	34.5	200.0	104
517.1908		11/16"	10.3	6.9	25.4	37.3	210.0	102
517.1909		3/4"	11.1	7.3	28.2	40.4	230.0	130
517.1911		25/32"	11.4	7.5	29.6	42.3	240.0	172
517.1912		13/16"	11.7	7.7	31.0	44.2	250.0	168
517.1913		7/8"	12.0	7.9	32.3	46.6	260.0	176
517.1914		15/16"	12.7	8.3	35.1	50.1	280.0	240
517.1952		1"	13.0	8.5	36.5	52.8	290.0	270
517.1916		1.1/16"	13.6	8.9	39.2	55.9	310.0	330
517.1917		1.1/8"	13.9	9.1	40.6	57.8	320.0	330
517.1918		1.3/16"	14.6	9.5	43.4	62.6	340.0	430
517.1919		1.1/4"	15.2	9.9	46.6	66.9	360.0	510
517.1921		1.5/16"	15.2	10.0	46.0	66.0	340.0	775
517.1922		1.3/8"	18.4	13.0	52.0	74.0	390.0	1015
517.1923		1.7/16"	19.0	13.0	52.1	75.0	390.0	1015
517.1924		1.1/2"	19.0	13.0	55.5	75.0	390.0	1015

CLASSIC Combination spanners set, offset

- FlankTraction profile 12 point)
- DIN 3113 Form A / ISO 3318 / ISO 7738
- Jaw 15° offset
- Ring head 15° offset
- Polished heads
- Matt finis
- Chrome vanadium

			kg
517.0045	5 pcs	8 - 10 - 13 - 17 - 19 mm	0.54
517.0048	8 pcs	8 - 9 - 10 - 11 - 13 - 14 - 17 - 19 mm	0.55
517.0080	10 pcs	8 - 10 - 11 -12 - 13 - 14 - 15 - 17 - 19 - 22 mm	1.02
517.0052	12 pcs	8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.88
517.0085	12 pcs	10 - 11 - 12 - 13 - 14 - 17 - 19 - 22 - 24 - 27 - 30 - 32 mm	2.53
517.0043	21 pcs	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm	3.80

CLASSIC combination spanners, offset

- FlankTraction profile 12 point)
- DIN 3113 Form B / ISO 3318 / ISO 7738
- Jaw 15° offset
- Ring head 70° offset
- Ring head 10° angled
- Matt finish
- Chrome vanadium

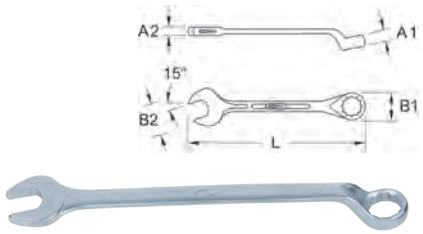

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	kg
517.1606	6		5.5	3.7	11.0	15.5	110.0	0.02
517.1607	7		6.0	3.7	12.5	17.5	120.0	0.02
517.1608	8		6.5	4.3	13.8	20.0	130.0	0.03
517.1609	9		7.0	4.3	15.0	21.5	140.0	0.04
517.1610	10		7.5	4.7	16.5	23.5	150.0	0.04
517.1611	11		8.0	5.1	18.0	25.0	158.0	0.05
517.1612	12		8.5	5.3	19.6	27.0	165.0	0.07
517.1613	13		7.0	5.5	21.2	29.5	175.0	0.08
517.1614	14		9.5	5.7	23.0	31.5	185.0	0.09
517.1615	15		10.0	6.1	24.4	33.5	195.0	0.10
517.1616	16		10.5	6.5	26.0	35.5	210.0	0.12
517.1617	17		11.0	6.9	27.6	37.0	225.0	0.14
517.1618	18		11.5	7.3	28.8	40.0	240.0	0.16
517.1619	19		12.0	7.7	30.5	42.5	255.0	0.18
517.1620	20		12.5	8.1	31.5	44.0	270.0	0.20
517.1621	21		13.0	8.5	33.0	45.5	285.0	0.24
517.1622	22		13.5	8.9	34.5	47.5	300.0	0.28
517.1623	23		14.5	9.5	37.0	52.0	320.0	0.38
517.1624	24		14.5	9.5	37.0	52.0	320.0	0.38
517.1625	25		15.5	10.3	39.0	54.5	350.0	0.44
517.1626	26		15.5	10.3	39.0	54.5	350.0	0.44
517.1627	27		16.5	11.3	42.0	60.5	380.0	0.49
517.1628	28		16.5	11.3	42.0	60.5	380.0	0.49
517.1629	29		17.5	12.5	45.0	64.0	410.0	0.68
517.1630	30		17.5	12.5	45.0	64.0	410.0	0.68
517.1632	32		18.5	12.5	49.0	66.0	430.0	0.72
517.1636	36		22.0	12.5	55.0	77.0	460.0	1.07
517.1638	38		22.0	12.5	55.0	77.0	465.0	1.08
517.1641	41		24.5	13.5	60.0	85.0	510.0	1.26
517.1646	46		25.5	16.0	66.0	93.0	530.0	1.70
517.1650	50		26.5	16.5	74.0	104.0	560.0	2.20
517.1655	55		28.3	19.0	82.0	112.0	570.0	2.90
517.1660	60		31.0	20.0	90.0	123.0	660.0	3.60
517.1665	65		33.0	22.0	98.0	133.0	710.0	4.55
517.1670	70		35.0	24.0	105.0	143.0	760.0	5.80
517.1675	75		38.0	26.0	110.0	153.0	810.0	6.65
517.1680	80		41.0	28.0	119.0	163.0	860.0	8.50
517.2601		1/4"	5.5	3.7	11.0	15.5	110.0	0.02
517.2602		5/16"	6.5	4.3	13.8	20.0	130.0	0.03
517.2603		3/8"	7.5	4.7	16.5	23.5	150.0	0.04
517.2604		7/16"	8.0	5.1	18.0	25.0	158.0	0.05
517.2651		1/2"	9.0	5.5	21.2	29.5	175.0	0.08
517.2606		9/16"	9.5	5.7	23.0	31.5	185.0	0.09
517.2607		5/8"	10.5	6.5	26.0	35.5	210.0	0.12
517.2608		11/16"	11.0	6.9	27.6	37.0	225.0	0.14
517.2609		3/4"	12.0	7.7	30.5	42.5	255.0	0.18
517.2611		25/32"	12.5	8.1	31.5	44.0	270.0	0.20
517.2612		13/16"	13.0	8.5	33.0	45.5	285.0	0.24
517.2613		7/8"	13.5	8.9	34.5	47.5	300.0	0.28
517.2614		15/16"	14.5	9.5	37.0	52.0	320.0	0.38
517.2652		1"	15.5	10.3	39.0	54.5	350.0	0.44
517.2616		1.1/16"	16.5	11.0	42.0	60.5	380.0	0.49
517.2617		1.1/8"	16.5	11.3	42.0	60.5	380.0	0.49
517.2618		1.3/16"	17.5	12.5	45.0	64.0	410.0	0.68
517.2619		1.1/4"	16.5	11.3	42.0	60.5	380.0	0.49
517.2621		1.5/16"	18.5	12.5	49.0	66.0	430.0	0.72
517.2622		1.3/8"	22.0	12.5	55.0	77.0	460.0	1.07
517.2623		1.7/16"	23.0	12.5	55.0	77.0	461.0	1.07
517.2624		1.1/2"	22.0	12.5	55.0	77.0	465.0	1.08
517.2653		1.9/16"	12.5	12.5	55.0	77.0	465.0	1.08
517.2626		1.5/8"	13.5	13.5	60.0	85.0	510.0	1.26
517.2627		1.11/16"	13.5	13.5	60.0	85.0	510.0	1.26
517.2628		1.3/4"	16.0	16.0	66.0	93.0	530.0	1.70
517.2629		1.13/16"	16.0	16.0	66.0	93.0	530.0	1.70
517.2631		1.7/8"	16.0	16.0	66.0	93.0	530.0	1.70

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	kg
517.2632		1.15/16"	16.5	16.5	74.0	104.0	560.0	2.20
517.2633		2"	16.5	16.5	74.0	104.0	560.0	2.20
517.2634		2.1/16"	16.5	16.5	74.0	104.0	560.0	2.20
517.2635		2.1/8"	16.5	16.5	74.0	104.0	560.0	2.20
517.2636		2.3/16"	19.0	19.0	82.0	112.0	570.0	2.90
517.2637		2.1/4"	19.0	19.0	82.0	112.0	570.0	2.90
517.2638		2.5/16"	19.0	19.0	82.0	112.0	570.0	2.90
517.2639		2.3/8"	20.0	20.0	90.0	123.0	660.0	3.60
517.2641		2.7/16"	20.0	20.0	90.0	123.0	660.0	3.60
517.2642		2.1/2"	22.0	22.0	98.0	133.0	710.0	4.55
517.2643		2.9/16"	22.0	22.0	98.0	133.0	710.0	4.55
517.2644		2.3/4"	24.0	24.0	105.0	143.0	760.0	5.80
517.2645		3"	26.0	26.0	110.0	153.0	810.0	6.65
517.2646		3.1/8"	28.0	28.0	119.0	163.0	860.0	8.50
517.2647		3.1/4"	28.0	28.0	119.0	163.0	860.0	8.50

CLASSIC combination spanners set, offset

- FlankTraction profile 12 point)
- DIN 3113 Form B / ISO 3318 / ISO 7738
- Jaw 15° offset
- Ring head 70° offset
- Ring head 10° angled
- Matt finishe
- Chrome vanadium

			kg
517.0090	8 pcs	8 - 10 - 12 - 13 - 14 - 17 - 19 - 22 mm	0.92
517.0095	12 pcs	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 17 - 19 - 22 mm	1.00
517.0099	25 pcs	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21- 22 - 23 - 24 - 25 - 26 - 27 - 28 - 30 - 32 mm	5.96

CHROME*plus*® Combination spanner, offset

- FlankTraction profile 12 point)
- DIN 3113 / ISO 3318 / ISO 7738
- Jaw 15° offset
- Ring head 15° offset
- Chrome plated and mirror polished
- Chrome vanadium

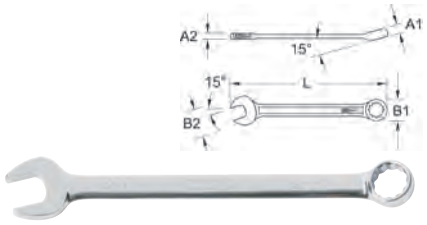

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
518.0606	6		4.6	4.3	10.5	13.7	128.0	21
518.0607	7		5.1	4.6	11.6	15.2	138.0	25
518.0608	8		5.7	4.7	12.6	18.9	148.0	32
518.0609	9		8.1	5.8	15.6	20.6	154.0	46
518.0610	10		8.3	6.0	16.4	21.5	162.0	48
518.0611	11		8.5	6.8	17.8	23.0	167.0	62
518.0612	12		8.6	6.9	18.3	25.6	174.0	70
518.0613	13		8.8	7.1	20.3	26.3	178.0	71

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g	
518.0614	14		9.6	7.7	22.1	28.9	190.0	95	
518.0615	15		10.7	8.5	24.5	32.6	205.0	124	
518.0616	16		10.7	8.5	24.5	32.6	205.0	124	
518.0617	17		11.0	8.8	26.7	36.3	225.0	159	
518.0618	18		11.2	9.2	28.3	38.6	248.0	176	
518.0619	19		11.2	9.2	28.3	38.6	248.0	176	
518.0620	20		12.4	9.8	30.5	42.5	270.0	233	
518.0621	21		12.4	9.8	30.5	42.5	270.0	233	
518.0622	22		12.9	10.4	33.3	46.5	292.0	335	
518.0624	24		13.9	10.8	35.4	48.5	314.0	395	
518.0627	27		15.4	12.3	38.4	53.5	359.0	512	
518.0630	30		15.8	12.9	43.1	57.2	390.0	662	
518.0632	32		16.4	13.0	45.1	62.0	425.0	800	
518.3001		1/4“	4.6	4.3	10.5	13.7	128.0	21	
518.3002		5/16“	5.7	4.7	12.6	18.9	148.0	32	
518.3003		3/8“	8.1	5.8	15.6	20.6	154.0	46	
518.3004		7/16“	8.5	6.8	17.8	23.0	167.0	62	
518.3005		1/2“	8.8	7.1	20.3	26.3	178.0	71	
518.3006		9/16“	9.6	7.7	22.1	28.9	190.0	95	
518.3007		5/8“	10.7	8.5	24.5	32.6	205.0	124	
518.3008		11/16“	11.0	8.8	26.7	36.3	225.0	155	
518.3009		3/4“	11.2	9.2	28.3	38.6	248.0	176	
518.3010		13/16“	12.4	9.8	30.5	42.5	270.0	233	
518.3011		7/8“	12.9	10.4	33.3	46.5	292.0	287	
518.3012		15/16“	13.9	10.8	35.4	48.5	314.0	332	
518.3013		1“	14.4	11.4	36.5	50.4	336.0	422	
518.3014		1.1/16“	15.4	12.3	38.4	53.5	359.0	512	
518.3015		1.1/8“	15.8	12.9	43.1	57.2	390.0	664	
518.3016		1.1/4“	16.4	13.0	45.1	62.0	425.0	847	

CHROME*plus*® combina tion spanner set, offset

- FlankTraction profile 12 point)
- DIN 3113 / ISO 3318 / ISO 7738
- Jaw 15° offset
- Ring head 15° offset
- Chrome plated and mirror polished
- Chrome vanadium

			g
518.0640	9 pcs	8 - 9 - 10 - 11 - 12 - 13 - 14 - 17 - 19 mm	930

CHROME*plus*® C ombination spanner set, offset

- FlankTraction profile 12 point)
- DIN 3113 / ISO 3318 / ISO 7738
- Jaw 15° offset
- Ring head 15° offset
- Chrome plated and mirror polished
- Chrome vanadium

			kg
518.0641	11 pcs	8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 17 - 19 - 22 mm	1.40
518.0643	13 pcs	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 17 - 19 - 22 mm	1.40
518.0644	4 pcs	24 - 27 - 30 - 32 mm	2.50
518.3000	11 pcs	1/4“ - 5/16“ - 3/8“ - 7/16“ - 1/2“ - 9/16“ - 5/8“ - 11/16“ - 3/4“ - 13/16“ - 7/8“	1.30
518.3020	7 pcs	3/8“ - 7/16“ - 1/2“ - 9/16“ - 5/8“ - 11/16“ - 3/4“	0.73

GEAR*plus*® C ombination ratcheting spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

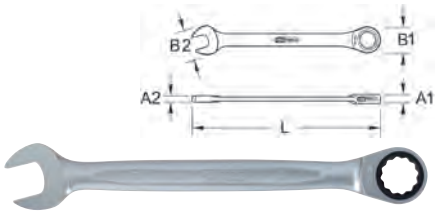

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g	
503.42055	5,5		6.3	3.9	14.0	15.0	127.5	20	
503.4206	6		6.3	3.9	14.0	15.0	128.0	25	
503.4207	7		6.5	4.0	16.8	16.7	140.0	30	
503.4208	8		6.5	4.0	16.8	16.7	140.0	30	
503.4209	9		6.9	4.4	18.8	18.7	149.0	40	
503.4210	10		7.3	4.8	20.8	20.8	158.0	50	
503.4211	11		7.7	5.2	21.8	23.0	165.0	60	
503.4212	12		8.2	5.5	22.8	24.6	171.0	70	
503.4213	13		8.6	5.8	24.8	26.8	178.0	80	
503.4214	14		9.0	6.2	27.8	29.0	190.0	110	
503.4215	15		9.4	6.5	28.8	31.0	199.0	120	
503.4216	16		9.9	6.8	30.8	33.0	208.0	150	
503.4217	17		10.3	7.2	31.8	35.5	225.0	180	
503.4218	18		10.7	7.7	32.8	37.5	236.0	210	
503.4219	19		11.2	8.2	33.8	39.4	247.0	240	
503.4221	21		13.0	9.0	40.0	45.8	289.0	340	
503.4222	22		13.0	9.0	40.0	45.8	289.0	345	
503.4224	24		14.5	10.0	46.0	51.8	322.0	470	
503.4227	27		15.5	10.5	52.0	56.4	358.0	580	
503.4228	30		17.0	11.4	58.0	62.7	401.0	860	
503.4229	32		17.5	12.5	62.0	66.4	424.0	1060	
503.4230	34		17.5	13.0	62.0	70.0	459.0	1170	
503.4248	41		19.5	16.5	71.0	86.0	565.0	2000	
503.4102		5/16”	6.5	4.0	16.8	16.7	140.0	30	
503.4103		3/8”	7.3	4.8	20.8	20.8	158.0	40	
503.4104		7/16”	7.7	5.2	21.8	23.0	165.0	50	
503.4105		1/2”	8.6	5.8	24.8	26.8	178.0	70	
503.4106		9/16”	9.0	6.2	27.8	29.0	190.0	110	
503.4107		5/8”	9.9	6.8	30.8	33.0	208.0	130	
503.4108		11/16”	10.3	7.2	31.8	35.5	225.0	170	
503.4109		3/4”	11.2	8.2	33.8	39.4	247.0	220	

GEAR*plus*® C ombination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

			kg	
503.4204	4 pcs	10 - 13 - 17 - 19 mm	0.65	
503.4205	5 pcs	8 - 10 - 13 - 17 - 19 mm	0.69	
503.4270	4 pcs	24 - 27 - 30 - 32 mm	3.07	
503.4202	5 pcs	5/16” - 3/8” - 1/2” - 11/16” - 3/4”	0.69	

GEAR*plus*® r atchet combination spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

			kg	
503.4255	5 pcs	GEAR*plus*® r atchet combination spanner set	0.67	
5 x		8 - 10 - 13 - 17 - 19 mm		

GEAR*plus*® combina tion ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

			kg	
503.4259	6 pcs	GEAR*plus*® combination ratcheting spanner set	0.97	
6 x		8 - 10 - 12 - 13 - 17 - 19 mm		

GEARplus® combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4260	10 pcs	GEARplus® combination ratcheting spanner set	1.06

6 x		8 - 10 - 12 - 13 - 17 - 19 mm
1 x		1/4“
3 x		1/4“ - 3/8“ - 1/2“

GEARplus® combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4266	16 pcs	GEARplus® combination ratcheting spanner set	1.73

12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
1 x		1/4“
3 x		1/4“ - 3/8“ - 1/2“

GEARplus® reversing combination ratcheting spanner

- FlankTraction Profil
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium

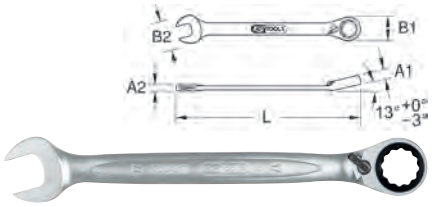

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4606	6		6.3	3.9	14.0	15.0	127.5	30
503.4607	7		6.5	4.6	16.4	16.2	140.0	30
503.4608	8		6.5	4.6	16.4	16.2	140.0	30
503.4609	9		6.9	4.9	18.3	18.2	150.0	40
503.4610	10		7.3	5.3	20.0	20.5	159.0	50
503.4611	11		7.7	5.6	21.4	22.6	166.0	60
503.4612	12		8.2	6.0	22.6	24.6	172.0	70
503.4613	13		8.6	6.4	24.5	26.7	178.0	80
503.4614	14		9.0	6.8	27.0	28.8	191.0	100
503.4615	15		9.4	7.0	28.2	30.8	200.0	120
503.4616	16		9.9	7.2	30.3	33.2	208.0	150
503.4617	17		10.3	7.7	31.6	35.1	225.0	160
503.4618	18		10.7	8.2	32.3	37.2	236.0	190
503.4619	19		11.2	8.8	33.7	39.3	248.0	220
503.4621	21		13.0	9.0	40.1	46.2	290.0	245
503.4622	22		13.0	9.0	40.1	46.2	290.0	360
503.4624	24		14.5	10.0	46.5	51.5	323.0	470
503.4627	27		15.5	10.5	52.5	56.5	357.0	660
503.4628	30		17.0	11.4	58.5	62.7	400.0	860
503.4629	32		17.5	12.5	62.5	66.4	423.0	1050
503.4630	34		17.5	13.0	62.5	70.6	460.0	1200
503.4643	36		18.0	13.4	65.8	79.0	488.0	1300
503.4644	38		18.0	13.4	65.8	79.0	488.0	1400
503.4648	41		19.5	16.5	71.0	86.0	565.0	2000
503.4681		5/16“	6.5	4.0	16.6	16.7	145.0	30
503.4683		3/8“	7.3	4.8	20.0	20.8	159.0	60
503.4684		7/16“	7.7	5.2	21.8	23.0	165.0	70
503.4685		1/2“	8.6	5.8	24.7	27.1	178.0	80
503.4686		9/16“	9.0	6.5	27.0	29.2	190.0	100
503.4687		5/8“	9.9	6.8	30.0	33.4	208.0	140
503.4688		11/16“	10.3	7.2	31.8	35.5	225.0	170
503.4689		3/4“	11.2	8.2	33.8	39.7	248.0	230

GEARplus® combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

			kg
503.4265	12 pcs	GEARplus® combination ratcheting spanner set	1.88

12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 -18 - 19 mm

GEARplus® combination ratcheting spanner display

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4200	70 pcs	GEARplus® combination ratcheting spanner display	2.87

60 x		5 x (8 - 9 - 10 - 11- 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm)
5 x		1/4“ ; 1/4“ - 3/8“ - 1/2“
5 x		5/16“ - 10 mm

GEARplus® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium

			g
503.4604	4 pcs	10 - 13 - 17 - 19 mm	650
503.4605	5 pcs	8 - 10 - 13 - 17 - 19 mm	700
503.4602	5 pcs	5/16“ - 3/8“ - 1/2“ - 11/16“ - 3/4“	600

GEARplus® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4650	9 pcs	GEARplus® reversing combination ratcheting spanner set	1.10
5 x		8 - 10 - 13 - 17 - 19 mm	
1 x		1/4“	
3 x		1/4“ - 3/8“ - 1/2“	

GEARplus® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4647	10 pcs	GEARplus® reversing combination ratcheting spanner set	1.11
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	
1 x		1/4“	
3 x		1/4“ - 3/8“ - 1/2“	

GEARplus® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4666	16 pcs	GEARplus® reversing combination ratcheting spanner set	1.79
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	
1 x		1/4“	
3 x		1/4“ - 3/8“ - 1/2“	

GEARplus® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg
503.4646	6 pcs	GEARplus® reversing combination ratcheting spanner set	1.04
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	

GEARplus® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg
503.4665	12 pcs	GEARplus® reversing combination ratcheting spanner set	1.71
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	

GEAR*plus*® reversing combination ratcheting spanner display

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4600	70 pcs	GEAR*plus*® reversing combination ratcheting spanner display	2.82
60 x		5 x (8 - 9 - 10 - 11- 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm)	
5 x		1/4“ ; 1/4“ - 3/8“ - 1/2“	
5 x		5/16“ - 10 mm	

GEAR*plus*® reversing combination ratcheting spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- With reverse lever
- Ring stop fuction
- High quality finis
- Chrome vanadium

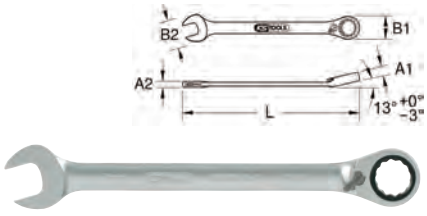

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4908	8	6.5	4.6	16.6	16.7	140.0	40
503.4909	9	6.9	4.9	18.4	18.8	150.0	45
503.4910	10	7.3	5.3	20.0	20.8	159.0	50
503.4911	11	7.7	5.6	21.8	23.0	165.0	60
503.4912	12	8.2	6.0	22.7	25.0	172.0	70
503.4913	13	8.6	6.4	24.7	27.1	178.0	80
503.4914	14	9.0	6.8	27.0	29.2	191.0	100
503.4915	15	9.4	7.0	28.3	31.1	200.0	120
503.4916	16	9.9	7.2	30.0	33.4	208.0	140
503.4917	17	10.3	7.7	31.8	35.5	226.0	170
503.4918	18	10.7	8.2	32.6	37.6	237.0	200
503.4919	19	11.2	8.8	33.8	39.7	248.0	210

GEAR*plus*® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- With reverse lever
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg
503.4955	5 pcs	GEAR*plus*® reversing combination ratcheting spanner set	0.66
5 x		8 - 10 - 13 - 17 - 19 mm	

GEAR*plus*® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- With reverse lever
- Versatile sockets with go through function
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4960	30 pcs	GEAR*plus*® reversing combination ratcheting spanner set	2.43
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	
3 x		1/4“ - 5/16“ - 10 mm	
3 x		1/4“ - 3/8“ - 1/2“	

DUO GEAR*plus*® combination spanner set with ratchet mechanism in ring and open jaw

- Open end side with innovative ratchet mechanism
- FlankTraction Profil
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- High quality finis
- Chrome vanadium

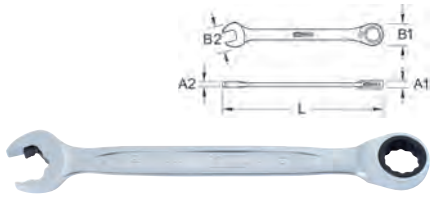

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	Nm	Nm	g
503.5208	8	6.5	4.1	16.4	16.2	140.0	15.0	36.0	30
503.5209	9	6.9	4.3	18.3	18.3	150.0	21.1	48.0	40
503.5210	10	7.3	4.8	20.0	20.0	159.0	31.1	85.2	50
503.5211	11	7.7	5.1	21.4	21.4	166.0	46.1	96.0	60
503.5212	12	8.2	5.3	22.6	22.6	172.0	49.1	109.2	70
503.5213	13	8.6	5.9	24.5	24.5	178.0	62.1	138.0	80
503.5214	14	9.0	6.3	27.0	27.0	191.0	86.0	189.6	110
503.5215	15	9.4	6.6	28.2	28.2	200.0	104.1	240.0	120
503.5216	16	9.9	6.9	30.3	30.3	208.0	124.1	297.6	150
503.5217	17	10.3	7.3	31.6	31.6	225.0	139.1	320.4	170
503.5218	18	10.7	7.8	32.3	32.3	236.0	155.1	364.8	210
503.5219	19	11.2	8.3	33.7	33.7	248.0	186.1	387.6	218
503.5221	21	13.0	8.8	40.1	46.2	290.0	248.1	446.4	340
503.5222	22	13.0	8.8	40.1	46.2	290.0	279.1	489.6	340
503.5224	24	14.5	9.8	46.5	51.5	323.0	341.2	610.8	470
503.5227	27	15.5	10.4	52.9	56.1	352.0	432.0	805.2	650
503.5228	30	17.1	11.2	57.6	62.5	396.0	570.0	954.0	875
503.5229	32	17.6	12.1	61.9	66.2	418.0	650.0	1086.0	1035

DUO GEAR*plus*® combination spanner set with ratchet mechanism in ring and open jaw

- Open end side with innovative ratchet mechanism
- FlankTraction Profil
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- High quality finis
- Chrome vanadium
- In durable plastic holder

			kg
503.5205	5 pcs	8 - 10 - 13 - 17 - 19 mm	0.66

DUO GEAR*plus*® combination spanner with ratchet mechanism in ring and open jaw, reversible

- Open end side with innovative ratchet mechanism
- FlankTraction Profil
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ring head 15° offset
- With reverse lever
- Exact gearing with 72 teeth
- High quality finis
- Chrome vanadium

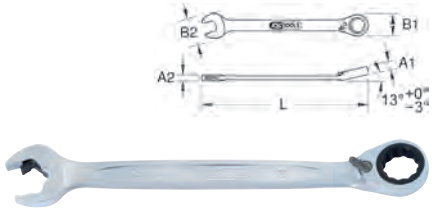

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	Nm	Nm	g
503.5908	8	6.5	4.1	16.4	16.2	140.0	15.0	36.0	40
503.5909	9	6.9	4.3	18.3	18.2	150.0	21.1	48.0	45
503.5910	10	7.3	4.8	20.0	20.5	159.0	31.1	85.2	50
503.5911	11	7.7	5.1	21.4	22.6	166.0	46.1	96.0	60
503.5912	12	8.2	5.3	22.6	24.6	172.0	49.1	109.2	70
503.5913	13	8.6	5.9	24.5	26.7	178.0	62.1	138.0	80
503.5914	14	9.0	6.3	27.0	28.8	191.0	86.0	189.6	100
503.5915	15	9.4	6.6	28.2	30.8	200.0	104.1	240.0	120
503.5916	16	9.9	6.9	30.3	33.2	208.0	124.1	297.6	140
503.5917	17	10.3	7.3	31.6	35.1	225.0	139.1	320.4	170
503.5918	18	10.7	7.8	32.3	37.2	236.0	155.1	364.8	200
503.5919	19	11.2	8.3	33.7	39.3	248.0	186.1	387.6	210
503.5921	21	13.0	8.8	40.1	46.2	290.0	248.1	446.4	365
503.5922	22	13.0	8.8	40.0	46.2	290.0	279.1	489.6	375
503.5924	24	14.5	9.8	46.5	51.5	323.0	341.2	610.8	470
503.5927	27	15.5	10.4	52.9	56.1	352.0	432.0	805.2	650
503.5928	30	17.1	11.2	57.6	62.5	396.0	570.0	954.0	875
503.5929	32	17.6	12.1	61.9	66.2	418.0	650.0	1086.0	1035

DUO GEAR*plus*® combination spanner set with ratchet mechanism in ring and open jaw, reversible

- Open end side with innovative ratchet mechanism
- FlankTraction Profil
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ring head 15° offset
- With reverse lever
- Exact gearing with 72 teeth
- High quality finis
- Chrome vanadium
- In durable plastic holder

			kg
503.5905	5 pcs	8 - 10 - 13 - 17 - 19 mm	0.66

FLEXIBLE COMBINATION SPANNERS

GEAR*plus*® fl xible combination ratcheting spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Jaw 15° offset
- Exact gearing with 72 teeth
- With fl xible head
- 180° revolving head
- High quality finis
- Chrome vanadium



	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4708	8	6.5	4.3	16.7	16.2	127.0	30
503.4709	9	6.9	4.6	18.6	18.2	131.5	40
503.4710	10	7.3	5.0	20.0	20.3	136.0	50
503.4711	11	7.7	5.4	21.8	22.5	141.0	60
503.4712	12	8.2	5.8	23.0	24.3	147.5	70
503.4713	13	8.6	6.1	25.2	26.8	154.0	80
503.4714	14	9.0	6.4	26.8	28.3	160.0	100
503.4715	15	9.4	6.9	28.3	29.8	169.0	120
503.4716	16	9.9	7.2	29.8	31.8	179.0	150
503.4717	17	10.3	7.6	31.8	32.8	190.0	174
503.4718	18	10.7	8.0	32.8	37.0	203.0	190
503.4719	19	11.2	8.6	33.9	39.2	215.0	220
503.4721	21	13.0	9.0	40.0	46.0	274.0	400
503.4722	22	13.0	9.0	40.0	46.0	274.0	400
503.4724	24	14.5	10.0	46.0	52.2	296.0	550

GEAR*plus*® fl xible combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Jaw 15° offset
- Exact gearing with 72 teeth
- With fl xible head
- 180° revolving head
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg
503.4759	6 pcs	GEAR*plus*® fl xible combination ratcheting spanner set	1.90
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	

GEAR*plus*® fl xible combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Jaw 15° offset
- Exact gearing with 72 teeth
- With fl xible head
- 180° revolving head
- Square drive adaptor to DIN 3120-ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4760	10 pcs	GEAR*plus*® fl xible combination ratcheting spanner set	1.21
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	
1 x		1/4"	
3 x		1/4" - 3/8" - 1/2"	

GEAR*plus*® fl xible combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Jaw 15° offset
- Exact gearing with 72 teeth
- With fl xible head
- 180° revolving head
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg
503.4765	12 pcs	GEAR*plus*® fl xible combination ratcheting spanner set	2.56
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	

GEARplus® flexible combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Jaw 15° offset
- Exact gearing with 72 teeth
- With flexible head
- 180° revolving head
- Square drive adaptor to DIN 3120-ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4766	16 pcs	GEARplus® flexible combination ratcheting spanner set	2.66
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	
1 x		1/4“	
3 x		1/4“ - 3/8“ - 1/2“	

GEARplus® flexible locking combination ratcheting spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- With flexible locking head
- Exact gearing with 72 teeth
- 180° revolving head
- High quality finis
- Chrome vanadium



	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4808	8	6.5	4.3	16.7	16.2	127.0	30
503.4809	9	6.9	4.6	18.6	18.2	131.5	40
503.4810	10	7.3	5.0	20.0	20.3	136.0	50
503.4811	11	7.7	5.4	21.8	22.5	141.0	60
503.4812	12	8.2	5.8	23.0	24.3	147.5	70
503.4813	13	8.6	6.1	25.2	26.8	154.0	80
503.4814	14	9.0	6.4	26.8	28.7	160.0	100
503.4815	15	9.4	6.9	28.3	30.5	169.0	120
503.4816	16	9.9	7.2	29.8	32.9	179.0	150
503.4817	17	10.3	7.6	31.8	34.5	190.0	160
503.4818	18	10.7	8.0	32.8	37.0	203.0	190
503.4819	19	11.2	8.6	33.9	39.2	215.0	220

GEARplus® flexible locking combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- With flexible locking head
- Exact gearing with 72 teeth
- 180° revolving head
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4867	12 pcs	GEARplus® flexible locking combination ratcheting spanner set	1.30
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	
3 x		1/4“ - 5/16“ - 10 mm	
3 x		1/4“ - 3/8“ - 1/2“	

GEARplus® flexible combination ratcheting spanner display

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Jaw 15° offset
- Exact gearing with 72 teeth
- With flexible head
- 180° revolving head
- High quality finis
- Chrome vanadium

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4700	70 pcs	GEARplus® flexible combination ratcheting spanner display	2.74
60 x		5 x (8 - 9 - 10 - 11- 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm)	
5 x		1/4“ ; 1/4“ - 3/8“ - 1/2“	
5 x		5/16“ - 10 mm	

GEARplus® flexible locking combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- With flexible locking head
- Exact gearing with 72 teeth
- 180° revolving head
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg
503.4859	6 pcs	GEARplus® flexible locking combination ratcheting spanner set	1.21
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	

GEARplus® flexible locking combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- With flexible locking head
- Exact gearing with 72 teeth
- 180° revolving head
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg
503.4865	12 pcs	GEARplus® flexible locking combination ratcheting spanner set	2.56
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	

GEAR*plus*® fl xible locking combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- With fl xible locking head
- Exact gearing with 72 teeth
- 180° revolving head
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4868	18 pcs	GEAR*plus*® fl xible locking combination ratcheting spanner set	2.90
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	
3 x		1/4“ - 5/16“ - 10 mm	
3 x		1/4“ - 3/8“ - 1/2“	

GEAR*plus*® fl xible locking combination ratcheting spanner display

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- With fl xible locking head
- Exact gearing with 72 teeth
- 180° revolving head
- High quality finis
- Chrome vanadium

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4800	70 pcs	GEAR*plus*® fl xible locking combination ratcheting spanner display	2.82
60 x		5 x (8 - 9 - 10 - 11- 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm)	
5 x		1/4“ ; 1/4“ - 3/8“ - 1/2“	
5 x		5/16“ - 10 mm	

COMBINATION SPANNERS, EXTRA LONG

CLASSIC combination spanner, extra long

- FlankTraction Profil
- Jaw 15° offset
- Ring head 15° offset
- Matt finis
- Chrome vanadium



	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
517.1508	8	7.5	4.5	13.2	20.3	170.0	45
517.1509	9	8.0	4.5	14.6	22.4	180.0	55
517.1510	10	8.5	5.0	16.0	24.4	190.0	60
517.1511	11	9.0	5.5	17.2	26.4	200.0	75
517.1512	12	9.5	6.0	19.0	28.4	210.0	90
517.1513	13	10.0	6.5	20.0	30.5	225.0	108
517.1514	14	11.0	7.0	21.8	32.5	235.0	120
517.1515	15	12.0	7.5	23.0	34.5	250.0	150
517.1516	16	13.0	8.0	24.5	36.4	265.0	174
517.1517	17	14.0	8.5	26.5	38.4	280.0	206
517.1518	18	15.0	9.0	28.0	40.6	295.0	240
517.1519	19	16.0	9.5	29.5	42.6	310.0	272
517.1520	20	16.0	9.5	29.5	42.0	310.0	265
517.1521	21	17.0	10.0	33.0	46.6	340.0	370
517.1522	22	18.0	11.0	34.5	48.7	350.0	410
517.1523	23	18.0	11.5	34.0	47.0	345.0	400
517.1524	24	19.0	12.0	37.5	52.7	400.0	535
517.1525	25	19.0	12.0	37.0	52.0	395.0	510
517.1526	26	20.0	13.0	41.0	58.0	445.0	700
517.1527	27	20.0	13.0	42.0	58.9	450.0	680
517.1528	28	20.0	13.5	41.0	58.0	445.0	660
517.1530	30	21.0	14.0	47.0	64.8	480.0	870
517.1532	32	22.0	15.0	49.5	67.0	500.0	1000
517.1534	34	23.0	15.0	53.0	70.0	520.0	1100
517.1536	36	24.0	16.0	57.2	73.0	550.0	1320
517.1541	41	26.0	16.0	63.5	86.0	600.0	1700
517.1546	46	27.0	17.5	70.9	96.0	640.0	2230

CLASSIC Combination spanner set, extra long

- FlankTraction profil
- Execution similar to DIN 3113
- Jaw 15° offset
- Ring head 15° offset
- Matt finis
- Chrome vanadium

			kg
517.1500	5 pcs	8 - 10 - 13 - 17 - 19 mm	0.70
517.1505	11 pcs	12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 mm	2.67

CHROME*plus*® combination spanner, extra long

- FlankTraction profile 12 point)
- Jaw 15° offset
- Ring head 15° offset
- Chrome plated and mirror polished
- Chrome vanadium



	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
519.0650	10	6.9	5.1	15.8	22.8	189.0	53
519.0651	11	7.0	5.3	17.3	24.6	207.0	62
519.0652	12	7.8	5.6	18.8	27.2	225.0	77
519.0653	13	8.5	5.7	20.4	28.6	243.0	113
519.0654	14	9.1	6.9	21.8	31.4	261.0	128
519.0655	15	9.3	7.0	23.4	33.5	279.0	144
519.0656	16	10.0	7.3	24.8	35.3	297.0	182
519.0657	17	10.1	7.4	26.2	37.6	314.0	197
519.0658	18	11.3	7.8	27.5	39.4	333.0	223
519.0659	19	12.7	8.7	28.7	41.5	349.0	271

CHROME*plus*® combination spanner set, extra long

- FlankTraction profile 12 point)
- Jaw 15° offset
- Ring head 15° offset
- Chrome plated and mirror polished
- Chrome vanadium

			kg
519.0660	10 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	1.73

OPEN ENDED SPANNERS

One handed multi function spanner

- Multi function spanner with ratchet function
- For complete screw working
- Adapts itself automatically to the screw size
- No sliping due to the coarse teeth
- Chrome vanadium

	mm	L mm	g
114.0050	8-19	190.0	165
114.0051	14-32	300.0	515

CLASSIC Adjustable spanner

- DIN 3117 Form A
- Jaw 15° offset
- Swedish type design
- With mm scale
- With hanging hole
- Matt finis
- Chrome vanadium



	mm		A mm	B mm	C mm	H1 mm	H2 mm	L mm	L	g
577.0100	13	1/2"	6.4	31.0	10.9	9.5	8.9	100.0	4"	50
577.0150	18	23/32"	7.1	46.0	15.2	11.6	10.7	150.0	6"	130
577.0200	23	29/32"	8.7	57.4	20.6	14.6	11.9	200.0	8"	250
577.0250	28	1.1/8"	11.1	69.8	24.9	16.9	14.5	250.0	10"	450
577.0300	34	1.5/16"	13.5	82.3	29.0	20.5	15.2	300.0	12"	690
577.0375	43	1.11/16"	15.9	104.3	37.1	25.4	17.5	375.0	15"	1240
577.0450	53	2.1/16"	18.2	120.0	45.2	30.9	19.1	450.0	18"	2100

CLASSIC adjustable spanner set

- DIN 3117 Form A
- Jaw 15° offset
- Swedish type design
- With mm scale
- With hanging hole
- Matt finis
- Chrome vanadium

			kg
577.0299	2 pcs	250 - 300 mm	1.14
577.0399	3 pcs	250 - 300 - 375 mm	2.80

CLASSIC adjustable spanner with dual component comfort grip handle

- DIN 3117 Form A
- Jaw 15° offset
- Swedish type design
- With mm scale
- With hanging hole
- Two component handle
- Phosphate finis
- Chrome vanadium



	mm		A mm	B mm	C mm	H1 mm	H2 mm	L mm	L	g
577.0201	23	29/32"	8.7	57.4	20.6	14.6	11.9	200.0	8"	250
577.0251	28	1.1/8"	11.1	69.8	24.9	16.9	14.5	250.0	10"	450
577.0301	34	1.5/16"	13.5	82.3	29.0	20.5	15.2	300.0	12"	690

CLASSIC adjustable spanner set with dual component comfort grip handle

- DIN 3117 Form A
- Jaw 15° offset
- Swedish type design
- With mm scale
- With hanging hole
- Two component handle
- Phosphate finis
- Chrome vanadium

			kg
577.0199	3 pcs	200 - 250 - 300 mm	1.39

Single open ended spanner

- DIN 894 / ISO 3380
- Jaw 15° offset
- For heavy duty applications
- Phosphate finis
- Tempered steel

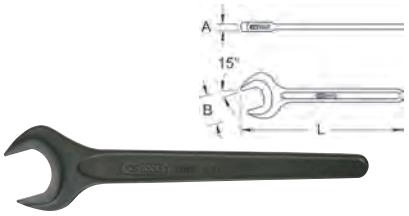

	mm	A mm	B mm	L mm	kg
517.2506	6	3.2	15.5	75.0	0.01
517.2507	7	3.5	17.0	80.0	0.01
517.2508	8	3.5	19.0	95.0	0.02
517.2509	9	4.0	20.0	100.0	0.02
517.2510	10	4.5	22.0	105.0	0.02
517.2511	11	5.0	24.5	115.0	0.03
517.2512	12	5.0	26.5	125.0	0.04
517.2513	13	5.5	28.5	135.0	0.04
517.2514	14	5.5	30.0	140.0	0.04
517.2515	15	5.5	32.0	145.0	0.05
517.2516	16	5.5	33.0	155.0	0.05
517.2517	17	6.0	36.0	150.0	0.07
517.2518	18	6.0	36.0	160.0	0.07
517.2519	19	7.0	40.0	170.0	0.08
517.0522	22	8.0	48.0	193.0	0.17
517.0524	24	9.0	50.0	217.0	0.17
517.0527	27	9.8	56.0	239.0	0.23
517.0530	30	10.8	62.0	263.0	0.29
517.0532	32	11.8	66.0	275.0	0.35
517.0536	36	12.8	74.0	305.0	0.41
517.0538	38	12.8	74.0	305.0	0.41
517.0540	40	13.7	87.0	350.0	0.62
517.0541	41	13.8	87.0	344.0	0.62
517.0542	42	13.5	87.0	350.0	0.70
517.0546	46	19.8	94.0	380.0	0.85
517.0548	48	16.5	99.0	395.0	0.94
517.0550	50	15.8	102.0	413.0	1.02
517.0555	55	16.8	112.0	459.0	1.28
517.0560	60	17.7	122.0	494.0	1.63
517.0565	65	18.7	132.0	528.0	1.71
517.0570	70	19.7	142.0	572.0	2.50
517.0575	75	20.7	152.0	610.0	3.50
517.0580	80	21.7	162.0	645.0	3.70
517.0585	85	23.0	173.0	690.0	4.78
517.0590	90	23.0	173.0	690.0	5.45
517.0595	95	25.0	195.0	847.0	5.59
517.0596	100	25.0	195.0	847.0	5.80
517.2605	105	28.0	217.0	1000.0	8.90
517.2610	110	28.0	217.0	1000.0	9.00
517.2615	115	28.0	220.0	1000.0	9.00
517.2620	120	28.0	220.0	1000.0	9.00
517.2625	125	28.0	220.0	1000.0	8.30
517.2630	130	28.0	225.0	1000.0	8.30
517.0635	135	28.0	225.0	1000.0	8.20

Slogging open end spanner

- DIN 133
- Jaw 15° offset
- Impact area
- For heavy duty applications
- Phosphate finis
- Chrome vanadium

	mm		A mm	B mm	L mm	kg
517.2122	22		16.0	55.0	180.0	0.30
517.0124	24		16.0	55.0	180.0	0.28

	mm		A mm	B mm	L mm	kg
517.0127	27		16.3	56.0	181.0	0.39
517.0130	30		16.7	62.0	188.0	0.53
517.0132	32		17.2	66.0	196.0	0.53
517.0136	36		18.2	76.0	211.0	0.76
517.0141	41		19.2	88.0	227.0	0.92
517.0146	46		19.7	98.0	256.0	1.31
517.0150	50		21.2	106.5	281.0	1.57
517.0155	55		23.6	117.0	310.0	2.31
517.0160	60		24.1	128.0	321.0	2.31
517.0165	65		27.6	139.0	351.0	3.30
517.0170	70		29.6	150.0	370.0	4.56
517.0175	75		31.0	161.5	390.0	4.46
517.0180	80		34.0	172.5	406.0	6.12
517.0185	85		34.0	172.5	406.0	5.74
517.0190	90		38.4	194.0	456.0	8.04
517.0195	95		38.4	194.0	456.0	8.16
517.0196	100		46.0	225.0	500.0	11.80
517.2105	105		46.3	225.5	500.0	11.20
517.2110	110		46.3	225.5	500.0	14.00
517.2115	115		54.2	245.5	525.0	13.80
517.2120	120		54.2	254.5	525.0	18.00
517.2125	125		50.0	255.0	545.0	17.80
517.2130	130		55.0	275.0	575.0	21.00
517.2135	135		55.0	275.0	575.0	20.40
517.2140	140		55.0	275.0	575.0	20.00
517.2145	145		60.0	305.0	640.0	28.50
517.2150	150		60.0	305.0	640.0	28.30
517.2155	155		60.0	305.0	640.0	28.00
517.2160	160		60.0	305.0	640.0	28.40
517.2165	165		70.0	342.0	715.0	42.00
517.2170	170		70.0	342.0	715.0	39.00
517.2175	175		70.0	342.0	715.0	39.00
517.2180	180		70.0	392.0	715.0	40.00
517.2185	185		70.0	392.0	715.0	39.50
517.2190	190		78.0	392.0	800.0	53.00
517.2195	195		78.0	392.0	800.0	52.00
517.2200	200		78.0	392.0	800.0	51.00
517.2205	205		78.0	392.0	800.0	51.00
517.2210	210		78.0	392.0	800.0	50.50
517.2220	220		72.0	415.0	800.0	48.00
517.2251		1.1/16“	16.3	56.0	181.0	0.30
517.2254		1.1/8“	16.3	56.0	181.0	0.35
517.2255		1.3/16“	16.7	62.0	188.0	0.40
517.2253		1.1/4“	16.7	62.0	188.0	0.53
517.2258		1.5/16“	17.2	66.0	196.0	0.65
517.2257		1.3/8“	17.2	66.0	196.0	0.76
517.2260		1.7/16“	18.2	76.0	211.0	1.25
517.2252		1.1/2“	18.2	76.0	211.0	0.35
517.2262		1.9/16“	19.2	88.0	227.0	2.05
517.2259		1.5/8“	19.2	88.0	227.0	0.95
517.2263		1.11/16“	19.2	88.0	227.0	2.45
517.2256		1.3/4“	19.2	88.0	227.0	0.48
517.2264		1.13/16“	19.7	98.0	256.0	1.31
517.2261		1.7/8“	19.7	98.0	256.0	1.60
517.2265		1.15/16“	21.2	106.5	281.0	4.25
517.2266		2“	21.2	106.5	281.0	4.88
517.2267		2.1/16“	21.2	106.5	281.0	6.10
517.2270		2.1/8“	21.2	106.0	281.0	7.60
517.2271		2.3/16“	23.6	117.0	310.0	11.50
517.2269		2.1/4“	23.6	117.0	310.0	8.25
517.2274		2.5/16“	23.6	117.0	310.0	13.80
517.2273		2.3/8“	23.6	128.0	321.0	14.00
517.2276		2.7/16“	23.6	128.0	321.0	17.80
517.2268		2.1/2“	23.6	128.0	321.0	5.90
517.2278		2.9/16“	27.6	139.0	351.0	17.80
517.2275		2.5/8“	27.6	139.0	351.0	18.00
517.2272		2.3/4“	29.6	150.0	370.0	11.20
517.2279		2.13/16“	29.6	150.0	370.0	21.00
517.2277		2.7/8“	29.6	150.0	370.0	18.00
517.2280		2.15/16“	31.0	161.5	390.0	20.40
517.2281		3“	31.0	161.5	390.0	20.00
517.2284		3.1/8“	34.0	172.5	406.0	28.00
517.2283		3.1/4“	34.0	172.5	406.0	28.30
517.2286		3.3/8“	34.0	172.5	406.0	42.00
517.2282		3.1/2“	38.4	194.0	456.0	28.50
517.2287		3.5/8“	38.4	194.0	456.0	39.00
517.2285		3.3/4“	38.4	194.0	456.0	28.40
517.2288		3.7/8“	46.3	225.5	500.0	39.00
517.2289		4“	46.3	225.5	500.0	40.00
517.2292		4.1/8“	46.3	225.5	800.0	52.00
517.2291		4.1/4“	47.0	235.0	510.0	53.00
517.2290		4.1/2“	47.0	235.0	510.0	39.50
517.2293		4.3/4“	50.0	255.0	545.0	51.00
517.2294		5“	50.0	255.0	545.0	51.00
517.2296		5.3/8“	55.0	275.0	575.0	48.00
517.2295		5.3/4“	55.0	275.0	575.0	50.50
517.2297		6“	60.0	305.0	640.0	47.50

Intermediate sizes are also available upon request.

DOUBLE OPEN ENDED SPANNERS

CLASSIC Double open ended spanners

- DIN 3110 / ISO 1085 / ISO 10102 / ISO 3318
- Jaw 15° offset
- Ground heads
- Matt finish
- Chrome vanadium

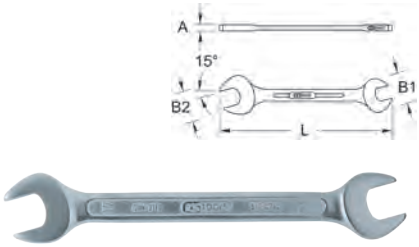

	mm		A mm	B1 mm	B2 mm	L mm	g
517.0738	3,2x5,5		3.0	10.5	12.0	97.0	11
517.0739	4x5		4.0	14.0	16.0	125.0	21
517.0745	5,5x7		3.6	15.7	17.7	122.0	17
517.0701	6x7		3.7	15.5	18.0	122.0	20
517.0702	8x9		4.0	20.4	22.7	140.0	40
517.0740	8x10		4.0	18.0	22.0	140.0	30
517.0747	9x11		4.8	23.9	26.9	156.0	45
517.0704	10x11		5.0	24.9	27.1	157.0	50
517.0741	10x12		5.5	22.0	28.0	162.0	60
517.0706	10x13		5.0	24.9	31.2	157.0	70
517.0748	10x14		5.3	28.0	31.0	172.0	65
517.0742	11x13		5.0	25.0	29.0	172.0	69
517.0749	11x14		5.3	28.0	31.0	172.0	75
517.0707	12x13		5.0	29.2	31.2	172.0	70
517.0751	12x14		5.3	28.0	31.0	172.0	75
517.0743	13x14		6.0	30.0	31.5	188.0	90
517.0752	13x15		5.7	32.5	34.9	190.0	95
517.0708	13x17		6.0	31.2	38.9	172.0	120
517.0709	14x15		5.5	33.3	35.3	190.0	100
517.0753	14x17		2.9	32.1	38.2	204.0	120
517.0710	16x17		6.0	37.1	38.9	205.0	130
517.0744	16x18		6.5	36.0	40.0	220.0	150
517.0711	17x19		6.5	38.9	42.8	222.0	180
517.0712	18x19		6.5	40.9	42.8	222.0	180
517.0714	20x22		7.0	45.5	49.5	236.0	230
517.0713	19x22		7.0	42.8	49.5	236.0	200
517.0757	19x24		7.3	42.3	52.5	250.0	250
517.0715	21x23		7.5	47.0	51.0	250.0	220
517.0758	21x24		7.3	47.4	51.5	250.0	250
517.0736	22x24		7.5	49.5	54.5	250.0	260
517.0761	24x26		7.8	51.6	52.5	265.0	330
517.0716	24x27		8.0	54.5	61.0	266.0	330
517.0764	24x30		8.1	52.5	64.8	280.0	395
517.0737	25x28		8.5	65.0	61.0	280.0	360
517.0765	27x29		8.1	58.6	64.8	280.0	460
517.0766	27x30		8.1	58.6	64.4	280.0	475
517.0767	27x32		8.6	59.7	69.9	302.0	500
517.0718	30x32		9.0	65.5	69.0	302.0	510
517.0768	30x34		8.6	64.8	73.0	302.0	540
517.0769	30x36		9.5	64.8	76.7	326.0	630
517.0771	32x36		9.5	69.5	76.7	326.0	630
517.0725	36x41		10.0	77.0	85.0	380.0	950
517.0726	41x46		10.7	86.5	95.5	400.0	1220
517.0728	46x50		11.6	97.0	103.0	420.0	1920
517.0772	55x60		16.5	110.0	120.0	565.0	3000
517.0781		1/4x5/16“	3.9	17.7	20.8	120.0	25
517.0782		5/16x3/8“	3.9	20.8	22.9	140.0	35
517.0783		3/8x7/16“	4.8	23.9	26.9	156.0	45
517.0784		7/16x1/2“	5.3	28.0	31.0	172.0	85
517.0785		1/2x9/16“	5.7	32.5	34.9	190.0	95
517.0786		9/16x5/8“	5.7	32.5	34.9	190.0	103
517.0787		19/32x11/16“	5.9	36.1	39.2	204.0	132
517.0788		5/8x11/16“	5.9	36.1	39.2	204.0	132
517.0789		11/16x3/4“	6.5	40.2	42.3	223.0	155
517.0791		5/8x3/4“	6.5	40.2	42.3	223.0	155

	mm		A mm	B1 mm	B2 mm	L mm	g
517.0792		3/4x25/32“	6.8	44.9	48.4	236.0	230
517.0793		3/4x7/8“	6.8	44.9	48.8	236.0	230
517.0794		13/16x7/8“	6.8	44.9	48.8	236.0	230
517.0795		15/16x1“	7.8	51.6	52.5	265.0	315
517.0796		1x1.1/8“	8.1	55.2	61.3	280.0	405
517.0797		1.1/16x1.1/4“	8.6	59.7	69.9	302.0	440

CLASSIC Double open ended spanner set

- DIN 3110 / ISO 1085 / ISO 10102 / ISO 3318
- Jaw 15° offset
- Ground heads
- Matt finish
- Chrome vanadium

			kg
517.0145	5 pcs	8x9 - 10x11 - 12x13 - 16x17 - 18x19 mm	0.47
517.0148	8 pcs	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 mm	0.81
517.0149	10 pcs	8x10 - 10x12 - 13x17 - 14x15 - 16x18 - 17x19 - 20x22 - 21x23 - 24x27 - 30x32 mm	1.95
517.0123	11 pcs	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 21x23 - 24x27 - 30x32 mm	1.60
517.0125	12 pcs	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 21x23 - 24x27 - 25x28 - 30x32 mm	2.40

CHROME*plus*® Double open ended spanner

- DIN 3110 / ISO 3318 / ISO 1085 / ISO 10102
- Jaw 15° offset
- Chrome plated and mirror polished
- Chrome vanadium



	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
518.0701	6x7		4.5	4.6	14.3	16.1	125.0	27
518.0702	8x9		5.0	5.5	17.1	19.1	140.0	32
518.0704	10x11		5.7	5.9	20.5	23.3	157.0	58
518.0706	10x13		6.6	6.8	26.2	29.7	157.0	93
518.0707	12x13		6.5	6.8	27.0	29.7	172.0	93
518.0709	14x15		7.2	7.2	29.2	32.8	190.0	122
518.0710	16x17		7.4	7.5	33.4	38.6	205.0	170
518.0719	16x18		7.4	7.4	33.5	38.6	210.0	170
518.0711	17x19		8.2	8.2	36.2	39.2	220.0	212
518.0712	18x19		8.2	8.4	36.2	39.2	220.0	212
518.0714	20x22		8.6	8.6	37.6	43.0	236.0	235
518.0715	21x23		8.8	8.8	42.6	45.1	250.0	277
518.0716	24x27		9.8	9.8	49.5	51.6	265.0	410
518.0718	30x32		12.1	12.1	55.9	66.4	300.0	693
518.0720	36x41		12.2	12.2	73.8	84.0	380.0	992
518.3201		1/4“x5/16“	4.5	4.6	14.3	16.1	125.0	27
518.3202		3/8“x7/16“	5.7	5.9	20.5	23.3	157.0	58
518.3203		1/2“x9/16“	6.5	6.8	27.0	29.7	172.0	93
518.3204		9/16“x5/8“	7.2	7.4	29.2	32.8	185.0	122
518.3205		5/8“x11/16“	7.4	7.5	33.5	38.6	205.0	170
518.3206		11/16“x3/4“	8.2	8.4	36.2	39.2	220.0	212
518.3207		3/4“x7/8“	8.6	9.1	37.6	43.0	236.0	235
518.3208		15/16“x1“	9.8	9.9	49.5	51.6	265.0	410
518.3209		1.1/8“x1.1/4“	12.1	12.3	55.9	66.4	300.0	693

CHROME*plus*® Double open ended spanner set

- DIN 3110 / ISO 3318 / ISO 1085 / ISO 10102
- Jaw 15° offset
- Mirror polished chrome
- Chrome vanadium

			kg	
518.0747	7 pcs	8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 mm	1.03	
518.0743	3 pcs	21x23 - 24x27 - 30x32 mm	1.42	
518.3220	6 pcs	1/4"x5/16" - 3/8"x7/16" - 1/2"x9/16" - 5/8"x11/16" - 11/16"x3/4" - 3/4"x7/8"	0.80	
518.3200	8 pcs	1/4"x5/16" - 3/8"x7/16" - 1/2"x9/16" - 5/8"x11/16" - 11/16"x3/4" - 3/4"x7/8" - 15/16"x1" - 1.1/8"x1.1/4"	1.90	

Double open ended spanner

- DIN 895 / ISO 3318 / ISO 1085
- Jaw 15° offset
- For heavy duty applications
- Phosphate finis
- Chrome vanadium



	mm	A mm	B1 mm	B2 mm	L mm	g	
517.1406	6x7	3.2	15.0	17.0	96.0	10	
517.1407	7x8	3.5	17.0	19.0	110.0	20	
517.1408	8x9	3.7	19.0	20.5	108.0	15	
517.2408	8x10	4.2	19.0	22.0	115.0	26	
517.1409	9x10	4.3	18.8	23.3	118.0	30	
517.2409	9x11	5.0	20.5	24.0	125.0	30	
517.1410	10x11	5.0	22.0	24.5	124.0	30	
517.2410	10x12	5.0	22.0	26.8	125.0	34	
517.1411	10x13	5.0	22.0	28.5	128.0	40	
517.2411	11x13	5.5	24.5	28.5	140.0	45	
517.1412	12x13	5.5	26.5	28.5	140.0	40	
517.2412	12x14	5.5	26.5	30.0	140.0	50	
517.1413	13x14	5.5	28.5	30.0	140.0	40	
517.2413	13x15	5.5	28.5	32.0	150.0	60	
517.1415	13x17	6.0	28.5	36.0	158.0	70	
517.1414	14x15	5.5	30.0	32.0	154.0	60	
517.2414	14x17	6.0	30.0	36.0	160.0	70	
517.1416	16x17	6.0	33.0	36.0	158.0	80	
517.1417	17x19	7.0	36.0	40.0	171.0	100	
517.2417	17x22	8.0	36.0	46.0	190.0	145	
517.1418	18x19	7.0	38.0	40.0	171.0	100	
517.1419	19x22	8.0	40.0	46.0	195.0	135	
517.2419	19x24	9.0	40.0	50.0	215.0	140	
517.1420	20x22	8.0	42.5	46.0	195.0	135	
517.2421	21x23	9.0	44.0	49.0	215.0	180	
517.1422	22x24	9.0	46.0	50.0	221.0	180	
517.2422	22x27	10.0	46.0	56.0	235.0	230	
517.1423	24x27	9.8	50.0	56.0	246.0	260	
517.1425	25x28	9.8	53.0	58.0	246.0	330	
517.1426	27x30	10.8	56.0	62.0	275.0	400	
517.2427	27x32	12.0	56.0	66.0	270.0	370	
517.1430	30x32	11.8	62.0	66.0	278.0	420	
517.2430	30x36	13.0	62.0	74.0	305.0	500	

	mm	A mm	B1 mm	B2 mm	L mm	g	
517.1432	32x36	12.8	66.0	74.0	310.0	520	
517.1436	36x41	13.8	74.0	84.0	347.0	800	
517.1441	41x46	14.8	84.0	94.0	383.0	950	
517.1446	46x50	15.8	94.0	102.0	420.0	1200	
517.1450	50x55	16.5	102.0	112.0	450.0	1400	
517.1455	55x60	18.0	112.0	122.0	480.0	1900	
517.1465	65x70	20.0	132.0	142.0	580.0	2310	
517.1475	75x80	21.0	152.0	162.0	665.0	4480	

Double open ended spanner set

- DIN 895 / ISO 3318 / ISO 1085
- Jaw 15° offset
- For heavy duty applications
- Phosphate finis
- Chrome vanadium

			kg	
517.1490	8 pcs	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 mm	0.57	
517.1491	10 pcs	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 24x27 - 30x32 mm	1.41	

SINGLE RING ENDED SPANNER

CLASSIC offset single ring spanner

- FlankTraction Profil
- Ring head 75° offset
- With shaft for snap-on handle
- With locking pin
- Heavy duty to deliver maximum torque
- Matt finis
- Chrome vanadium



	mm		A mm	B mm	D mm	H mm	L mm	kg	
517.9022	22		17.0	38.0	18.3	29.0	180.0	0.32	
517.9024	24		17.0	38.0	19.0	29.5	180.0	0.35	
517.9027	27		17.0	42.0	19.0	31.5	190.0	0.40	
517.9030	30		18.0	48.0	19.0	33.5	195.0	0.45	
517.9032	32		18.0	49.0	21.8	34.0	200.0	0.55	
517.9036	36		18.0	49.0	21.8	34.0	200.0	0.65	
517.9041	41		20.0	54.0	21.8	35.5	205.0	0.75	
517.9046	46		22.0	62.0	25.0	39.5	265.0	1.05	
517.9050	50		23.0	69.0	25.0	40.0	280.0	1.15	
517.9055	55		25.5	76.0	25.0	42.5	290.0	1.40	

	mm		A mm	B mm	D mm	H mm	L mm	kg	
517.9060	60		28.0	81.0	30.0	45.5	300.0	2.10	
517.9065	65		30.5	90.0	30.0	49.0	345.0	2.30	
517.9070	70		33.0	98.0	30.0	53.0	355.0	2.60	
517.9075	75		35.5	105.0	30.0	55.0	365.0	3.00	
517.9080	80		38.0	110.0	30.0	57.5	375.0	3.45	
517.9085	85		40.5	125.0	30.0	59.0	385.0	3.80	
517.9090	90		45.0	140.0	30.0	63.0	410.0	4.88	
517.9095	95		45.0	140.0	30.0	63.0	410.0	5.67	
517.9100	100		47.0	140.0	30.0	63.0	412.0	6.66	
517.9105	105		47.0	143.0	30.0	63.0	415.0	7.50	
517.9111		1"	17.0	38.0	18.3	29.0	180.0	0.37	
517.9112		1.1/16"	17.0	38.0	18.3	31.5	185.0	0.41	
517.9115		1.1/8"	17.0	38.0	18.3	33.0	185.0	0.41	
517.9116		1.3/16"	18.0	48.0	18.3	33.0	195.0	0.49	
517.9114		1.1/4"	18.0	49.0	21.3	34.0	230.0	0.72	
517.9119		1.5/16"	20.0	54.0	21.3	34.0	240.0	0.72	
517.9118		1.3/8"	20.0	54.0	21.3	35.0	240.0	0.84	
517.9121		1.7/16"	20.0	54.0	21.3	35.0	250.0	0.84	
517.9113		1.1/2"	20.0	54.0	21.3	39.0	240.0	0.84	
517.9123		1.9/16"	23.0	69.0	21.3	39.0	250.0	0.94	
517.9120		1.5/8"	23.0	69.0	21.3	39.0	250.0	0.94	
517.9124		1.11/16"	23.0	69.0	21.3	39.0	250.0	0.94	
517.9117		1.3/4"	22.0	62.0	21.4	40.0	250.0	0.94	
517.9125		1.13/16"	23.0	69.0	24.1	40.0	260.0	1.30	
517.9122		1.7/8"	23.0	69.0	24.1	40.0	260.0	1.30	
517.9126		2"	28.0	81.0	24.1	42.0	270.0	1.45	
517.9127		2.1/16"	28.0	81.0	24.1	42.0	270.0	1.45	
517.9130		2.1/8"	28.0	81.0	24.1	45.0	270.0	1.45	
517.9131		2.3/16"	28.0	81.0	24.1	45.0	270.0	1.50	
517.9129		2.1/4"	28.0	81.0	24.1	45.0	270.0	1.50	
517.9134		2.5/16"	30.5	90.0	29.1	49.0	325.0	2.40	
517.9133		2.3/8"	30.5	90.0	29.1	49.0	325.0	2.40	
517.9135		2.7/16"	30.5	90.0	29.1	49.0	345.0	2.60	
517.9128		2.1/2"	30.5	90.0	29.1	53.0	325.0	2.40	
517.9136		2.9/16"	30.5	90.0	29.1	53.0	345.0	2.60	
517.9132		2.3/4"	30.5	90.0	29.1	55.0	345.0	2.80	
517.9137		2.13/16"	38.0	110.0	29.1	55.0	375.0	3.00	
517.9138		2.15/16"	38.0	110.0	29.1	57.5	375.0	3.00	
517.9139		3"	38.0	110.0	29.1	57.5	375.0	3.00	
517.9142		3.1/8"	40.5	125.0	29.1	59.0	385.0	4.10	
517.9141		3.1/4"	40.5	125.0	29.1	59.0	385.0	4.10	
517.9144		3.3/8"	40.5	125.0	29.1	59.0	385.0	4.10	
517.9140		3.1/2"	40.5	125.0	29.1	63.0	385.0	4.10	
517.9145		3.5/8"	45.0	140.0	29.1	63.0	410.0	4.95	
517.9143		3.3/4"	45.0	140.0	29.1	63.0	410.0	4.95	
517.9146		3.7/8"	45.0	140.0	29.1	63.0	410.0	4.95	
517.9147		4"	45.0	140.0	29.1	63.0	412.0	4.95	

Snap-on handle for single ring spanner

- Four different sizes
- Matt finis
- Chrome vanadium

	mm	D mm	L mm	#	kg	
517.9001	24 - 30	19.0	460.0	1	0.75	
517.9002	32 - 41	22.0	610.0	2	1.25	
517.9003	46 - 55	25.0	760.0	3	2.30	
517.9004	60 - 105	30.0	860.0	4	2.80	

Ratchet ring spanner, clamp head

- 12 point
- Straight form
- Hanging hole
- From 27 mm with rubber handle
- Chrome plated handle
- Head phosphate finis
- Chrome vanadium



	mm	A mm	B mm	L mm	g	
500.5007	7	7.0	21.0	137.0	81	
500.5008	8	7.0	21.0	137.0	83	
500.5009	9	7.0	22.0	137.0	83	
500.5010	10	7.0	22.0	137.0	82	
500.5011	11	7.0	24.0	139.0	200	
500.5012	12	7.0	28.0	140.0	88	
500.5013	13	7.0	28.0	140.0	200	
500.5014	14	7.0	28.0	140.0	88	
500.5016	16	9.5	30.0	187.0	145	
500.5017	17	9.5	31.0	187.0	280	
500.5018	18	10.0	34.0	190.0	150	
500.5019	19	10.0	36.0	190.0	280	
500.5022	22	13.0	40.0	234.0	280	
500.5024	24	13.0	43.0	234.0	300	
500.5027	27	13.0	47.0	240.0	313	
500.5030	30	16.0	56.0	325.0	610	
500.5032	32	16.0	59.0	325.0	615	

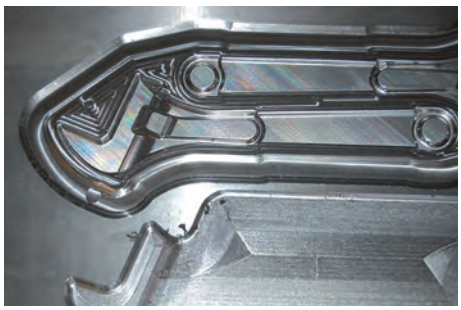

Ratchet ring spanner set, clamp head

- 12 point
- Straight form
- Hanging hole
- From 27 mm with rubber handle
- Chrome plated handle
- Head phosphate finis
- Chrome vanadium

			g	
500.5606	6 pcs	10 - 11 - 13 - 17 - 19 - 22 mm	980	

Scaffold spanner, reversing

- FlankTraction profile 12 point)
- Exact gearing with 32 teeth
- Centering pin at the handle end
- Extremely substaintial
- Reversible
- Phosphate finis
- Chrome vanadium



	mm	A mm	B mm	L mm	g	
522.1013	10x13	36.5	31.0	240.0	200	
522.1317	13x17	44.2	34.0	280.0	270	
522.1618	16x18	49.0	42.1	315.0	450	
522.1719	17x19	49.3	42.3	315.0	450	
522.1922	19x22	49.5	42.3	315.0	450	
522.1924	19x24	54.0	51.3	360.0	750	
522.2427	24x27	54.0	51.6	360.0	750	
522.2430	24x30	62.2	64.5	450.0	1280	
522.3036	30x36	67.0	65.2	450.0	1300	
522.3236	32x36	67.1	65.4	450.0	1300	

Slogging ring spanner

- FlankTraction profile 12 point)
- DIN 7444
- Impact area
- For heavy duty applications
- Phosphate finis
- Chrome vanadium



	mm		A mm	B mm	L mm	kg	
517.0922	22		15.0	43.0	165.0	0.24	
517.0924	24		15.0	42.5	160.0	0.24	
517.0927	27		15.5	47.0	180.0	0.33	
517.0930	30		16.5	51.5	190.0	0.44	
517.0932	32		16.5	54.0	195.0	0.53	
517.0936	36		19.5	60.0	205.0	0.55	
517.0941	41		20.5	66.0	225.0	0.73	
517.0946	46		22.5	75.0	240.0	0.97	
517.0950	50		23.5	80.0	250.0	1.16	
517.0955	55		25.0	87.5	270.0	1.52	
517.0960	60		26.0	93.5	270.0	1.46	
517.0965	65		29.0	101.0	290.0	2.18	
517.0970	70		32.5	109.5	320.0	2.40	
517.0975	75		34.0	114.5	325.0	2.76	

	mm		A mm	B mm	L mm	kg	
517.0980	80		35.0	123.0	345.0	4.00	
517.0985	85		37.0	129.0	360.0	4.86	
517.0990	90		41.5	152.0	400.0	5.88	
517.0995	95		41.5	152.0	400.0	5.88	
517.0996	100		41.5	152.0	400.0	6.76	
517.1905	105		47.5	172.0	435.0	6.53	
517.1910	110		47.5	172.0	435.0	8.60	
517.1915	115		47.5	172.0	435.0	8.60	
517.1920	120		54.0	182.0	480.0	13.20	
517.1925	125		54.0	182.0	480.0	13.20	
517.1930	130		58.0	202.0	520.0	13.80	
517.1935	135		58.0	202.0	520.0	13.80	
517.1940	140		58.0	202.0	520.0	13.80	
517.1945	145		64.0	228.0	580.0	19.20	
517.1950	150		64.0	228.0	580.0	19.20	
517.1955	155		64.0	228.0	580.0	19.20	
517.1960	160		64.0	228.0	580.0	19.20	
517.1965	165		70.0	265.0	650.0	28.60	
517.1970	170		70.0	265.0	650.0	28.60	
517.1975	175		70.0	265.0	650.0	28.60	
517.1980	180		70.0	265.0	650.0	34.00	
517.1985	185		75.0	290.0	700.0	33.50	
517.1990	190		75.0	290.0	700.0	33.00	
517.1995	195		75.0	290.0	700.0	32.50	
517.2900	200		75.0	290.0	700.0	32.00	
517.2905	205		80.0	320.0	750.0	38.50	
517.2910	210		80.0	320.0	750.0	38.00	
517.2915	215		80.0	320.0	750.0	38.70	
517.2920	220		80.0	320.0	750.0	37.50	
517.2930	230		80.0	320.0	750.0	36.00	
517.2951		1.1/16"	15.5	47.0	180.0	0.35	
517.2954		1.1/8"	15.5	47.0	180.0	0.35	
517.2955		1.3/16"	16.5	51.5	190.0	0.47	
517.2953		1.1/4"	16.5	51.5	190.0	0.53	
517.2958		1.5/16"	16.5	53.0	195.0	0.47	
517.2957		1.3/8"	16.5	53.0	195.0	0.57	
517.2960		1.7/16"	19.5	60.0	205.0	0.57	
517.2952		1.1/2"	19.5	60.0	205.0	0.57	
517.2962		1.9/16"	20.5	66.0	225.0	0.76	
517.2959		1.5/8"	20.5	66.0	225.0	0.76	
517.2963		1.11/16"	20.5	66.0	225.0	0.76	
517.2956		1.3/4"	20.5	66.0	225.0	0.95	
517.2964		1.13/16"	22.5	75.0	240.0	0.95	
517.2961		1.7/8"	22.5	75.0	240.0	0.95	
517.2965		1.15/16"	23.5	80.0	250.0	1.12	
517.2966		2"	23.5	80.0	250.0	1.12	
517.2967		2.1/16"	23.5	80.0	250.0	1.12	
517.2970		2.1/8"	23.5	80.0	250.0	1.56	
517.2971		2.3/16"	25.0	87.5	270.0	1.56	
517.2969		2.1/4"	25.0	87.5	270.0	1.56	
517.2974		2.5/16"	26.0	93.5	270.0	1.63	
517.2973		2.3/8"	26.0	93.5	270.0	1.63	
517.2976		2.7/16"	26.0	93.5	270.0	1.63	
517.2968		2.1/2"	29.0	101.0	290.0	2.06	
517.2978		2.9/16"	29.0	101.0	290.0	2.06	
517.2975		2.5/8"	29.0	101.0	290.0	2.06	
517.2972		2.3/4"	32.5	109.5	320.0	3.00	
517.2979		2.13/16"	32.5	109.5	320.0	3.00	
517.2977		2.7/8"	32.5	109.5	320.0	3.00	
517.2980		2.15/16"	34.0	114.5	325.0	3.00	
517.2981		3"	34.0	114.5	325.0	3.00	
517.2984		3.1/8"	35.0	123.0	345.0	4.00	
517.2983		3.1/4"	36.0	126.0	360.0	4.00	
517.2986		3.3/8"	36.0	126.0	360.0	4.00	
517.2982		3.1/2"	40.0	142.0	390.0	4.00	
517.2987		3.5/8"	40.0	142.0	390.0	5.40	
517.2985		3.3/4"	41.5	152.0	400.0	5.74	
517.2988		3.7/8"	45.0	155.0	420.0	5.40	
517.2989		4"	45.0	155.0	420.0	6.53	
517.2992		4.1/8"	45.0	155.0	420.0	6.53	
517.2991		4.1/4"	48.0	170.0	450.0	8.60	
517.2990		4.1/2"	48.0	170.0	450.0	8.60	
517.2993		4.3/4"	54.0	182.0	480.0	13.20	
517.2994		5"	54.0	182.0	480.0	13.20	
517.2995		5.1/8"	58.0	202.0	520.0	13.30	
517.2997		5.3/8"	58.0	202.0	520.0	13.80	
517.2996		5.3/4"	64.0	228.0	580.0	19.20	
517.2998		6"	64.0	228.0	580.0	19.20	

Intermediate sizes are also available upon request.

OPEN DOUBLE RING SPANNERS

CLASSIC Open double ring spanner, offset

- 6 point
- DIN 3118
- Jaw 15° offset
- Opening 15° cranked
- Chrome vanadium

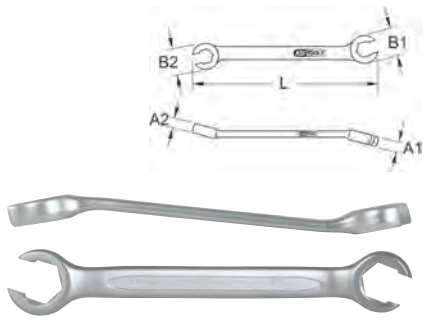

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g	
517.0252	8x10	6.6	6.7	17.6	19.8	143.0	45	
517.0253	9x11	7.6	7.4	21.3	22.9	152.0	50	
517.0254	10x11	7.6	7.4	21.3	22.9	152.0	60	
517.0255	10x12	7.6	7.4	21.3	22.9	152.0	80	
517.0257	12x13	8.8	9.0	23.1	23.8	156.0	100	
517.0258	12x14	10.0	9.9	25.3	27.6	178.0	110	
517.0260	14x15	11.4	11.5	30.0	32.1	196.0	120	
517.0261	14x17	11.4	11.5	30.0	32.1	196.0	140	
517.0263	16x18	11.4	11.5	30.0	32.1	196.0	160	
517.0264	17x19	11.4	11.5	30.0	32.1	196.0	180	
517.0265	19x21	13.5	13.1	34.1	37.6	207.0	240	
517.0266	19x22	13.5	13.1	34.1	37.6	207.0	240	
517.0267	22x24	13.5	17.0	37.6	46.0	252.0	320	
517.0268	24x27	17.0	16.2	46.0	42.3	264.0	430	
517.0269	30x32	22.4	20.4	46.3	44.8	283.0	700	

CHROME*plus*® Open double ring spanner, offset

- 6 point
- DIN 3118
- Jaw 15° offset
- Opening 15° cranked
- Chrome plated and mirror polished
- Chrome vanadium

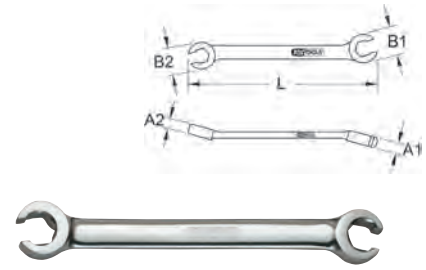

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g	
518.0511	6x8		6.6	6.7	17.6	19.8	143.0	50	
518.0512	8x12		6.7	7.4	19.8	21.3	147.0	50	
518.0513	9x11		7.6	7.4	21.3	22.9	152.0	60	
518.0523	10x11		7.6	7.4	21.3	22.9	152.0	60	
518.0514	10x12		7.6	7.4	21.3	22.9	152.0	60	
518.0524	12x13		8.8	9.0	23.1	23.8	156.0	80	
518.0515	13x14		10.0	9.9	25.3	25.3	178.0	120	
518.0525	14x15		11.4	11.5	30.0	30.0	196.0	170	
518.0526	14x17		11.4	11.5	30.0	30.0	196.0	170	
518.0516	15x17		11.4	11.5	30.0	30.0	196.0	170	
518.0517	16x18		11.4	11.5	30.0	30.0	196.0	170	
518.0518	17x19		11.4	11.5	30.0	30.0	196.0	170	
518.0519	19x21		13.5	13.1	34.1	34.1	207.0	220	
518.0520	19x22		13.5	13.1	34.1	34.1	207.0	220	
518.0521	24x27		17.0	16.2	46.0	46.0	264.0	360	
518.0522	30x32		22.4	20.4	46.3	46.3	283.0	480	
518.0501		1/4"x5/16"	6.6	6.7	17.6	19.8	143.0	50	
518.0503		3/8"x7/16"	7.6	7.4	21.3	22.9	152.0	60	
518.0506		7/16"x1/2"	8.8	9.0	23.1	23.8	158.0	80	
518.0504		1/2"x9/16"	10.0	9.9	25.3	27.6	178.0	120	
518.0505		5/8"x11/16"	11.4	11.5	30.0	32.1	196.0	170	
518.0507		3/4"x7/8"	13.5	13.1	34.1	37.6	207.0	220	

CHROME*plus*® Open double ring spanner set, offset

- 6 point
- Ring head 30° offset
- Spanner has double sized head
- Heavy duty head
- For brake pipe couplers
- No slippage
- Chrome plated and mirror polished
- Chrome vanadium



	mm	A1 mm	A2 mm	B1 mm	B2 mm	C1 mm	C2 mm	L mm	g	
517.0270	10x11	10.5	11.2	17.8	20.0	6.0	6.1	175.0	80	

OPEN DOUBLE RING SPANNERS WITH FLEXIBLE JOINT

CHROME*plus*® open double ring spanner, with fl xible joint

- 6 point
- Ring head 15° offset
- Opening 15° cranked
- With fl xible head
- Chrome plated and mirror polished
- Chrome vanadium



	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g	
518.0378	8	7.0	7.0	18.0	18.0	128.0	50	
518.0379	9	7.0	7.0	18.0	18.0	128.0	50	
518.0380	10	7.0	7.0	18.0	18.0	128.0	50	
518.0381	11	9.0	9.0	22.0	22.0	148.0	120	
518.0382	12	9.0	9.0	22.0	22.0	148.0	120	
518.0383	13	11.0	11.0	26.0	26.0	175.0	140	
518.0384	14	11.0	11.0	26.0	26.0	175.0	140	
518.0387	17	13.0	13.0	32.0	32.0	190.0	200	
518.0389	19	13.0	13.0	32.0	32.0	190.0	200	

CHROME*plus*® open double ring spanner set, with fl xible joint

- 6 point
- Ring head 15° offset
- Opening 15° cranked
- With fl xible head
- Chrome plated and mirror polished
- Chrome vanadium

			g	
518.0350	3 pcs	10 - 11 - 12 mm	220	
518.0360	5 pcs	8 - 9 - 10 - 11 - 12 mm	345	
518.0370	3 pcs	14 - 17 - 19 mm	610	

OPEN RATCHET DOUBLE RING SPANNER SET WITH FLEXIBLE JOINT

CHROME*plus*® ratchet spanner with revolving head

- 6 point
- Straight form
- 180° revolving head
- With ratchet function
- Suitable for force fit appli ations
- Chrome plated and mirror polished
- Chrome vanadium

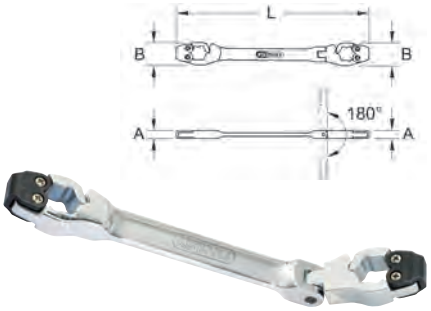

	mm	A mm	B mm	L mm	g	
518.0321	11	10.3	19.0	155.0	115	

CHROME*plus*® ratchet spanner with revolving head

- 6 point
- Straight form
- 180° revolving head
- Ratchet function
- Suitable for force fit appli ations
- Chrome plated and mirror polished
- Chrome vanadium

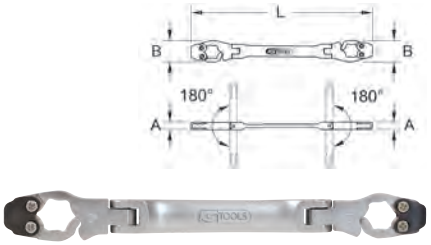

	mm	A mm	B mm	L mm	g	
518.0332	8x9	8.5	14.8	123.0	56	
518.0334	10x11	10.0	18.4	156.0	116	
518.0336	12x13	11.2	21.1	179.0	170	
518.0338	14x15	12.1	24.6	208.0	240	

CHROME*plus*® ratchet spanner set with revolving head

- 6 point
- Straight form
- 180° revolving head
- Ratchet function
- Suitable for force fit appli ations
- Chrome plated and mirror polished
- Chrome vanadium

			g	
518.0330	4 pcs	8x9 - 10x11 - 12x13 - 14x15 mm	600	

DOUBLE RING SPANNERS

CHROME*plus*® Starter and block spanner

- FlankTraction profile 12 point)
- Especially suitable for narrow hard to access areas
- Chrome plated and mirror polished
- Chrome vanadium

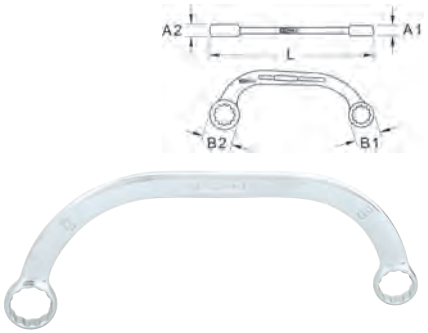

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
518.0852	10x12	6.5	6.6	15.6	17.9	142.0	57
518.0853	11x13	8.0	8.2	17.9	20.7	164.0	90
518.0856	14x17	8.2	9.2	21.4	25.1	190.0	133
518.0857	16x18	8.8	9.6	24.8	27.7	216.0	166
518.0859	19x22	10.0	11.1	27.6	33.0	255.0	244

CHROME*plus*® half moon - and manifold spanner set

- FlankTraction profil
- Especially suitable for narrow hard to access areas
- Chrome plated and mirror polished
- Chrome vanadium

			g
518.0850	5 pcs	10x12 - 11x13 - 14x17 - 16x18 - 19x22 mm	890

ULTIMATE*plus* double ring ended spanner

- FlankTraction profile 12 point)
- In accordance to DIN / ISO
- Straight form
- Matt finis
- Chrome vanadium

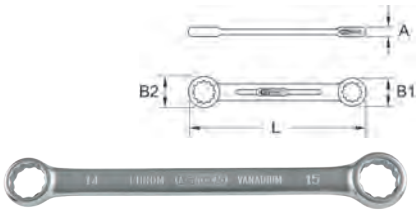

	mm	A mm	B1 mm	B2 mm	L mm	g
920.0406	6x7	4.5	10.0	11.5	99.0	10
920.0408	8x9	5.2	13.0	11.5	114.0	15
920.0410	10x11	5.8	16.0	17.0	131.0	28
920.0412	12x13	6.4	19.0	20.5	149.0	35
920.0414	14x15	7.2	21.5	23.0	161.0	50
920.0416	16x17	7.8	24.5	25.5	169.0	65
920.0417	17x19	8.5	25.5	28.0	186.0	80
920.0418	18x19	8.5	27.0	28.0	186.0	80
920.0419	19x22	9.4	28.0	32.5	209.0	115
920.0420	20x22	9.4	29.5	32.5	209.0	120
920.0421	21x23	10.0	30.5	33.5	233.0	145
920.0422	22x24	10.0	32.5	35.5	233.0	150
920.0424	24x26	10.8	35.5	38.0	261.0	190
920.0425	24x27	10.8	35.5	39.0	260.0	200
920.0426	25x28	11.6	36.5	41.0	289.0	240
920.0427	27x32	12.6	39.0	46.0	320.0	320
920.0430	30x32	12.6	43.5	46.0	320.0	340

ULTIMATE*plus* straight double open ended spanner set

- FlankTraction profile 12 point)
- In accordance to DIN / ISO
- Straight form
- Matt finis
- Chrome vanadium

			kg
920.0448	8 pcs	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 mm	0.66
920.0450	12 pcs	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 21x23 - 24x27 - 25x28 - 30x32 mm	1.69

GEAR*plus*® Double ratchet ring spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4502	8x9		6.5	6.9	16.8	20.2	128.0	60
503.4511	8x10		7.3	6.5	20.0	17.0	128.0	40
503.4503	10x11		7.3	7.7	20.2	20.2	150.0	80
503.4512	10x13		7.3	8.6	20.2	20.2	150.0	80
503.4504	12x13		8.2	8.6	23.0	23.0	170.0	100
503.4505	14x15		9.0	9.4	26.5	26.5	190.0	140
503.4506	16x18		9.9	10.7	29.5	29.5	210.0	180
503.4507	17x19		10.3	11.2	31.5	31.5	230.0	220
503.4402		5/16"x3/8"	6.5	7.3	16.8	20.2	128.0	40
503.4403		7/16"x1/2"	7.7	8.6	23.0	24.8	170.0	80
503.4404		9/16"x5/8"	9.0	9.9	26.5	29.5	190.0	125
503.4405		11/16"x3/4"	10.3	11.2	31.5	33.5	230.0	200

GEAR*plus*® double ratchet ring spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3310 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

			g
503.4552	2 pcs	10x13 - 17x19 mm	335

GEAR*plus*® double ratchet ring spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3310 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

			g
503.4557	6 pcs	8x 9 - 10x11 - 12x13 - 14x15 - 16x18 - 17x19 mm	900

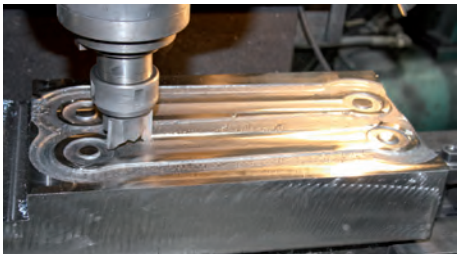

GEAR*plus*® double ratchet ring spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3310 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

			g
503.4556	6 pcs	GEAR*plus*® double ratchet ring spanner set	790
6 x		8x9 - 10x11 - 12x13 - 14x15 - 16x18 17x19 mm	

GEARplus® double ratchet ring spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3310 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4560	10 pcs	GEARplus® double ratchet ring spanner set	1.20
6 x		8x9 - 10x11 - 12x13 - 14x15 - 16x18 17x19 mm	
1 x		1/4“	
3 x		1/4“ - 3/8“ - 1/2“	

4 in 1 GEARplus® reversing double ratchet ring spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Four different sizes on each spanner
- With reverse lever
- High quality finis
- Chrome vanadium

	mm	A1 mm	A2 mm	A3 mm	A4 mm	B1 mm	B2 mm	L mm	g
503.4541	8x11-9x10	7.7	7.3	14.6	13.8	21.8	20.0	150.0	68
503.4656	8x10-12x13	8.6	7.3	16.8	13.8	24.8	16.8	150.0	86
503.4543	12x15-13x14	9.4	9.0	18.0	17.1	29.5	18.0	190.0	147
503.4565	10x19-13x17	11.2	9.0	21.9	17.1	33.6	21.9	190.0	196
503.4546	16x19-17x18	11.2	10.3	21.9	20.2	33.5	21.9	230.0	244
503.4657	14x17-18x19	11.2	10.3	21.9	19.3	33.5	21.9	230.0	245
503.4553	21x27-22x24	16.0	13.0	30.0	26.0	52.0	40.0	275.0	610
503.4554	30x36-32x34	18.0	18.0	36.0	35.0	65.0	62.0	360.0	1400

		A1 mm	A2 mm	A3 mm	A4 mm	B1 mm	B2 mm	L mm	g
503.4586	5/16“x1/2“-3/8“x7/16“	8.6	7.3	16.8	13.8	24.8	20.2	150.0	91
503.4589	9/16“x3/4“-5/8“x11/16“	11.2	10.3	21.9	19.3	33.5	31.5	230.0	238

4 in 1 GEARplus® fl xible reversing double ratchet ring spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- With fl xible head
- Four different sizes on each spanner
- With reverse lever
- High quality finis
- Chrome vanadium

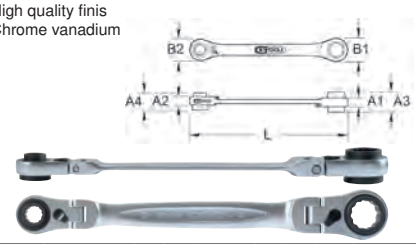

	mm	A1 mm	A2 mm	A3 mm	A4 mm	B1 mm	B2 mm	L mm	g
503.4745	10x13-17x19	11.2	9.0	22.0	17.1	33.7	27.0	253.0	196

4 in 1 GEARplus® reversing double ratchet ring spanner

- FlankTraction profile 12 point)
- Straight form
- Exact gearing with 72 teeth
- Four different sizes on each spanner
- With reverse lever
- High quality finis
- Chrome vanadium



			kg
503.4655	2 pcs	8x10 - 12x13 - 14x17 - 18x19 mm	0.34
503.4550	2 pcs	21x27 - 22x24 - 30x36 - 32x34 mm	2.01
503.4540	3 pcs	8x11 - 9x10 - 12x15 - 13x14 - 16x19 - 17x18 mm	0.55

OPEN DOUBLE RING SPANNERS, EXTRA LONG

CHROMEplus® double ring spanner set, extra long

- FlankTraction profile 12 point)
- Thin walled
- Mirror polished chrome
- Chrome molybdenum

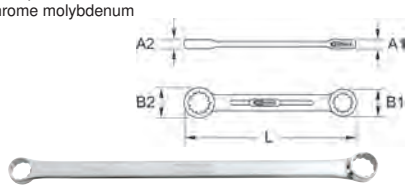

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
518.0821	8x10	7.5	8.4	12.5	15.0	235.0	72
518.0822	10x11	8.5	9.5	14.3	17.0	291.0	95
518.0823	12x14	10.4	11.3	17.8	20.3	328.0	157
518.0824	13x15	11.5	13.2	20.2	23.3	386.0	217
518.0825	16x18	13.0	14.8	23.7	26.6	407.0	284
518.0826	17x19	13.0	14.8	23.7	26.6	407.0	284
518.0827	20x21	13.5	15.2	27.5	29.7	415.0	376
518.0828	22x24	15.4	17.7	31.3	34.0	430.0	482

CHROMEplus® double ring spanner set, extra long

- FlankTraction profile 12 point)
- Thin walled
- Chrome plated and mirror polished
- Chrome molybdenum

			kg
518.0800	6 pcs	10x11 - 12x14 - 13x15 - 16x18 - 17x19 - 22x24 mm	2.06

OPEN DOUBLE RING SPANNERS, OFFSET

CLASSIC Double ring spanner, offset

- FlankTraction Profil
- DIN 838 / ISO 1085 / ISO 10104 / ISO 3318
- Ring head 75° offset
- Thin walled
- Polished heads
- Matt finis
- Chrome vanadium

	mm		A1 mm	A2 mm	B1 mm	B2 mm	kg
517.0836	5,5x7		6.4	5.9	12.0	10.5	0.04
517.0801	6x7		5.2	5.6	10.3	11.8	0.05
517.0802	8x9		6.3	6.4	12.9	14.2	0.08
517.0837	8x10		7.7	6.8	16.6	13.6	0.06
517.0838	9x10		7.7	7.3	16.6	15.0	0.08
517.0839	9x11		8.2	7.3	18.1	15.1	0.06
517.0804	10x11		7.2	7.5	16.0	16.9	0.11
517.0841	10x12		9.2	7.7	21.2	16.7	0.08
517.0806	10x13		7.2	9.0	16.0	20.0	0.12
517.0843	10x14		9.6	7.7	22.6	16.7	0.12
517.0842	11x13		9.2	8.7	21.2	20.0	0.12
517.0844	11x14		9.6	8.7	22.6	20.0	0.12
517.0807	12x13		8.2	9.0	18.5	20.0	0.14
517.0845	12x14		9.6	8.7	22.6	20.0	0.12
517.0846	13x14		9.6	9.2	24.0	21.1	0.15
517.0847	13x15		9.6	9.2	24.0	21.1	0.17
517.0808	13x17		9.0	11.0	20.0	25.2	0.22
517.0809	14x15		9.5	10.0	21.5	22.9	0.18
517.0835	14x17		9.5	11.0	21.5	25.2	0.21
517.0810	16x17		10.3	11.0	24.7	25.2	0.22
517.0848	16x18		11.1	10.5	28.0	25.7	0.20
517.0811	17x19		11.0	11.2	25.2	28.0	0.27
517.0812	18x19		10.6	11.2	26.1	28.0	0.27
517.0814	19x22		11.2	12.5	28.0	32.2	0.33
517.0852	19x24		13.2	19.2	37.3	29.8	0.35
517.0813	20x22		11.7	12.5	30.5	32.2	0.30
517.0815	21x23		12.2	12.5	30.7	33.8	0.41
517.0853	21x24		13.2	12.2	37.3	32.7	0.34
517.0854	22x24		13.2	12.5	37.3	34.3	0.34
517.0856	24x26		14.3	13.2	41.0	37.3	0.42
517.0816	24x27		12.7	13.7	36.0	40.0	0.43
517.0817	24x30		12.7	14.5	36.0	42.5	0.53
517.0857	25x28		14.7	13.6	43.3	37.3	0.46
517.0858	27x29		15.1	14.3	45.4	39.5	0.46
517.0859	27x30		15.1	14.3	45.4	40.8	0.47
517.0819	27x32		13.7	15.1	40.0	46.0	0.66
517.0818	30x32		14.5	15.1	42.5	46.0	0.66
517.0861	30x34		15.0	17.0	45.0	53.0	0.76
517.0862	30x36		15.0	17.0	45.0	53.0	0.74
517.0821	32x36		15.1	17.0	46.0	52.0	0.89
517.0825	36x41		17.7	19.7	53.2	61.1	1.15
517.0826	41x46		20.4	22.2	62.0	75.5	1.43
517.0827	46x50		22.2	23.6	68.9	91.8	1.96
517.0863	55x60		25.0	26.0	86.0	94.0	3.20
517.0864	65x70		27.0	28.0	103.0	110.0	4.70
517.0865	75x80		29.0	30.0	121.0	127.0	7.40
517.0866	85x90		29.0	30.0	121.0	127.0	7.20
517.0881		1/4x5/16“	8.3	6.4	13.5	12.1	0.05
517.0882		5/16x3/8“	7.3	6.8	15.1	12.1	0.06
517.0883		3/8x7/16“	8.2	7.7	18.1	16.6	0.06
517.0884		7/16x1/2“	9.2	8.7	21.2	20.0	0.10
517.0885		1/2x9/16“	9.6	9.2	24.0	21.1	0.12
517.0886		9/16x19/32“	10.1	9.6	25.0	22.4	0.14
517.0887		9/16x5/8“	10.8	10.5	27.5	25.7	0.18
517.0888		19/32x11/16“	10.8	10.5	27.5	25.7	0.20
517.0889		11/16x3/4“	11.4	11.1	30.0	28.0	0.24

	mm		A1 mm	A2 mm	B1 mm	B2 mm	kg	
517.0891		5/8x3/4"	11.4	10.5	30.0	25.7	0.24	
517.0892		3/4x25/32"	11.8	11.4	32.2	30.0	0.24	
517.0893		3/4x7/8"	12.5	11.4	34.3	39.8	0.28	
517.0894		13/16x7/8"	12.5	11.8	34.3	32.0	0.28	
517.0895		15/16x1"	14.3	13.2	41.0	37.3	0.44	
517.0896		1.1/16x1.1/4"	15.5	13.2	45.9	37.3	0.60	

CLASSIC Double ring spanner set, offset

- 12 point
- DIN 838 / ISO 1085 / ISO 10104 / ISO 3318
- Ring head 75° offset
- Thin walled
- Polished heads
- Matt finis
- Chrome vanadium

			kg	
517.0295	5 pcs	8x9 - 10x11 - 12x13 - 16x17 - 18x19 mm	0.76	
517.0248	8 pcs	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 mm	1.12	
517.0222	11 pcs	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 21x23 - 24x27 - 30x32 mm	2.93	
517.0250	12 pcs	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 21x23 - 24x27 - 25x28 - 30-32 mm	3.27	

CLASSIC Brake bleeding spanner

- 6 point
- Ring head cranked and offset
- For bleeding the brakes without dismantling of the wheels
- Matt finis
- Chrome vanadium

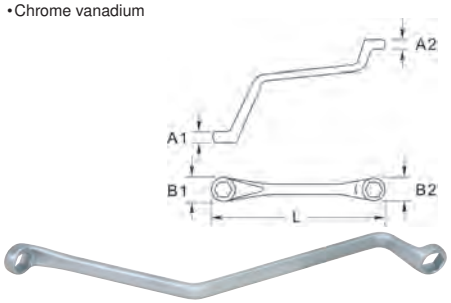

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g	
518.0307	7	5.3	5.6	12.9	12.1	190.0	60	
518.0308	8	7.5	7.0	16.0	15.8	211.0	130	
518.0309	9	7.4	6.9	16.0	15.9	211.0	130	
518.0310	10	7.3	7.1	17.5	16.9	236.0	135	
518.0311	11	7.2	7.0	17.3	16.9	236.0	135	

Brake bleeding spanner set

- 6 point
- Ring head cranked and offset
- For bleeding the brakes without dismantling of the wheels
- Matt finis
- Chrome vanadium

			kg	
518.0300	5 pcs	7 - 8 - 9 - 10 - 11 mm	1.20	

CHROME*plus*® Double ring spanner set, offset

- FlankTraction profil
- DIN 838 / ISO 3318 / ISO 1085 / ISO 10104
- Ring head 75° offset
- Thin walled
- Chrome plated and mirror polished
- Chrome vanadium

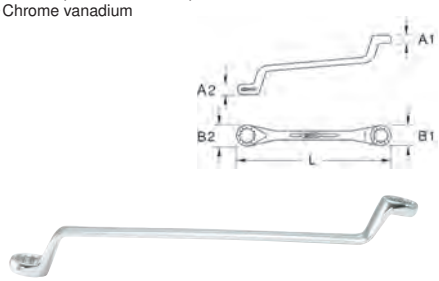

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
518.0801	6x7		5.9	6.6	10.2	12.5	168.0	52
518.0802	8x9		7.0	7.1	13.7	15.5	183.0	68
518.0804	10x11		7.5	7.5	16.8	18.2	198.0	92
518.0807	12x13		8.3	7.8	19.8	21.6	217.0	139
518.0809	14x15		9.0	9.1	22.7	24.7	239.0	167
518.0810	16x17		9.2	9.5	25.3	26.0	260.0	198
518.0811	17x19		10.3	10.8	28.6	29.8	292.0	263
518.0812	18x19		10.3	10.8	28.6	29.8	292.0	263
518.0814	20x22		10.4	11.4	31.1	34.6	318.0	319
518.0815	21x23		10.8	11.9	32.5	35.6	327.0	352
518.0816	24x27		11.8	13.7	36.5	41.4	339.0	466
518.0818	30x32		13.1	14.6	46.1	49.3	362.0	607
518.3101		1/4"x5/16"	5.4	6.0	10.8	13.1	165.0	40
518.3102		5/16"x3/8"	6.4	7.0	14.7	16.2	170.0	58
518.3103		3/8"x7/16"	6.9	7.6	16.3	18.6	195.0	73
518.3104		1/2"x9/16"	8.6	9.0	19.8	21.0	206.0	116
518.3105		9/16"x5/8"	8.8	9.3	21.4	24.8	232.0	134
518.3106		5/8"x11/16"	10.2	10.4	24.3	26.2	237.0	191
518.3107		11/16"x3/4"	11.1	11.6	27.8	29.3	270.0	269
518.3108		3/4"x7/8"	11.4	12.0	28.7	32.4	292.0	327
518.3109		7/8"x15/16"	11.6	12.3	21.1	34.4	327.0	345
518.3110		13/16"x7/8"	11.6	12.3	21.1	34.4	327.0	345
518.3111		15/16"x1"	14.0	14.1	34.4	36.5	362.0	517
518.3112		1"x1.1/8"	13.7	15.2	39.6	42.1	372.0	625
518.3113		1.1/8"x1.1/4"	17.2	18.6	44.4	48.3	392.0	880

CHROME*plus*® double ring ended spanner set

- FlankTraction profile 12 point)
- DIN 838 / ISO 3318 / ISO 1085 / ISO 10104
- Ring head 75° offset
- Thin walled
- Chrome plated and mirror polished
- Chrome vanadium

			kg	
518.0847	7 pcs	8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 mm	1.03	
518.0843	3 pcs	21x23 - 24x27 - 30x32 mm	1.51	
518.3120	6 pcs	1/4"x5/16" - 3/8"x7/16" - 1/2"x9/16" - 9/16"x5/8" - 11/16"x3/4" - 13/16"x7/8"	1.10	
518.3100	8 pcs	1/4"x5/16" - 3/8"x7/16" - 1/2"x9/16" - 9/16"x5/8" - 11/16"x3/4" - 13/16"x7/8" - 15/16"x1" - 1.1/8"x1.1/4"	2.46	

GEAR*plus*® reversing double ratchet ring spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g	
503.4571	8x9	6.9	6.5	20.2	16.8	128.0	60	
503.4572	8x10	7.4	6.7	20.2	16.7	128.0	65	
503.4573	10x11	7.7	7.3	21.8	20.2	150.0	70	
503.4574	10x13	8.7	7.4	25.4	20.5	150.0	80	
503.4575	12x13	8.6	8.2	24.8	23.0	170.0	100	
503.4576	14x15	9.4	9.0	29.5	26.5	190.0	140	
503.4577	16x18	10.7	9.9	33.5	29.5	210.0	180	
503.4578	17x19	11.2	10.3	33.5	31.5	230.0	220	

GEAR*plus*® double reversing ratchet ring spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium
- Supplied in a leather pouch

			g	
503.4580	6 pcs	8x9 - 10x11 - 12x13 - 14x15 - 16x18 - 17x19 mm	790	

CLASSIC ratchet ring spanner, reversing

- FlankTraction profile 12 point)
- In accordance to DIN 838 / ISO 1085
- Ring head 75° offset
- Reversible
- Exact gearing with 24 teeth
- Matt finis
- Chrome vanadium

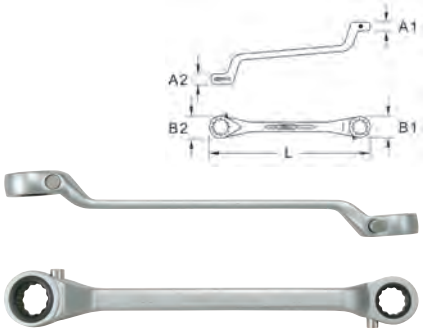

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g	
520.1011	10x11	11.5	11.7	23.3	25.1	210.0	180	
520.1214	12x14	12.1	12.4	26.4	30.8	245.0	260	
520.1317	13x17	13.2	13.3	31.5	36.3	265.0	360	
520.1516	15x16	14.6	14.7	33.1	34.9	260.0	420	
520.1922	19x22	16.1	16.2	39.8	43.8	325.0	600	
520.2427	24x27	17.7	17.9	47.4	51.6	390.0	800	
520.3032	30x32	19.7	19.9	55.1	57.1	410.0	1300	

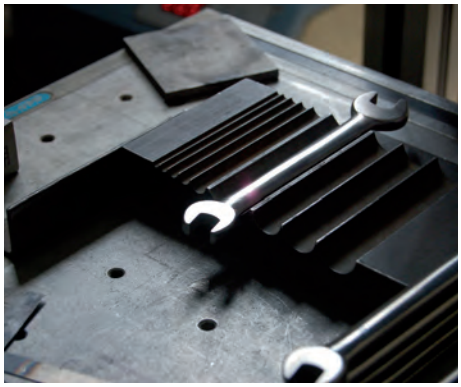

CLASSIC ratchet ring spanner set, reversing

- FlankTraction profile 12 point)
- In accordance to DIN 838 / ISO 1085
- Ring head 75° offset
- Reversible
- Exact gearing with 72 teeth
- Matt finis
- Chrome vanadium

			kg
520.1000	5 pcs	10x11 - 12x14 - 13x17 - 15x16 - 19x22 mm	1.85
520.1100	7 pcs	10x11 - 12x14 - 13x17 - 15 x 16 - 19x22 - 24x27 - 30x32 mm	4.05

GEAR*plus*® Universal double ratchet ring spanner set

- 6 point
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- Reversible
- With go-through facility
- The collar on each insert prevents slipping
- Especially suitable for narrow hard to access areas
- Matt finis
- Chrome vanadium
- In durable plastic storage case

			g
503.4625	8 pcs	GEAR*plus*® Universal double ratchet ring spanner set	500
1 x		14 x 19 mm	
7 x		5/16" - 3/8" - 7/16" - 1/2" - 9/16" - 5/8" - 11/16"	

GEAR*plus*® Universal double ratchet ring spanner set

- 6 point
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- Reversible
- With go-through facility
- The collar on each insert prevents slipping
- Especially suitable for narrow hard to access areas
- Matt finis
- Chrome vanadium
- In durable plastic storage case

			g
503.4645	10 pcs	GEAR*plus*® Universal double ratchet ring spanner set	500
1 x		14 x 19 mm	
9 x		8 - 9 - 10 - 11 - 12 - 13 - 15 - 16 - 17 mm	

DOUBLE RING SPANNERS FOR TX E PROFILE

CLASSIC double ring spanner for TX E-Profil

- TX E profil
- Straight form
- Thin walled
- Matt finis
- Chrome vanadium

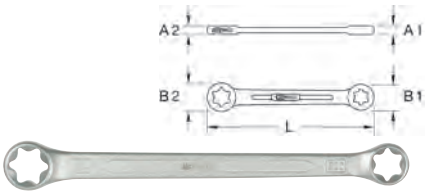

		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
911.0371	E6 x E8	4.2	5.3	7.3	9.7	114.0	20
911.0372	E7 x E11	5.2	7.2	10.8	14.8	130.0	50
911.0373	E10 x E12	6.5	7.7	12.3	15.1	141.0	40
911.0374	E14 x E18	8.2	10.3	17.0	21.1	180.0	90
911.0375	E16 x E22	8.4	11.8	19.7	27.3	205.0	130
911.0376	E20 x E24	11.0	12.6	23.9	27.9	224.0	170

CLASSIC double ring spanner set for TX E-Profil

- TX E profil
- Straight form
- Thin walled
- Matt finis
- Chrome vanadium

			g
911.0370	6 pcs	E6xE8 - E7xE11 - E10xE12 - E14xE18 - E16xE22 - E20xE24	585

CHROME*plus*® Double ring spanner for TX E-Profil

- TX E profil
- Straight form
- Thin walled
- Chrome plated and mirror polished
- Chrome vanadium

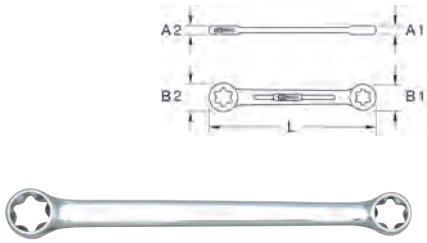

		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
518.0861	E6 x E8	4.2	5.3	7.3	9.7	114.0	17
518.0862	E10 x E12	6.5	7.7	12.3	15.1	141.0	36
518.0863	E14 x E18	8.2	10.3	17.0	21.1	180.0	88
518.0864	E20 x E24	11.0	12.6	23.9	27.9	224.0	165

CHROME*plus*® Double ring spanner set for TX E-Profil

- TX E profil
- Straight form
- Thin walled
- Chrome plated and mirror polished
- Chrome vanadium

			g
518.0860	4 pcs	E6xE8 - E10xE12 - E14xE18 - E20xE24	410

CHROME*plus*® Double ring spanner for TX-E profil , extra long

- TX E profil
- Thin walled
- Chrome plated and mirror polished
- Chrome vanadium

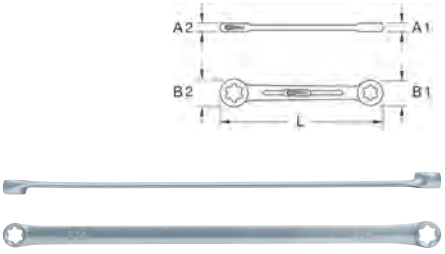

		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
518.0931	E6 x E7	5.8	6.9	9.5	11.0	200.0	42
518.0932	E8 x E10	7.3	8.6	12.0	14.3	240.0	68
518.0933	E11 x E12	9.1	9.9	14.9	16.6	280.0	109
518.0934	E14 x E16	10.3	11.2	18.1	19.8	320.0	161
518.0935	E18 x E20	11.6	12.7	22.8	25.7	360.0	227
518.0936	E22 x E24	13.3	14.0	26.9	29.2	400.0	344

CHROME*plus*® Double ring spanner set for TX-E profil , extra long

- TX E profil
- Thin walled
- Chrome plated and mirror polished
- Chrome vanadium

518.0930	6 pcs	E6-E7-E8-E10-E11-E12-E14-E16-E18-E20-E22-E24	943

GEAR*plus*® Double ring ratchet spanner for TX E profil

- TX E profil
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

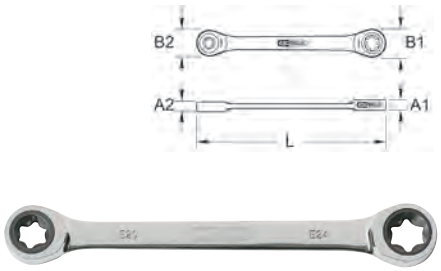

		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4351	E6 x E8	6.5	6.9	16.8	20.2	128.0	70
503.4353	E10 x E12	7.3	7.7	20.2	21.8	150.0	60
503.4355	E14 x E18	9.0	9.9	26.5	29.5	190.0	150
503.4357	E20 x E24	10.3	11.2	31.5	33.5	230.0	230

GEAR*plus*® Double ring ratcheting spanner set for TX E profil

- TX E profil
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

503.4364	4 pcs	E6xE8 - E10xE12 - E14xE18 - E20xE24	475

CLASSIC double ring spanner for TX E profil , offset

- TX E profil
- Ring head 75° offset
- Thin walled
- Matt finis
- Chrome vanadium

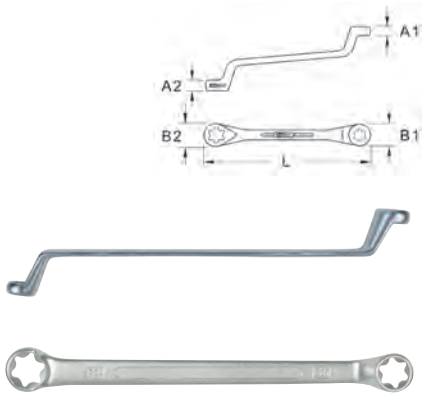

		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
911.0361	E6 x E8	5.5	6.2	10.0	12.3	147.0	32
911.0362	E7 x E11	5.6	7.0	11.3	14.5	159.0	43
911.0363	E10 x E12	5.9	6.8	13.5	15.5	175.0	50
911.0364	E14 x E18	7.7	9.3	17.3	21.7	215.0	108
911.0365	E16 x E22	8.1	11.6	20.1	27.4	234.0	157
911.0366	E20 x E24	11.3	13.3	23.5	28.2	262.0	223

CLASSIC Double ring spanner set for TX E profil , offset

- TX E-Profil
- Ring head 75° offset
- Thin walled
- Matt finis
- Chrome vanadium

911.0360	6 pcs	E6xE8 - E7xE11 - E10xE12 - E14xE18 - E16xE22 - E20xE24	970

FLEXIBLE SPANNERS

CLASSIC double revolving head spanner

- FlankTraction profile 12 point)
- Revolving head
- Extra large pivoting range
- Especially suitable for narrow hard to access areas
- Matt finis
- Chrome vanadium

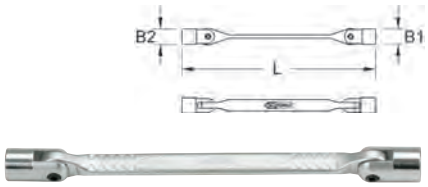

	mm	B1 mm	B2 mm	L mm	g
517.0300	6x7	10.5	11.2	198.0	90
517.0301	8x9	12.3	12.7	198.0	91
517.0302	10x11	14.8	15.7	216.0	118
517.0303	12x13	18.7	18.9	223.0	172
517.0304	14x15	20.8	20.9	245.0	214
517.0305	16x17	22.7	23.8	257.0	282
517.0306	18x19	25.7	25.8	273.0	359
517.0307	20x22	27.7	30.0	297.0	486
517.0308	21x23	27.7	32.0	297.0	492

CLASSIC TX E profile double h aded revolving wrench set

- TX E-Profil
- Revolving head
- Extra large pivoting range
- Especially suitable for narrow hard to access areas
- Matt finis
- Chrome vanadium

517.0340	5 pcs	E6xE8 - E10xE12 - E14xE16 - E18xE20 - E22xE24	1.00

CLASSIC Double revolving head spanner for TX E profil

- TX E profil
- Revolving head
- Extra large pivoting range
- Especially suitable for narrow hard to access areas
- Matt finis
- Chrome vanadium

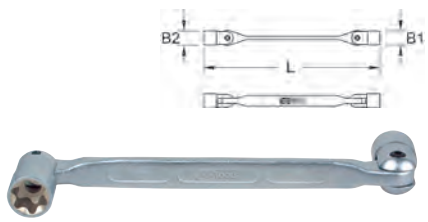

		B1 mm	B2 mm	L mm	g
517.0330	E6 x E8	12.9	12.9	200.0	85
517.0332	E10 x E12	14.6	16.0	220.0	130
517.0333	E14 x E16	19.1	20.9	245.0	190
517.0334	E18 x E20	21.9	22.8	255.0	270
517.0335	E22 x E24	25.9	25.9	270.0	370

CLASSIC double revolving head spanner set

- FlankTraction profile 12 point)
- Revolving head
- Extra large pivoting range
- Especially suitable for narrow hard to access areas
- Matt finis
- Chrome vanadium

			kg
517.0310	6 pcs	8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 mm	1.34

CLASSIC hexagonal double revolving head wrench

- 6 point
- Revolving head
- Extra large pivoting range
- Especially suitable for narrow hard to access areas
- Matt finis
- Chrome vanadium



	mm	B1 mm	B2 mm	T1 mm	T2 mm	L mm	g
517.0341	3x4	12.0	12.0	5.8	4.5	205.0	90
517.0342	5x6	12.0	12.0	6.7	6.0	218.0	105
517.0343	8x10	15.0	14.9	8.7	10.1	225.0	190

ULTIMATE*plus* double box spanner set, offset

- 6 point
- Ring head 90° offset
- With go through function
- Chrome plated and mirror polished
- Chrome vanadium

			kg
517.0450	9 pcs	8 - 9 - 10 - 11 - 12 - 13 - 14 - 17 - 19 mm	1.55
517.0451	11 pcs	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 17 - 19 mm	1.60
517.0452	8 pcs	8 - 10 - 11 - 13 - 17 - 19 - 22 - 24 mm	2.60
517.0453	21 pcs	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm	8.40
517.0454	26 pcs	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 - 30 - 32 mm	15.90
517.0455	13 pcs	8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 24 mm	4.56

BOX SPANNERS

CLASSIC double revolving head spanner for TX

- TX profil
- Revolving head
- Extra large pivoting range
- Especially suitable for narrow hard to access areas
- Matt finis
- Chrome vanadium



		B1 mm	B2 mm	T1 mm	T2 mm	L mm	g
517.0315	T15 x T20	14.7	14.7	7.9	7.9	225.0	110
517.0316	T25 x T27	15.0	15.0	9.0	9.0	225.0	130
517.0317	T30 x T40	14.8	14.8	8.7	8.7	225.0	150
517.0318	T45 x T50	16.9	16.9	12.4	12.4	245.0	190
517.0319	T55 x T60	17.0	17.0	13.5	13.5	245.0	250

CLASSIC double revolving head spanner set for TX

- TX profil
- Revolving head
- Extra large pivoting range
- Especially suitable for narrow hard to access areas
- Matt finis
- Chrome vanadium

			g
517.0320	5 pcs	T15xT20 - T25xT27 - T30xT40 - T45xT50 - T55xT60	845

ULTIMATE*plus* double box spanner with go through centre

- 6 point
- Ring head 90° offset
- With go through function
- Chrome plated and mirror polished
- Chrome vanadium



	mm	D mm	L mm	g
517.0406	6	10.0	102.0	46
517.0407	7	11.0	106.0	57
517.0408	8	12.5	114.0	65
517.0409	9	13.5	122.0	86
517.0410	10	15.0	129.0	108
517.0411	11	16.5	136.0	133
517.0412	12	18.0	144.0	158
517.0413	13	19.5	152.0	181
517.0414	14	21.0	160.0	229
517.0415	15	22.5	169.0	255
517.0416	16	24.0	178.0	320
517.0417	17	25.5	187.0	349
517.0418	18	26.5	195.0	407
517.0419	19	28.0	204.0	449
517.0420	20	29.5	212.0	513
517.0421	21	30.5	221.0	556
517.0422	22	32.0	230.0	658
517.0423	23	33.5	240.0	764
517.0424	24	34.5	250.0	832
517.0427	27	38.0	296.0	1243
517.0430	30	42.0	330.0	1565
517.0432	32	44.5	350.0	1842
517.0434	34	47.0	340.0	1600
517.0436	36	49.5	380.0	2396

CLASSIC pipe head spanner

- 6 point
- DIN 896 / ISO 2236 / ISO 1085
- With hollow shaft
- Matt finis
- Chrome vanadium

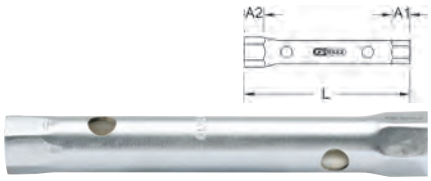

	mm	A1 mm	A2 mm	L mm		g
518.0870	6x7	10.0	11.0	100.0	1,2,3	27
518.0871	8x9	11.0	12.0	110.0	1,2,3	43
518.0872	10x11	12.5	13.0	120.0	1,2,3	63
518.0881	10x13	13.0	14.5	140.0	2,3	80
518.0873	12x13	14.0	14.5	130.0	2,3	96
518.0874	14x15	15.0	16.0	140.0	2,3	132
518.0875	16x17	16.0	17.0	150.0	2,3	155
518.0882	17x19	17.0	20.0	160.0	2,3	160
518.0876	18x19	18.0	20.0	160.0	2,3	187
518.0877	20x22	20.0	21.0	170.0	2,3	275
518.0878	21x23	20.0	20.0	180.0	2,3	310
518.0883	24x26	24.0	26.0	190.0	4	365
518.0879	24x27	24.0	26.0	190.0	4	365
518.0880	30x32	27.0	31.0	220.0	4	610
518.0884	36x41	32.0	35.0	220.0	5	650
518.0885	41x46	35.0	38.0	240.0	5	950
518.0886	46x50	38.0	40.0	240.0	5	1050

Tommy bar for box spanner

- Hardened
- Matt finis
- Chrome vanadium

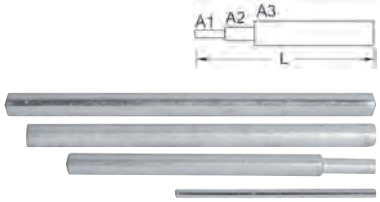

	mm	A1 mm	A2 mm	A3 mm	L mm	#	g
518.0865	6x7-10x11	6.0	6.0	6.0	115.0	1	40
518.0866	6x7-21x23	5.8	8.0	9.5	160.0	2	80
518.0868	24x26-30x32	14.0	14.0	14.0	204.0	4	260
518.0869	36x41-46x50	15.6	15.6	15.6	253.0	5	370

CLASSIC box wrench sets

- 6 point
- DIN 896 / ISO 2236 / ISO 1085
- With hollow shaft
- Matt finis
- Chrome vanadium

			g
518.0900	10 pcs	CLASSIC box wrench sets	920

8 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 mm
2 x		6-11 + 10-22 mm

ULTIMATE*plus* Double box spanner

- FlankTraction profile 12 point)
- DIN 896 form A / ISO 2236
- Extremely versatile
- With centre hole
- Can use a combination spanner to drive
- Matt finis
- Chrome vanadium

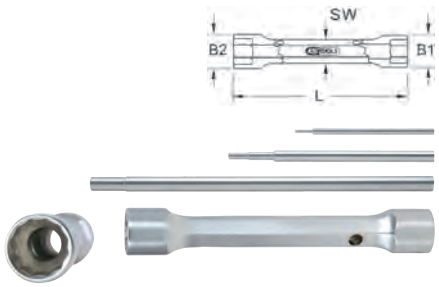

	mm	B1 mm	B2 mm	mm	L mm		g
518.0406	6x7	9.0	10.0	8,0	100.0	1	27
518.0408	8x9	11.5	12.5	9,0	110.0	1	43
518.0410	10x11	14.0	15.0	11,0	120.0	1	63
518.0412	12x13	16.5	17.5	13,0	130.0	2	96
518.0414	14x15	19.5	20.0	14,0	140.0	2	132
518.0416	16x17	21.0	22.0	16,0	150.0	2	155
518.0418	18x19	23.0	24.0	18,0	160.0	2	187
518.0420	20x22	26.0	28.0	20,0	170.0	2	275
518.0421	21x23	27.0	29.0	21,0	180.0	2	310
518.0424	24x26	30.0	32.0	24,0	190.0	3	365
518.0425	25x28	31.0	34.0	25,0	200.0	3	410
518.0427	27x29	34.0	36.0	27,0	210.0	3	540
518.0430	30x32	37.0	39.0	30,0	220.0	3	610

Tommy bar for double box spanner

- Hardened
- Matt finis
- Chrome vanadium

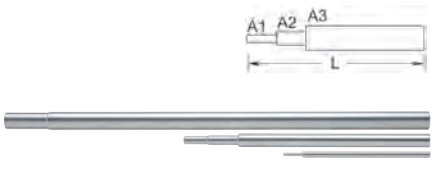

	mm	A1 mm	A2 mm	A3 mm	L mm	#	g
518.0450	6x7-10x11	2.6	5.0	5.0	100.0	1	10
518.0455	12x13-21x23	5.9	7.0	9.3	170.0	2	80
518.0460	24x26-30x32	11.6	12.5	12.5	290.0	3	280

ULTIMATE*plus* Double box head spanner set

- FlankTraction profile 12 point)
- DIN 896 form A / ISO 2236
- Extremely versatile
- With centre hole
- Can use a ring spanner to drive
- Matt finis
- Chrome vanadium

			kg
518.0405	10 pcs	ULTIMATE*plus* Double box head spanner set	1.16

8 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 mm
2 x		#1 100 mm + #2 170 mm

Extended bar HGV wheel nut wrench set

- Two sided serviceable
- Large head depth for projecting bolts
- 1.200 mm extended drive bar
- Loading capacity at 1.000 N•m
- Ideally suited for commercial vehicles
- Matt finis
- Special steel

			kg
518.0840	4 pcs	32x33 mm	3.90

ERGOTORQUE*plus*® sock et screwdriver

- 6 point
- Two component handle
- With hanging hole
- Matt finis
- Chrome vanadium

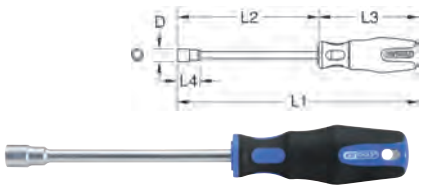

	mm	D mm	L1 mm	L2 mm	L3 mm	L4 mm	g
159.1201	4	6.6	255.0	150.0	105.0	4.3	60
159.1202	5	7.6	255.0	150.0	105.0	4.4	70
159.1203	5,5	8.2	255.0	150.0	105.0	4.8	80
159.1204	6	8.8	255.0	150.0	105.0	5.5	80
159.1205	7	10.0	255.0	150.0	105.0	6.8	110
159.1206	8	11.2	264.0	150.0	114.0	7.0	110
159.1207	9	13.9	264.0	150.0	114.0	9.3	110
159.1208	10	15.0	264.0	150.0	114.0	9.9	120
159.1209	11	16.5	264.0	150.0	114.0	10.3	130
159.1210	12	17.6	264.0	150.0	114.0	11.2	180
159.1211	13	17.6	264.0	150.0	114.0	11.6	180
159.1212	14	18.9	264.0	150.0	114.0	13.0	180

ERGOTORQUE*plus*® sock et screwdriver set

- 6 point
- Two component handle
- With hanging hole
- Matt finis
- Chrome vanadium

			g
159.1200	8 pcs	5 - 6 - 7 - 8 - 10 - 11 - 12 - 13	800

CHROME*plus*® T -handle socket screwdriver, long

- 6 point
- Two component handle
- With hanging hole
- Chrome plated and mirror polished
- Chrome vanadium

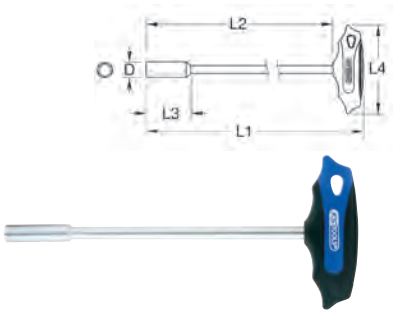

	mm	D mm	L1 mm	L2 mm	L3 mm	L4 mm	g
158.50055	5,5	9.9	264.0	230.0	10.0	95.0	80
158.5006	6	9.9	264.0	230.0	10.0	95.0	100
158.5007	7	10.1	264.0	230.0	10.0	95.0	120
158.5008	8	12.5	270.0	230.0	14.0	115.0	140
158.5009	9	13.6	270.0	230.0	12.0	115.0	150
158.5010	10	14.5	270.0	230.0	14.0	115.0	160
158.5011	11	15.7	270.0	230.0	15.0	115.0	180
158.5012	12	16.7	270.0	230.0	15.0	115.0	180
158.5013	13	17.6	270.0	230.0	16.0	115.0	180
158.5014	14	19.2	270.0	230.0	15.0	115.0	190

CHROME*plus*® T -handle socket srewdriver set

- 6 point
- Two component handle
- With hanging hole
- Chrome plated and mirror polished
- Chrome vanadium

			kg
158.5000	6 pcs	6 - 8 - 10 - 12 - 13 - 14 mm	1.40

CHROME*plus*® T-handle socket screwdriver, extra long

- 6 point
- Two component handle
- With hanging hole
- Chrome plated and mirror polished
- Chrome vanadium

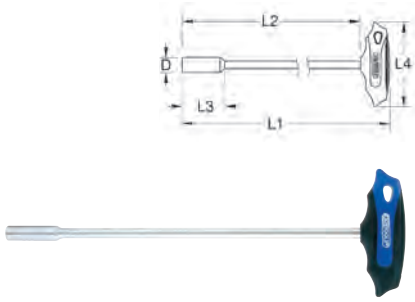

	mm	D mm	L1 mm	L2 mm	L3 mm	L4 mm	g
158.5408	8	12.6	390.0	350.0	13.0	115.0	180
158.5409	9	13.6	390.0	350.0	14.0	115.0	190
158.5410	10	14.7	390.0	350.0	15.0	115.0	220
158.5413	13	17.7	390.0	350.0	15.0	115.0	230
158.5414	14	19.1	390.0	350.0	16.0	115.0	250

ERGOTORQUE® socket screwdriver

- 6 point
- Flexible
- Limited torque
- Double spiral shaft
- Plastic protective coating
- With hanging hole
- Chrome vanadium

	mm	D mm	L1 mm	L2 mm	L3 mm	L4 mm	g
911.1126	6	10.8	259.0	150.0	109.0	9.3	155
911.1127	7	11.7	259.0	150.0	109.0	10.0	155
911.1128	8	11.9	259.0	150.0	109.0	10.0	155
911.1125	10	12.5	279.0	170.0	109.0	14.3	170

ERGOTORQUE*plus*® socket screwdriver, extra long

- 6 point
- Flexible
- Limited torque
- Double spiral shaft
- Plastic protective coating
- Two component handle
- With hanging hole
- Chrome vanadium

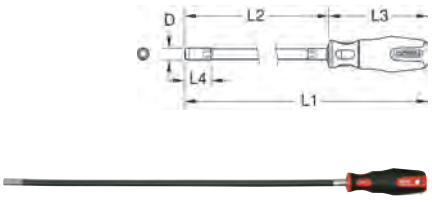

	mm	D mm	L1 mm	L2 mm	L3 mm	L4 mm	g
911.1175	5	11.9	614.0	500.0	114.0	8.9	270
911.1176	6	10.9	614.0	500.0	114.0	11.3	280
911.1177	7	11.7	614.0	500.0	114.0	11.3	280
911.1178	8	11.7	614.0	500.0	114.0	11.3	280

T-HANDLE FLEXIBLE WRENCH

CLASSIC T-Handle Spark plug socket

- FlankTraction profil
- Flexible head
- For diffi ult to access areas
- Matt finis
- Chrome vanadium

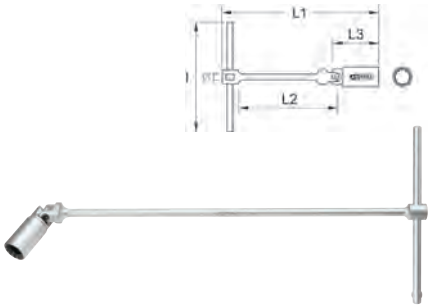

	mm	l mm	L1 mm	L2 mm	L3 mm	g
517.1131	14,0	200.0	500.0	418.5	81.5	490
517.1132	16,0	200.0	500.0	418.5	81.5	500
517.1133	18,0	200.0	500.0	418.5	81.5	580
517.1134	21,0	200.0	500.0	418.5	81.5	590

CLASSIC T-handle universal wrench, extra long

- 6 point
- With fl xible head
- For diffi ult to access areas
- Matt finis
- Chrome vanadium

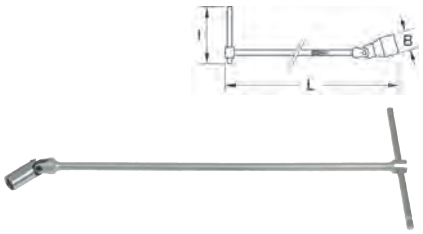

	mm	B mm	l mm	L mm	g
517.1108	8	12.0	200.0	394.0	400
517.1109	9	14.5	200.0	395.0	420
517.1110	10	15.3	200.0	490.0	460
517.1111	11	17.0	200.0	491.0	470
517.1112	12	18.0	200.0	493.0	485
517.1113	13	18.0	200.0	493.0	485
517.1114	14	20.0	200.0	495.0	480
517.1115	15	22.0	200.0	495.0	480
517.1116	16	22.0	200.0	496.0	490
517.1117	17	24.0	200.0	469.0	495
517.1118	18	26.0	200.0	500.0	500
517.1119	19	28.0	200.0	500.0	520

CLASSIC T-Handle universal wrench for sockets, extra long

- In accordance to DIN 3122 / ISO 3315
- With fl xible head
- For diffi ult to access areas
- Matt finis
- Chrome vanadium

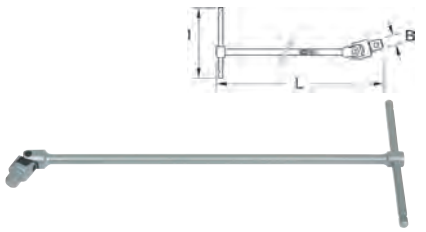

	■	B mm	l mm	L mm	g
517.1125	1/4"	6.3	200.0	490.0	420
517.1126	3/8"	9.5	200.0	495.0	540
517.1127	1/2"	12.6	200.0	500.0	760

HOOK WRENCH

Fixed hook wrench with nose

- In accordance to DIN 1810 Form A
- With hanging hole
- For slotted nuts
- Burnished
- Chrome vanadium

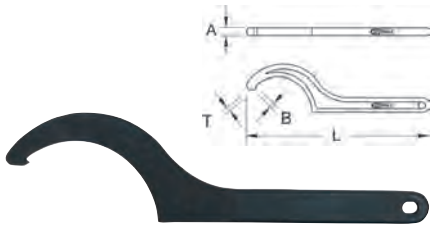

	mm	A mm	B mm	L mm	T mm	g
517.1370	12 - 14	2.5	2.0	109.5	1.5	22
517.1371	16 - 20	2.5	2.0	109.5	1.5	22
517.1372	25 - 28	4.0	2.5	135.9	2.0	36
517.1373	30 - 32	4.0	2.5	135.9	2.0	36
517.1374	34 - 36	5.0	3.0	170.2	2.0	82
517.1375	40 - 42	5.0	3.0	170.3	2.0	76
517.1376	45 - 50	6.0	3.5	195.0	2.0	132
517.1377	52 - 55	7.0	3.5	220.0	2.5	176
517.1378	58 - 62	7.0	4.0	240.0	2.5	224
517.1379	68 - 75	7.6	4.0	260.0	3.0	280
517.1380	80 - 90	8.0	5.0	280.0	3.5	368
517.1381	92 - 100	8.0	5.0	280.0	3.5	394
517.1382	110 - 115	9.5	5.0	334.9	4.0	590
517.1383	120 - 130	9.5	5.0	334.9	4.0	540

Fixed hook wrench with pin

- In accordance to DIN 1810 Form B
- With hanging hole
- For pin type round nuts
- Burnished
- Chrome vanadium

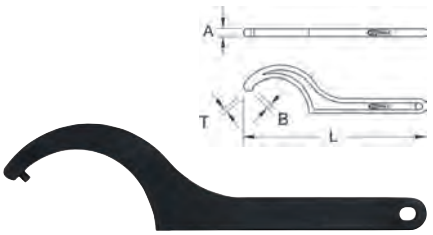

	mm	A mm	B mm	L mm	T mm	g
517.1471	12 - 14	3.0	2.0	110.0	2.0	25
517.1472	16 - 18	3.0	2.5	110.0	2.5	25
517.1473	20 - 22	3.0	2.5	110.0	2.5	25
517.1474	25 - 28	4.0	3.0	136.0	3.0	55
517.1488	30 - 32	5.0	4.0	136.0	3.0	55
517.1476	34 - 36	5.0	4.0	170.0	3.5	100
517.1477	40 - 42	5.0	4.0	170.0	3.5	100
517.1478	45 - 50	6.0	5.0	206.0	4.0	165
517.1479	52 - 55	6.0	5.0	206.0	4.0	165
517.1480	58 - 62	7.0	5.0	240.0	5.0	270
517.1481	68 - 75	7.0	6.0	240.0	5.0	270
517.1482	80 - 90	8.0	6.0	280.0	6.0	410
517.1483	95 - 100	8.0	8.0	280.0	6.0	410
517.1484	110 - 115	8.0	8.0	335.0	8.0	610
517.1485	120 - 130	8.0	8.0	335.0	8.0	610
517.1486	135 - 145	8.0	8.0	380.0	8.0	790
517.1487	155 - 165	8.0	8.0	380.0	8.0	790

Pin-type face wrench

- DIN 3,116 A
- Phosphate
- Special steel

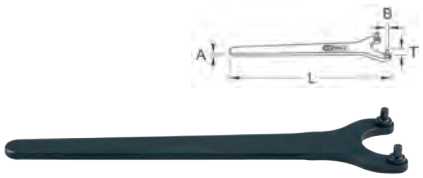

	mm	A mm	B mm	L mm	T mm	g
517.2013	13	3.0	2.5	90.0	3.0	27
517.2015	15	3.0	3.0	90.0	4.0	27
517.2020	20	4.0	3.0	122.0	5.0	50
517.2025	25	4.0	3.0	137.0	4.0	65
517.2030	30	4.0	4.0	164.0	5.0	85
517.2035	35	5.0	5.0	180.0	6.0	120
517.2040	40	5.0	4.0	167.0	5.0	120
517.2045	45	5.0	4.0	187.0	5.0	145
517.2050	50	5.0	5.0	198.0	6.0	175
517.2060	60	6.0	5.0	213.0	6.0	220
517.2075	75	6.0	6.0	243.0	7.0	330
517.2090	90	6.0	7.0	270.0	7.5	410

Hook wrench with nose

- In accordance to DIN 1810 Form A
- With fl xible head
- With hanging hole
- For slotted nuts
- Matt finis
- Chrome vanadium

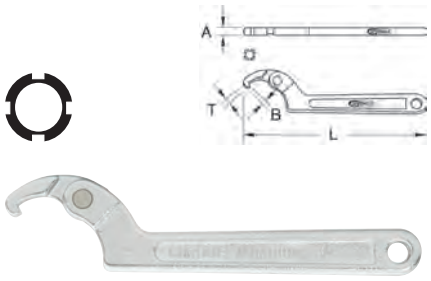

	mm		A mm	B mm	L mm	T mm	g
517.1302	19-50	3/4-2"	9.0	3.5	162.0	2.9	100
517.1303	32-76	1.1/4-3"	11.5	4.5	205.0	3.7	210
517.1304	50-120	2-4.3/4"	12.4	6.5	295.0	4.6	420
517.1305	114-158	4.1/2-6.1/4"	12.4	9.8	315.0	8.3	440

Flexible hook wrench with pin

- In accordance to DIN 1810 Form B
- With fl xible head
- With hanging hole
- For pin type round nuts
- Matt finis
- Chrome vanadium

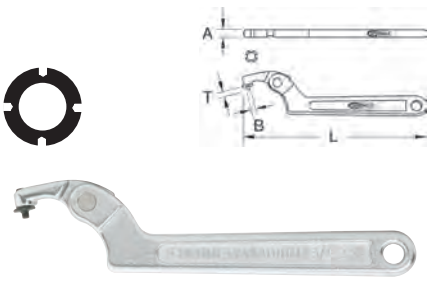

	mm		A mm	B mm	L mm	T mm	g
517.1312	19-50	3/4-2"	9.2	4.0	165.0	4.0	110
517.1313	32-76	1.1/4-3"	11.3	5.0	210.0	4.7	220
517.1314	50-120	2-4.3/4"	12.5	6.0	295.0	5.5	420
517.1315	114-158	4.1/2-6.1/4"	12.6	8.0	320.0	7.6	440

Hook wrench with nose

- In accordance to DIN 1810 Form A
- With fl xible head
- With hanging hole
- For slotted nuts
- Matt finis
- Chrome vanadium

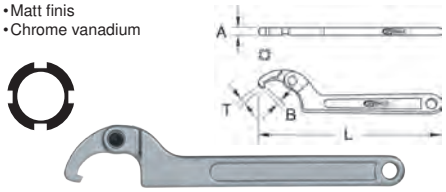

	mm	A mm	B mm	L mm	T mm	g
517.1316	13 - 35	5.2	3.2	175.0	3.2	96
517.1317	35 - 50	5.9	4.0	202.0	4.2	186
517.1318	50 - 80	7.5	4.9	280.0	5.2	392
517.1319	80 - 120	8.2	5.3	345.0	5.8	656
517.1320	120 - 180	10.8	8.9	465.0	7.8	1286

Flexible hook wrench with pin

- In accordance to DIN 1810 Form B
- With fl xible head
- With hanging hole
- For pin type round nuts
- Matt finis
- Chrome vanadium

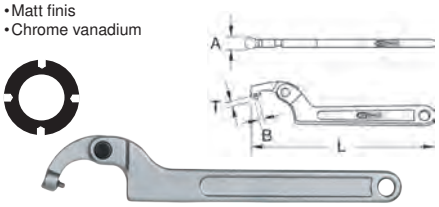

	mm	A mm	B mm	L mm	T mm	g
517.1323	15 - 35	9.8	2.8	177.0	2.8	96
517.1324	35 - 50	10.7	3.8	202.0	3.6	186
517.1325	50 - 80	14.0	4.8	280.0	5.0	380
517.1326	80 - 120	17.2	5.8	345.0	7.0	652
517.1327	120 - 180	19.2	7.8	465.0	9.0	1318

Hook wrench with nose

- In accordance to DIN 1810 Form A
- With fl xible head
- With hanging hole
- For slotted nuts
- Infini ely variable
- Matt finis
- Chrome vanadium

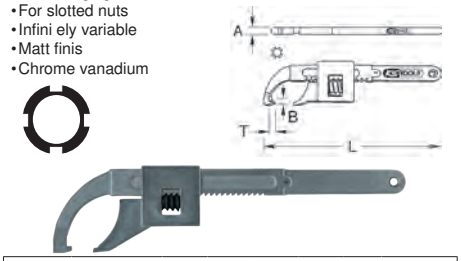

	mm	A mm	B mm	L mm	T mm	g
517.1397	10 - 50	7.6	4.2	210.0	4.5	380
517.1398	20 - 100	8.2	6.8	360.0	5.5	840
517.1399	30 - 200	10.6	9.4	570.0	7.0	2250

Flexible hook wrench with pin

- In accordance to DIN 1810 Form B
- With fl xible head
- With hanging hole
- For pin type round nuts
- Infini ely variable
- Matt finis
- Chrome vanadium

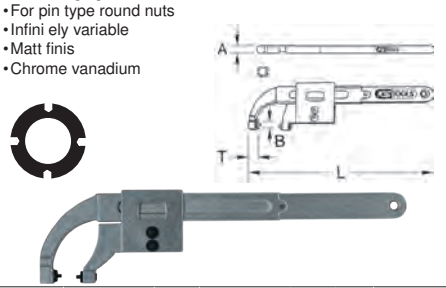

	mm	A mm	B mm	L mm	T mm	g
517.1328	10-50	8.3	2.6	210.0	2.5	380
517.1329	20-100	12.3	4.0	360.0	4.5	840
517.1330	30-200	17.3	5.8	570.0	4.8	2250

SLOGGING SPANNER

Slogging open end spanner

- DIN 133
- Jaw 15° offset
- Impact area
- For heavy duty applications
- Phosphate finis
- Chrome vanadium

	mm		A mm	B mm	L mm	kg
517.2122	22		16.0	55.0	180.0	0.30
517.0124	24		16.0	55.0	180.0	0.28
517.0127	27		16.3	56.0	181.0	0.39
517.0130	30		16.7	62.0	188.0	0.53
517.0132	32		17.2	66.0	196.0	0.53
517.0136	36		18.2	76.0	211.0	0.76
517.0141	41		19.2	88.0	227.0	0.92
517.0146	46		19.7	98.0	256.0	1.31
517.0150	50		21.2	106.5	281.0	1.57
517.0155	55		23.6	117.0	310.0	2.31
517.0160	60		24.1	128.0	321.0	2.31
517.0165	65		27.6	139.0	351.0	3.30
517.0170	70		29.6	150.0	370.0	4.56
517.0175	75		31.0	161.5	390.0	4.46
517.0180	80		34.0	172.5	406.0	6.12
517.0185	85		34.0	172.5	406.0	5.74
517.0190	90		38.4	194.0	456.0	8.04
517.0195	95		38.4	194.0	456.0	8.16
517.0196	100		46.0	225.0	500.0	11.80
517.2105	105		46.3	225.5	500.0	11.20
517.2110	110		46.3	225.5	500.0	14.00
517.2115	115		54.2	245.5	525.0	13.80
517.2120	120		54.2	254.5	525.0	18.00
517.2125	125		50.0	255.0	545.0	17.80
517.2130	130		55.0	275.0	575.0	21.00
517.2135	135		55.0	275.0	575.0	20.40
517.2140	140		55.0	275.0	575.0	20.00
517.2145	145		60.0	305.0	640.0	28.50
517.2150	150		60.0	305.0	640.0	28.30
517.2155	155		60.0	305.0	640.0	28.00
517.2160	160		60.0	305.0	640.0	28.40
517.2165	165		70.0	342.0	715.0	42.00
517.2170	170		70.0	342.0	715.0	39.00
517.2175	175		70.0	342.0	715.0	39.00
517.2180	180		70.0	392.0	715.0	40.00
517.2185	185		70.0	392.0	715.0	39.50
517.2190	190		78.0	392.0	800.0	53.00
517.2195	195		78.0	392.0	800.0	52.00
517.2200	200		78.0	392.0	800.0	51.00
517.2205	205		78.0	392.0	800.0	51.00
517.2210	210		78.0	392.0	800.0	50.50
517.2220	220		72.0	415.0	800.0	48.00
517.2251		1.1/16"	16.3	56.0	181.0	0.30
517.2254		1.1/8"	16.3	56.0	181.0	0.35
517.2255		1.3/16"	16.7	62.0	188.0	0.40
517.2253		1.1/4"	16.7	62.0	188.0	0.53
517.2258		1.5/16"	17.2	66.0	196.0	0.65
517.2257		1.3/8"	17.2	66.0	196.0	0.76
517.2260		1.7/16"	18.2	76.0	211.0	1.25
517.2252		1.1/2"	18.2	76.0	211.0	0.35
517.2262		1.9/16"	19.2	88.0	227.0	2.05
517.2259		1.5/8"	19.2	88.0	227.0	0.95
517.2263		1.11/16"	19.2	88.0	227.0	2.45
517.2256		1.3/4"	19.2	88.0	227.0	0.48
517.2264		1.13/16"	19.7	98.0	256.0	1.31
517.2261		1.7/8"	19.7	98.0	256.0	1.60
517.2265		1.15/16"	21.2	106.5	281.0	4.25
517.2266		2"	21.2	106.5	281.0	4.88
517.2267		2.1/16"	21.2	106.5	281.0	6.10
517.2270		2.1/8"	21.2	106.0	281.0	7.60
517.2271		2.3/16"	23.6	117.0	310.0	11.50

	mm		A mm	B mm	L mm	kg
517.2269		2.1/4"	23.6	117.0	310.0	8.25
517.2274		2.5/16"	23.6	117.0	310.0	13.80
517.2273		2.3/8"	23.6	128.0	321.0	14.00
517.2276		2.7/16"	23.6	128.0	321.0	17.80
517.2268		2.1/2"	23.6	128.0	321.0	5.90
517.2278		2.9/16"	27.6	139.0	351.0	17.80
517.2275		2.5/8"	27.6	139.0	351.0	18.00
517.2272		2.3/4"	29.6	150.0	370.0	11.20
517.2279		2.13/16"	29.6	150.0	370.0	21.00
517.2277		2.7/8"	29.6	150.0	370.0	18.00
517.2280		2.15/16"	31.0	161.5	390.0	20.40
517.2281		3"	31.0	161.5	390.0	20.00
517.2284		3.1/8"	34.0	172.5	406.0	28.00
517.2283		3.1/4"	34.0	172.5	406.0	28.30
517.2286		3.3/8"	34.0	172.5	406.0	42.00
517.2282		3.1/2"	38.4	194.0	456.0	28.50
517.2287		3.5/8"	38.4	194.0	456.0	39.00
517.2285		3.3/4"	38.4	194.0	456.0	28.40
517.2288		3.7/8"	46.3	225.5	500.0	39.00
517.2289		4"	46.3	225.5	500.0	40.00
517.2292		4.1/8"	46.3	225.5	800.0	52.00
517.2291		4.1/4"	47.0	235.0	510.0	53.00
517.2290		4.1/2"	47.0	235.0	510.0	39.50
517.2293		4.3/4"	50.0	255.0	545.0	51.00
517.2294		5"	50.0	255.0	545.0	51.00
517.2296		5.3/8"	55.0	275.0	575.0	48.00
517.2295		5.3/4"	55.0	275.0	575.0	50.50
517.2297		6"	60.0	305.0	640.0	47.50

Slogging ring spanner

- FlankTraction profile 12 point)
- DIN 7444
- Impact area
- For heavy duty applications
- Phosphate finis
- Chrome vanadium

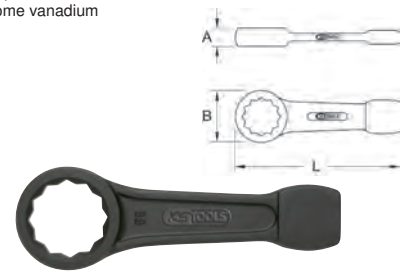

	mm		A mm	B mm	L mm	kg
517.0922	22		15.0	43.0	165.0	0.24
517.0924	24		15.0	42.5	160.0	0.24
517.0927	27		15.5	47.0	180.0	0.33
517.0930	30		16.5	51.5	190.0	0.44
517.0932	32		16.5	54.0	195.0	0.53
517.0936	36		19.5	60.0	205.0	0.55
517.0941	41		20.5	66.0	225.0	0.73
517.0946	46		22.5	75.0	240.0	0.97
517.0950	50		23.5	80.0	250.0	1.16
517.0955	55		25.0	87.5	270.0	1.52
517.0960	60		26.0	93.5	270.0	1.46
517.0965	65		29.0	101.0	290.0	2.18
517.0970	70		32.5	109.5	320.0	2.40
517.0975	75		34.0	114.5	325.0	2.76
517.0980	80		35.0	123.0	345.0	4.00
517.0985	85		37.0	129.0	360.0	4.86
517.0990	90		41.5	152.0	400.0	5.88
517.0995	95		41.5	152.0	400.0	5.88
517.0996	100		41.5	152.0	400.0	6.76
517.1905	105		47.5	172.0	435.0	6.53
517.1910	110		47.5	172.0	435.0	8.60
517.1915	115		47.5	172.0	435.0	8.60
517.1920	120		54.0	182.0	480.0	13.20
517.1925	125		54.0	182.0	480.0	13.20
517.1930	130		58.0	202.0	520.0	13.80
517.1935	135		58.0	202.0	520.0	13.80
517.1940	140		58.0	202.0	520.0	13.80
517.1945	145		64.0	228.0	580.0	19.20
517.1950	150		64.0	228.0	580.0	19.20
517.1955	155		64.0	228.0	580.0	19.20
517.1960	160		64.0	228.0	580.0	19.20
517.1965	165		70.0	265.0	650.0	28.60
517.1970	170		70.0	265.0	650.0	28.60
517.1975	175		70.0	265.0	650.0	28.60
517.1980	180		70.0	265.0	650.0	34.00
517.1985	185		75.0	290.0	700.0	33.50
517.1990	190		75.0	290.0	700.0	33.00

	mm		A mm	B mm	L mm	kg
517.1995	195		75.0	290.0	700.0	32.50
517.2900	200		75.0	290.0	700.0	32.00
517.2905	205		80.0	320.0	750.0	38.50
517.2910	210		80.0	320.0	750.0	38.00
517.2915	215		80.0	320.0	750.0	38.70
517.2920	220		80.0	320.0	750.0	37.50
517.2930	230		80.0	320.0	750.0	36.00
517.2951		1.1/16"	15.5	47.0	180.0	0.35
517.2954		1.1/8"	15.5	47.0	180.0	0.35
517.2955		1.3/16"	16.5	51.5	190.0	0.47
517.2953		1.1/4"	16.5	51.5	190.0	0.53
517.2958		1.5/16"	16.5	53.0	195.0	0.47
517.2957		1.3/8"	16.5	53.0	195.0	0.57
517.2960		1.7/16"	19.5	60.0	205.0	0.57
517.2952		1.1/2"	19.5	60.0	205.0	0.57
517.2962		1.9/16"	20.5	66.0	225.0	0.76
517.2959		1.5/8"	20.5	66.0	225.0	0.76
517.2963		1.11/16"	20.5	66.0	225.0	0.76
517.2956		1.3/4"	20.5	66.0	225.0	0.95
517.2964		1.13/16"	22.5	75.0	240.0	0.95
517.2961		1.7/8"	22.5	75.0	240.0	0.95
517.2965		1.15/16"	23.5	80.0	250.0	1.12
517.2966		2"	23.5	80.0	250.0	1.12
517.2967		2.1/16"	23.5	80.0	250.0	1.12
517.2970		2.1/8"	23.5	80.0	250.0	1.56
517.2971		2.3/16"	25.0	87.5	270.0	1.56
517.2969		2.1/4"	25.0	87.5	270.0	1.56
517.2974		2.5/16"	26.0	93.5	270.0	1.63
517.2973		2.3/8"	26.0	93.5	270.0	1.63
517.2976		2.7/16"	26.0	93.5	270.0	1.63
517.2968		2.1/2"	29.0	101.0	290.0	2.06
517.2978		2.9/16"	29.0	101.0	290.0	2.06
517.2975		2.5/8"	29.0	101.0	290.0	2.06
517.2972		2.3/4"	32.5	109.5	320.0	3.00
517.2979		2.13/16"	32.5	109.5	320.0	3.00
517.2977		2.7/8"	32.5	109.5	320.0	3.00
517.2980		2.15/16"	34.0	114.5	325.0	3.00
517.2981		3"	34.0	114.5	325.0	3.00
517.2984		3.1/8"	35.0	123.0	345.0	4.00
517.2983		3.1/4"	36.0	126.0	360.0	4.00
517.2986		3.3/8"	36.0	126.0	360.0	4.00
517.2982		3.1/2"	40.0	142.0	390.0	4.00
517.2987		3.5/8"	40.0	142.0	390.0	5.40
517.2985		3.3/4"	41.5	152.0	400.0	5.74
517.2988		3.7/8"	45.0	155.0	420.0	5.40
517.2989		4"	45.0	155.0	420.0	6.53
517.2992		4.1/8"	45.0	155.0	420.0	6.53
517.2991		4.1/4"	48.0	170.0	450.0	8.60
517.2990		4.1/2"	48.0	170.0	450.0	8.60
517.2993		4.3/4"	54.0	182.0	480.0	13.20
517.2994		5"	54.0	182.0	480.0	13.20
517.2995		5.1/8"	58.0	202.0	520.0	13.30
517.2997		5.3/8"	58.0	202.0	520.0	13.80
517.2996		5.3/4"	64.0	228.0	580.0	19.20
517.2998		6"	64.0	228.0	580.0	19.20

Intermediate sizes are also available upon request.

SINGLE RING ENDED SPANNER

CLASSIC offset single ring spanner

- FlankTraction Profil
- Ring head 75° offset
- With shaft for snap-on handle
- With locking pin
- Heavy duty to deliver maximum torque
- Matt finis
- Chrome vanadium

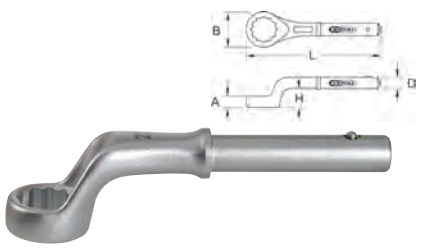

	mm		A mm	B mm	D mm	H mm	L mm	kg
517.9022	22		17.0	38.0	18.3	29.0	180.0	0.32

	mm		A mm	B mm	D mm	H mm	L mm	kg
517.9024	24		17.0	38.0	19.0	29.5	180.0	0.35
517.9027	27		17.0	42.0	19.0	31.5	190.0	0.40
517.9030	30		18.0	48.0	19.0	33.5	195.0	0.45
517.9032	32		18.0	49.0	21.8	34.0	200.0	0.55
517.9036	36		18.0	49.0	21.8	34.0	200.0	0.65
517.9041	41		20.0	54.0	21.8	35.5	205.0	0.75
517.9046	46		22.0	62.0	25.0	39.5	265.0	1.05
517.9050	50		23.0	69.0	25.0	40.0	280.0	1.15
517.9055	55		25.5	76.0	25.0	42.5	290.0	1.40
517.9060	60		28.0	81.0	30.0	45.5	300.0	2.10
517.9065	65		30.5	90.0	30.0	49.0	345.0	2.30
517.9070	70		33.0	98.0	30.0	53.0	355.0	2.60
517.9075	75		35.5	105.0	30.0	55.0	365.0	3.00
517.9080	80		38.0	110.0	30.0	57.5	375.0	3.45
517.9085	85		40.5	125.0	30.0	59.0	385.0	3.80
517.9090	90		45.0	140.0	30.0	63.0	410.0	4.88
517.9095	95		45.0	140.0	30.0	63.0	410.0	5.67
517.9100	100		47.0	140.0	30.0	63.0	412.0	6.66
517.9105	105		47.0	143.0	30.0	63.0	415.0	7.50
517.9111		1"	17.0	38.0	18.3	29.0	180.0	0.37
517.9112		1.1/16"	17.0	38.0	18.3	31.5	185.0	0.41
517.9115		1.1/8"	17.0	38.0	18.3	33.0	185.0	0.41
517.9116		1.3/16"	18.0	48.0	18.3	33.0	195.0	0.49
517.9114		1.1/4"	18.0	49.0	21.3	34.0	230.0	0.72
517.9119		1.5/16"	20.0	54.0	21.3	34.0	240.0	0.72
517.9118		1.3/8"	20.0	54.0	21.3	35.0	240.0	0.84
517.9121		1.7/16"	20.0	54.0	21.3	35.0	250.0	0.84
517.9113		1.1/2"	20.0	54.0	21.3	39.0	240.0	0.84
517.9123		1.9/16"	23.0	69.0	21.3	39.0	250.0	0.94
517.9120		1.5/8"	23.0	69.0	21.3	39.0	250.0	0.94
517.9124		1.11/16"	23.0	69.0	21.3	39.0	250.0	0.94
517.9117		1.3/4"	22.0	62.0	21.4	40.0	250.0	0.94
517.9125		1.13/16"	23.0	69.0	24.1	40.0	260.0	1.30
517.9122		1.7/8"	23.0	69.0	24.1	40.0	260.0	1.30
517.9126		2"	28.0	81.0	24.1	42.0	270.0	1.45
517.9127		2.1/16"	28.0	81.0	24.1	42.0	270.0	1.45
517.9130		2.1/8"	28.0	81.0	24.1	45.0	270.0	1.45
517.9131		2.3/16"	28.0	81.0	24.1	45.0	270.0	1.50
517.9129		2.1/4"	28.0	81.0	24.1	45.0	270.0	1.50
517.9134		2.5/16"	30.5	90.0	29.1	49.0	325.0	2.40
517.9133		2.3/8"	30.5	90.0	29.1	49.0	325.0	2.40
517.9135		2.7/16"	30.5	90.0	29.1	49.0	345.0	2.60
517.9128		2.1/2"	30.5	90.0	29.1	53.0	325.0	2.40
517.9136		2.9/16"	30.5	90.0	29.1	53.0	345.0	2.60
517.9132		2.3/4"	30.5	90.0	29.1	55.0	345.0	2.80
517.9137		2.13/16"	38.0	110.0	29.1	55.0	375.0	3.00
517.9138		2.15/16"	38.0	110.0	29.1	57.5	375.0	3.00
517.9139		3"	38.0	110.0	29.1	57.5	375.0	3.00
517.9142		3.1/8"	40.5	125.0	29.1	59.0	385.0	4.10
517.9141		3.1/4"	40.5	125.0	29.1	59.0	385.0	4.10
517.9144		3.3/8"	40.5	125.0	29.1	59.0	385.0	4.10
517.9140		3.1/2"	40.5	125.0	29.1	63.0	385.0	4.10
517.9145		3.5/8"	45.0	140.0	29.1	63.0	410.0	4.95
517.9143		3.3/4"	45.0	140.0	29.1	63.0	410.0	4.95
517.9146		3.7/8"	45.0	140.0	29.1	63.0	410.0	4.95
517.9147		4"	45.0	140.0	29.1	63.0	412.0	4.95

Snap-on handle for single ring spanner

- Four different sizes
- Matt finis
- Chrome vanadium



	mm	D mm	L mm	#	kg
517.9001	24 - 30	19.0	460.0	1	0.75
517.9002	32 - 41	22.0	610.0	2	1.25
517.9003	46 - 55	25.0	760.0	3	2.30
517.9004	60 - 105	30.0	860.0	4	2.80

GEAR*plus*® RATCHETING SPANNER

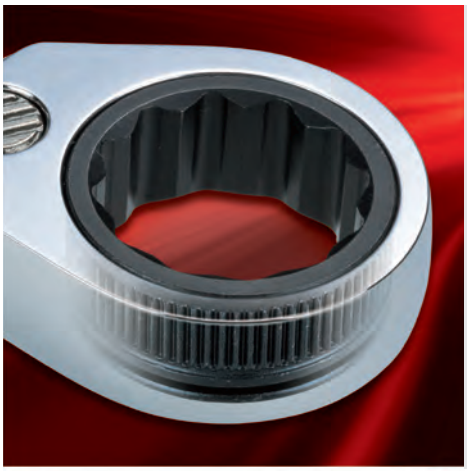

The GEAR*plus*® ring ratcheting spanner offer all the benefi s of a ratchet and much more...

The ultra slimline design of the ring sides allows work in very narrow places, even where normal ratchets and sockets can't be used
Allows very quick loosening or tightening of diffi ult nuts and bolts.

Further development of the progressive gearing means an increase in the transmission of up to 30% more torque compared to previous ring ratcheting spanners.
The components of the ratchet mechanism are manufactured from special high grade steel.
Thereby the GEARplus® reaches and even surpasses the DIN and ANSI torque standards for standard combination spanners.

The especially robust ratchet mechanism with 72 teeth works with a ratcheting angle of only 5° which makes it possible to work in confined spa es. The future of ratchets.
Standard combination wrenches require a ratcheting angle of at least 30° which means continual re-mounting of the wrench. This awkward process now belongs to the past.

All GEAR*plus*® ratchet ring spanners are of course fi ted with the proven FlankTraction system to optimise the torque transmission. This enables 100% power transfer to the faces of the nuts or bolts being worked on.
A further multitude of applications are offered by the valued bit and socket adaptors which can be obtained as seperate accessories.

GEAR
KS TOOLS GEAR plus

GEAR
KS TOOLS GEAR plus

FLEX
KS TOOLS GEAR plus

FLEXLOK
KS TOOLS GEAR plus

REVERSE
KS TOOLS GEAR plus

MINI
KS TOOLS GEAR plus

ADAPTER
KS TOOLS GEAR plus

REVERSE
KS TOOLS GEAR plus

GEARplus® MINI REVERSIBLE COMBINATION SPANNER

GEARplus® combina tion ratcheting spanner, stubby

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- With reverse lever
- High quality finis
- Chrome vanadium

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4631	8	6.5	4.0	16.6	16.7	90.0	30
503.4632	9	6.9	4.4	18.4	18.8	93.0	40
503.4633	10	7.3	4.8	20.0	20.8	95.0	45
503.4634	11	7.7	5.2	21.8	23.0	103.0	50
503.4635	12	8.2	5.5	22.7	25.0	106.0	55
503.4636	13	8.6	5.8	24.7	27.1	108.0	60
503.4637	14	9.0	6.2	27.0	29.2	115.0	70
503.4638	15	9.4	6.5	28.3	31.3	119.0	90
503.4639	16	9.9	6.8	30.0	33.4	123.0	100
503.4640	17	10.3	7.2	31.8	35.5	127.0	110
503.4641	18	10.7	7.7	32.6	37.6	131.0	120
503.4642	19	11.2	8.2	33.8	39.7	139.0	150

GEARplus® combina tion ratcheting spanner set, stubby

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- With reverse lever
- High quality finis
- Chrome vanadium
- In durable plastic storage case

	kg
503.4652	12 pcs GEARplus® combination ratcheting spanner set, stubby 1.08
12 x	8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm

GEARplus® combina tion ratcheting spanner set, stubby

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- With reverse lever
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

	kg
503.4653	16 pcs GEARplus® combination ratcheting spanner set, stubby 1.35
12 x	8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
1 x	1/4"
3 x	1/4" - 3/8" - 1/2"

GEARplus® C OMBINATION SPANNER

GEARplus® C ombination ratcheting spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

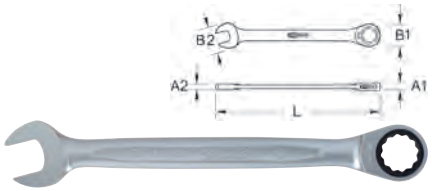

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.42055	5,5		6.3	3.9	14.0	15.0	127.5	20
503.4206	6		6.3	3.9	14.0	15.0	128.0	25
503.4207	7		6.5	4.0	16.8	16.7	140.0	30
503.4208	8		6.5	4.0	16.8	16.7	140.0	30
503.4209	9		6.9	4.4	18.8	18.7	149.0	40
503.4210	10		7.3	4.8	20.8	20.8	158.0	50
503.4211	11		7.7	5.2	21.8	23.0	165.0	60
503.4212	12		8.2	5.5	22.8	24.6	171.0	70
503.4213	13		8.6	5.8	24.8	26.8	178.0	80
503.4214	14		9.0	6.2	27.8	29.0	190.0	110
503.4215	15		9.4	6.5	28.8	31.0	199.0	120
503.4216	16		9.9	6.8	30.8	33.0	208.0	150
503.4217	17		10.3	7.2	31.8	35.5	225.0	180
503.4218	18		10.7	7.7	32.8	37.5	236.0	210
503.4219	19		11.2	8.2	33.8	39.4	247.0	240
503.4221	21		13.0	9.0	40.0	45.8	289.0	340
503.4222	22		13.0	9.0	40.0	45.8	289.0	345
503.4224	24		14.5	10.0	46.0	51.8	322.0	470
503.4227	27		15.5	10.5	52.0	56.4	358.0	580
503.4228	30		17.0	11.4	58.0	62.7	401.0	860
503.4229	32		17.5	12.5	62.0	66.4	424.0	1060
503.4230	34		17.5	13.0	62.0	70.0	459.0	1170
503.4248	41		19.5	16.5	71.0	86.0	565.0	2000
503.4102		5/16"	6.5	4.0	16.8	16.7	140.0	30
503.4103		3/8"	7.3	4.8	20.8	20.8	158.0	40
503.4104		7/16"	7.7	5.2	21.8	23.0	165.0	50
503.4105		1/2"	8.6	5.8	24.8	26.8	178.0	70
503.4106		9/16"	9.0	6.2	27.8	29.0	190.0	110
503.4107		5/8"	9.9	6.8	30.8	33.0	208.0	130
503.4108		11/16"	10.3	7.2	31.8	35.5	225.0	170
503.4109		3/4"	11.2	8.2	33.8	39.4	247.0	220

GEARplus® C ombination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

			kg
503.4202	5 pcs	5/16" - 3/8" - 1/2" - 11/16" - 3/4"	0.69
503.4204	4 pcs	10 - 13 - 17 - 19 mm	0.65
503.4205	5 pcs	8 - 10 - 13 - 17 - 19 mm	0.69
503.4270	4 pcs	24 - 27 - 30 - 32 mm	3.07

GEARplus® r atchet combination spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

			g
503.4255	5 pcs	GEARplus® r atchet combination spanner set	670
5 x	8 - 10 - 13 - 17 - 19 mm		

GEAR*plus*® combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

			kg
503.4259	6 pcs	GEAR*plus*® combination ratcheting spanner set	0.97
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	

GEAR*plus*® combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

			kg
503.4265	12 pcs	GEAR*plus*® combination ratcheting spanner set	1.88
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 -18 - 19 mm	

GEAR*plus*® combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4260	10 pcs	GEAR*plus*® combination ratcheting spanner set	1.06
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	
1 x		1/4"	
3 x		1/4" - 3/8" - 1/2"	

GEAR*plus*® combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4266	16 pcs	GEAR*plus*® combination ratcheting spanner set	1.73
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	
1 x		1/4"	
3 x		1/4" - 3/8" - 1/2"	

GEAR*plus*® combination ratcheting spanner display

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4200	70 pcs	GEAR*plus*® combination ratcheting spanner display	2.87
60 x		5 x (8 - 9 - 10 - 11- 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm)	
5 x		1/4" ; 1/4" - 3/8" - 1/2"	
5 x		5/16" - 10 mm	

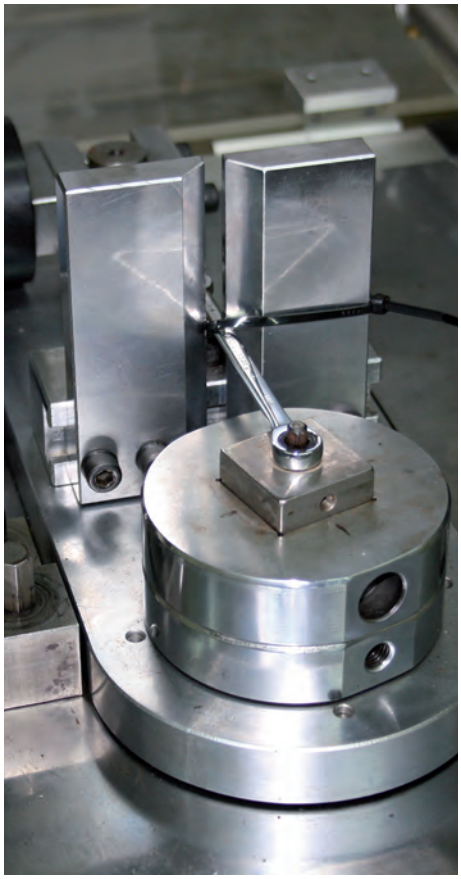

GEAR*plus*® REVERSIBLE COMBINATION SPANNER

GEAR*plus*® reversing combination ratcheting spanner

- FlankTraction Profil
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium



	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4606	6		6.3	3.9	14.0	15.0	127.5	30
503.4607	7		6.5	4.6	16.4	16.2	140.0	30
503.4608	8		6.5	4.6	16.4	16.2	140.0	30
503.4609	9		6.9	4.9	18.3	18.2	150.0	40
503.4610	10		7.3	5.3	20.0	20.5	159.0	50
503.4611	11		7.7	5.6	21.4	22.6	166.0	60
503.4612	12		8.2	6.0	22.6	24.6	172.0	70
503.4613	13		8.6	6.4	24.5	26.7	178.0	80
503.4614	14		9.0	6.8	27.0	28.8	191.0	100
503.4615	15		9.4	7.0	28.2	30.8	200.0	120
503.4616	16		9.9	7.2	30.3	33.2	208.0	150
503.4617	17		10.3	7.7	31.6	35.1	225.0	160
503.4618	18		10.7	8.2	32.3	37.2	236.0	190
503.4619	19		11.2	8.8	33.7	39.3	248.0	220
503.4621	21		13.0	9.0	40.1	46.2	290.0	245
503.4622	22		13.0	9.0	40.1	46.2	290.0	360
503.4624	24		14.5	10.0	46.5	51.5	323.0	470
503.4627	27		15.5	10.5	52.5	56.5	357.0	660

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4628	30		17.0	11.4	58.5	62.7	400.0	860
503.4629	32		17.5	12.5	62.5	66.4	423.0	1050
503.4630	34		17.5	13.0	62.5	70.6	460.0	1200
503.4643	36		18.0	13.4	65.8	79.0	488.0	1300
503.4644	38		18.0	13.4	65.8	79.0	488.0	1400
503.4648	41		19.5	16.5	71.0	86.0	565.0	2000
503.4681		5/16"	6.5	4.0	16.6	16.7	145.0	30
503.4683		3/8"	7.3	4.8	20.0	20.8	159.0	60
503.4684		7/16"	7.7	5.2	21.8	23.0	165.0	70
503.4685		1/2"	8.6	5.8	24.7	27.1	178.0	80
503.4686		9/16"	9.0	6.5	27.0	29.2	190.0	100
503.4687		5/8"	9.9	6.8	30.0	33.4	208.0	140
503.4688		11/16"	10.3	7.2	31.8	35.5	225.0	170
503.4689		3/4"	11.2	8.2	33.8	39.7	248.0	230

GEAR*plus*® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium

			g
503.4604	4 pcs	10 - 13 - 17 - 19 mm	650
503.4605	5 pcs	8 - 10 - 13 - 17 - 19 mm	700
503.4602	5 pcs	5/16" - 3/8" - 1/2" - 11/16" - 3/4"	600

GEAR*plus*® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg
503.4646	6 pcs	GEAR*plus*® reversing combination ratcheting spanner set	1.04
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	

GEAR*plus*® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4650	9 pcs	GEAR*plus*® reversing combination ratcheting spanner set	1.10
5 x		8 - 10 - 13 - 17 - 19 mm	
1 x		1/4"	
3 x		1/4" - 3/8" - 1/2"	

GEAR*plus*® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4647	10 pcs	GEAR*plus*® reversing combination ratcheting spanner set	1.11
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	
1 x		1/4"	
3 x		1/4" - 3/8" - 1/2"	

GEARplus® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg	
503.4666	16 pcs	GEARplus® reversing combination ratcheting spanner set	1.79	
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm		
1 x		1/4“		
3 x		1/4“ - 3/8“ - 1/2“		

GEARplus® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg	
503.4665	12 pcs	GEARplus® reversing combination ratcheting spanner set	1.71	
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm		

GEARplus® reversing combination ratcheting spanner display

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4600	70 pcs	GEARplus® reversing combination ratcheting spanner display	2.82
60 x		5 x (8 - 9 - 10 - 11- 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm)	
5 x		1/4“ ; 1/4“ - 3/8“ - 1/2“	
5 x		5/16“ - 10 mm	

DUO GEARplus® COMBINATION RATCHETING SPANNER

DUO GEARplus® combination spanner set with ratchet mechanism in ring and open jaw

- Open end side with innovative ratchet mechanism
- FlankTraction Profil
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- High quality finis
- Chrome vanadium



	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	Nm	Nm	g
503.5208	8	6.5	4.1	16.4	16.2	140.0	15.0	36.0	30
503.5209	9	6.9	4.3	18.3	18.3	150.0	21.1	48.0	40
503.5210	10	7.3	4.8	20.0	20.0	159.0	31.1	85.2	50
503.5211	11	7.7	5.1	21.4	21.4	166.0	46.1	96.0	60
503.5212	12	8.2	5.3	22.6	22.6	172.0	49.1	109.2	70
503.5213	13	8.6	5.9	24.5	24.5	178.0	62.1	138.0	80
503.5214	14	9.0	6.3	27.0	27.0	191.0	86.0	189.6	110
503.5215	15	9.4	6.6	28.2	28.2	200.0	104.1	240.0	120
503.5216	16	9.9	6.9	30.3	30.3	208.0	124.1	297.6	150
503.5217	17	10.3	7.3	31.6	31.6	225.0	139.1	320.4	170
503.5218	18	10.7	7.8	32.3	32.3	236.0	155.1	364.8	210
503.5219	19	11.2	8.3	33.7	33.7	248.0	186.1	387.6	218
503.5221	21	13.0	8.8	40.1	46.2	290.0	248.1	446.4	340
503.5222	22	13.0	8.8	40.1	46.2	290.0	279.1	489.6	340
503.5224	24	14.5	9.8	46.5	51.5	323.0	341.2	610.8	470
503.5227	27	15.5	10.4	52.9	56.1	352.0	432.0	805.2	650
503.5228	30	17.1	11.2	57.6	62.5	396.0	570.0	954.0	875
503.5229	32	17.6	12.1	61.9	66.2	418.0	650.0	1086.0	1035

DUO GEARplus® combination spanner set with ratchet mechanism in ring and open jaw

- Open end side with innovative ratchet mechanism
- FlankTraction Profil
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- High quality finis
- Chrome vanadium
- In durable plastic holder

			kg
503.5205	5 pcs	8 - 10 - 13 - 17 - 19 mm	0.66

DUO GEARplus® combination spanner with ratchet mechanism in ring and open jaw, reversible

- Open end side with innovative ratchet mechanism
- FlankTraction Profil
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ring head 15° offset
- With reverse lever
- Exact gearing with 72 teeth
- High quality finis
- Chrome vanadium

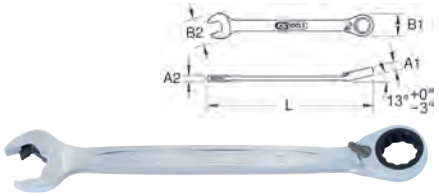

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	Nm	Nm	g
503.5908	8	6.5	4.1	16.4	16.2	140.0	15.0	36.0	40
503.5909	9	6.9	4.3	18.3	18.2	150.0	21.1	48.0	45
503.5910	10	7.3	4.8	20.0	20.5	159.0	31.1	85.2	50
503.5911	11	7.7	5.1	21.4	22.6	166.0	46.1	96.0	60
503.5912	12	8.2	5.3	22.6	24.6	172.0	49.1	109.2	70
503.5913	13	8.6	5.9	24.5	26.7	178.0	62.1	138.0	80
503.5914	14	9.0	6.3	27.0	28.8	191.0	86.0	189.6	100
503.5915	15	9.4	6.6	28.2	30.8	200.0	104.1	240.0	120
503.5916	16	9.9	6.9	30.3	33.2	208.0	124.1	297.6	140
503.5917	17	10.3	7.3	31.6	35.1	225.0	139.1	320.4	170
503.5918	18	10.7	7.8	32.3	37.2	236.0	155.1	364.8	200
503.5919	19	11.2	8.3	33.7	39.3	248.0	186.1	387.6	210
503.5921	21	13.0	8.8	40.1	46.2	290.0	248.1	446.4	365
503.5922	22	13.0	8.8	40.0	46.2	290.0	279.1	489.6	375
503.5924	24	14.5	9.8	46.5	51.5	323.0	341.2	610.8	470
503.5927	27	15.5	10.4	52.9	56.1	352.0	432.0	805.2	650
503.5928	30	17.1	11.2	57.6	62.5	396.0	570.0	954.0	875
503.5929	32	17.6	12.1	61.9	66.2	418.0	650.0	1086.0	1035

DUO GEARplus® combination spanner set with ratchet mechanism in ring and open jaw, reversible

- Open end side with innovative ratchet mechanism
- FlankTraction Profil
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ring head 15° offset
- With reverse lever
- Exact gearing with 72 teeth
- High quality finis
- Chrome vanadium
- In durable plastic holder

			kg
503.5905	5 pcs	8 - 10 - 13 - 17 - 19 mm	0.66



GEARplus® RING STOP COMBINATION SPANNER

GEARplus® reversing combination ratcheting spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- With reverse lever
- Ring stop fuction
- High quality finis
- Chrome vanadium

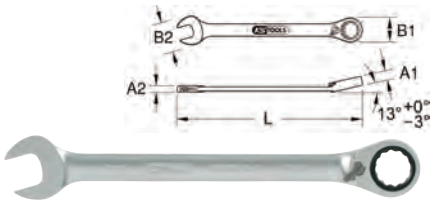

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g	
503.4908	8	6.5	4.6	16.6	16.7	140.0	40	
503.4909	9	6.9	4.9	18.4	18.8	150.0	45	
503.4910	10	7.3	5.3	20.0	20.8	159.0	50	
503.4911	11	7.7	5.6	21.8	23.0	165.0	60	
503.4912	12	8.2	6.0	22.7	25.0	172.0	70	
503.4913	13	8.6	6.4	24.7	27.1	178.0	80	
503.4914	14	9.0	6.8	27.0	29.2	191.0	100	
503.4915	15	9.4	7.0	28.3	31.1	200.0	120	
503.4916	16	9.9	7.2	30.0	33.4	208.0	140	
503.4917	17	10.3	7.7	31.8	35.5	226.0	170	
503.4918	18	10.7	8.2	32.6	37.6	237.0	200	
503.4919	19	11.2	8.8	33.8	39.7	248.0	210	

GEARplus® Socket adapter with go through

- FlankTraction profile 12 point)
- With go through function
- Suitable for ring stop spanners
- Chrome plated and mirror polished
- Chrome vanadium

	mm	B mm	L mm	g	
503.4978	8	12.0	19.8	10	
503.4979	9	12.0	21.2	10	
503.4980	10	15.0	22.6	10	
503.4981	11	16.2	22.9	10	
503.4982	12	17.4	24.5	20	
503.4983	13	18.7	25.8	20	
503.4984	14	19.9	26.1	20	
503.4985	15	20.8	28.0	30	
503.4986	16	22.6	29.5	30	
503.4987	17	23.7	30.6	30	
503.4988	18	24.5	32.0	40	
503.4989	19	26.1	33.5	50	

GEARplus® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- With reverse lever
- High quality finis
- Chrome vanadium
- In durable plastic storage case

	g	
503.4955	5 pcs	8 - 10 - 13 - 17 - 19 mm	660	

GEARplus® reversing combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Ratchet head 15° offset
- With reverse lever
- Versatile sockets with go through function
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2" 5/16" 10 mm

			kg	
503.4960	30 pcs	GEARplus® reversing combination ratcheting spanner set	2.43	
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm		
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm		
3 x		1/4“ - 5/16“ - 10 mm		
3 x		1/4“ - 3/8“ - 1/2“		

GEARplus® FLEXIBLE COMBINATION RATCHETING SPANNER

GEARplus® fl xible combination ratcheting spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Jaw 15° offset
- Exact gearing with 72 teeth
- With fl xible head
- 180° revolving head
- High quality finis
- Chrome vanadium



	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g	
503.4708	8	6.5	4.3	16.7	16.2	127.0	30	
503.4709	9	6.9	4.6	18.6	18.2	131.5	40	
503.4710	10	7.3	5.0	20.0	20.3	136.0	50	
503.4711	11	7.7	5.4	21.8	22.5	141.0	60	
503.4712	12	8.2	5.8	23.0	24.3	147.5	70	
503.4713	13	8.6	6.1	25.2	26.8	154.0	80	
503.4714	14	9.0	6.4	26.8	28.3	160.0	100	
503.4715	15	9.4	6.9	28.3	29.8	169.0	120	
503.4716	16	9.9	7.2	29.8	31.8	179.0	150	
503.4717	17	10.3	7.6	31.8	32.8	190.0	174	
503.4718	18	10.7	8.0	32.8	37.0	203.0	190	
503.4719	19	11.2	8.6	33.9	39.2	215.0	220	
503.4721	21	13.0	9.0	40.0	46.0	274.0	400	
503.4722	22	13.0	9.0	40.0	46.0	274.0	400	
503.4724	24	14.5	10.0	46.0	52.2	296.0	550	

Handle for fl xible combination ratcheting spanner

- Two component handle
- Suitable as a crank handle ratchet
- Mirror polished chrome
- Chrome vanadium



	mm	B1 mm	B2 mm	L1 mm	L2 mm	g	
503.0100	8-19	34.0	28.0	143.0	110.0	160	

GEARplus® fl xible combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Jaw 15° offset
- Exact gearing with 72 teeth
- With fl xible head
- 180° revolving head
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg	
503.4759	6 pcs	GEARplus® fl xible combination ratcheting spanner set	1.90	
6 x		8 - 10 - 12 - 13 - 17 - 19 mm		

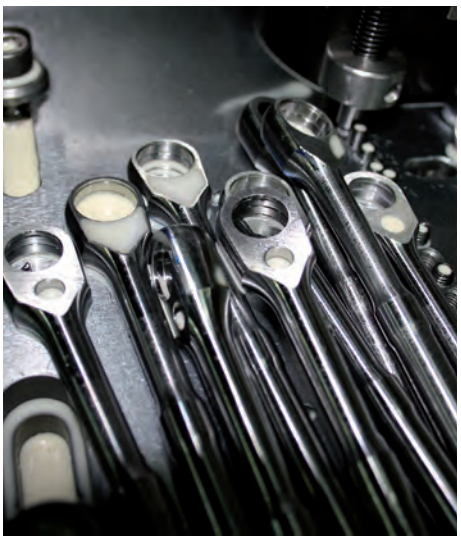

GEARplus® flexible combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Jaw 15° offset
- Exact gearing with 72 teeth
- With flexible head
- 180° revolving head
- Square drive adaptor to DIN 3120-ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4760	10 pcs	GEARplus® flexible combination ratcheting spanner set	1.21
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	
1 x		1/4“	
3 x		1/4“ - 3/8“ - 1/2“	

GEARplus® flexible combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Jaw 15° offset
- Exact gearing with 72 teeth
- With flexible head
- 180° revolving head
- Square drive adaptor to DIN 3120-ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4766	16 pcs	GEARplus® flexible combination ratcheting spanner set	2.66
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	
1 x		1/4“	
3 x		1/4“ - 3/8“ - 1/2“	

GEARplus® FLEXIBLE LOCKING COMBINATION RATCHETING SPANNER

GEARplus® flexible locking combination ratcheting spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- With flexible locking head
- Exact gearing with 72 teeth
- 180° revolving head
- High quality finis
- Chrome vanadium



	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4808	8	6.5	4.3	16.7	16.2	127.0	30
503.4809	9	6.9	4.6	18.6	18.2	131.5	40
503.4810	10	7.3	5.0	20.0	20.3	136.0	50
503.4811	11	7.7	5.4	21.8	22.5	141.0	60
503.4812	12	8.2	5.8	23.0	24.3	147.5	70
503.4813	13	8.6	6.1	25.2	26.8	154.0	80
503.4814	14	9.0	6.4	26.8	28.7	160.0	100
503.4815	15	9.4	6.9	28.3	30.5	169.0	120
503.4816	16	9.9	7.2	29.8	32.9	179.0	150
503.4817	17	10.3	7.6	31.8	34.5	190.0	160
503.4818	18	10.7	8.0	32.8	37.0	203.0	190
503.4819	19	11.2	8.6	33.9	39.2	215.0	220

GEARplus® flexible combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Jaw 15° offset
- Exact gearing with 72 teeth
- With flexible head
- 180° revolving head
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg
503.4765	12 pcs	GEARplus® flexible combination ratcheting spanner set	2.56
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	

GEARplus® flexible combination ratcheting spanner display

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Jaw 15° offset
- Exact gearing with 72 teeth
- With flexible head
- 180° revolving head
- High quality finis
- Chrome vanadium

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4700	70 pcs	GEARplus® flexible combination ratcheting spanner display	2.74
60 x		5 x (8 - 9 - 10 - 11- 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm)	
5 x		1/4“ ; 1/4“ - 3/8“ - 1/2“	
5 x		5/16“ - 10 mm	

Handle for flexible combination ratcheting spanner

- Two component handle
- Suitable as a crank handle ratchet
- Mirror polished chrome
- Chrome vanadium



	mm	B1 mm	B2 mm	L1 mm	L2 mm	g
503.0100	8-19	34.0	28.0	143.0	110.0	160

GEARplus® fl xible locking combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- With fl xible locking head
- Exact gearing with 72 teeth
- 180° revolving head
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg
503.4859	6 pcs	GEARplus® fl xible locking combination ratcheting spanner set	1.21
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	

GEARplus® fl xible locking combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- With fl xible locking head
- Exact gearing with 72 teeth
- 180° revolving head
- High quality finis
- Chrome vanadium
- In durable plastic storage case

			kg
503.4865	12 pcs	GEARplus® fl xible locking combination ratcheting spanner set	2.56
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	

GEARplus® fl xible locking combination ratcheting spanner display

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- With fl xible locking head
- Exact gearing with 72 teeth
- 180° revolving head
- High quality finis
- Chrome vanadium

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4800	70 pcs	GEARplus® fl xible locking combination ratcheting spanner display	2.82
60 x		5 x (8 - 9 - 10 - 11- 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm)	
5 x		1/4" ; 1/4" - 3/8" - 1/2"	
5 x		5/16" - 10 mm	

GEARplus® DOUBLE RING SPANNER

GEARplus® Double ratchet ring spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

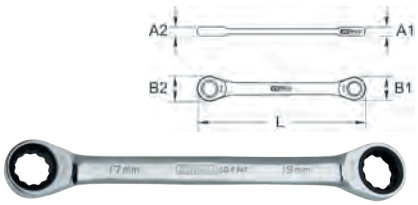

	mm		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4502	8x9		6.5	6.9	16.8	20.2	128.0	60
503.4511	8x10		7.3	6.5	20.0	17.0	128.0	40
503.4503	10x11		7.3	7.7	20.2	20.2	150.0	80
503.4512	10x13		7.3	8.6	20.2	20.2	150.0	80
503.4504	12x13		8.2	8.6	23.0	23.0	170.0	100
503.4505	14x15		9.0	9.4	26.5	26.5	190.0	140
503.4506	16x18		9.9	10.7	29.5	29.5	210.0	180
503.4507	17x19		10.3	11.2	31.5	31.5	230.0	220
503.4402		5/16"x3/8"	6.5	7.3	16.8	20.2	128.0	40
503.4403		7/16"x1/2"	7.7	8.6	23.0	24.8	170.0	80
503.4404		9/16"x5/8"	9.0	9.9	26.5	29.5	190.0	125
503.4405		11/16"x3/4"	10.3	11.2	31.5	33.5	230.0	200

GEARplus® fl xible locking combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- With fl xible locking head
- Exact gearing with 72 teeth
- 180° revolving head
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4867	12 pcs	GEARplus® fl xible locking combination ratcheting spanner set	1.30
6 x		8 - 10 - 12 - 13 - 17 - 19 mm	
3 x		1/4" - 5/16" - 10 mm	
3 x		1/4" - 3/8" - 1/2"	

GEARplus® fl xible locking combination ratcheting spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- With fl xible locking head
- Exact gearing with 72 teeth
- 180° revolving head
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- High quality finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2" 5/16" 10 mm

			kg
503.4868	18 pcs	GEARplus® fl xible locking combination ratcheting spanner set	2.90
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	
3 x		1/4" - 5/16" - 10 mm	
3 x		1/4" - 3/8" - 1/2"	

GEARplus® double ratchet ring spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3310 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

			g
503.4552	2 pcs	10x13 - 17x19 mm	335

GEARplus® double ratchet ring spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3310 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium
- Supplied in a leather pouch

			g
503.4557	6 pcs	8x 9 - 10x11 - 12x13 - 14x15 - 16x18 - 17x19 mm	900

GEARplus® double ratchet ring spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3310 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

			g
503.4556	6 pcs	GEARplus® double ratchet ring spanner set	790
6 x		8x9 - 10x11 - 12x13 - 14x15 - 16x18 17x19 mm	

GEARplus® double ratchet ring spanner set

- FlankTraction profile 12 point)
- In accordance to DIN 3310 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
503.4560	10 pcs	GEARplus® double ratchet ring spanner set	1.20
6 x		8x9 - 10x11 - 12x13 - 14x15 - 16x18 17x19 mm	
1 x		1/4“	
3 x		1/4“ - 3/8“ - 1/2“	

GEARplus® 4 IN 1 DOUBLE RING SPANNER

4 in 1 GEARplus® reversing double ratchet ring spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Four different sizes on each spanner
- With reverse lever
- High quality finis
- Chrome vanadium

	mm	A1 mm	A2 mm	A3 mm	A4 mm	B1 mm	B2 mm	L mm	g
503.4541	8x11-9x10	7.7	7.3	14.6	13.8	21.8	20.0	150.0	68
503.4656	8x10-12x13	8.6	7.3	16.8	13.8	24.8	16.8	150.0	86
503.4543	12x15-13x14	9.4	9.0	18.0	17.1	29.5	18.0	190.0	147
503.4565	10x19-13x17	11.2	9.0	21.9	17.1	33.6	21.9	190.0	196
503.4546	16x19-17x18	11.2	10.3	21.9	20.2	33.5	21.9	230.0	244
503.4657	14x17-18x19	11.2	10.3	21.9	19.3	33.5	21.9	230.0	245
503.4553	21x27-22x24	16.0	13.0	30.0	26.0	52.0	40.0	275.0	610
503.4554	30x36-32x34	18.0	18.0	36.0	35.0	65.0	62.0	360.0	1400

		A1 mm	A2 mm	A3 mm	A4 mm	B1 mm	B2 mm	L mm	g
503.4586	5/16"x1/2"-3/8"x7/16"	8.6	7.3	16.8	13.8	24.8	20.2	150.0	91
503.4589	9/16"x3/4"-5/8"x11/16"	11.2	10.3	21.9	19.3	33.5	31.5	230.0	238

4 in 1 GEARplus® fl xible reversing double ratchet ring spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- With fl xible head
- Four different sizes on each spanner
- With reverse lever
- High quality finis
- Chrome vanadium



	mm	A1 mm	A2 mm	A3 mm	A4 mm	B1 mm	B2 mm	L mm	g
503.4745	10x13-17x19	11.2	9.0	22.0	17.1	33.7	27.0	253.0	196

4 in 1 GEARplus® reversing double ratchet ring spanner

- FlankTraction profile 12 point)
- Straight form
- Exact gearing with 72 teeth
- Four different sizes on each spanner
- With reverse lever
- High quality finis
- Chrome vanadium

			g
503.4655	2 pcs	8x10 - 12x13 - 14x17 - 18x19 mm	340
503.4550	2 pcs	21x27 - 22x24 - 30x36 - 32x34 mm	2010
503.4540	3 pcs	8x11 - 9x10 - 12x15 - 13x14 - 16x19 - 17x18 mm	550

GEARplus® REVERSIBLE DOUBLE RING SPANNER

GEARplus® reversing double ratchet ring spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium

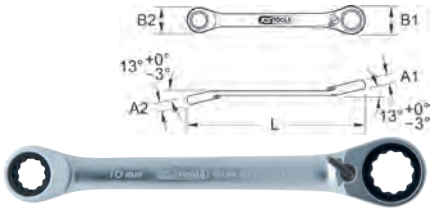

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4571	8x9	6.9	6.5	20.2	16.8	128.0	60
503.4572	8x10	7.4	6.7	20.2	16.7	128.0	65
503.4573	10x11	7.7	7.3	21.8	20.2	150.0	70
503.4574	10x13	8.7	7.4	25.4	20.5	150.0	80
503.4575	12x13	8.6	8.2	24.8	23.0	170.0	100
503.4576	14x15	9.4	9.0	29.5	26.5	190.0	140
503.4577	16x18	10.7	9.9	33.5	29.5	210.0	180
503.4578	17x19	11.2	10.3	33.5	31.5	230.0	220

GEARplus® double reversing ratchet ring spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- With reverse lever
- High quality finis
- Chrome vanadium
- Supplied in a leather pouch

			g
503.4580	6 pcs	8x9 - 10x11 - 12x13 - 14x15 - 16x18 - 17x19 mm	790

GEARplus® TX DOUBLE RING SPANNER

GEARplus® Double ring ratchet spanner for TX E profil

- TX E profil
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium



		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4351	E6 x E8	6.5	6.9	16.8	20.2	128.0	70
503.4353	E10 x E12	7.3	7.7	20.2	21.8	150.0	60
503.4355	E14 x E18	9.0	9.9	26.5	29.5	190.0	150
503.4357	E20 x E24	10.3	11.2	31.5	33.5	230.0	230

GEARplus® Double ring ratcheting spanner set for TX E profil

- TX E profil
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

503.4364	4 pcs	E6xE8 - E10xE12 - E14xE18 - E20xE24	475

GEARplus® UNIVERSAL DOUBLE RING SPANNER SETS

GEARplus® Universal double ratchet ring spanner set

- 6 point
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- Reversible
- With go-through facility
- The collar on each insert prevents slipping
- Especially suitable for narrow hard to access areas
- Matt finis
- Chrome vanadium
- In durable plastic storage case

503.4625	8 pcs	GEARplus® Universal double ratchet ring spanner set	500
1 x		14 x 19 mm	
7 x		5/16" - 3/8" - 7/16" - 1/2" - 9/16" - 5/8" - 11/16"	

GEARplus® Universal double ratchet ring spanner set

- 6 point
- Ratchet head 15° offset
- Exact gearing with 72 teeth
- Reversible
- With go-through facility
- The collar on each insert prevents slipping
- Especially suitable for narrow hard to access areas
- Matt finis
- Chrome vanadium
- In durable plastic storage case

503.4645	10 pcs	GEARplus® Universal double ratchet ring spanner set	500
1 x		14 x 19 mm	
9 x		8 - 9 - 10 - 11 - 12 - 13 - 15 - 16 - 17 mm	

GEARplus® ACCESSORIES

GEARplus® Bit adapter

- FlankTraction profile 12 point)
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 5/16" 10 mm

	mm		B mm	L mm	
503.4290	10,0	1/4"	11.0	15.7	6
503.4292	13,0	5/16"	15.5	15.3	11
503.4293	13,0	10 mm	21.0	21.0	17

GEARplus® Bit adapter set

- FlankTraction profile 12 point)
- Chrome plated and mirror polished
- Chrome vanadium

5/16" 10 mm

503.4294	2 pcs	GEARplus® Bit adapter set	100
2 x		13 mm x 5/16" - 13 mm x 10 mm	

GEARplus® Socket adapter

- 6 point
- With quick release locking function
- Suitable for GEARplus® spanners
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2"

			B mm	L mm	
503.4296	10 mm	1/4"	11.1	16.7	50
503.4297	13 mm	3/8"	14.5	21.7	70
503.4298	19 mm	1/2"	21.4	28.8	100

GEARplus® Socket adapter set, for metric spanner

- FlankTraction profile 12 point)
- Suitable for metric GEARplus® spanners
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2"

503.4286	4 pcs	GEARplus® Socket adapter set, for metric spanner	270
1 x		10 mm x 1/4"	
3 x		10 mm x 1/4" - 13 mm x 3/8" - 19 mm x 1/2"	

GEARplus® Socket adapter set, for imperial spanners

- FlankTraction profile 12 point)
- Suitable for imperial GEARplus® spanners
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2"

503.4287	4 pcs	GEARplus® Socket adapter set, for imperial spanners	100
1 x		3/8" x 1/4"	
3 x		3/8" x 1/4" - 1/2" x 3/8" - 3/4" x 1/2"	

GEARplus® Socket adapter for ring stop spanner

- 6 point
- With quick release locking function
- Suitable for ring stop spanners
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

			B mm	L mm	
503.4998	19 mm	1/2"	21.4	28.8	100

KS TOOLS®

Innovation is our mission!

SPANNERS

CLASSIC

CHROME plus®

ULTIMATE PLUS

GEAR plus®

SOCKETS AND OPERATING TOOLS

KS TOOLS®

Innovation is our mission!

	PAGE
1/4“ SOCKETS	68 - 70
1/4“ BIT SOCKETS	70 - 73
1/4“ ADAPTERS	74
1/4“ UNIVERSAL JOINTS	74 - 75
1/4“ T-HANDLES	75
1/4“ EXTENSIONS	75 - 77
1/4“ MANUAL DRIVE TOOLS	77
1/4“ RATCHETS	77 - 78
1/4“ SET ASSORTMENTS	78 - 80
1/4“ SET ASSORTMENTS	80 - 88
1/4“ POINT OF SALE DISPLAYS	88
3/8“ SOCKETS	88 - 92
3/8“ BIT SOCKETS	92 - 96
3/8“ ADAPTERS	96 - 97
3/8“ UNIVERSAL JOINTS	97
3/8“ T-HANDLES	98
3/8“ EXTENSIONS	98 - 99
3/8“ MANUAL DRIVE TOOLS	99
3/8“ RATCHETS	99 - 100
3/8“ SET ASSORTMENTS	100 - 101
3/8“ SET ASSORTMENTS	101 - 104
3/8“ POINT OF SALE DISPLAYS	104 - 105
1/2“ SOCKETS	105 - 109
1/2“ BIT SOCKETS	109 - 115
GO THROUGH SOCKETS	115 - 116
1/2“ ADAPTERS	116 - 117
1/2“ UNIVERSAL JOINTS	117 - 118
1/2“ T-HANDLES	118
1/2“ EXTENSIONS	118 - 119
1/2“ MANUAL DRIVE TOOLS	119
1/2“ RATCHETS	119 - 120
1/2“ SET ASSORTMENTS	120 - 121
1/2“ SET ASSORTMENTS	121 - 126
1/2“ POINT OF SALE DISPLAYS	126
3/4“ SOCKETS	127
3/4" BIT SOCKETS	127
3/4“ ADAPTERS	127 - 128
3/4“ T-HANDLES	128
3/4“ EXTENSIONS	128
3/4“ MANUAL DRIVE TOOLS	128
3/4“ RATCHETS	128 - 129
3/4“ SOCKETS	129
1“ SOCKETS	130
1" BIT SOCKETS	130
1“ T-HANDLES	130
1“ EXTENSIONS	131
1/4“ MANUAL DRIVE TOOLS	131
1“ RATCHETS	131
1“ SET ASSORTMENTS	131
1/4“ POWER SOCKETS	132
1/4“ POWER EXTENSIONS	132
1/4“ POWER ADAPTERS	132
1/4“ POWER SECURING ELEMENTS	132
3/8“ POWER SOCKETS	133 - 134
3/8“ POWER EXTENSIONS	134
3/8“ POWER BALL JOINTS	134
3/8“ POWER ADAPTERS	134
3/8“ POWER SECURING ELEMENTS	134 - 135
1/2“ POWER SOCKETS	135 - 137
1/2“ WHEEL ASSEMBLY SOCKETS	137 - 138
1/2“ POWER BIT SOCKETS	139 - 140
1/2“ POWER EXTENSIONS	140
1/2“ POWER BALL JOINTS	140
1/2“ POWER ADAPTERS	141
1/2“ POWER SECURING ELEMENTS	141
3/4“ POWER SOCKETS	141 - 142
3/4“ POWER BIT SOCKETS	142 - 143
3/4“ POWER EXTENSIONS	143
3/4“ POWER BALL JOINTS	143
3/4“ POWER ADAPTERS	143
3/4“ POWER SECURING ELEMENTS	143
1“ POWER SOCKETS	144
1“ POWER BIT SOCKETS	145
1/4“ POWER EXTENSIONS	145
1“ POWER BALL JOINTS	145
1“ POWER ADAPTERS	145
1“ POWER SECURING ELEMENTS	145

SOCKETS AND OPERATING TOOLS

Manufacturing and fabrication steps

Raw material blank cutting

Forging of the blank socket with square drive and socket profil

Dressing the socket size

Amti slip ground

Knurling

Hardening and tempering

Galvanizing preprocessing

Drive profile

Profil

FlankTraction 6 point

- Perfect grip even on screws and nuts which are not true to size or damaged
- Larger contact area for better pressure distribution
- Avoids damage of head of screws
- Perfect torque transfer to the flan s of nuts and bolts

FlankTraction 12 point

- The recessed corners typical for this profil ensure that the corners are protected and the power is transmitted onto the fl t area
- Also does not need to be 100% the exact size so is suitable for damaged screws and/or nuts
- Good pressure distribution
- Screw head is protected
- Ideal for corroded screws and high power expenditure

E-TX

- This profile is onsidered as a further development of Phillips and hexagonal heads
- The six notched star form with rounded tip is typical
- No cam distortion effect due to vertical driving force
- Optimal power transmission
  T = Internal profil
  E = Outer profile external)

Socket profil

CLASSIC

- For manual operation
- Matt finis
- Chrome vanadium
- FlankTraction Profil

CHROME plus

- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- FlankTraction Profil

KRAFT

- For machinery usage
- Phosphate
- Chrome molybdenum

1/4“ SOCKETS

CLASSIC Hexagonal socket

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

1/4"

	mm		L mm	D1 mm	D2 mm	T mm	g
917.1404	4,0		25.0	7.0	12.0	2.0	9
917.14045	4,5		25.0	8.0	12.0	2.0	10
917.1405	5,0		25.0	8.0	12.0	3.0	10
917.14055	5,5		25.0	9.0	12.0	3.0	10
917.1406	6,0		25.0	9.0	12.0	4.0	10
917.1407	7,0		25.0	11.0	12.0	4.0	12
917.1408	8,0		25.0	12.0	12.0	5.0	14
917.1409	9,0		25.0	13.0	13.0	5.0	16
917.1410	10,0		25.0	14.0	14.0	6.0	20
917.1411	11,0		25.0	16.0	16.0	7.0	25
917.1412	12,0		25.0	17.0	17.0	8.0	30
917.1413	13,0		25.0	18.0	18.0	8.0	35
917.1414	14,0		25.0	20.0	20.0	10.0	40
917.1499		5/32“	25.0	5.6	10.7	2.0	9
917.1516		3/16“	25.0	8.0	12.0	3.0	10
917.1517		7/32“	25.0	9.0	12.0	3.0	10
917.1518		1/4“	25.0	10.0	12.0	4.0	10
917.1519		9/32“	25.0	11.0	12.0	4.0	12
917.1520		5/16“	25.0	12.0	12.0	5.0	14
917.1521		11/32“	25.0	13.0	13.0	5.0	16
917.1522		3/8“	25.0	14.0	14.0	6.0	20
917.1523		7/16“	25.0	16.0	16.0	7.0	25
917.1524		1/2“	25.0	18.0	18.0	8.0	35
917.1601		9/16“	25.0	20.0	20.0	10.0	40

CLASSIC Hexagonal socket set

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Includes storage rail

1/4"

			kg
917.0620	10 pcs	4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	0.35

CLASSIC Hexagonal socket, deep

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium

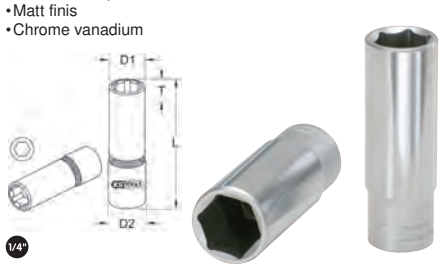

1/4"

	mm		L mm	D1 mm	D2 mm	T mm	g
917.1525	4,0		50.0	7.0	11.0	3.0	15
917.1526	4,5		50.0	8.0	11.0	3.0	15
917.1527	5,0		50.0	8.0	11.0	4.0	15
917.1528	5,5		50.0	9.0	11.0	5.0	20
917.1426	6,0		50.0	9.0	11.0	5.0	20
917.1427	7,0		50.0	11.0	11.0	6.0	20
917.1428	8,0		50.0	12.0	12.0	8.0	30
917.1429	9,0		50.0	13.0	13.0	8.0	30
917.1430	10,0		50.0	14.0	14.0	9.0	40
917.1431	11,0		50.0	16.0	16.0	11.0	50
917.1432	12,0		50.0	17.0	17.0	12.0	50
917.1433	13,0		50.0	18.0	18.0	12.0	50
917.1515		5/32“	50.0	6.7	10.7	3.0	13
917.1531		3/16“	50.0	8.0	11.0	4.0	15
917.1532		7/32“	50.0	9.0	11.0	5.0	20
917.1533		1/4“	50.0	10.0	11.0	5.0	20
917.1534		9/32“	50.0	11.0	11.0	6.0	20
917.1535		5/16“	50.0	12.0	12.0	8.0	30
917.1536		11/32“	50.0	13.0	13.0	8.0	30
917.1537		3/8“	50.0	14.0	14.0	9.0	40
917.1538		7/16“	50.0	16.0	16.0	11.0	50
917.1539		1/2“	50.0	18.0	18.0	12.0	70

CLASSIC Hexagonal socket set, deep

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Includes storage rail

1/4"

			kg
917.0610	10 pcs	4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	0.36

CHROME*plus*® Hexagonal socket

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

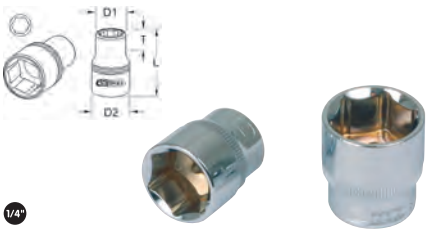

1/4"

	mm		D1 mm	D2 mm	L mm	T mm	g
918.1404	4,0		7.0	12.0	25.0	2.0	10
918.14045	4,5		7.0	12.0	25.0	2.0	40
918.1405	5,0		8.0	12.0	25.0	3.0	40
918.14055	5,5		9.0	12.0	25.0	3.0	40
918.1406	6,0		9.0	12.0	25.0	4.0	40
918.1407	7,0		11.0	12.0	25.0	4.0	40
918.1408	8,0		12.0	12.0	25.0	5.0	40
918.1409	9,0		13.0	13.0	25.0	5.0	12
918.1410	10,0		14.0	14.0	25.0	6.0	40
918.1411	11,0		16.0	16.0	25.0	7.0	40
918.1412	12,0		17.0	17.0	25.0	8.0	40
918.1413	13,0		18.0	18.0	25.0	8.0	40
918.1414	14,0		20.0	20.0	25.0	10.0	40
918.1511		5/32“	5.6	10.7	25.0	2.0	10
918.1512		3/16“	8.0	12.0	25.0	3.0	10
918.1513		7/32“	9.0	12.0	25.0	3.0	10
918.1514		1/4“	10.0	12.0	25.0	4.0	10
918.1515		9/32“	11.0	12.0	25.0	4.0	12
918.1516		5/16“	12.0	12.0	25.0	5.0	14
918.1517		11/32“	13.0	13.0	25.0	5.0	16
918.1518		3/8“	14.0	14.0	25.0	6.0	20
918.1519		7/16“	16.0	16.0	25.0	7.0	25
918.1520		1/2“	18.0	18.0	25.0	8.0	35
918.15205		9/16“	20.0	20.0	25.0	10.0	40

CHROME*plus*® Hexagonal socket set

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Includes storage rail

1/4"

			kg
918.0620	10 pcs	4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	0.35

CHROME*plus*® Hexagonal socket, deep

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	mm		D1 mm	D2 mm	L mm	T mm	g
918.1424	4,0		7.0	11.0	50.0	3.0	15
918.14245	4,5		8.0	11.0	50.0	3.0	15
918.1425	5,0		8.0	11.0	50.0	4.0	15
918.14255	5,5		9.0	11.0	50.0	5.0	20
918.1426	6,0		9.0	11.0	50.0	5.0	20
918.1427	7,0		11.0	11.0	50.0	6.0	20
918.1428	8,0		12.0	12.0	50.0	8.0	25
918.1429	9,0		13.0	13.0	50.0	8.0	30
918.1430	10,0		14.0	14.0	50.0	9.0	35
918.1431	11,0		16.0	16.0	50.0	11.0	45
918.1432	12,0		17.0	17.0	50.0	12.0	50
918.1433	13,0		18.0	18.0	50.0	12.0	65
918.1521		5/32“	6.7	10.7	50.0	3.0	20
918.1522		3/16“	8.0	11.0	50.0	4.0	15
918.1523		7/32“	9.0	11.0	50.0	5.0	20
918.1524		1/4“	10.0	11.0	50.0	5.0	20
918.1525		9/32“	11.0	11.0	50.0	6.0	20
918.1526		5/16“	12.0	12.0	50.0	8.0	25
918.1527		11/32“	13.0	13.0	50.0	8.0	30
918.1528		3/8“	14.0	14.0	50.0	9.0	35
918.1529		7/16“	16.0	16.0	50.0	11.0	50
918.1530		1/2“	18.0	18.0	50.0	12.0	65

CHROME*plus*® hexagonal socket set, deep

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/4"

			kg
918.0610	10 pcs	4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	0.36

12 Point socket

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

1/4"

	mm		D1 mm	D2 mm	L mm	g
917.1461	4,0		7.0	12.0	25.0	10
917.1462	4,5		8.0	12.0	25.0	10
917.1463	5,0		8.0	12.0	25.0	10
917.1464	5,5		9.0	12.0	25.0	12
917.1465	6,0		10.0	12.0	25.0	10
917.1466	7,0		11.0	12.0	25.0	10
917.1467	8,0		12.0	12.0	25.0	15
917.1468	9,0		13.0	13.0	25.0	15
917.1469	10,0		15.0	15.0	25.0	20
917.1470	11,0		16.0	16.0	25.0	25
917.1471	12,0		17.0	17.0	25.0	25
917.1472	13,0		18.0	18.0	25.0	30
917.1473	14,0		20.0	20.0	25.0	40
917.1474		3/16"	8.0	12.0	25.0	11
917.1475		7/32"	9.0	12.0	25.0	12
917.1476		1/4"	10.0	12.0	25.0	13
917.1477		9/32"	11.0	12.0	25.0	14
917.1478		5/16"	12.0	12.0	25.0	15
917.1479		11/32"	13.0	13.0	25.0	15
917.1480		3/8"	14.0	14.0	25.0	15
917.1481		7/16"	16.0	16.0	25.0	25
917.1482		1/2"	18.0	18.0	25.0	30
917.1483		9/16"	20.0	20.0	25.0	40

12 point socket set

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Includes storage rail

1/4"

			kg
917.0625	10 pcs	4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	0.35

12 Point socket, deep

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finishe
- Chrome vanadium

1/4"

	mm		D1 mm	D2 mm	L mm	g
917.1604	4,0		7.0	11.0	50.0	15
917.16045	4,5		8.0	11.0	50.0	15
917.1605	5,0		8.0	11.0	50.0	15
917.16055	5,5		9.0	11.0	50.0	20
917.1606	6,0		9.0	11.0	50.0	20
917.1607	7,0		11.0	11.0	50.0	20
917.1608	8,0		12.0	12.0	50.0	25
917.1609	9,0		13.0	13.0	50.0	30
917.1610	10,0		14.0	14.0	50.0	35
917.1611	11,0		16.0	16.0	50.0	45
917.1612	12,0		17.0	17.0	50.0	50
917.1613	13,0		18.0	18.0	50.0	65
917.1565		3/16"	8.0	12.0	50.0	11
917.1566		7/32"	9.0	12.0	50.0	12
917.1567		1/4"	10.0	12.0	50.0	13
917.1568		9/32"	11.0	12.0	50.0	14
917.1569		5/16"	12.0	12.0	50.0	15
917.1570		11/32"	13.0	13.0	50.0	15
917.1571		3/8"	14.0	14.0	50.0	15
917.1572		7/16"	16.0	16.0	50.0	25
917.1573		1/2"	18.0	18.0	50.0	30
917.1574		9/16"	20.0	20.0	50.0	40

12 Point socket set, deep

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Includes storage rail

1/4"

			kg
917.0630	10 pcs	4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	0.35

CHROME*plus*® 12 point socket

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	mm		D1 mm	D2 mm	L mm	g
918.1502	4,0		7.0	12.0	25.0	10
918.1503	4,5		7.0	12.0	25.0	10
918.1504	5,0		8.0	12.0	25.0	10
918.1506	5,5		9.0	12.0	25.0	10
918.1507	6,0		9.0	12.0	25.0	10
918.1508	7,0		11.0	12.0	25.0	10
918.1509	8,0		12.0	12.0	25.0	10
918.1541	9,0		13.0	13.0	25.0	11
918.1542	10,0		14.0	14.0	25.0	12
918.1543	11,0		16.0	16.0	25.0	17
918.1544	12,0		17.0	17.0	25.0	20
918.1546	13,0		18.0	18.0	25.0	23
918.1547	14,0		20.0	20.0	25.0	40
918.1548		3/16"	8.0	12.0	25.0	9
918.1549		7/32"	9.0	12.0	25.0	9
918.1551		1/4"	10.0	12.0	25.0	10
918.1552		9/32"	11.0	12.0	25.0	10
918.1553		5/16"	12.0	12.0	25.0	9
918.1554		11/32"	13.0	13.0	25.0	11
918.1555		3/8"	14.0	14.0	25.0	12
918.1556		7/16"	16.0	16.0	25.0	25
918.1557		1/2"	18.0	18.0	25.0	23
918.1559		9/16"	20.0	20.0	25.0	40

CHROME*plus*® 12 Point socket set

- 12-point
- FlankTraction-Profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Includes storage rail

1/4"

			kg
918.0615	10 pcs	4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	0.35

CHROME*plus*® 12 Point socket, deep

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	mm		D1 mm	D2 mm	L mm	g
918.1561	4,0		7.0	11.0	50.0	15
918.1562	4,5		8.0	11.0	50.0	15
918.1563	5,0		8.0	11.0	50.0	15
918.1589	5,5		9.0	11.0	50.0	20
918.1591	6,0		9.0	11.0	50.0	20
918.1592	7,0		11.0	11.0	50.0	20
918.1596	8,0		12.0	12.0	50.0	25
918.1597	9,0		13.0	13.0	50.0	30
918.1598	10,0		14.0	14.0	50.0	35
918.1599	11,0		16.0	16.0	50.0	45
918.1418	12,0		17.0	17.0	50.0	50
918.1419	13,0		18.0	18.0	50.0	65
918.1423		3/16"	8.0	11.0	50.0	15
918.1601		7/32"	9.0	11.0	50.0	20
918.1602		1/4"	10.0	11.0	50.0	20
918.1603		9/32"	11.0	11.0	50.0	20
918.1611		5/16"	12.0	12.0	50.0	25
918.1613		11/32"	13.0	13.0	50.0	30
918.1615		3/8"	14.0	14.0	50.0	35
918.1616		7/16"	16.0	16.0	50.0	50
918.1618		1/2"	18.0	18.0	50.0	65

CHROME*plus*® 12-point socket-set, deep

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Includes storage rail

1/4"

			kg
918.0630	10 pcs	4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	0.35

TX E Socket

- TX E
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

1/4"

		D1 mm	D2 mm	L mm	T mm	g	
911.4313	E4	6.0	11.0	25.0	5.0	10	
911.4314	E5	7.0	11.0	25.0	5.0	10	
911.4315	E6	8.0	11.0	25.0	5.0	10	
911.4316	E7	10.0	11.0	25.0	6.0	10	
911.4317	E8	11.0	12.0	25.0	7.0	15	
911.4332	E10	13.0	13.0	25.0	7.0	15	
911.4350	E11	14.0	15.0	25.0	8.0	15	

TX E Socket set

- TX E
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/4"

			kg	
911.4355	7 pcs	E4 - E5 - E6 - E7 - E8 - E10 - E11	0.10	

CHROME*plus*® TX E Socket

- TX E
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

		D1 mm	D2 mm	L mm	T mm	g	
918.1582	E4	6.0	11.0	25.0	5.0	10	
918.1583	E5	7.0	11.0	25.0	5.0	10	
918.1584	E6	8.0	11.0	25.0	5.0	10	
918.1585	E7	10.0	11.0	25.0	6.0	10	
918.1586	E8	11.0	12.0	25.0	7.0	15	
918.1587	E10	13.0	13.0	25.0	7.0	15	
918.1588	E11	13.0	15.0	25.0	8.0	15	

CHROME*plus*® TX E Socket set

- TX E
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/4"

			g
918.4355	7 pcs	E4 - E5 - E6 - E7 - E8 - E10 - E11	100

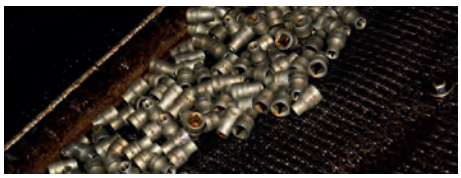

1/4“ BIT SOCKETS

Bit socket for slotted screws

- Slotted
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium



1/4"

	mm	D mm	L mm	T mm	g	
911.1418	4.0	12.0	37.0	18.0	20	
911.1419	5.5	12.0	37.0	18.0	20	
917.1421	6.5	12.0	37.0	18.0	20	
911.1420	7.0	12.0	37.0	18.0	20	
917.1422	8.0	12.0	37.0	18.0	20	

CHROME*plus*® Bit socket for slotted screws

- Slotted
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	mm	D mm	L mm	T mm	g	
918.1487	4.0	12.0	37.0	18.0	20	
918.1488	5.0	12.0	37.0	18.0	20	
918.1489	6.5	12.0	37.0	18.0	20	
918.1491	7.0	12.0	37.0	18.0	20	
918.1486	8.0	12.0	37.0	18.0	20	

Bit socket for phillips head screws PH

- PH
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- With press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium



1/4"

		D mm	L mm	T mm	g	
911.1482	PH0	12.0	37.0	18.0	15	
911.1415	PH1	12.0	37.0	18.0	20	
911.1416	PH2	12.0	37.0	18.0	20	
911.1417	PH3	12.0	37.0	18.0	20	
911.1421	PH4	12.0	37.0	18.0	20	

CHROME*plus*® Bit socket for phillips screws PH

- PH
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

		D mm	L mm	T mm	g	
918.1416	PH0	12.0	37.0	18.0	20	
918.1468	PH1	12.0	37.0	18.0	20	
918.1469	PH2	12.0	37.0	18.0	20	
918.1436	PH3	12.0	37.0	18.0	20	
918.1440	PH4	12.0	37.0	18.0	20	

Bit socket for phillips head screws PZ

- PZ
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- With press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

1/4"

		D mm	L mm	T mm	g	
911.1483	PZ 0	12.0	37.0	18.0	15	
911.1401	PZ 1	12.0	37.0	18.0	14	
911.1402	PZ 2	12.0	37.0	18.0	15	
911.1403	PZ 3	12.0	37.0	18.0	15	
917.1415	PZ 4	12.0	37.0	18.0	20	

CHROME*plus*® Bit socket for phillips screws PZ

- PZ
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

		D mm	L mm	T mm	g	
918.1417	PZ0	12.0	37.0	18.0	14	
918.1477	PZ1	12.0	37.0	18.0	15	
918.1478	PZ2	12.0	37.0	18.0	15	
918.1437	PZ3	12.0	37.0	18.0	15	
918.1448	PZ4	12.0	37.0	18.0	20	

Bit socket for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

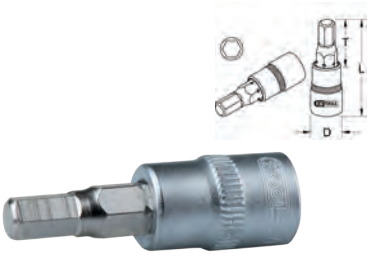

1/4"

	mm		D mm	L mm	T mm	g	
917.1434	2,0		12.0	37.0	18.0	12	
917.1435	2,5		12.0	37.0	18.0	13	
911.1436	3,0		12.0	37.0	18.0	14	
911.1437	4,0		12.0	37.0	18.0	20	
911.1438	5,0		12.0	37.0	18.0	20	
911.1439	6,0		12.0	37.0	18.0	25	
911.1440	7,0		12.0	37.0	18.0	25	
911.1441	8,0		12.0	37.0	18.0	25	
917.1440		1/8"	12.0	37.0	18.0	25	
917.1441		5/32"	12.0	37.0	18.0	25	
917.1442		3/16"	12.0	37.0	18.0	25	
917.1443		7/32"	12.0	37.0	18.0	25	
917.1444		1/4"	12.0	37.0	18.0	25	

Bit socket set for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/4"

			kg	
911.1544	7 pcs	2,5 - 3 - 4 - 5 - 6 - 7 - 8 mm	0.17	

CHROME*plus*® Bit socket for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	mm		D mm	L mm	T mm	g	
918.1438	2,0		12.0	37.0	18.0	12	
918.1439	2,5		12.0	37.0	18.0	13	
918.1461	3,0		12.0	37.0	18.0	20	
918.1462	4,0		12.0	37.0	18.0	20	
918.1463	5,0		12.0	37.0	18.0	15	
918.1464	6,0		12.0	37.0	18.0	25	
918.1465	7,0		12.0	37.0	18.0	25	
918.1466	8,0		12.0	37.0	18.0	25	
918.1531		1/8"	12.0	37.0	18.0	25	
918.1532		5/32"	12.0	37.0	18.0	25	
918.1533		3/16"	12.0	37.0	18.0	25	
918.1534		7/32"	12.0	37.0	18.0	25	
918.1535		1/4"	12.0	37.0	18.0	25	

CHROME*plus*® Bit socket set for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/4"

			kg	
918.1670	7 pcs	2,5 - 3 - 4 - 5 - 6 - 7 - 8 mm	0.17	

Bit socket for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

1/4"

		D mm	L mm	T mm	g	
911.1448	T8	12.0	37.0	18.0	10	
911.1478	T9	12.0	37.0	18.0	10	
911.1442	T10	12.0	37.0	18.0	10	
911.1443	T15	12.0	37.0	18.0	10	
911.1444	T20	12.0	37.0	18.0	10	
911.1445	T25	12.0	37.0	18.0	14	
911.1449	T27	12.0	37.0	18.0	15	
911.1446	T30	12.0	37.0	18.0	15	
911.1447	T40	12.0	37.0	18.0	20	

Bit socket set for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/4"

			kg	
911.1458	7 pcs	T10 - T15 - T20 - T25 - T27 - T30 -T40	0.16	

CHROME*plus*® Bit socket for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

		D mm	L mm	T mm	g	
918.1492	T8	12.0	37.0	18.0	20	
918.1494	T9	12.0	37.0	18.0	20	
918.1479	T10	12.0	37.0	18.0	20	
918.1480	T15	12.0	37.0	18.0	20	
918.1481	T20	12.0	37.0	18.0	20	
918.1482	T25	12.0	37.0	18.0	20	
918.1483	T27	12.0	37.0	18.0	20	
918.1484	T30	12.0	37.0	18.0	20	
918.1485	T40	12.0	37.0	18.0	20	

CHROME*plus*® Bit socket set for TX screws

- TX
- Internal square drive adaptor to DIN 3120 / ISO 1174
- With press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/4"

			kg	
918.1558	7 pcs	T10 - T15 - T20 - T25 - T27 - T30 -T40	0.16	

CHROME*plus*® bit socket with joint for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- With press fi ted nickel plated insert bit
- For manual operation
- Ideal for diffi ult to access areas
- Screwed joints
- Especially short execution
- Chrome plated and mirror polished
- Chrome vanadium



1/4"

		D mm	L mm	T mm	g	
917.1491	T8	15.0	40.0	10.0	22	
917.1492	T10	15.0	40.0	10.0	22	
917.1493	T15	15.0	40.0	10.0	22	
917.1494	T20	15.0	40.0	10.0	22	
917.1495	T25	15.0	40.0	10.0	23	
917.1496	T27	15.0	40.0	10.0	23	
917.1497	T30	15.0	40.0	10.0	23	
917.1498	T40	15.0	40.0	10.0	25	

CHROME*plus*® bit socket set with joint for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- With press fi ted nickel plated insert bit
- For manual operation
- Ideal for diffi ult to access areas
- Screwed joints
- Especially short execution
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4"

			g	
917.1490	8 pcs	T8 - T10 - T15 - T20 - T25 - T27 - T30 - T40	350	

Bit socket for TX tamperproof screws

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- With press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium



1/4"

		D mm	L mm	T mm	g	
911.1461	TB8	12.0	37.0	20.0	14	
911.1485	TB9	12.0	37.0	18.0	14	
911.1462	TB10	12.0	37.0	20.0	14	
911.1463	TB15	12.0	37.0	20.0	14	
911.1464	TB20	12.0	37.0	20.0	14	
911.1465	TB25	12.0	37.0	20.0	15	
911.1466	TB27	12.0	37.0	20.0	15	
911.1467	TB30	12.0	37.0	20.0	15	
911.1468	TB40	12.0	37.0	20.0	20	

Bit socket set for TX tamperproof screws

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated stud
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/4"

911.1460	7 pcs	TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	0.16	

CHROME*plus*® Bit socket for TX tamperproof screws

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium



1/4"

		D mm	L mm	T mm	g	
918.1467	TB8	12.0	37.0	18.0	20	
918.1415	TB9	12.0	37.0	18.0	20	
918.1470	TB10	12.0	37.0	18.0	20	
918.1471	TB15	12.0	37.0	18.0	20	
918.1472	TB20	12.0	37.0	18.0	20	
918.1473	TB25	12.0	37.0	18.0	20	
918.1474	TB27	12.0	37.0	18.0	20	
918.1475	TB30	12.0	37.0	18.0	20	
918.1476	TB40	12.0	37.0	18.0	20	

CHROME*plus*® Bit socket set for TX tamperproof screws

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated stud
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/4"

			kg	
918.1460	7 pcs	TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	0.16	

Bit socket for spline (XZN®) screws

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium



1/4"

		D mm	L mm	T mm	g	
917.1541	M4	12.0	37.0	18.0	20	
917.1542	M5	12.0	37.0	18.0	20	
917.1543	M6	12.0	37.0	18.0	20	
917.1544	M7	12.0	37.0	18.0	16	
917.1545	M8	12.0	37.0	18.0	20	
917.1546	M10	12.0	37.0	18.0	20	

Bit socket set for spline (XZN®) screws

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/4"

			kg	
911.1547	6 pcs	M4 - M5 - M6 - M7 - M8 - M10	0.16	

CHROME*plus*® Bit socket for spline (XZN®) screws

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium



1/4"

		D mm	L mm	T mm	g
918.1441	M4	12.0	37.0	18.0	20
918.1442	M5	12.0	37.0	18.0	20
918.1443	M6	12.0	37.0	18.0	20
918.1444	M7	12.0	37.0	18.0	20
918.1445	M8	12.0	37.0	18.0	20
918.1446	M10	12.0	37.0	18.0	20

CHROME*plus* bit socket set for spline (XZN®) screws

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/4"

			g
918.0645	6 pcs	M4 - M5 - M6 - M7 - M8 - M10	0.16

Bit socket for fi e star tamperproof screws

- Five star bit, tamperproof
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

1/4"

	D	D mm	L mm	T mm	g
911.1471	TS10	12.0	25.0	6.0	10
911.1472	TS15	12.0	25.0	6.0	10
911.1473	TS20	12.0	25.0	7.0	10
911.1474	TS25	12.0	25.0	7.0	10
911.1475	TS27	12.0	25.0	8.0	10
911.1476	TS30	12.0	25.0	8.0	10
911.1477	TS40	12.0	25.0	9.0	10

Bit socket set for tamperproof fi e star screws

- Five star bit, tamperproof
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/4"

			g
911.1470	7 pcs	TS10 - TS15 - TS20 - TS25 - TS27 - TS30 - TS40	0.16

CLASSIC Bit set for tamperproof fi e star screws

- Five star bit, tamperproof
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- 1/4" Bit adaptor socket
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

1/4"

			g
911.1480	8 pcs	TS10 - TS15 - TS20 - TS25 - TS27 - TS30 - TS40	50

CHROME*plus*® Bit socket for fi e star tamperproof screws

- Five star bit, tamperproof
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

		D mm	L mm	T mm	g
918.1575	TS10	12.0	25.0	6.0	10
918.1576	TS15	12.0	25.0	6.0	10
918.1577	TS20	12.0	25.0	7.0	10
918.1578	TS25	12.0	25.0	7.0	10
918.1579	TS27	12.0	25.0	8.0	10
918.1580	TS30	12.0	25.0	8.0	10
918.1581	TS40	12.0	25.0	9.0	10

CHROME*plus*® Bit socket set for fi e star tamperproof screws

- Five star bit, tamperproof
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/4"

			g
918.1545	7 pcs	TS10 - TS15 - TS20 - TS25 - TS27 - TS30 -TS40	0.16

Automotive bit socket set

- Problem solver for many automotive applications
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4" 1/2"

			g
911.4500	38 pcs	Automotive bit socket set	6.50

9 x		1/4": 37 mm, TS10 - TS15 - TS20 - TS25 - TS27 - TS30 - TS40 - TS45 - TS50
5 x		1/2": 55 mm, 14 - 17 - 19 - 22 - 24 mm
1 x		1/2": 55 mm, M16
1 x		1/2": 75 mm, M18
1 x		1/2": 100 mm, M9
2 x		1/2": 110 mm, M9 - M16
1 x		1/2": 110 mm, TB80
3 x		1/2": 140 mm, 10 - 11 - 13 mm
6 x		1/2": 140 mm, T40 - T45 - T50 - T55 - T60 - T70
3 x		1/2": 140 mm, M10 - M12 - M14
1 x		1/2": 140 mm, M10
1 x		1/2": 160 mm, 5 mm
1 x		1/2": 240 mm, 7 mm
2 x		1/2": 240 mm, M7 - M8
1 x		1/2": 300 mm, TB30

1/4“ ADAPTERS

Bit adaptor socket

- Internal square to DIN 3120 / ISO 1174 with ball reception
- For 1/4" bits with external hexagon drive to DIN 3126 / ISO 1173
- For manual operation
- Matt finis
- Chrome vanadium

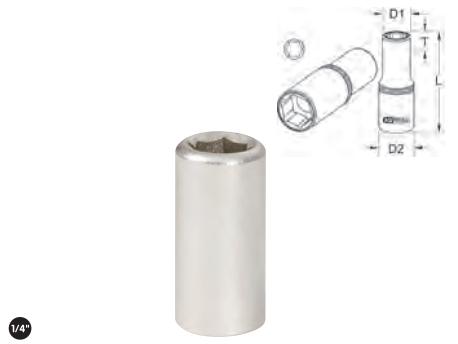

1/4"

	D1 mm	D2 mm	L mm	T mm	g
911.4337	10.0	12.0	25.0	8.0	10

CHROME*plus*® Bit adaptor socket

- Internal square to DIN 3120 / ISO 1174 with ball reception
- For 1/4" bits with external hexagon drive to DIN 3126 / ISO 1173
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	D1 mm	D2 mm	L mm	T mm	g
918.1421	10.0	12.0	25.0	8.0	10

Bit adaptor socket

- With clamping ring
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For 1/4" bits with external hexagon drive to DIN 3126 / ISO 1173
- For manual operation
- Matt finis
- Chrome vanadium

1/4"

	D1 mm	D2 mm	L mm	T mm	g
911.4327	10.0	12.0	25.0	8.0	10

CHROME*plus*® Bit adaptor socket

- Clamping ring
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For 1/4" bits with external hexagon drive to DIN 3126 / ISO 1173
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	D1 mm	D2 mm	L mm	T mm	g
918.1422	10.0	12.0	25.0	8.0	10

Adaptor

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

1/4"

	□	■	L mm	g
911.1494	1/4"	3/8"	25.0	30

Adaptor and reducing adaptor set

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.0106	6 pcs	1/4" x 3/8" - 3/8" x 1/4" - 3/8" x 1/2" - 1/2" x 3/8" - 1/2" x 3/4" - 3/4" x 1/2"	0.66

CHROME*plus*® Adaptor

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	□	■	L mm	g
918.1501	1/4"	3/8"	25.0	30

CHROME*plus*® adaptor and reducing adaptor set

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
918.0106	6 pcs	1/4" x 3/8" - 3/8" x 1/4" - 3/8" x 1/2" - 1/2" x 3/8" - 1/2" x 3/4" - 3/4" x 1/2"	0.66

1/4“ UNIVERSAL JOINTS

Universal joint

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- With fl ible joint
- For manual operation
- Matt finis
- Chrome vanadium

1/4"

	□	■	L mm	g
911.1450	1/4"	1/4"	38.0	20

CHROME*plus*® Universal joint

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- With fl xible joint
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	□	■	L mm	g
918.1450	1/4"	1/4"	38.0	20

Power universal ball joint

- Ideal for use with electric screwdriver
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Very low running rotation
- New joint construction
- Outstanding use of angles up to 45°
- Very resistant to breakage
- Can be used by hand or with and electric screwdriver
- Matt finis
- Chrome vanadium

1/4"

	□	■	L mm	g
917.1450	1/4"	1/4"	35.0	30

CHROME*plus*® Power universal ball joint

- Ideal for use with electric screwdriver
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Very low running rotation
- New joint construction
- Outstanding use of angles up to 45°
- Very resistant to breakage
- Can be used by hand or with and electric screwdriver
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	□	■	L mm	g
919.1450	1/4"	1/4"	35.0	30

1/4" T-HANDLES

Sliding T-handle

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- For manual operation
- Matt finis
- Chrome vanadium

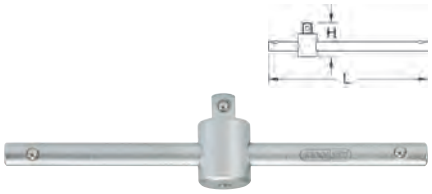

1/4"

	■	H mm	L mm	g
911.1425	1/4"	6.0	110.0	50

CHROME*plus*® Sliding T-handle

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

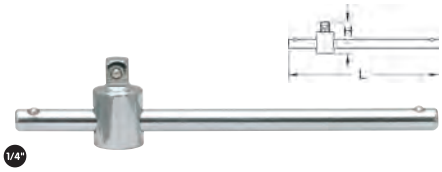

1/4"

	■	H mm	L mm	g
918.1451	1/4"	6.0	110.0	50

1/4" EXTENSIONS

Flexible extension

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Limited torque due to a spiral spring
- For diffi ult to access areas
- For manual operation
- Matt finis
- Chrome vanadium

1/4"

	L mm	g
911.1422	150.0	60

CHROME*plus*® Flexible extension

- Square drive adaptor to DIN 3123 / ISO 3316 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Limited torque due to a spiral spring
- For diffi ult to access areas
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	L mm	g
918.1505	150.0	60

Extension with hexagon drive

- Square drive to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- With hexagon drive
- For manual operation
- Matt finis
- Chrome vanadium

1/4"

	L mm	g
911.1423	50.0	30
911.1486	75.0	35
911.1424	100.0	40
911.1451	150.0	90
911.1504	250.0	130

Extension set

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- With hexagon drive
- For manual operation
- Matt finis
- Chrome vanadium

1/4" 3/8" 1/2"

			kg
911.0007	9 pcs	Extension set	1.22
3 x		1/4" : 50 - 100 - 250 mm	
4 x		3/8" : 45 - 75 - 150 - 200 mm	
2 x		1/2" : 125 - 250 mm	

CHROME*plus*® Extension

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	L mm	g
918.1452	50.0	20
918.1453	75.0	30
918.1455	100.0	50
918.1454	150.0	60
918.1652	250.0	130

CHROME*plus*® Extension set

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2"

			kg
918.0007	9 pcs	CHROME*plus*® Extension set	1.22
3 x		1/4" : 50 - 100 - 250 mm	
4 x		3/8" : 45 - 75 - 150 - 200 mm	
2 x		1/2" : 125 - 250 mm	

Wobble extension with hexagon drive

- Internal square to DIN 3120 / ISO 1174 with ball reception
- Wobble extension with ball lock
- 8° tilt angle to each side
- Hexagon drive
- For manual operation
- Matt finis
- Chrome vanadium

1/4"

	L mm	g
911.1506	50.0	20
911.1509	75.0	35
911.1507	100.0	40
911.1508	150.0	60
911.1543	250.0	130

Wobble extension set

- Internal square to DIN 3120 / ISO 1174 with ball reception
- Wobble extension with ball lock
- 8° tilt angle to each side
- For manual operation
- Matt finis
- Chrome vanadium

1/4" 3/8" 1/2"

			kg
911.0009	9 pcs	Wobble extension set	1.22
3 x		1/4" : 50 - 100 - 250 mm	
4 x		3/8" : 45 - 75 - 150 - 200 mm	
2 x		1/2" : 125 - 250 mm	

CHROME*plus*® Wobble extension

- Internal square to DIN 3120 / ISO 1174 with ball reception
- Wobble extension with ball lock
- 8° tilt angle to each side
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	L mm	g
918.1403	50.0	20
918.1653	75.0	35
918.1401	100.0	40
918.1402	150.0	60
918.1458	250.0	100

CHROME*plus*® Wobble extension set

- Internal square to DIN 3120 / ISO 1174 with ball reception
- Wobble extension with ball lock
- 8° tilt angle to each side
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2"

			kg
918.0009	9 pcs	CHROME*plus*® Wobble extension set	1.22
3 x		1/4" : 50 - 100 - 250 mm	
4 x		3/8" : 45 - 75 - 150 - 225 mm	
2 x		1/2" : 125 - 250 mm	

CHROME*plus*® extension with interlock

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Interlocking mechanism against accidental loosening
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	L mm	g
919.1402	100.0	40
919.1404	150.0	60
919.1406	250.0	100

CHROME*plus*® Extension set with interlock

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Interlocking mechanism against accidental loosening
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

		kg
919.0143	3 pcs	100 - 150 - 250 mm	0.33

CHROME*plus*® Extension set with interlock

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Interlocking mechanism against accidental loosening
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2"

			kg
919.0007	7 pcs	CHROME*plus*® Extension set with interlock	1.24
2 x		1/4" : 100 - 150 mm	
3 x		3/8" : 75 - 150 - 250 mm	
2 x		1/2" : 125 - 250 mm	

1/4“ MANUAL DRIVE TOOLS

Square drive screwdriver

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Protective cap on the handle end
- Dual component handle
- Matt finis
- Chrome vanadium

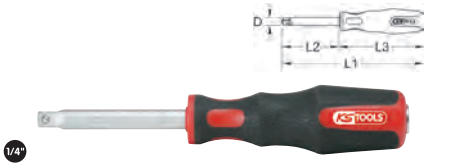

	D mm	L1 mm	L2 mm	L3 mm	g
911.1434	6.0	150.0	60.0	90.0	140

CHROME*plus*® Square drive screwdriver

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Dual component handle
- Chrome plated and mirror polished
- Chrome vanadium

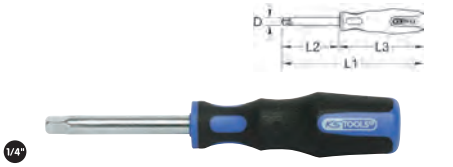

	D	L1 mm	L2 mm	L3 mm	g
918.1434	1/4"	150.0	60.0	90.0	60

ERGOTORQUE® Square screwdriver

- Flexible blade with double spiral shaft
- Limited torque
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Plastic protective coating
- One component handle
- With hanging hole

	D mm	L1 mm	L2 mm	L3 mm	g
911.1120	15.0	200.0	150.0	50.0	150

1/4“ RATCHETS

ERGOTORQUE®*max* T-handle ratchet

- DIN 3122 / ISO 3315
- Reversible
- 1/4" square drive adaptor to DIN 3120 / ISO 1174
- With ball lock
- Exact gearing with 45 teeth
- Two component handle
- With hanging hole
- Handy and compact
- Matt finis
- Chrome vanadium

	B mm	L1 mm	L2 mm	g
151.1109	115.0	110.0	55.0	40

Mini reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Recessed reverse lever
- Matt finis
- Chrome vanadium

	A mm	D mm	L mm	Repair set	g
911.1510	10.0	22.0	110.0	911.1599	70

CHROME*plus*® Mini reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Recessed reverse lever
- Chrome plated and mirror polished
- Chrome vanadium

	A mm	D mm	L mm	Repair set	g
918.1510	10.0	22.0	110.0	911.1599	70

Reversible ratchet

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Exact gearing 45 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle with soft zone
- Matt finis
- Chrome vanadium

	A mm	D mm	L mm	Repair set	g
911.1400	12.0	25.0	145.0	911.1499	130

CHROME*plus*® Reversible ratchet

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Exact gearing 45 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Chrome plated and mirror polished
- Chrome vanadium

	A mm	D mm	L mm	Repair set	g
918.1400	12.0	25.0	145.0	911.1499	130

Reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Recessed reverse lever
- Matt finis
- Chrome vanadium

	A mm	D mm	L mm	Repair set	g
914.1490	12.0	26.0	145.0	914.1497	130

CHROME*plus*® Reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Recessed reverse lever
- Chrome plated and mirror polished
- Chrome vanadium

	A mm	D mm	L mm	Repair set	g
918.1490	12.0	26.0	145.0	914.1497	130

CHROME*plus*® Reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- With ejection mechanism on the ratchet head
- Recessed reverse lever
- Chrome plated and mirror polished
- Chrome vanadium

	A mm	D mm	L mm	Repair set	g
918.1593	12.0	25.0	145.0	914.1497	150

SlimPOWER reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- 102 N•m maximum load
- Reversible
- Extremely slim head
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle with soft zone
- Chrome plated and mirror polished
- Chrome vanadium

	A mm	D mm	L mm	Repair set	g
920.1490	20.0	20.0	140.0	920.1490-1	80

SlimPOWER reversible ratchet set

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Extremely slim head
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle with soft zone
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 1/2"

			g
920.0002	2 pcs	1/4" + 1/2"	430

Flexibel head reversible ratchet

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- 180° revolving head with locking device
- Reversible
- Exact gearing 45 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Recessed reverse lever
- Matt finis
- Chrome vanadium

1/4"

	A mm	D mm	L mm	Repair set	g
911.1495	12.0	26.0	140.0	911.1499	160

CHROME*plus*® Flexibel head reversible ratchet

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- 180° revolving head
- Reversible
- Exact gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Recessed reverse lever
- Chrome plated and mirror polished
- Chrome vanadium

1/4"

	A mm	D mm	L mm	Repair set	g
918.1493	12.0	26.0	140.0	914.1497	130

1/4“ SET ASSORTMENTS

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4"

		kg
918.0613	13 pcs CHROME*plus*® Socket set	0.78
11 x	4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 mm	
1 x	100 mm	
1 x	140 mm	

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4"

		kg
911.0623	23 pcs Socket set	0.45
12 x	4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 mm	
1 x	1/4“	
1 x	100 mm	
1 x	1/4“	
2 x	PH1 - PH2	
2 x	PZ1 - PZ2	
4 x	T15 - T20 - T25 - T30	

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4"

		kg
911.0625	25 pcs Socket set	0.83
13 x	4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm	
2 x	50 - 100 mm	
1 x	150 mm	
1 x	1/4“	
1 x	1/4“	
1 x	1/4“	
1 x	1/4“ x 1/4“	
4 x	1,0 - 1,5 - 2,0 - 2,5 mm	
1 x	1/4“	

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable metal case

1/4"

		kg
917.4030	30 pcs Socket set	1.20
11 x	4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 14 mm	
3 x	4 - 5,5 - 6 mm	
3 x	PH1 - PH2 - PH3	
3 x	PZ1 - PZ2 - PZ3	
4 x	3 - 4 - 5 - 6 mm	
2 x	50 - 100 mm	
1 x	1/4“	
1 x	1/4“	
1 x	1/4“	
1 x	1/4“	

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable metal case

1/4"

			kg
911.0833	33 pcs	Socket set	1.52
13 x		4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm	
6 x		3 - 4 - 5 - 6 - 7 - 8 mm	
7 x		TB10 - TB15 - TB20 - TB25 - TB27 TB30 - TB40	
2 x		50 - 100 mm	
1 x		1/4“	
1 x		1/4“	
1 x		1/4“: 110 mm	
1 x		1/4“ x 1/4“	
1 x		140 mm	

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4"

			kg
918.0640	40 pcs	CHROME*plus*® Socket set	0.80
13 x		4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm	
2 x		PH1 - PH2	
6 x		PZ1 - PZ2	
7 x		3 - 4 - 5 - 6 - 7 - 8 mm	
5 x		T10 - T15 - T20 - T25 - T27 - T30 T40	
1 x		M4 - M5 - M6 - M8 - M10	
1 x		1/4“	
1 x		100 mm	
1 x		1/4“	
1 x		1/4“	
1 x		110 mm	

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4"

			kg
911.0646	46 pcs	Socket set	1.10
13 x		4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm	
3 x		4 - 5,5 - 7 mm	
3 x		PH1 - PH2 - PH3	
2 x		PZ1 - PZ2	
6 x		3 - 4 - 5 - 6 - 7 - 8 mm	
7 x		T10 - T15 - T20 - T25 - T27 - T30 T40	
2 x		50 - 100 mm	
1 x		150 mm	
1 x		1/4“	
1 x		1/4“	
1 x		1/4“	
4 x		1 - 1,5 - 2 - 2,5 mm	
1 x		1/4“ x 1/4“	
1 x		1/4“	

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/4"

			kg
918.0646	46 pcs	CHROME*plus*® Socket set	1.10
13 x		4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm	
3 x		4 - 5,5 - 7 mm	
3 x		PH1 - PH2 - PH3	
2 x		PZ1 - PZ2	
6 x		3 - 4 - 5 - 6 - 7 - 8 mm	
7 x		T10 - T15 - T20 - T25 - T27 - T30 T40	
2 x		50 - 100 mm	
1 x		150 mm	
1 x		1/4“	
1 x		1/4“	
4 x		M4 - M5 - M6 - M8	
2 x		50 - 100 mm	
1 x		150 mm	
1 x		1/4“	
1 x		1/4“	
1 x		110 mm	
1 x		110 mm	

CHROME*plus*® Socket set

- Imperial sizes
- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/4"

			kg
918.0847	47 pcs	CHROME*plus*® Socket set	1.13
10 x		5/32“ - 3/16“ - 7/32“ - 1/4“ - 9/32“ 5/16“ - 11/32“ - 3/8“ - 7/16“ - 1/2“	
10 x		5/32“ - 3/16“ - 7/32“ - 1/4“ - 9/32“ 5/16“ - 11/32“ - 3/8“ - 7/16“ - 1/2“	
3 x		4 - 5,5 - 7 mm	
2 x		PH1 - PH2	
5 x		1/8“ - 5/32“ - 3/16“ - 7/32“ - 1/4“	
6 x		T10 - T15 - T20 - T25 - T30 - T40	
4 x		M4 - M5 - M6 - M8	
2 x		50 - 100 mm	
1 x		150 mm	
1 x		1/4“	
1 x		1/4“	
1 x		110 mm	
1 x		110 mm	

3 x		PH1 - PH2 - PH3
2 x		PZ1 - PZ2
6 x		3 - 4 - 5 - 6 - 7 - 8 mm
7 x		T10 - T15 - T20 - T25 - T27 - T30 T40
2 x		50 - 100 mm
1 x		150 mm
1 x		1/4“
1 x		1/4“
1 x		1/4“
4 x		1 - 1,5 - 2 - 2,5 mm
1 x		1/4“ x 1/4“
1 x		145 mm

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4"

		kg
911.0651	51 pcs	Socket set	1.35

13 x		4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm
3 x		4 - 5,5 - 7 mm
3 x		PH1 - PH2 - PH3
3 x		PZ1 - PZ2 - PH3
6 x		3 - 4 - 5 - 6 - 7 - 8 mm
7 x		T10 - T15 - T20 - T25 - T27 - T30 T40
2 x		50 - 100 mm
1 x		150 mm
1 x		1/4“
1 x		1/4“
1 x		1/4“
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm
1 x		145 mm

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4"

		kg
911.0653	53 pcs	Socket set	1.55

13 x		4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm
7 x		6 - 7 - 8 - 10 - 11 - 12 - 13 mm
3 x		4 - 5,5 - 7 mm
3 x		PH1 - PH2 - PH3
3 x		PZ1 - PZ2 - PH3
6 x		3 - 4 - 5 - 6 - 7 - 8 mm
6 x		T10 - T15 - T20 - T25 - T30 - T40
2 x		50 - 100 mm
1 x		150 mm
1 x		1/4“
1 x		1/4“
1 x		1/4“
1 x		1 - 1,5 - 2 - 2,5 mm
1 x		1/4“ x 1/4“
1 x		145 mm

1/4“ SET ASSORTMENTS

TX Socket set

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" - 1/2"

		kg
911.4307	21 pcs	TX Socket set	1.15

4 x		1/4“: E4 - E5 - E6 - E8
5 x		1/2“: E10 - E12 - E14 - E18 - E20
7 x		1/4“: T8 - T10 - T15 - T20 - T25 T27 - T30
5 x		1/2“: T40 - T45 - T50 - T55 - T60

TX Socket set

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

		kg
911.4302	31 pcs	TX Socket set	1.40

6 x		1/4“: T10 - T15 - T20 - T25 - T27 - T30
3 x		5/16“: T40 - T45 - T50
3 x		1/4“: TB30 x 30 mm - TB25 x 75 mm - TB30 x 75 mm
2 x		1/2“: T55 - T60
4 x		1/4“: E5 - E6 - E7 - E8
3 x		3/8“: E10 - E12 - E14
3 x		1/2“: E16 - E18 - E20
3 x		1/4“ x 1/4“ - 3/8“ x 5/16“ - 1/2“ x 5/16“
4 x		E6 x E8 - E7 x E11 - E10 x E12 E14 x E18 -

TX Socket and bit set

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

		kg
911.4305	57 pcs	TX Socket and bit set	2.00

2 x		3/8“ x 10mm - 1/2“ x 1/4“
12 x		1/4“: E4 - E5 - E6 - E7 - E8; 3/8“: E10 - E11 - E12 - E14;1/2“: E16 - E18 - E20
7 x		4 - 5 - 6 - 7 - 8 - 10 - 12 mm
9 x		TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50 - TB55 - TB60
5 x		M5 - M6 - M8 - M10 - M12
2 x		8 - 10 mm
2 x		PH2 - PH3
5 x		5 - 6 - 7 - 8 - 10 mm
9 x		T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60
4 x		M6 - M8 - M10 - M12

TX Socket and bit set

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.4301-1	30 pcs	TX Socket and bit set	1.45
5 x		1/4": E4 - E5 - E6 - E7 - E8	
4 x		3/8": E10 - E11 - E12 - E14	
5 x		1/2": E16 - E18 - E20 - E22 - E24	
2 x		3/8" x 10 mm - 1/2" x 10mm	
7 x		30 mm (T20 - T25 - T30 - T40 - T45 T50 - T55)	
7 x		75 mm (T20 - T25 - T30 - T40 - T45 T50 - T55)	

TX Bit socket set for TX tamperproof screws

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.4301-2	30 pcs	TX Bit socket set for TX tamper-proof screws	1.45
5 x		1/4": E4 - E5 - E6 - E7 - E8	
4 x		3/8": E10 - E11 - E12 - E14	
5 x		1/2": E16 - E18 - E20 - E22 - E24	
2 x		3/8" x 10 mm - 1/2" x 10mm	
7 x		30 mm (TB20 - TB25 - TB30 - TB40 TB45 - TB50 - TB55)	
7 x		75 mm (TB20 - TB25 - TB30 - TB40 TB45 - TB50 - TB55)	

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4" 1/2"

			kg
917.4052	52 pcs	Socket set	6.25
11 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 13 mm	
13 x		1/2": 10 - 11 - 12 - 13 - 14 - 15 - 17 19 - 21 - 24 - 27 - 30 - 32 mm	
3 x		1/4": 4 - 5,5 - 7 mm	
3 x		1/4": PH1 - PH3 - PH4	
4 x		1/4": 3 - 4 - 5 - 6 mm	
2 x		1/2": 8 - 10 mm	
1 x		1/2": PH3	
5 x		1/2": 7 - 8 - 10 - 12 - 14 mm	
2 x		1/4": 50 - 100 mm	
2 x		1/2": 125 - 250 mm	
1 x		1/4"	
1 x		1/4"	
1 x		1/2"	
1 x		1/4"	
1 x		1/4": 145 mm	
1 x		1/2": 250 mm	

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In a classy aluminium case

1/4" - 1/2"

			kg
911.0670	70 pcs	Socket set	7.30
13 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm	
3 x		1/4": 8 - 10 - 13 mm	
12 x		1/2": 15 - 16 - 17 - 18 - 19 - 20 - 21 22 - 24 - 27 - 30 - 32 mm	
2 x		1/2": 17 - 19 mm	
3 x		1/4": 4 - 5,5 - 7 mm	
2 x		1/4": PH1 - PH2	
2 x		1/4": PZ1 - PZ2	
6 x		1/4": 3 - 4 - 5 - 6 - 7 - 8 mm	
6 x		1/4": T10 - T15 - T20 - T25 - T30 - T40	
3 x		1,5 - 2 - 2,5 mm	
2 x		1/4": 50 - 100 mm	
1 x		1/4"	
1 x		1/4"	
1 x		1/4"	
1 x		1/4": 145 mm	
2 x		1/2": 125 - 250 mm	
1 x		1/2" x 3/8"	
1 x		1/2"	
1 x		1/2": 250 mm	
7 x		8 - 10 - 12 - 13 - 14 - 17 - 19 mm	

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/4" - 1/2"

			kg
918.0678	78 pcs	CHROME*plus*® Socket set	6.30
13 x		1/4“: 4-4,5-5-5,5-6-7-8-9-10-11-12 13-14 mm	
8 x		1/4“: 6-7-8-9-10-11-12-13 mm	
15 x		1/2“: 13-14-15-16-17-18-19-20-21-22 24-27-30-32-34 mm	
5 x		1/2“: 14-15-17-19-22 mm	
3 x		1/2“: 16-18-21 mm	
2 x		1/4“: PH1-PH2	
2 x		1/4“: PZ1-PZ2	
6 x		1/4“: 3-4-5-6-7-8 mm	
7 x		1/4“: T10-T15-T20-T25-T27 T30-T40	
6 x		1/4“: M4-M5-M6-M7-M8-M10	
1 x		1/4“	
2 x		1/4“: 50-100 mm	
1 x		1/4“	
1 x		1/4“	
1 x		1/4“: 145 mm	
1 x		F3/8“ x M1/2“	
2 x		1/2“: 125-250 mm	
1 x		1/2“	
1 x		1/2“: 250 mm	

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4" - 1/2"

			kg
911.0682	82 pcs	Socket set	5.80
13 x		1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm	
12 x		1/2“: 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm	
2 x		1/2“: 16 - 21 mm	
3 x		1/4“: 4 - 5,5 - 7 mm	
2 x		1/4“: PH1 - PH2	
2 x		1/4“: PZ1 - PZ2	
4 x		1/4“: 3 - 4 - 5 - 6 mm	
6 x		1/4“: T8 - T10 - T15 - T20 - T25 - T30	
3 x		5/16“: 8 - 10 - 12 mm	
2 x		5/16“: PH3 - PH4	
2 x		5/16“: PZ3 - PZ4	
4 x		5/16“: 8 - 10 - 12 - 14	
4 x		5/16“: T40 - T45 - T50 - T55	
2 x		1/4“: 50 - 100 mm	
1 x		1/4“: 150 mm	
1 x		1/4“	
1 x		1/4“	
1 x		1/4“	
1 x		1/4“	
1 x		1/4“	
2 x		1/2“: 125 + 250 mm	
1 x		1/2“	
1 x		1/2“	
1 x		1/2“ x 5/16“	
1 x		1/2“	
9 x		8 - 10 - 11 - 12 - 13 - 14 - 17 - 19 - 22 mm	

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4" - 1/2"

			kg
911.0694	94 pcs	Socket set	6.20
13 x		1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm	
8 x		1/4“: 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	
18 x		1/2“: 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 23 - 24 27 - 30 - 32 mm	
4 x		1/2“: 14 - 15 - 17 - 19 mm	
2 x		1/2“: 16 - 21 mm	
3 x		1/4“: 4 - 5,5 - 7 mm	
2 x		1/4“: PH1 - PH2	
2 x		1/4“: PZ1 - PZ2	
4 x		1/4“: 3 - 4 - 5 - 6 mm	
6 x		1/4“: TB8 - TB10 - TB15 - TB20 - TB25 - TB30	
2 x		1/4“: 50 - 100 mm	
1 x		1/4“: 150 mm	
3 x		5/16“: 8 - 10 - 12 mm	
2 x		5/16“: PH3 - PH4	
2 x		5/16“: PZ3 - PZ4	
4 x		5/16“: 8 - 10 - 12 - 14 mm	
4 x		5/16“: TB40 - TB45 - TB50 - TB55	
1 x		1/4“	
1 x		1/4“	
1 x		1/4“	
1 x		1/4“: 145 mm	
4 x		1 - 1,5 - 2 - 2,5 mm	
1 x		1/4“	
2 x		1/2“: 125 - 250 mm	
1 x		1/2“	
1 x		1/2“	
1 x		1/2“ x 5/16“	
1 x		1/2“: 250 mm	

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/4" - 1/2"

			kg
918.0694	94 pcs	CHROME*plus*® Socket set	6.38
13 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm	
8 x		1/4": 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	
18 x		1/2": 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 23 - 24 - 27 - 30 - 32 mm	
4 x		1/2": 14 - 15 - 17 - 19 mm	
2 x		1/2": 16 - 21 mm	
3 x		1/4": 4 - 5,5 - 7 mm	
2 x		1/4": PH1 - PH2	
2 x		1/4": PZ1 - PZ2	
4 x		1/4": 3 - 4 - 5 - 6 mm	
6 x		1/4": TB8 - TB10 - TB15 - TB20 TB25 - TB30	
2 x		1/4": 50 - 100 mm	
1 x		1/4": 150 mm	
3 x		5/16": 8 - 10 - 12 mm	
2 x		5/16": PH3 - PH4	
2 x		5/16": PZ3 - PZ4	
4 x		5/16": 8 - 10 - 12 - 14 mm	
4 x		5/16": T40 - T45 - T50 - T55	
1 x		1/4"	
1 x		1/4"	
1 x		1/4"	
1 x		1/4": 145 mm	
4 x		1 - 1,5 - 2 - 2,5 mm	
1 x		1/4"	
2 x		1/2": 125 - 250 mm	
1 x		F3/8" x M1/2"	
1 x		1/2"	
1 x		1/2" x 5/16"	
1 x		1/2": 250 mm	

CHROME*plus*® Socket set

- Imperial sizes
- 6 point
- FlankTraction Profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/4" 3/8"

			kg
918.0699	99 pcs	CHROME*plus*® Socket set	6.30
12 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm	
10 x		1/4": 5/32" - 3/16" - 7/32" - 1/4" - 9/32" 5/16" - 11/32" - 3/8" - 7/16" - 1/2"	
16 x		3/8": 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 24 mm	
5 x		3/8": 10 - 12 - 13 - 17 - 19 mm	
11 x		3/8": 1/4" - 5/16" - 3/8" - 7/16" - 1/2" 9/16" - 5/8" - 11/16" - 3/4" - 13/16" 7/8"	
5 x		3/8": 3/8" - 7/16" - 1/2" - 9/16" - 5/8"	
3 x		3/8": 16 - 18 - 21 mm	
3 x		3/8": 5,5 - 6,5 - 8 mm	
2 x		3/8": PH1 - PH2	
2 x		3/8": PZ1 - PZ2	
5 x		3/8": 5 - 6 - 7 - 8 - 10 mm	
5 x		3/8": 5/32" - 3/16" - 1/4" - 5/16" - 3/8"	
8 x		3/8": T10 - T15 - T20 - T25 - T27 - T30 T40 - T45	
5 x		3/8": M4 - M5 - M6 - M8 - M10	
1 x		1/4"	
1 x		1/4": 100 mm	
1 x		1/4"	
2 x		3/8": 75 - 150 mm	
1 x		3/8"	
1 x		3/8": 200 mm	

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In a classy aluminium case

1/4" - 1/2"

			kg
918.0702	102 pcs	CHROME*plus*® Socket set	9.70
13 x		1/4": 4 - 4,5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm	
3 x		1/4": 8 - 10 - 13 mm	
13 x		1/2": 13 - 15 - 17 - 18 - 19 - 20 - 21 22 - 24 - 27 - 30 - 32 - 34 mm	
5 x		1/2": 14 - 15 - 17 - 19 - 22 mm	
3 x		1/4": PH1 - PH2 - PH3	
2 x		1/4": PZ1 - PZ2	
4 x		1/4": 3 - 4 - 5 - 6 mm	
7 x		1/4": T10 - T15 - T20 - T25 - T27 T30 - T40	
3 x		1/4": M4 - M5 - M6	
3 x		1/4": E6 - E7 - E8	
6 x		1/2": E10 - E12 - E14 - E16 - E18 E20	
2 x		1/2": 16 - 21 mm	
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	
1 x		5/16": PZ3	
2 x		5/16": 8 - 10 mm	
4 x		5/16": TB45 - TB50 - TB55 - TB60	
3 x		5/16": M8 - M10 - M12	
1 x		1/4"	
1 x		1/4"	
2 x		1/4": 50 - 100 mm	
2 x		1/2": 125 - 250 mm	
1 x		F3/8" x M1/2"	
1 x		1/2"	
1 x		1/2" x 5/16"	
2 x		1/4" - 1/2"	
7 x		7 - 8 - 10 - 12 - 13 - 17 - 19 mm	

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4" - 1/2"

			kg
911.0708	108 pcs	Socket set	7.00
13 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm	
8 x		1/4": 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	
5 x		1/4": E4 - E5 - E6 - E7 - E8	
3 x		1/4": 4 - 5,5 - 6,5 mm	
2 x		1/4": PH1 - PH2	
2 x		1/4": PZ1 - PZ2	
4 x		1/4": 3 - 4 - 5 - 6 mm	
7 x		1/4": T8 - T10 - T15- T20 - T25- T27 T30	
17 x		1/2": 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19 - 20 - 21 - 22 - 24 - 27 30 - 32 mm	
5 x		1/2": 14 - 15 - 17 - 19 - 22 mm	
8 x		1/2": E10 - E11 - E12 - E14 - E16 E18 - E20 - E24	
2 x		1/2": 16 - 21 mm	
2 x		1/4": 50 - 100 mm	
3 x		5/16": 8 - 10 - 12 mm	
2 x		5/16": PH3 - PH4	
2 x		5/16": PZ3 - PZ4	
5 x		5/16": 7 - 8 - 10 - 12 - 14 mm	
5 x		5/16": T40 - T45 - T50 - T55 - T60	
1 x		1/4"	
1 x		1/4"	
1 x		1/4"	
1 x		1/4": 145 mm	
3 x		1,5 - 2 - 2,5 mm	
1 x		1/2": 125 - 250 mm	
1 x		1/2"	
1 x		1/2"	
1 x		1/2" x 5/16"	
1 x		1/2": 250 mm	

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
918.0724	124 pcs	CHROME*plus*® Socket set	9.50
10 x		1/4": 4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 mm	
6 x		1/4": 5 - 6 - 7 - 8 - 9 - 10 mm	
11 x		3/8": 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm	
6 x		3/8": 10 - 11 - 12 - 13 - 14 - 15 mm	
8 x		3/8": E8 - E10 - E11 - E12 - E14 - E16 E18 - E20	
8 x		1/2": 20 - 21 - 22 - 24 - 27 - 30 - 32 34 mm	
6 x		1/2": 10 - 12 - 13 - 14 - 17 - 19 mm	
2 x		1/2": E22 - E24	
2 x		1/2": 16 - 21 mm	
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm	
2 x		3/8": 4 - 5,5 mm	
3 x		3/8": PH1 - PH2 - PH3	
3 x		3/8": PZ1 - PZ2 - PZ3	
5 x		3/8": 3 - 4 - 5 - 6 - 8 mm	
5 x		3/8": T20 - T30 - T40 - T45 - T50	
4 x		3/8": M4 - M5 - M6 - M8	
7 x		1/4": T10 - T15 - T20 - T25 - T27 T30 -T40	
1 x		1/4"	
1 x		1/4"	
1 x		1/4": 100 mm	
2 x		3/8": 75 - 150 mm	
2 x		1/2": 125 - 250 mm	
3 x		1/4" - 3/8" - 1/2"	
2 x		1/2": F1/2" x M 3/8"	
3 x		1/4" - 3/8" - 1/2"	

Socket set

- 6 point
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
917.0779	179 pcs	Socket set	9.00
13 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm	
7 x		1/4": 4 - 5 - 6 - 7 - 8 - 9 - 10 mm	
10 x		3/8": 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm	
6 x		3/8": 10 - 11 - 12 - 13 - 14 - 15 mm	
17 x		1/2": 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 30 - 32 mm	
5 x		1/2": 16 - 17 - 18 - 19 - 22 mm	
1 x		3/8": 18 mm	
2 x		1/2": 16 - 21 mm	
4 x		1/4": 4 - 5,5 - 6,5 - 7 mm	
3 x		1/4": PH0 - PH1 - PH2	
3 x		1/4": PZ0 - PZ1 - PZ2	
4 x		1/4": 3 - 4 - 5 - 6 mm	
8 x		1/4": T8 - T9 - T10 - T15 - T20 - T25 - T27 T30	
8 x		1/4": TB8 - TB9 - TB10 - TB15 - TB20 TB25 TB27 - TB30	
5 x		1/4": E4 - E5 - E6 - E7 - E8	
6 x		3/8": E10 - E11 - E12 - E14 - E16 - E18	
2 x		1/2": E20 - E24	
11 x		1/4": T5 - T6 - T7 - T8 - T9 - T10 - T15 T20 - T25 - T27 - T30	
1 x		1/4": TB7	
3 x		1/4": M5 - M6 - M8	
5 x		1/4": M5 - M6 - M7 - M8 - M9	
8 x		1/4": TS10 - TS15 - TS20 - TS25 TS27 - TS30 - TS40 - TS45	
3 x		5/16": 8 - 10 - 12 mm	
5 x		5/16": 7 - 8 - 10 - 12 - 14 mm	
2 x		5/16": PH3 - PH4	
2 x		5/16": PZ3 - PZ4	
6 x		5/16": T40 - T45 - T50 - T55 - T60 - T70	
6 x		5/16": TB40 - TB45 - TB50 - TB55 TB60 - TB70	

7 x		1,3 - 1,5 - 2 - 2,5 - 3 - 4 - 5 mm
1 x		1/4“: 150 mm
1 x		1/4“: 110 mm
2 x		1/4“: 50 - 100 mm
1 x		3/8“: 150 mm
2 x		1/2“: 125 - 250 mm
3 x		1/4“ - 3/8“ - 1/2
1 x		1/4“ x 1/4“
1 x		3/8“ x 5/16“
1 x		1/2“ x 5/16“
1 x		3/8“Fx1/2“M
3 x		1/4“ - 3/8“ - 1/2

Tool kit

- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4" - 1/2"

			kg
911.0688	88 pcs	Tool kit	7.45

12 x		1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 mm
17 x		1/2“: 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 23 - 24 - 25 - 26 - 27 - 28 30 - 32 mm
1 x		1/4“: 911.2060
2 x		1/4“: 50 - 100 mm
1 x		1/4“
1 x		1/4“
1 x		1/4“: 145 mm
1 x		1/2“: 125 mm
1 x		1/2“: 250 mm
2 x		6,5 - 8 mm
2 x		PH1 - PH2
1 x		150 - 250 V
1 x		250 mm
1 x		180 mm
1 x		300 g
12 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 17 19 - 22 mm

Universal tool kit

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In a classy aluminium case

1/4" - 1/2"

			kg
911.0727	127 pcs	Universal tool kit	15.50

13 x		1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm
13 x		1/2“: 10 - 13 - 14 - 16 - 17 - 18 - 19 - 20 - 22 - 24 - 27 - 30 - 32 mm
2 x		1/2“: 16 - 21 mm
1 x		1/4“: 911.2060
1 x		1/4“ x 1/4“
2 x		1/4“: 50 - 100 mm
1 x		1/4“
1 x		1/4“: 110 mm
1 x		1/4“: 145 mm
1 x		1/4“
2 x		1/2“: 125 - 250 mm
1 x		F3/8“ x M1/2“
1 x		1/2“
1 x		1/2“: 250 mm
1 x		2 - 2,5 - 3 - 4 - 5 - 6 - 8 -10 mm
1 x		T10 - T15 - T20 - T25 - T30 - T40 - T45 - T50
2 x		5,5 - 6,5 mm
2 x		PH1 - PH2
1 x		1/4“: 150 mm
8 x		8 - 9 - 10 - 11 - 13 - 14 - 17 - 19 mm
1 x		160 mm
1 x		180 mm
1 x		200 mm
1 x		250 mm
1 x		200 mm
1 x		145 mm
1 x		300 g
1 x		150 - 250 V
1 x		
1 x		250 mm

1 x		200 mm
1 x		150 mm
3 x		907.2131
1 x		
1 x		
1 x		0 - 150 mm
1 x		400 mm
1 x		5 m x 19 mm
1 x		
1 x		

Universal tool kit

- Removeable plastic trays
- Matt finis
- Chrome vanadium
- Telescopic carrying handle
- In a classy aluminium trolley

1/4" - 1/2"

			kg
911.0735	135 pcs	Universal tool kit	17.60

9 x		1/4“: 4 - 5 - 6 - 7 - 8 - 9 - 11 - 12 - 13 mm
4 x		1/4“: 8 - 9 - 10 - 13 mm
13 x		1/2“: 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 21 - 22 - 24 mm
1 x		1/4“: 911.2060
1 x		2 - 2,5 - 3 - 4 - 5 - 6 - 8 -10 mm
1 x		T10 - T15 - T20 - T25 - T30 - T40 T45 - T45 - T50
1 x		1/4“: 100 mm
1 x		1/4“: 150 mm
1 x		1/4“
1 x		1/4“
1 x		1/4“: 145 mm
2 x		1/2“: 125 - 250 mm
1 x		1/2“
1 x		1/2“
1 x		1/2“: 250 mm
2 x		4 - 8 mm
3 x		PH1 - PH2 - PH3
3 x		PZ1 - PZ2 - PZ3
11 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 16 - 17 18 - 19 mm

1 x		150 - 250 V
1 x		2,5 mm
2 x		PH1 - PH2
1 x		max. 2 kg
1 x		160 mm
1 x		160 mm
1 x		240 mm
1 x		250 mm
1 x		250 mm
1 x		10“
1 x		
1 x		
1 x		140 mm
1 x		165 mm
1 x		3 - 42 mm
1 x		
1 x		250 mm
1 x		300 mm
1 x		8 mm
1 x		300 g
1 x		5 m x 19 mm
1 x		400 mm

CHROME*plus*® Tool kit

- 6 point
- FlankTraction profil
- With removeable plastic storage trays
- Chrome plated and mirror polished
- Chrome vanadium
- Telescopic carrying handle
- In a classy aluminium trolley

1/4" - 1/2"

			kg
918.0690	90 pcs	CHROME*plus*® Tool kit	10.50
13 x		1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm	
10 x		1/2“: 15 - 17 - 18 - 19 - 20 - 22 - 24 27 - 30 - 32 mm	
2 x		1/2“: 16 - 21 mm	
1 x		1/4“	
2 x		1/4“: 50 - 100 mm	
1 x		1/4“	
1 x		1/4“ x 1/4“	
1 x		1/4“: 185 mm	
1 x		1/4“	
1 x		1/4“: 140 mm	
2 x		1/2“: 125 - 250 mm	
1 x		1/2“	
1 x		1/2“: F3/8“ - M1/2“	
1 x		1/2“: 250 mm	
6 x		1/4“: 3 - 4 - 5 - 6 - 7 - 8 mm	
5 x		1/4“: PH0 - PH1 - 2 x PH2 - PH3	
5 x		1/4“: PZ0 - PZ1 - 2 x PZ2 - PZ3	
6 x		1/4“: 3 - 4 - 5 - 6 - 7 - 8 mm	
7 x		1/4“: T10 - T15 - T20 - T25 - T27 T30 - T40	
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	
7 x		7 - 8 - 10 - 12 - 13 - 17 - 19 mm	
2 x		5,5 - 6,5 mm	
2 x		PH1 - PH2	
1 x		240 mm	
1 x		180 mm	

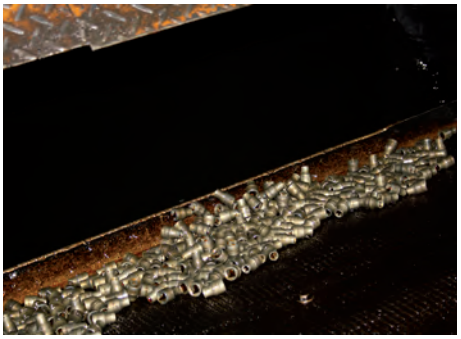

Universal tool kit

- 6 point
- Flank Traction profile
- With 3 drawers and upper insert storage
- Matt finis
- Chrome vanadium
- In durable steel tool chest

1/4" 1/2"

			kg
911.0100	100 pcs	Universal tool kit	19.80
12 x		1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 -9 - 10 11 - 12 - 13 mm	
12 x		1/2“: 14 - 15 - 16 - 17 - 18 - 19 - 20 22 - 24 - 27 - 30 - 32 mm	
2 x		1/2“: 16 - 21 mm	
1 x		1/4“: 911.2060	
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	
4 x		1/4“: 50 - 100 mm; 1/2“: 125 - 250 mm	
2 x		1/4“: 100 mm; 1/2“: 250 mm	
1 x		1/4“	
2 x		1/4“ - 1/2“	
2 x		1/4“: 145 mm; 1/2“: 250 mm	
12 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 17 19 - 22 mm	
4 x		4,0 x 100 mm - 4,5 x 100 mm 5,0 x 100 mm - 5,0 x 150 mm	
2 x		PH1 x 75 mm - PH2 x 100 mm	
1 x		160 mm	
1 x		180 mm	
1 x		200 mm	
1 x		10“	

CHROME*plus*® Universal tool set

- With 3 drawers and upper insert storage
- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable steel tool chest

1/4" 1/2"

			kg
918.0100	99 pcs	CHROME*plus*® Universal tool set	19.50
13 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 - 14 mm
3 x		1/4": 8 - 10 - 13 mm
1 x		1/4": 50 mm
1 x		1/4"
1 x		1/4": 110 mm
1 x		1/4": 140 mm
3 x		1/4": 4 - 5,5 - 7 mm
2 x		1/4": PH1 - PH2
2 x		1/4": PZ1 - PZ2
6 x		1/4": 3 - 4 - 5 - 6 - 7 - 8 mm
7 x		1/4": T10 - T15 - T20 - T25 - T27 T30 - T40
12 x		1/2": 13 - 15 - 17 - 18 - 19 - 20 - 21 22 - 24 - 27 - 30 - 32 mm
2 x		1/2": 17 - 19 mm
2 x		1/2": 16 - 21 mm
2 x		1/2": 125 - 250 mm
1 x		1/2": F3/8" x M 1/2"
1 x		1/2"
1 x		1/2": 250 mm
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm
6 x		6 x 38 - 3 x 75 - 4 x 100 - 5,5 x 100 6,5 x 125 - 8 x 150 mm
4 x		PH2 x 38 mm - PH1 x 75 mm - PH2 x 100 mm - PH3 x 150 mm
1 x		160 mm
1 x		180 mm
1 x		200 mm
1 x		10"
1 x		250 mm
1 x		300 g

CHROME*plus*® Universal tool set

- With 3 drawers and upper insert storage
- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable steel tool chest

1/4" - 1/2"

			kg
918.0200	99 pcs	CHROME*plus*® Universal tool set	19.50
13 x		1/4": 4 - 4,5 - 5 -5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm
3 x		1/4": 8 - 10 - 13 mm
1 x		1/4": 50 mm
1 x		1/4"
1 x		1/4": 110 mm
1 x		1/4": 145 mm
3 x		1/4": 4 - 4,5 - 7 mm
2 x		1/4": PH1 - PH2
2 x		1/4": PZ1 - PZ2
6 x		1/4": 3 - 4 - 5 - 6 - 7 - 8 mm
7 x		1/4": T10 - T15 - T20 - T25 - T27 T30 - T40
12 x		1/2": 13 - 15 - 17 - 18 - 19 - 20 - 21 22 - 24 - 27 - 30 - 32 mm
2 x		1/2": 17 - 19 mm
2 x		1/2": 16 - 21 mm
2 x		1/2": 125 - 250 mm
1 x		1/2": F3/8" x M 1/2"
1 x		1/2"
1 x		1/2": 250 mm
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm
6 x		6 x 38 mm - 3 x 75 mm - 4 x 100 mm 5,5 x 100 mm - 6,5 x 125 mm - 8 x 150 mm
4 x		PH2 x 38 mm - PH1 x 75 mm PH2 x 100 mm - PH3 x 150 mm
1 x		160 mm
1 x		180 mm
1 x		200 mm
1 x		10"
1 x		250 mm
1 x		300 g

CHROME*plus*® Universal tool set

- With 3 drawers and upper insert storage
- Imperial sizes
- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable steel tool chest

1/4" 1/2"

			kg
918.0150	99 pcs	CHROME*plus*® Universal tool set	25.60
13 x		1/4": 5/32" - 3/16" - 7/32" - 1/4" - 9/32" - 5/16" 11/32" - 3/8" - 13/32" - 7/16" - 15/32" - 1/2" - 9/16"
3 x		1/4": 5/16" - 3/8" - 1/2"
1 x		1/4": 50 mm
1 x		1/4"
1 x		1/4": 110 mm
1 x		1/4": 140 mm
3 x		1/4": 5/32" - 1/4" - 9/32"
2 x		1/4": PH1 - PH2
2 x		1/4": PZ1 - PZ2
6 x		1/4": 1/8" - 5/32" - 3/16" - 7/32" - 1/4" - 5/16"
7 x		1/4": T10 - T15 - T20 - T25 - T27 - T30 - T40
12 x		1/2": 7/16" - 1/2" - 9/16" - 5/8" - 11/16" - 3/4" 13/16" - 7/8" - 15/16" 1.1/16" - 1.3/16" - 1.1/4"
2 x		1/2": 11/16" - 3/4"
2 x		1/2": 16 - 21 mm
2 x		1/2": 125 - 250 mm
1 x		1/2": F3/8" x M 1/2"
1 x		1/2"
1 x		1/2": 250 mm
1 x		1/16" - 5/64" - 3/32" - 1/8" - 5/32" - 3/16" 7/32" - 1/4" - 5/16" - 3/8"
12 x		1/4" - 5/16" - 3/8" - 7/16" - 1/2" - 9/16" - 5/8" 11/16" - 3/4" - 13/16" - 7/8" - 15/16"
6 x		6 x 38 mm - 3 x 75 mm - 4 x 100 mm 5,5 x 100 mm - 6,5 x 125 mm - 8 x 150 mm
4 x		PH2 x 38 mm - PH1 x 75 mm PH2 x 100 mm - PH3 x 150 mm
1 x		125 mm
1 x		180 mm
1 x		200 mm
1 x		10"
1 x		250 mm
1 x		300 g

1/4“ POINT OF SALE DISPLAYS

Socket display

- Superlock
- Matt finis
- Chrome vanadium

1/4“

			kg
911.0320	379 pcs	Socket display	13.50
179 x		19x(4-5-6-7-8mm)-17x9mm-16x10mm -14x11mm-13x(12-13mm)-11x14mm	
20 x		150 mm	
20 x		100 mm	
11 x		110 mm	
129 x		19x(6-7-8mm)-17x9mm-15x10mm-14x11mm-13x(12-13mm)	
20 x		25 mm	

CHROME*plus*® Socket display

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In point of sale display

1/4“

			kg
918.0320	379 pcs	CHROME*plus*® Socket display	13.50
179 x		19x(4-5-6-7-8mm)-17x9mm-16x10mm -14x11mm-13x(12-13mm)-11x14mm	
20 x		150 mm	
20 x		100 mm	
11 x		110 mm	
129 x		19x(6-7-8mm)-17x9mm-15x10mm-14x11mm-13x(12-13mm)	
20 x		25 mm	

Bit socket display

- Matt finis
- Chrome vanadium
- In point of sale display

1/4“

			kg
911.0330	540 pcs	Bit socket display	13.00
40 x		20 x (4 - 5,5 mm)	
60 x		20 x (PH1 - PH2 - PH3)	
60 x		20 x (PZ1 - PZ2 - PZ3)	
100 x		20 x (3 - 4 - 5 - 6 - 7 mm)	
80 x		20 x (T10 - T15 - T20 - T25)	
160 x		20 x (TB8 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40)	
40 x		20 x (50 - 100mm)	

CHROME*plus*® Bit socket display

- Chrome plated and mirror polished
- Chrome vanadium
- In point of sale display

1/4“

			kg
918.0330	540 pcs	CHROME*plus*® Bit socket display	13.00
40 x		20 x (4 - 5,5 mm)	
60 x		20 x (PH1 - PH2 - PH3)	
60 x		20 x (PZ1 - PZ2 - PZ3)	
100 x		20 x (3 - 4 - 5 - 6 - 7 mm)	
80 x		20 x (T10 - T15 - T20 - T25)	
160 x		20 x (TB8 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40)	
40 x		20 x (50 - 100mm)	

3/8“ SOCKETS

CLASSIC Hexagonal socket

- 6 point
- FlankTraction Profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium



3/8“

	mm		D1 mm	D2 mm	L mm	T mm	g	
917.3806	6,0		10.0	18.0	28.0	5.0	20	
917.3807	7,0		11.0	18.0	28.0	5.0	22	
917.3808	8,0		12.0	18.0	28.0	9.0	24	
917.3809	9,0		14.0	18.0	28.0	9.0	26	
917.3810	10,0		15.0	18.0	28.0	9.0	30	
917.3811	11,0		16.0	18.0	28.0	9.0	30	
917.3812	12,0		17.0	18.0	28.0	9.0	32	
917.3813	13,0		19.0	18.0	28.0	9.0	35	
917.3814	14,0		20.0	18.0	29.0	11.0	40	
917.3815	15,0		21.0	20.0	30.0	13.0	42	
917.3816	16,0		22.0	21.0	30.0	13.0	48	
917.3817	17,0		24.0	22.0	30.0	13.0	55	
917.3818	18,0		25.0	23.0	30.0	13.0	60	
917.3819	19,0		26.0	24.0	30.0	13.0	70	
917.3820	20,0		27.0	25.0	31.0	13.0	75	
917.3821	21,0		29.0	26.0	31.0	14.0	82	
917.3822	22,0		30.0	26.0	32.0	15.0	85	
917.3824	24,0		31.0	27.0	32.0	16.0	88	
917.3870		1/4“	10.0	18.0	30.0	6.0	20	
917.3871		9/32“	11.0	18.0	30.0	7.0	22	
917.3872		5/16“	12.0	18.0	30.0	7.0	24	
917.3873		11/32“	13.0	18.0	30.0	7.0	26	
917.3874		3/8“	14.0	18.0	30.0	9.0	26	
917.3875		7/16“	16.0	16.0	27.0	10.0	30	
917.3876		1/2“	18.0	18.0	30.0	12.0	30	
917.3877		9/16“	20.0	20.0	30.0	13.0	30	
917.3801		19/32“	19.0	20.8	30.0	13.0	40	
917.3878		5/8“	22.0	22.0	30.0	13.0	40	
917.3879		11/16“	23.0	24.0	30.0	14.0	50	
917.3880		3/4“	25.0	26.0	30.0	15.0	60	
917.3881		13/16“	21.0	28.0	32.0	16.0	70	
917.3882		7/8“	29.0	30.0	32.0	18.0	80	

CLASSIC hexagonal socket set

- 6 point
- FlankTraction Profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

3/8“

			kg
911.0608	11 pcs	8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.75

CLASSIC Hexagonal socket, deep

- 6 point
- FlankTraction Profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium

3/8"

	mm		D1 mm	D2 mm	L mm	T mm	g
917.3828	8,0		12.0	16.0	63.0	10.0	110
917.3829	9,0		14.0	17.0	63.0	11.0	110
917.3830	10,0		15.0	18.0	63.0	11.0	110
917.3831	11,0		16.0	18.0	63.0	12.0	120
917.3832	12,0		17.0	18.0	63.0	14.0	120
917.3833	13,0		19.0	19.0	63.0	14.0	140
917.3834	14,0		20.0	20.0	63.0	17.0	140
917.3835	15,0		21.0	21.0	63.0	17.0	140
917.3836	16,0		22.0	22.0	63.0	17.0	150
917.3837	17,0		24.0	21.0	63.0	17.0	150
917.3838	18,0		24.0	25.0	63.0	20.0	150
917.3839	19,0		26.0	22.0	63.0	20.0	150
917.3840	20,0		28.0	24.0	63.0	20.0	150
917.3841	21,0		28.0	24.0	63.0	20.0	150
917.3842	22,0		30.0	24.0	63.0	23.0	150
917.3843		3/8"	15.0	18.0	63.0	11.0	50
917.3844		7/16"	16.0	18.0	63.0	12.0	50
917.3845		1/2"	19.0	19.0	63.0	14.0	70
917.3846		9/16"	20.0	20.0	63.0	17.0	70
917.3847		5/8"	22.0	22.0	63.0	17.0	90
917.3848		11/16"	24.0	21.0	63.0	17.0	90
917.3849		3/4"	26.0	22.0	63.0	20.0	90
917.3802		13/16"	27.0	25.0	63.0	23.0	180
917.3803		7/8"	29.0	26.5	63.0	25.0	190

CLASSIC hexagonal socket set, deep

- 6 point
- FlankTraction Profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

3/8"

			kg
911.0611	11 pcs	8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.75

CHROME*plus*® hexagonal socket

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	mm		D1 mm	D2 mm	L mm	T mm	g
918.3936	6,0		10.0	18.0	28.0	5.0	20
918.3937	7,0		11.0	18.0	27.0	5.0	22

	mm		D1 mm	D2 mm	L mm	T mm	g
918.3808	8,0		12.0	18.0	27.0	9.0	24
918.3809	9,0		14.0	18.0	27.0	9.0	26
918.3810	10,0		15.0	18.0	27.0	9.0	30
918.3811	11,0		16.0	18.0	27.0	9.0	30
918.3812	12,0		17.0	18.0	30.0	9.0	32
918.3813	13,0		19.0	18.0	30.0	9.0	35
918.3814	14,0		20.0	18.0	30.0	11.0	40
918.3815	15,0		21.0	20.0	30.0	13.0	42
918.3816	16,0		22.0	21.0	30.0	13.0	48
918.3817	17,0		24.0	22.0	30.0	13.0	55
918.3818	18,0		25.0	24.0	30.0	13.0	60
918.3819	19,0		26.0	25.0	30.0	13.0	70
918.3820	20,0		27.7	24.9	30.0	16.0	70
918.3821	21,0		27.8	25.0	32.0	16.0	63
918.3822	22,0		29.8	26.6	30.0	16.0	82
918.3824	24,0		31.7	29.0	30.0	16.0	92
918.3901		1/4"	10.5	16.9	28.0	11.5	20
918.3912		9/32"	10.6	16.9	28.0	11.5	22
918.3902		5/16"	11.9	16.9	28.0	11.5	20
918.3903		11/32"	14.2	16.9	28.0	11.5	26
918.3913		3/8"	14.6	16.9	28.0	11.5	26
918.3904		7/16"	15.6	16.9	28.0	11.5	30
918.3905		1/2"	17.8	16.9	28.0	11.5	30
918.3906		9/16"	19.8	16.9	28.0	14.3	30
918.3951		19/32"	19.0	20.8	30.0	13.0	40
918.3907		5/8"	21.8	18.8	28.0	14.3	40
918.3908		11/16"	23.9	19.9	30.0	16.4	50
918.3909		3/4"	25.8	22.9	30.0	16.4	60
918.3910		13/16"	27.8	25.0	30.0	16.4	70
918.3911		7/8"	29.8	28.8	30.0	16.4	80

CHROME*plus*® Hexagonal socket set

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Includes storage rail

3/8"

			kg
918.0608	11 pcs	8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.75

CHROME*plus*® Hexagonal socket, deep

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	mm		D1 mm	D2 mm	L mm	g
918.3828	8		12.6	16.9	63.0	43
918.3829	9		17.0	13.0	63.0	45
918.3830	10		14.6	16.9	63.0	51
918.3831	11		16.0	16.9	63.0	52
918.3832	12		17.8	16.9	63.0	59
918.3833	13		17.8	16.9	63.0	75
918.3834	14		19.6	17.9	63.0	77
918.3835	15		21.8	19.6	63.0	78
918.3836	16		21.8	19.6	63.0	82
918.3837	17		23.7	21.8	63.0	107
918.3838	18		25.7	22.9	63.0	120
918.3839	19		25.7	22.9	63.0	149
918.3840	20		27.8	25.2	63.0	154
918.3841	21		27.8	25.5	63.0	150

	mm		D1 mm	D2 mm	L mm	g
918.3842	22		29.9	26.8	63.0	159
918.3923		3/8"	14.6	16.9	63.0	50
918.3924		7/16"	15.9	16.9	63.0	50
918.3925		1/2"	17.8	16.9	63.0	70
918.3926		9/16"	19.8	18.0	63.0	70
918.3927		5/8"	23.8	21.7	63.0	90
918.3928		11/16"	23.8	21.7	63.0	90
918.3929		3/4"	25.8	23.2	63.0	90
918.3706		13/16"	27.0	25.0	63.0	130
918.3707		7/8"	29.0	26.5	63.0	180

CHROME*plus*® hexagonal socket set, deep

- 6 point
- FlankTraction Profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 - ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

3/8"

			kg
918.0611	11 pcs	8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.75

Classic hexagonal socket with fl xible joint

- 6 point
- FlankTraction Profil
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Screwed joints
- For manual operation
- Matt finis
- Chrome vanadium

3/8"

	mm	D1 mm	D2 mm	L mm	T mm	g
917.3941	10,0	15.0	20.0	40.0	6.0	50
917.3942	11,0	16.0	20.0	40.0	6.0	60
917.3943	12,0	17.0	20.0	40.0	7.0	70
917.3944	13,0	19.0	20.0	40.0	7.0	80
917.3945	14,0	20.0	20.0	40.0	9.0	80
917.3946	15,0	21.0	20.0	40.0	9.0	80
917.3947	16,0	22.0	20.0	40.0	10.0	80
917.3948	17,0	24.0	20.0	40.0	11.0	80
917.3949	18,0	24.0	20.0	40.0	12.0	100
917.3951	19,0	26.0	20.0	40.0	13.0	100

Classic hexagonal socket set with fl xible joint

- 6 point
- FlankTraction Profil
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Screwed joints
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

3/8"

			kg
917.3940	10 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	1.10

CHROME*plus*® hexagonal socket with fl xible joint

- 6 point
- FlankTraction Profil
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Screwed joints
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

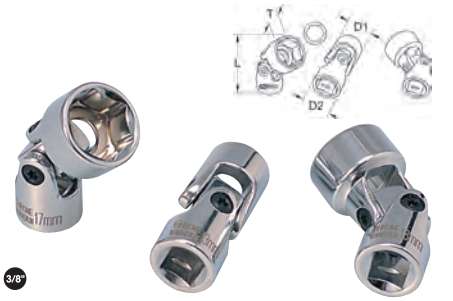

3/8"

	mm	D1 mm	D2 mm	L mm	T mm	g
911.3841	10,0	15.0	20.0	40.0	6.0	50
911.3842	11,0	16.0	20.0	40.0	6.0	60
911.3843	12,0	17.0	20.0	40.0	7.0	70
911.3844	13,0	19.0	20.0	40.0	7.0	80
911.3845	14,0	20.0	20.0	40.0	9.0	80
911.3846	15,0	21.0	20.0	40.0	9.0	80
911.3847	16,0	22.0	20.0	40.0	10.0	80
911.3848	17,0	24.0	20.0	40.0	11.0	80
911.3849	18,0	24.0	20.0	40.0	12.0	100
911.3851	19,0	26.0	20.0	40.0	13.0	100

CHROME*plus*® hexagonal socket set with fl xible joint

- 6 point
- FlankTraction Profil
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Screwed joints
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

3/8"

			kg
911.3840	10 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	1.11

12 Point socket

- 12 point
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

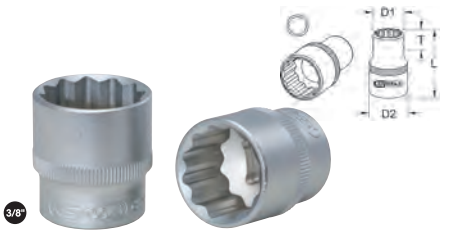

3/8"

	mm		D1 mm	D2 mm	L mm	T mm	g
917.3804	6.0		10.0	18.0	28.0	5.0	20
917.3805	7.0		11.0	18.0	28.0	5.0	22
911.3981	8.0		12.0	18.0	28.0	9.0	24
911.3982	9.0		14.0	18.0	28.0	9.0	26
911.3983	10.0		15.0	18.0	28.0	9.0	30
911.3984	11.0		16.0	18.0	28.0	9.0	30
911.3985	12.0		17.0	18.0	28.0	9.0	32
911.3986	13.0		19.0	18.0	28.0	9.0	35
911.3987	14.0		20.0	18.0	29.0	11.0	40
911.3988	15.0		21.0	20.0	30.0	13.0	42
911.3989	16.0		22.0	21.0	30.0	13.0	48
911.3992	17.0		24.0	22.0	30.0	13.0	55
911.3993	18.0		25.0	23.0	30.0	13.0	60
911.3994	19.0		26.0	24.0	30.0	13.0	70
911.3996	21.0		29.0	26.0	31.0	14.0	82
911.3997	22.0		30.0	26.0	32.0	15.0	85
911.3998	24.0		31.0	27.0	32.0	15.0	90
917.3823		1/4"	10.0	18.0	30.0	6.0	20
917.3825		9/32"	11.0	18.0	30.0	7.0	22
917.3826		5/16"	12.0	18.0	30.0	7.0	24
917.3827		11/32"	13.0	18.0	30.0	7.0	26
917.3851		3/8"	14.0	18.0	30.0	9.0	26
917.3852		7/16"	16.0	16.0	27.0	10.0	30
911.4000		1/2"	18.0	19.0	28.0	9.0	35
911.4001		9/16"	20.0	19.0	29.0	11.0	40
911.4002		19/32"	21.0	20.0	30.0	13.0	42
911.4003		5/8"	22.0	21.0	30.0	13.0	48
911.4004		11/16"	24.0	23.0	30.0	13.0	55
911.4005		3/4"	26.0	24.0	30.0	13.0	70
917.3854		13/16"	21.0	28.0	32.0	16.0	70
911.4006		7/8"	30.0	27.0	32.0	15.0	100

12 point socket set

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Includes storage rail

3/8"

			kg
911.0609	11 pcs	8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.75

12 Point socket, deep

- 12 point
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium

3/8"

	mm		D1 mm	D2 mm	L mm	T mm	g
917.3855	8.0		12.0	16.0	63.0	10.0	40
917.3856	9.0		14.0	17.0	63.0	10.0	43
917.3970	10.0		15.0	18.0	63.0	11.0	50
917.3971	11.0		16.0	18.0	63.0	12.0	60
917.3972	12.0		17.0	18.0	63.0	14.0	65
917.3973	13.0		19.0	19.0	63.0	14.0	70
917.3974	14.0		20.0	20.0	63.0	17.0	85
917.3975	15.0		21.0	21.0	63.0	17.0	85
917.3976	16.0		22.0	22.0	63.0	17.0	95
917.3977	17.0		24.0	21.0	63.0	17.0	105
917.3978	18.0		25.0	22.0	63.0	20.0	110
917.3979	19.0		26.0	22.0	63.0	20.0	120
917.3980	20.0		27.0	24.0	63.0	20.0	135
917.3981	21.0		29.0	24.0	63.0	20.0	145
917.3982	22.0		30.0	24.0	63.0	23.0	160
917.3983		3/8"	14.0	18.0	63.0	11.0	50
917.3984		7/16"	16.0	18.0	63.0	12.0	60
917.3985		1/2"	18.0	19.0	63.0	14.0	70
917.3986		9/16"	20.0	20.0	63.0	17.0	85
917.3987		5/8"	22.0	22.0	63.0	17.0	95
917.3988		11/16"	24.0	21.0	63.0	17.0	105
917.3989		3/4"	26.0	22.0	63.0	20.0	135
917.3990		13/16"	28.0	24.0	63.0	20.0	145
917.3991		7/8"	30.0	24.0	63.0	23.0	160

12 Point socket set, deep

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Includes storage rail

3/8"

			kg
911.0606	11 pcs	8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.75

CHROME*plus*® 12 point socket

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725-1
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	mm		D1 mm	D2 mm	L mm	T mm	g
918.3723	6,0		10.0	18.0	28.0	5.0	20
918.3725	7,0		11.0	18.0	28.0	5.0	22
918.3708	8,0		12.0	18.0	28.0	9.0	24
918.3709	9,0		14.0	18.0	28.0	9.0	26
918.3710	10,0		15.0	18.0	28.0	9.0	30
918.3711	11,0		16.0	18.0	28.0	9.0	30
918.3712	12,0		17.0	18.0	28.0	9.0	32
918.3713	13,0		19.0	18.0	28.0	9.0	35
918.3714	14,0		20.0	18.0	29.0	11.0	40
918.3715	15,0		21.0	20.0	30.0	13.0	42
918.3716	16,0		22.0	21.0	30.0	13.0	48
918.3717	17,0		24.0	22.0	30.0	13.0	55
918.3718	18,0		25.0	23.0	30.0	13.0	60
918.3719	19,0		26.0	24.0	30.0	13.0	70
918.3720	20,0		27.0	25.0	31.0	13.0	75
918.3721	21,0		29.0	26.0	31.0	14.0	82
918.3722	22,0		30.0	26.0	32.0	15.0	85
918.3724	24,0		31.0	27.0	32.0	16.0	88
918.3726		1/4"	10.0	18.0	30.0	6.0	20
918.3727		9/32"	11.0	18.0	30.0	7.0	22
918.3728		5/16"	12.0	18.0	30.0	7.0	24
918.3729		11/32"	13.0	18.0	30.0	7.0	26
918.3731		3/8"	14.0	18.0	30.0	9.0	26
918.3732		7/16"	16.0	18.0	30.0	10.0	30
918.3733		1/2"	18.0	18.0	30.0	12.0	30
918.3734		9/16"	20.0	20.0	30.0	13.0	30
918.3741		19/32"	19.0	20.8	30.0	13.0	40
918.3735		5/8"	22.0	22.0	30.0	13.0	40
918.3736		11/16"	23.0	24.0	30.0	14.0	50
918.3737		3/4"	25.0	26.0	30.0	15.0	60
918.3738		13/16"	21.0	28.0	32.0	16.0	70
918.3739		7/8"	29.0	30.0	32.0	18.0	80

CHROME*plus*® 12 Point socket set

- 12-point
- FlankTraction-Profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Includes storage rail

3/8"

			kg
918.0601	11 pcs	8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.75

CHROME*plus*® 12 Point socket, deep

- 12 point
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	mm		D1 mm	D2 mm	L mm	T mm	g
918.3742	8,0		12.0	16.0	63.0	10.0	45
918.3743	9,0		14.0	17.0	63.0	10.0	50
918.3744	10,0		15.0	18.0	64.0	11.0	50
918.3745	11,0		16.0	18.0	64.0	12.0	60
918.3746	12,0		17.0	18.0	64.0	14.0	65
918.3747	13,0		19.0	19.0	64.0	14.0	70
918.3748	14,0		20.0	20.0	64.0	17.0	85
918.3749	15,0		21.0	21.0	64.0	17.0	85
918.3751	16,0		22.0	22.0	64.0	17.0	95
918.3752	17,0		24.0	21.0	64.0	17.0	105
918.3753	18,0		25.0	22.0	64.0	20.0	110
918.3754	19,0		26.0	22.0	64.0	20.0	120
918.3755	20,0		27.0	24.0	64.0	20.0	135
918.3756	21,0		29.0	24.0	64.0	20.0	145
918.3757	22,0		30.0	24.0	64.0	23.0	160
918.3758		3/8"	14.0	18.0	64.0	11.0	50
918.3759		7/16"	16.0	18.0	64.0	12.0	60
918.3761		1/2"	18.0	19.0	64.0	14.0	70
918.3762		9/16"	20.0	20.0	64.0	17.0	85
918.3763		5/8"	22.0	22.0	64.0	17.0	95
918.3764		11/16"	24.0	22.0	64.0	17.0	105
918.3765		3/4"	26.0	22.0	64.0	20.0	135
918.3766		13/16"	28.0	24.0	64.0	20.0	145
918.3767		7/8"	30.0	24.0	64.0	23.0	160

CHROME*plus*® 12-point socket-set, deep

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Includes storage rail

3/8"

			kg
918.0602	11 pcs	8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.75

TX E socket

- TX E
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

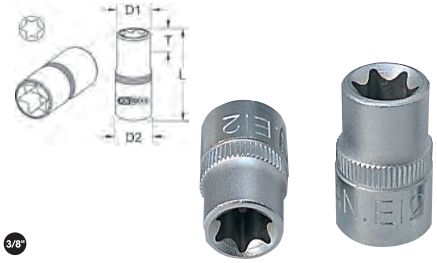

3/8"

		D1 mm	D2 mm	L mm	T mm	g
911.4338	E4	7.0	17.0	28.0	5.0	25
911.4339	E5	7.0	18.0	28.0	5.0	25
911.4340	E6	9.0	18.0	28.0	5.0	25
911.4341	E7	10.0	18.0	28.0	6.0	25
911.4342	E8	11.0	18.0	28.0	6.0	25
911.4318	E10	13.0	18.0	28.0	9.0	30
911.4319	E11	14.0	18.0	28.0	9.0	30
911.4320	E12	15.0	18.0	28.0	9.0	30
911.4321	E14	17.0	18.0	28.0	9.0	35
911.4343	E16	18.0	19.0	28.0	9.0	40
911.4344	E18	19.0	19.0	28.0	9.0	40
911.4345	E20	19.0	20.0	28.0	9.0	40

TX E socket set

- TX E
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

3/8"

			kg
911.3930	10 pcs	E5 - E6 - E7 - E8 - E10 - E11 - E12 - E14 - E16 - E18	0.31

CHROME*plus*® TX E socket

- TX E
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

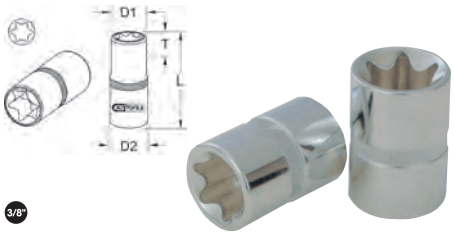

3/8"

		D1 mm	D2 mm	L mm	T mm	g
918.3971	E4	7.0	17.0	28.0	5.0	25
918.3972	E5	7.0	18.0	28.0	5.0	25
918.3973	E6	9.0	18.0	28.0	5.0	25
918.3974	E7	10.0	18.0	28.0	6.0	25
918.3975	E8	11.0	18.0	28.0	6.0	25
918.3976	E10	13.0	18.0	28.0	9.0	30
918.3977	E11	14.0	18.0	28.0	9.0	30
918.3978	E12	15.0	18.0	28.0	9.0	30
918.3979	E14	17.0	18.0	28.0	9.0	35
918.3980	E16	18.0	23.0	28.0	9.0	40
918.3981	E18	19.0	24.0	28.0	9.0	40
918.3982	E20	19.0	17.0	28.0	9.0	40

CHROME*plus*® TX E socket set

- TX E
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

3/8"

			kg
918.3955	10 pcs	E5 - E6 - E7 - E8 - E10 - E11 - E12 - E14 - E16 - E18	0.31

Crawfoot wrench, hexagonal

- 6 point
- With internal square drive
- For manual operation
- Matt finis
- Chrome vanadium

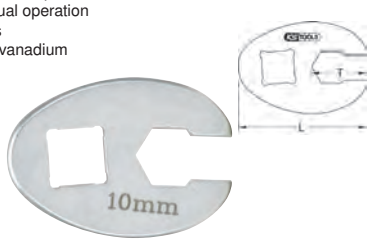

3/8"

	mm	L mm	T mm	g
913.3810	10,0	40.0	16.0	40
913.3811	11,0	37.0	13.0	40
913.3812	12,0	37.0	15.0	40
913.3813	13,0	36.0	14.0	40
913.3814	14,0	43.0	18.0	60
913.3815	15,0	42.0	20.0	60
913.3816	16,0	43.0	22.0	60
913.3817	17,0	48.0	23.0	80
913.3818	18,0	46.0	21.0	80
913.3819	19,0	44.0	22.0	80

Crawfoot wrench, hexagonal

- 6 point
- Internal square drive
- For manual operation
- Matt finis
- Chrome vanadium

3/8"

			kg
913.3800	10 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.63

CHROME*plus*® 12 point crawfoot wrench

- 12 point
- Internal square drive
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	mm	L mm	T mm	g
913.3910	10.0	36.0	13.0	40
913.3911	11.0	36.0	17.0	40
913.3912	12.0	37.0	14.0	40
913.3913	13.0	37.0	17.0	40
913.3914	14.0	41.0	19.0	60
913.3915	15.0	42.0	21.0	60
913.3916	16.0	43.0	22.0	60
913.3917	17.0	46.0	22.0	80
913.3919	19.0	46.0	23.0	80
913.3922	22.0	54.0	30.0	90

CHROME*plus*® 12 point crawfoot wrench set

- 12 point
- Internal square drive
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

3/8"

			kg
913.3900	10 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 19 - 22 mm	0.50

Spark plug socket

- DIN 3124 / ISO 3315
- Internal square to DIN 3120 / ISO 1174 with ball reception
- With rubber stop for holding the sparks plugs
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium

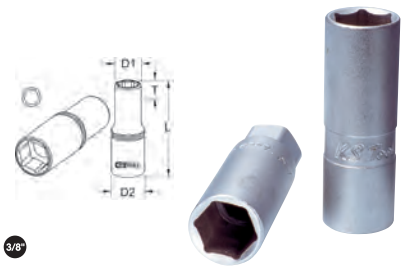

3/8"

	Profile	mm		D1 mm	D2 mm	L mm	g
911.3990	◯	14,0		26.0	20.0	63.0	60
911.3804	◯	16,0		20.0	18.0	63.0	60
911.3823	◯	18,0		26.0	21.0	63.0	135
911.3805	◯	21,0		22.0	19.0	63.0	60
911.3909	◯		5/8"	22.0	20.0	63.0	60
911.3908	◯		13/16"	27.0	20.0	63.0	60

CHROME*plus*® Spark plug socket

- DIN 3124 / ISO 3315
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Rubber stop for holding the sparks plugs
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	Profile	mm		D1 mm	D2 mm	L mm	g
918.3990	◯	14		20.0	18.0	63.0	60
918.3804	◯	16,0		22.0	19.0	63.0	60
918.3805	◯	18,0		26.0	20.0	63.0	60
918.3806	◯	21,0		28.0	21.0	63.0	60
918.3991	◯		13/16"	27.0	20.0	63.0	60
918.3992	◯		5/8"	22.0	20.0	63.0	60

3/8" BIT SOCKETS

Bit socket for slotted screws

- Slotted
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

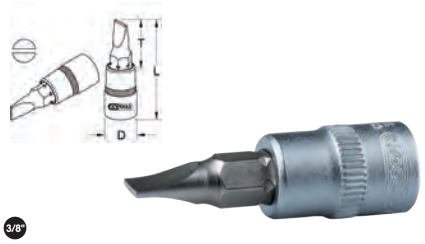

3/8"

	mm	D mm	L mm	T mm	g
911.3946	4.0	18.0	50.0	24.0	45
911.3947	5.0	18.0	50.0	24.0	45
911.3878	5.5	18.0	50.0	24.0	45
911.3879	6.5	18.0	50.0	24.0	45
911.3880	8.0	18.0	50.0	24.0	50
911.3948	12.0	18.0	50.0	24.0	50
911.3949	10.0	18.0	50.0	24.0	50

CHROME*plus*® bit socket for slotted screws

- Slotted
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

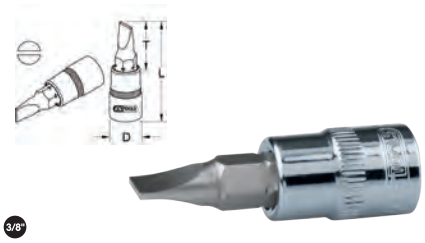

3/8"

	mm	D mm	L mm	T mm	g
918.3851	4.0	18.0	50.0	24.0	40
918.3852	5.0	18.0	50.0	24.0	40
918.3853	5.5	18.0	50.0	24.0	45
918.3854	6.5	18.0	50.0	24.0	45
918.3855	8.0	18.0	50.0	24.0	50
918.3986	10.0	18.0	50.0	24.0	50
918.3987	12.0	18.0	50.0	24.0	50

Bit socket for phillips head screws PH

- PH
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

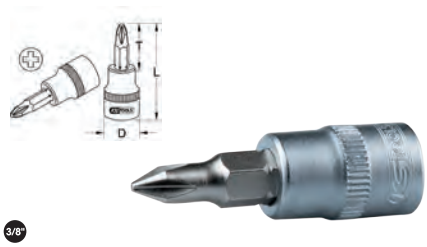

3/8"

		D mm	L mm	T mm	g
911.3875	PH 1	18.0	50.0	24.0	35
911.3876	PH 2	18.0	50.0	24.0	45
911.3877	PH 3	18.0	50.0	24.0	50

CHROME*plus*® bit socket for Phillips screws PH

- PH
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

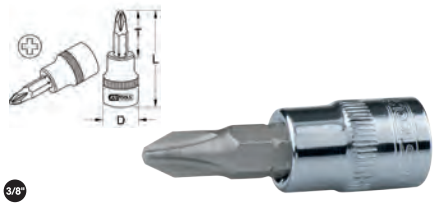

3/8"

		D mm	L mm	T mm	g
918.3868	PH 1	18.0	50.0	24.0	35
918.3869	PH 2	18.0	50.0	24.0	45
918.3891	PH 3	18.0	50.0	24.0	50

Bit socket for Phillips head screws PZ

- PZ
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

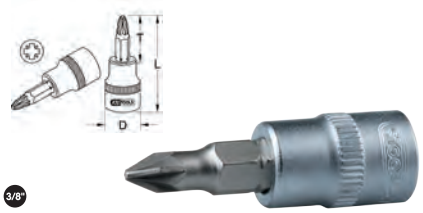

3/8"

		D mm	L mm	T mm	g
911.3881	PZ 1	18.0	50.0	24.0	40
911.3882	PZ 2	18.0	50.0	24.0	40
911.3883	PZ 3	18.0	50.0	24.0	55

CHROME*plus*® bit socket for Phillips screws PZ

- PZ
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

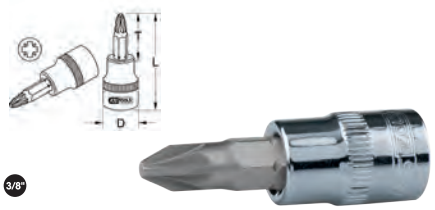

3/8"

		D mm	L mm	T mm	g
918.3877	PZ 1	18.0	50.0	24.0	40
918.3878	PZ 2	18.0	50.0	24.0	40
918.3892	PZ 3	18.0	50.0	24.0	55

Bit socket for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

	mm		D mm	L mm	T mm	g
911.3863	3,0		18.0	50.0	24.0	40
911.3864	4,0		18.0	50.0	24.0	43
911.3865	5,0		18.0	50.0	24.0	44
911.3866	6,0		18.0	50.0	24.0	45
911.3867	7,0		18.0	50.0	24.0	46
911.3868	8,0		18.0	50.0	24.0	47
917.3857	10,0		18.0	50.0	24.0	60
911.3862	12,0		18.0	50.0	24.0	65
917.3962		5/32"	18.0	50.0	24.0	40
917.3963		3/16"	18.0	50.0	24.0	43
917.3964		1/4"	18.0	50.0	24.0	44
917.3965		5/16"	18.0	50.0	24.0	45
917.3966		3/8"	18.0	50.0	24.0	46
917.3967		1/8"	18.0	50.0	24.0	47
917.3968		7/32"	18.0	50.0	24.0	60

Bit socket set for hexagon key screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted stud
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

			kg
911.3945	7 pcs	4 - 5 - 6 - 7 - 8 - 10 - 12 mm	0.31

CHROME*plus*® Bit socket for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

	mm		D mm	L mm	T mm	g
918.3861	3,0		18.0	50.0	24.0	40
918.3862	4,0		18.0	50.0	24.0	43
918.3863	5,0		18.0	50.0	24.0	44
918.3864	6,0		18.0	50.0	24.0	45
918.3865	7,0		18.0	50.0	24.0	46
918.3866	8,0		18.0	50.0	24.0	47
918.3867	10,0		18.0	50.0	24.0	60
918.3961	12,0		18.0	50.0	24.0	65
918.3962		5/32"	18.0	50.0	24.0	40
918.3963		3/16"	18.0	50.0	24.0	43
918.3964		1/4"	18.0	50.0	24.0	44
918.3965		5/16"	18.0	50.0	24.0	45
918.3966		3/8"	18.0	50.0	24.0	46
918.3967		1/8"	18.0	50.0	24.0	47
918.3968		7/32"	18.0	50.0	24.0	60

CHROME*plus*® bit socket set for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted stud
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

			kg
918.3921	7 pcs	4 - 5 - 6 - 7 - 8 - 10 - 12 mm	0.31

Bit socket for hexagon screws, long

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

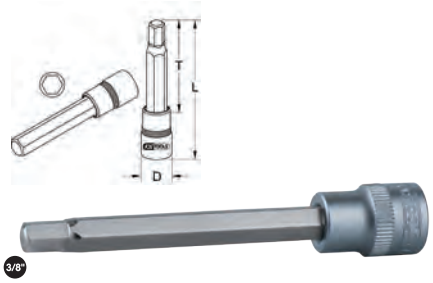

	mm	D mm	L mm	T mm	g
911.1561	4,0	18.0	100.0	74.0	50
911.1562	5,0	18.0	100.0	74.0	50
911.1563	6,0	18.0	100.0	74.0	50
911.1564	7,0	18.0	100.0	74.0	50
911.1565	8,0	18.0	100.0	74.0	60
911.1566	10,0	18.0	100.0	74.0	60
911.1567	12,0	18.0	100.0	74.0	60

Bit socket set for hexagon screws, long

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

			kg
911.1560	7 pcs	4 - 5 - 6 - 7 - 8 - 10 - 12 mm	0.52

CHROME*plus*® bit socket for hexagon screws, long

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

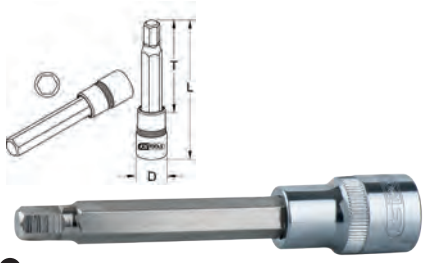

	mm	D mm	L mm	T mm	g
918.3914	4,0	18.0	100.0	74.0	50
918.3915	5,0	18.0	100.0	74.0	50
918.3916	6,0	18.0	100.0	74.0	50
918.3917	7,0	18.0	100.0	74.0	50
918.3918	8,0	18.0	100.0	74.0	60
918.3919	10,0	18.0	100.0	74.0	60
918.3920	12,0	18.0	100.0	74.0	60

CHROME*plus*® bit socket set for hexagon screws, long

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

			g
918.3960	7 pcs	4 - 5 - 6 - 7 - 8 - 10 - 12 mm	0.52

Bit socket for hexagon screws with ball end

- Ball end hexagon socket
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

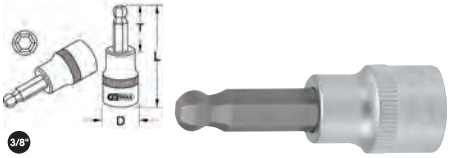

	mm	D mm	L mm	T mm	g
917.3860	3,0	18.0	50.0	24.0	45
917.3861	4,0	18.0	50.0	24.0	45
917.3862	5,0	18.0	50.0	24.0	45
917.3863	6,0	18.0	50.0	24.0	45
917.3864	7,0	18.0	50.0	24.0	45
917.3868	8,0	18.0	50.0	24.0	45
917.3869	10,0	18.0	50.0	24.0	45

Bit socket set for hexagon-screws with ball end

- Ball end hexagon socket
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

			kg
911.3922	7 pcs	3 - 4 - 5 - 6 - 7 - 8 - 10 mm	0.41

CHROME*plus*® bit socket for hexagon screws with ball end

- Ball end hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

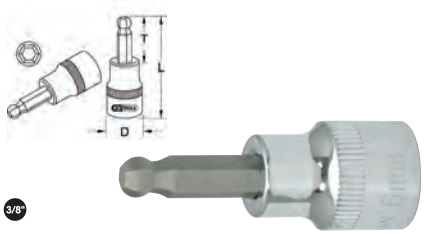

	mm	D mm	L mm	T mm	g
918.3870	3,0	18.0	50.0	24.0	45
918.3871	4,0	18.0	50.0	24.0	45
918.3872	5,0	18.0	50.0	24.0	45
918.3873	6,0	18.0	50.0	24.0	45
918.3874	7,0	18.0	50.0	24.0	45
918.3875	8,0	18.0	50.0	24.0	45
918.3876	10,0	18.0	50.0	24.0	45

CHROMEplus® bit socket-set for hexagon screws with ball end

- Ball end hexagon socket
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

			kg
918.3772	7 pcs	3 - 4 - 5 - 6 - 7 - 8 - 10 mm	0.41

Bit socket for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

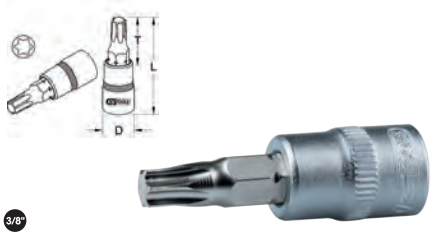

		D mm	L mm	T mm	g
911.3921	T9	18.0	50.0	24.0	42
911.3887	T10	18.0	50.0	24.0	45
911.3869	T15	18.0	50.0	24.0	45
911.3870	T20	18.0	50.0	24.0	45
911.3871	T25	18.0	50.0	24.0	45
911.3872	T27	18.0	50.0	24.0	45
911.3873	T30	18.0	50.0	24.0	45
911.3874	T40	18.0	50.0	24.0	45
911.3885	T45	18.0	50.0	24.0	50
911.3884	T50	18.0	50.0	24.0	70
911.3888	T55	18.0	50.0	24.0	70
911.3889	T60	18.0	50.0	24.0	70

Bit socket set for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

			kg
911.3935	10 pcs	T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55	0.41

CHROME*plus*® bit socket for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

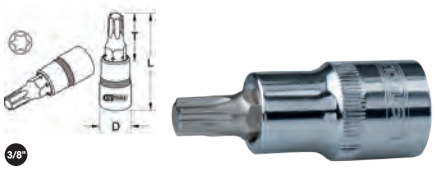

		D mm	L mm	T mm	g
918.3768	T9	18.0	50.0	24.0	42
918.3879	T10	18.0	50.0	24.0	45
918.3880	T15	18.0	50.0	24.0	45
918.3881	T20	18.0	50.0	24.0	45
918.3882	T25	18.0	50.0	24.0	45
918.3883	T27	18.0	50.0	24.0	45
918.3884	T30	18.0	50.0	24.0	45
918.3885	T40	18.0	50.0	24.0	35
918.3886	T45	18.0	50.0	24.0	50
918.3887	T50	18.0	50.0	24.0	70
918.3888	T55	18.0	50.0	24.0	70
918.3889	T60	18.0	50.0	24.0	70

CHROME*plus*® bit socket set for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

			kg
918.3939	10 pcs	T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55	0.41

Bit socket for TX screws, long

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

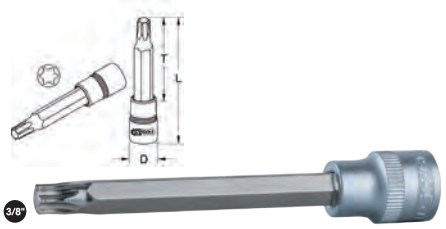

		D mm	L mm	T mm	g
911.1551	T20	18.0	100.0	74.0	50
911.1552	T25	18.0	100.0	74.0	50
911.1553	T27	18.0	100.0	74.0	50
911.1554	T30	18.0	100.0	74.0	60
911.1555	T40	18.0	100.0	74.0	60
911.1556	T45	18.0	100.0	74.0	60
911.1557	T50	18.0	100.0	74.0	60
911.1558	T55	18.0	100.0	74.0	80
911.1559	T60	18.0	100.0	74.0	100

Bit socket set for TX screws, long

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

			kg
911.1550	9 pcs	T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60	0.65

CHROME*plus*® bit socket for TX screws, long

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

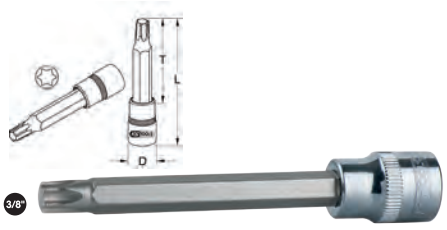

		D mm	L mm	T mm	g
918.4011	T20	18.0	100.0	74.0	50
918.4012	T25	18.0	100.0	74.0	50
918.4013	T27	18.0	100.0	74.0	50
918.4014	T30	18.0	100.0	74.0	60
918.4015	T40	18.0	100.0	74.0	60
918.4016	T45	18.0	100.0	74.0	60
918.4017	T50	18.0	100.0	74.0	60
918.4018	T55	18.0	100.0	74.0	80
918.4019	T60	18.0	100.0	74.0	100

CHROME*plus*® bit socket set for TX screws, long

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

			kg
918.1550	9 pcs	T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60	0.65

Bit socket for TX tamperproof screws

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

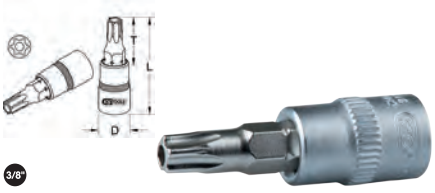

		D mm	L mm	T mm	g
911.3960	TB10	18.0	47.0	24.0	33
911.3961	TB15	18.0	47.0	24.0	34
911.3962	TB20	18.0	47.0	24.0	34
911.3963	TB25	18.0	47.0	24.0	34
911.3964	TB27	18.0	46.0	24.0	34
911.3965	TB30	18.0	64.0	24.0	35
911.3966	TB40	18.0	64.0	24.0	35
911.3967	TB45	18.0	64.0	24.0	38
911.3968	TB50	18.0	77.0	24.0	40
911.3969	TB55	18.0	77.0	24.0	45
911.3970	TB60	18.0	50.0	24.0	48

Bit socket set for TX tamperproof screws

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

			kg
911.3940	10 pcs	TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50 - TB55	0.40

CHROME*plus*® bit socket for TX tamperproof screws

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

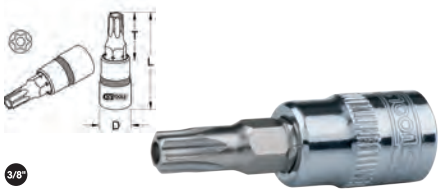

		D mm	L mm	T mm	g
918.3940	TB10	18.0	50.0	24.0	47
918.3941	TB15	18.0	50.0	24.0	47
918.3942	TB20	18.0	50.0	24.0	47
918.3943	TB25	18.0	50.0	24.0	47
918.3944	TB27	18.0	50.0	24.0	34
918.3945	TB30	18.0	50.0	24.0	34
918.3946	TB40	18.0	50.0	24.0	64
918.3947	TB45	18.0	50.0	24.0	39
918.3948	TB50	18.0	50.0	24.0	77
918.3949	TB55	18.0	50.0	24.0	77
918.3950	TB60	18.0	50.0	24.0	77

CHROME*plus*® bit socket set for TX tamperproof screws

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

			kg
918.3970	10 pcs	TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50 - TB55	0.40

Bit socket for TX tamperproof screws, long

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

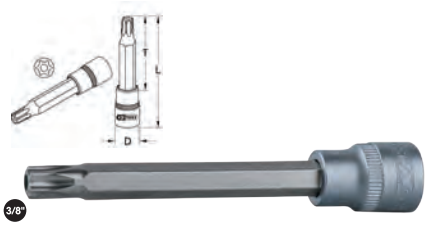

		D mm	L mm	T mm	g
911.3971	TB20	18.0	100.0	74.0	50
911.3972	TB25	18.0	100.0	74.0	50
911.3973	TB27	18.0	100.0	74.0	50
911.3974	TB30	18.0	100.0	74.0	60
911.3975	TB40	18.0	100.0	74.0	60
911.3976	TB45	18.0	100.0	74.0	60
911.3977	TB50	18.0	100.0	74.0	60
911.3978	TB55	18.0	100.0	74.0	80
911.3979	TB60	18.0	100.0	74.0	100

Bit socket set for TX tamperproof screws, long

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

			kg
911.3980	9 pcs	TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50 - TB55 - TB60	0.65

CHROME*plus*® bit socket for TX tamperproof screws, long

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

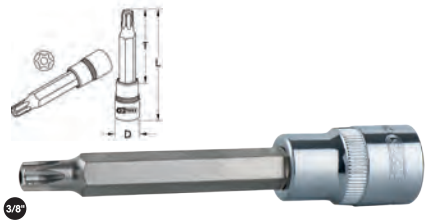

		D mm	L mm	T mm	g
918.4001	TB20	18.0	100.0	74.0	50
918.4002	TB25	18.0	100.0	74.0	50
918.4003	TB27	18.0	100.0	74.0	50
918.4004	TB30	18.0	100.0	74.0	60
918.4005	TB40	18.0	100.0	74.0	60
918.4006	TB45	18.0	100.0	74.0	60
918.4007	TB50	18.0	100.0	74.0	60
918.4008	TB55	18.0	100.0	74.0	80
918.4009	TB60	18.0	100.0	74.0	100

CHROMEplus® bit socket set for TX tamperproof screws, long

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

3/8"

			kg
918.3969	9 pcs	TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50 - TB55 - TB60	0.65

Bit socket for XZN® screws

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

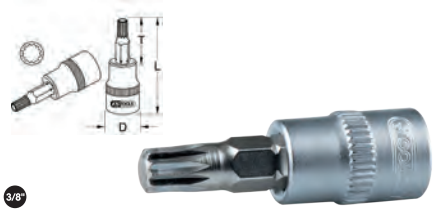

3/8"

		D mm	L mm	T mm	g
911.3918	M4	18.0	50.0	24.0	43
911.3915	M5	18.0	50.0	24.0	44
911.3916	M6	18.0	50.0	24.0	45
911.3917	M8	18.0	50.0	24.0	47
911.3920	M10	18.0	50.0	24.0	48

Bit socket for spline (XZN®) screws

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

3/8"

			kg
911.3923	5 pcs	M4 - M5 - M6 - M8 - M10	0.15

CHROMEplus® bit socket for Spline(XZN®) screws

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

		D mm	L mm	T mm	g
918.3856	M4	18.0	50.0	24.0	43
918.3857	M5	18.0	50.0	24.0	44
918.3858	M6	18.0	50.0	24.0	45
918.3859	M8	18.0	50.0	24.0	47
918.3860	M10	18.0	50.0	24.0	48

CHROMEplus® bit socket set for Spline(XZN®) screws

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

3/8"

			kg
918.3773	5 pcs	M4 - M5 - M6 - M8 - M10	0.15

3/8“ ADAPTERS

Bit adaptor socket

- Internal square to DIN 3120 / ISO 1174 with ball reception
- For 1/4" bits with external hexagon drive to DIN 3126 / ISO 1173
- For manual operation
- Matt finis
- Chrome vanadium

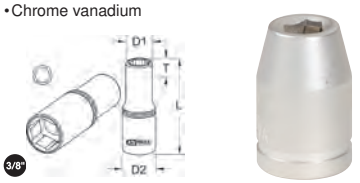

3/8"

	□	○	L mm	D1 mm	D2 mm	T mm	g
911.3894	3/8"	1/4"	25.0	12.0	17.0	11.0	20
911.4328	3/8"	5/16"	30.0	13.0	17.0	14.0	30

CHROMEplus® bit adaptor socket

- Internal square to DIN 3120 / ISO 1174 with ball reception
- For 1/4" bits with external hexagon drive to DIN 3126 / ISO 1173
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	□	○	L mm	D1 mm	D2 mm	T mm	g
918.3983	3/8"	1/4"	25.0	12.0	17.0	11.0	20
918.3984	3/8"	5/16"	30.0	13.0	17.0	14.0	30
918.3985	3/8"	10 mm	30.0	17.0	17.0	11.0	30

Bit adaptor socket

- Internal square to DIN 3120 / ISO 1174 with ball reception
- For 5/16" bits with external hexagon drive to DIN 3126 / ISO 1173
- For manual operation
- Matt finis
- Chrome vanadium

3/8"

	□	○	L mm	D1 mm	g
911.4331	3/8	5/16“	28.0	13.0	25
911.4311	3/8	10 mm	30.0	17.0	30

Adaptor

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

3/8"

	□	■	L mm	g
911.3892	3/8"	1/2"	30.0	60

CHROMEplus® adaptor

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

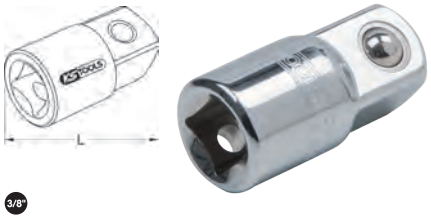

3/8"

	□	■	L mm	g
918.3931	3/8"	1/2"	30.0	60

Reducing adaptor

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

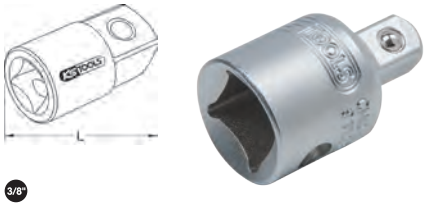

3/8"

	□	■	L mm	g
911.3897	3/8"	1/4"	30.0	60

CHROME*plus*® reducing adaptor

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	□	■	L mm	g
918.3930	3/8"	1/4"	30.0	60

Adaptor and reducing adaptor set

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.0106	6 pcs	1/4" x 3/8" - 3/8" x 1/4" - 3/8" x 1/2" - 1/2" x 3/8" - 1/2" x 3/4" - 3/4" x 1/2"	0.66

CHROME*plus*® adaptor and reducing adaptor set

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
918.0106	6 pcs	1/4" x 3/8" - 3/8" x 1/4" - 3/8" x 1/2" - 1/2" x 3/8" - 1/2" x 3/4" - 3/4" x 1/2"	0.66

Sliding adaptor and reducing adaptor

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- To the use with extensions
- Also usably as adaptors and/or reducing adaptors
- For manual operation
- Matt finis
- Chrome vanadium

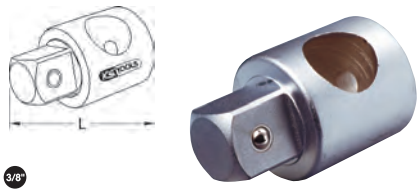

3/8"

	□	■	L mm	g
911.1207	3/8"	1/2"	40.0	60
911.3826	1/2"	3/8"	40.0	60

CHROME*plus*® sliding / adaptor and reducing adaptor

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- To the use with extensions
- Also usably as adaptors and/or reducing adaptors Reducing adaptor
- For manual operation
- Matt finis
- Chrome vanadium

3/8"

	□	■	L mm	g
918.3807	1/2"	3/8"	40.0	60
918.1449	1/4"	3/8"	40.0	60

3/8“ UNIVERSAL JOINTS

Universal joint

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Flexible joint
- For manual operation
- Matt finis
- Chrome vanadium

3/8"

	□	■	L mm	g
911.3850	3/8"	3/8"	55.0	80

CHROME*plus*® universal joint

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Flexible joint
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	□	■	L mm	g
918.3988	3/8"	3/8"	55.0	80

Power universal ball joint

- Ideal for use with electric screwdriver
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Very low running rotation
- New joint construction
- Outstanding use of angles up to 45°
- Very resistant to breakage
- Can be used by hand or with and electric screwdriver
- Matt finis
- Chrome vanadium

3/8"

	□	■	L mm	g
917.3850	3/8"	3/8"	50.0	80

CHROME*plus*® power universal joint

- Ideal for use with electric screwdriver
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Very low running rotation
- New joint construction
- Outstanding use of angles up to 45°
- Very resistant to breakage
- Can be used by hand or with and electric screwdriver
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	□	■	L mm	g
919.3850	3/8"	3/8"	50.0	80

3/8“ T-HANDLES

Sliding T-handle

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- For manual operation
- Matt finis
- Chrome vanadium

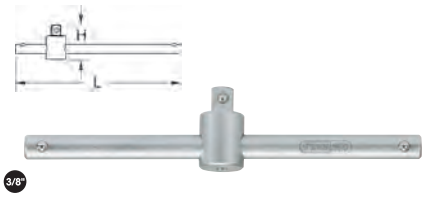

3/8"

	■	H mm	L mm	g	
911.3855	3/8"	40.0	160.0	160	

CHROME*plus*® sliding T handle

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

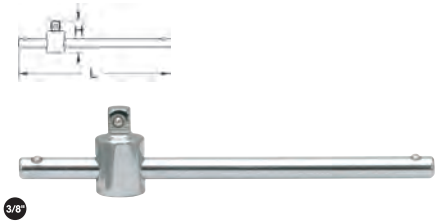

3/8"

	■	H mm	L mm	g	
918.3845	3/8"	40.0	160.0	160	

3/8“ EXTENSIONS

Extension

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

3/8"

	L mm	g	
911.3852	45.0	40	
911.3801	75.0	50	
911.3802	150.0	160	
911.3856	200.0	200	
911.3803	250.0	240	

Extension set

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- With hexagon drive
- For manual operation
- Matt finis
- Chrome vanadium

1/4" 3/8" 1/2"

		kg	
911.0007	9 pcs Extension set	1.22	

3 x		1/4“ : 50 - 100 - 250 mm
4 x		3/8“ : 45 - 75 - 150 - 200 mm
2 x		1/2“ : 125 - 250 mm

CHROME*plus*® extension

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Hexagon drive
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	L mm	g	
918.3769	45.0	40	
918.3896	75.0	120	
918.3897	150.0	150	
918.3771	200.0	190	
918.3898	250.0	240	

CHROME*plus*® Extension set

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2"

		kg	
918.0007	9 pcs CHROME*plus*® Extension set	1.22	

3 x		1/4“ : 50 - 100 - 250 mm
4 x		3/8“ : 45 - 75 - 150 - 200 mm
2 x		1/2“ : 125 - 250 mm

Wobble extension

- Internal square to DIN 3120 / ISO 1174 with ball reception
- Wobble extension with ball lock
- 8° tilt angle to each side
- For manual operation
- Matt finis
- Chrome vanadium

3/8"

	L mm	g	
911.3910	45.0	40	
911.3911	75.0	80	
911.3912	150.0	140	
911.3913	200.0	190	
911.3914	250.0	240	

Wobble extension set

- Internal square to DIN 3120 / ISO 1174 with ball reception
- Wobble extension with ball lock
- 8° tilt angle to each side
- For manual operation
- Matt finis
- Chrome vanadium

1/4" 3/8" 1/2"

		kg	
911.0009	9 pcs Wobble extension set	1.22	

3 x		1/4“ : 50 - 100 - 250 mm
4 x		3/8“ : 45 - 75 - 150 - 200 mm
2 x		1/2“ : 125 - 250 mm

CHROME*plus*® wobble extension

- Internal square to DIN 3120 / ISO 1174 with ball reception
- Wobble extension with ball lock
- 8° tilt angle to each side
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	L mm	g	
918.3935	45.0	120	
918.3801	75.0	150	
918.3802	150.0	145	
918.3958	225.0	210	
918.3803	250.0	240	

CHROME*plus*® Wobble extension set

- Internal square to DIN 3120 / ISO 1174 with ball reception
- Wobble extension with ball lock
- 8° tilt angle to each side
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2"

		kg	
918.0009	9 pcs CHROME*plus*® Wobble extension set	1.22	

CHROME*plus*® extension with interlock

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Interlocking mechanism against accidental loosening
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	L mm	g	
919.3801	75.0	70	
919.3804	150.0	140	
919.3806	250.0	250	

CHROME*plus*® extension set with interlock

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Interlocking mechanism against accidental loosening
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

			kg	
919.0383	3 pcs	75 - 150 - 250 mm	0.56	

CHROME*plus*® Extension set with interlock

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Interlocking mechanism against accidental loosening
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2"

			kg	
919.0007	7 pcs	CHROME*plus*® Extension set with interlock	1.24	
2 x		1/4" : 100 - 150 mm		
3 x		3/8" : 75 - 150 - 250 mm		
2 x		1/2" : 125 - 250 mm		

3/8" MANUAL DRIVE TOOLS

CHROME*plus*® Flexi head drive handle

- Square drive to DIN 3120 / ISO 1174 with ball lock
- Ideal for diffi ult to access areas
- Protects ratchet and torque wrenches from overloading
- Burnished head
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	L mm	head,spare	g	
918.3700	260.0	918.3826-1	390	
918.3826	400.0	918.3826-1	542	
918.3701	450.0	918.3826-1	615	

Offset handle

- DIN 3122 / ISO 3315
- Square drive according to DIN 3120 / ISO 1174 with with ball lock
- For manual operation
- Matt finis
- Chrome vanadium

3/8"

	L mm	g	
911.3925	180.0	198	

Crank handle

- DIN 3122 / ISO 3315
- Square drive according to DIN 3120 / ISO 1174 with with ball lock
- For manual operation
- Matt finis
- Chrome vanadium

3/8"

	L mm	g	
911.3950	190.0	482	

3/8" RATCHETS

Reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Recessed reverse lever
- Matt finis
- Chrome vanadium

3/8"

	A mm	D mm	L mm	Repair set	g	
914.3890	17.0	32.0	200.0	914.3897	130	

CHROME*plus*® reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Lightweight recessed reverse lever
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	A mm	D mm	L mm	Repair set	g	
918.3890	17.0	32.0	200.0	914.3897	130	

CHROME*plus*® reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Lightweight recessed reverse lever
- Chrome plated and mirror polished
- Chrome vanadium

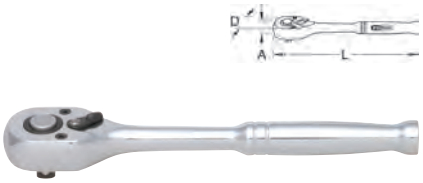

3/8"

	A mm	D mm	L mm	Repair set	g	
918.3993	17.0	31.0	180.0	914.3897	540	

SlimPOWER reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- 102 N•m maximum load
- Reversible
- Extremely slim head
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle with soft zone
- Chrome plated and mirror polished
- Chrome vanadium

3/8"

	A mm	D mm	L mm	Repair set	g	
920.3890	14.0	26.0	190.0	920.3890-1	267	

Reversible ratchet

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Exact gearing 45 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Matt finis
- Chrome vanadium

3/8"

	A mm	D mm	L mm	Repair set	g
911.3800	16.0	32.0	200.0	911.3899	310

CHROME*plus*® reversible ratchet

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Exact gearing 45 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Chrome plated and mirror polished
- Chrome vanadium



3/8"

	A mm	D mm	L mm	Repair set	g
918.3800	16.0	32.0	200.0	911.3899	310

CHROME*plus*® fl xible head reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- 180° revolving head
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Recessed reverse lever
- Chrome plated and mirror polished
- Chrome vanadium



3/8"

	A mm	D mm	L mm	Repair set	g
918.3997	16.0	31.0	150.0	914.3897	170

Flexible head reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- 180° revolving head
- Reversible
- Exact gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Recessed reverse lever
- Matt finis
- Chrome vanadium

3/8"

	A mm	D mm	L mm	Repair set	g
914.3896	16.0	30.0	275.0	914.3897	260

CHROME*plus*® fl xible head reversible ratchet with cranked shaft

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- 180° revolving head
- Cranked shaft
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Lightweight recessed reverse lever
- Chrome plated and mirror polished
- Chrome vanadium



3/8"

	A mm	D mm	L mm	Repair set	g
918.3895	16.0	30.0	275.0	914.3897	230

3/8“ SET ASSORTMENTS

CHROME*plus*® spark plug service set

- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

3/8"

			kg
918.0607	7 pcs	CHROME*plus*® spark plug service set	1.44
4 x		14 - 16 - 18 - 21 mm	
1 x		150 mm	
1 x		150 mm	
1 x		270 mm	

Socket set

- 12 point
- FlankTraction Profil
- Matt finis
- Chrome vanadium
- In durable plastic case

3/8"

			kg
911.3995	22 pcs	Socket set	2.00
15 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 21 - 22 - 24 mm	
1 x		3/8“	
2 x		75 - 150 mm	
1 x		3/8“	
2 x		16 - 21 mm	
1 x		1/2“F x 3/8“M	

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

3/8"

			kg
911.0626	26 pcs	Socket set	2.70
18 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 mm	
2 x		16 - 21 mm	
3 x		50 - 75 - 200 mm	
1 x		3/8“	
1 x		3/8“	
1 x		200 mm	

CHROME*plus*® socket set

- 6 point
- FlankTraction Profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

3/8"

			kg
918.0627	27 pcs	CHROME*plus*® socket set	2.40
13 x		8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 22 - 24 mm
10 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
2 x		75 - 150 mm
1 x		3/8“
1 x		195 mm

Socket set

- 6 point
- FlankTraction Profil
- Matt finis
- Chrome vanadium
- In durable steel case

3/8"

			kg
917.4031	30 pcs	Socket set	2.88
16 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 19 - 21 - 22 - 24 mm
7 x		8 - 10 - 11 - 12 - 13 - 15 - 17 mm
2 x		16 - 21 mm
2 x		75 - 200 mm
1 x		3/8“
1 x		3/8“
1 x		200 mm

CHROME*plus*® Socket set

- Imperial sizes
- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

3/8"

			kg
918.0846	46 pcs	CHROME*plus*® Socket set	1.13
11 x		1/4“ - 5/16“ - 3/8“ - 7/16“ - 1/2“ - 9/16“ 5/8“ - 11/16“ - 3/4“ - 13/16“ - 7/8“
6 x		3/8“ - 7/16“ - 1/2“ - 9/16“ - 11/16“ 3/4“
2 x		5/8“ - 13/16“
7 x		1/8“ - 5/32“ - 3/16“ - 7/32“ - 1/4“ 5/16“ - 3/8“
10 x		T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55
5 x		M4 - M5 - M6 - M8 - M10
2 x		75 - 150 mm
1 x		3/8“
1 x		160 mm
1 x		195 mm

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

3/8"

			kg
911.0661	61 pcs	Socket set	4.20
18 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 24 mm
10 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 17 - 19 mm
3 x		5,5 - 7 - 8 mm
3 x		PH1 - PH2 - PH3
3 x		PZ1 - PZ2 - PZ3
7 x		3 - 4 - 5 - 6 - 7 - 8 - 10 mm
10 x		T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55
2 x		16 - 21 mm
2 x		75 - 250 mm
1 x		3/8“
1 x		3/8“
1 x		200 mm

CHROME*plus*® socket set

- 6 point
- FlankTraction Profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

3/8"

			kg
918.0661	61 pcs	CHROME*plus*® socket set	3.80
18 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 mm
10 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 17 19 mm
2 x		16 - 21 mm
3 x		5,5 - 7 - 8 mm
3 x		PH1 - PH2 - PH3
3 x		PZ1 - PZ2 - PZ3
7 x		3 - 4 - 5 - 6 - 7 - 8 - 10 mm
10 x		T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55
2 x		75 - 150 mm
1 x		3/8“
1 x		3/8“
1 x		200 mm

3/8“ SET ASSORTMENTS

TX Socket and bit set

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.4301-1	30 pcs	TX Socket and bit set	1.45
5 x		1/4“: E4 - E5 - E6 - E7 - E8	
4 x		3/8“: E10 - E11 - E12 - E14	
5 x		1/2“: E16 - E18 - E20 - E22 - E24	
2 x		3/8“ x 10 mm - 1/2“ x 10mm	
7 x		30 mm (T20 - T25 - T30 - T40 - T45 T50 - T55)	
7 x		75 mm (T20 - T25 - T30 - T40 - T45 T50 - T55)	

TX Bit socket set for TX tamperproof screws

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.4301-2	30 pcs	TX Bit socket set for TX tamper-proof screws	1.45
5 x		1/4“: E4 - E5 - E6 - E7 - E8	
4 x		3/8“: E10 - E11 - E12 - E14	
5 x		1/2“: E16 - E18 - E20 - E22 - E24	
2 x		3/8“ x 10 mm - 1/2“ x 10mm	
7 x		30 mm (TB20 - TB25 - TB30 - TB40 TB45 - TB50 - TB55)	
7 x		75 mm (TB20 - TB25 - TB30 - TB40 TB45 - TB50 - TB55)	

TX Socket set

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.4302	31 pcs	TX Socket set	1.40
6 x		1/4“: T10 - T15 - T20 - T25 - T27 - T30	
3 x		5/16“: T40 - T45 - T50	
3 x		1/4“: TB30 x 30 mm - TB25 x 75 mm - TB30 x 75 mm	
2 x		1/2“: T55 - T60	
4 x		1/4“: E5 - E6 - E7 - E8	
3 x		3/8“: E10 - E12 - E14	
3 x		1/2“: E16 - E18 - E20	
3 x		1/4“ x 1/4“ - 3/8“ x 5/16“ - 1/2“ x 5/16“	
4 x		E6 x E8 - E7 x E11 - E10 x E12 E14 x E18 -	

TX Socket and bit set

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.4305	57 pcs	TX Socket and bit set	2.00
2 x		3/8“ x 10mm - 1/2“ x 1/4“	
12 x		1/4“: E4 - E5 - E6 - E7 - E8; 3/8“: E10 - E11 - E12 - E14;1/2“: E16 - E18 - E20	
7 x		4 - 5 - 6 - 7 - 8 - 10 - 12 mm	
9 x		TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50 - TB55 - TB60	
5 x		M5 - M6 - M8 - M10 - M12	
2 x		8 - 10 mm	
2 x		PH2 - PH3	
5 x		5 - 6 - 7 - 8 - 10 mm	
9 x		T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60	
4 x		M6 - M8 - M10 - M12	

CHROME*plus*® Socket set

- Imperial sizes
- 6 point
- FlankTraction Profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/4" 3/8"

			kg
918.0699	99 pcs	CHROME*plus*® Socket set	6.30
12 x		1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm	
10 x		1/4“: 5/32“ - 3/16“ - 7/32“ - 1/4“ - 9/32“ 5/16“ - 11/32“ - 3/8“ - 7/16“ - 1/2“	
16 x		3/8“: 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 24 mm	
5 x		3/8“: 10 - 12 - 13 - 17 - 19 mm	
11 x		3/8“: 1/4“ - 5/16“ - 3/8“ - 7/16“ - 1/2“ 9/16“ - 5/8“ - 11/16“ - 3/4“ - 13/16“ 7/8“	
5 x		3/8“: 3/8“ - 7/16“ - 1/2“ - 9/16“ - 5/8“	
3 x		3/8“: 16 - 18 - 21 mm	
3 x		3/8“: 5,5 - 6,5 - 8 mm	
2 x		3/8“: PH1 - PH2	
2 x		3/8“: PZ1 - PZ2	
5 x		3/8“: 5 - 6 - 7 - 8 - 10 mm	
5 x		3/8“: 5/32“ - 3/16“ - 1/4“ - 5/16“ - 3/8“	
8 x		3/8“: T10 - T15 - T20 - T25 - T27 - T30 T40 - T45	
5 x		3/8“: M4 - M5 - M6 - M8 - M10	
1 x		1/4“	
1 x		1/4“: 100 mm	
1 x		1/4“	
2 x		3/8“: 75 - 150 mm	
1 x		3/8“	
1 x		3/8“: 200 mm	

CHROME*plus*® Universal tool kit set

- 3 drawers and upper insert storage
- 6 point
- FlankTraction Profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable steel tool chest

1/4" 3/8"

			kg
918.0250	99 pcs	CHROME*plus*® Universal tool kit set	22.00

13 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm
3 x		1/4": 8 - 10 - 13 mm
1 x		1/4": 50 mm
1 x		1/4"
1 x		1/4": 110 mm
1 x		1/4": 140 mm
3 x		1/4": 4 - 5,5 - 7 mm
2 x		1/4": PH1 - PH2
2 x		1/4": PZ1 - PZ2
6 x		1/4": 3 - 4 - 5 - 6 - 7 - 8 mm
7 x		1/4": T10 - T15 - T20 - T25 - T27 T30 - T40
12 x		3/8": 8 - 10 - 12 - 13 - 14 - 15 - 17 - 18 - 19 - 20 - 22 - 24 mm
2 x		3/8": 17 - 19 mm
2 x		3/8": 16 - 21 mm
2 x		3/8": 75 - 150 mm
1 x		3/8": F1/4" x M 3/8"
1 x		3/8"
1 x		3/8": 200 mm
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm
6 x		6 x 38 mm - 3 x 75 mm - 4 x 100 mm 5,5 x 100 mm - 6,5 x 125 mm - 8 x 150 mm
4 x		PH2 x 38 mm - PH1 x 75 mm PH2 x 100 mm - PH3 x 150 mm
1 x		160 mm
1 x		180 mm
1 x		200 mm
1 x		10"
1 x		250 mm
1 x		300 g

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
918.0724	124 pcs	CHROME*plus*® Socket set	9.50

10 x		1/4": 4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 mm
6 x		1/4": 5 - 6 - 7 - 8 - 9 - 10 mm
11 x		3/8": 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm
6 x		3/8": 10 - 11 - 12 - 13 - 14 - 15 mm
8 x		3/8": E8 - E10 - E11 - E12 - E14 - E16 E18 - E20
8 x		1/2": 20 - 21 - 22 - 24 - 27 - 30 - 32 34 mm
6 x		1/2": 10 - 12 - 13 - 14 - 17 - 19 mm
2 x		1/2": E22 - E24
2 x		1/2": 16 - 21 mm
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm
2 x		3/8": 4 - 5,5 mm
3 x		3/8": PH1 - PH2 - PH3
3 x		3/8": PZ1 - PZ2 - PZ3
5 x		3/8": 3 - 4 - 5 - 6 - 8 mm
5 x		3/8": T20 - T30 - T40 - T45 - T50
4 x		3/8": M4 - M5 - M6 - M8
7 x		1/4": T10 - T15 - T20 - T25 - T27 T30 -T40
1 x		1/4"
1 x		1/4"
1 x		1/4": 100 mm
2 x		3/8": 75 - 150 mm
2 x		1/2": 125 - 250 mm
3 x		1/4" - 3/8" - 1/2"
2 x		1/2": F1/2" x M 3/8"
3 x		1/4" - 3/8" - 1/2"

CHROME*plus*® universal tool kit set

- 6 point
- FlankTraction Profil
- Removeable plastic storage trays
- Chrome plated and mirror polished
- Chrome vanadium
- Telescopic carrying handle
- In a classy aluminium trolley

3/8"

			kg
918.0772	172 pcs	CHROME*plus*® universal tool kit set	19.00

16 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 20 - 21 - 22 - 24 mm
2 x		16 - 21 mm
3 x		5,5 - 6,5 - 8 mm
4 x		M4 - M5 - M6 - M8 - M10
5 x		5 - 6 - 7 - 8 - 10 mm
8 x		T10 - T15 - T20 - T25 - T27 - T30 T40 - T45
2 x		PH1 - PH2
2 x		PZ1 - PZ2
1 x		
1 x		
1 x		200 mm
1 x		3/8"
2 x		75 - 150 mm
1 x		250 mm
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm
4 x		6 x 38 mm - 3 x 75 mm 6,5 x 125 mm - 10 x 250 mm
3 x		PH 1 x 75 mm - PH 2 x 100 mm PH 2 x 38 mm
2 x		PZ 1 x 75 mm - PZ 2 x 38 mm
1 x		160 mm
1 x		165 mm
1 x		180 mm
1 x		250 mm
1 x		
1 x		
1 x		10"
1 x		250 mm
1 x		140 mm
1 x		300 g
1 x		
1 x		5 mm

1 x		12 mm
1 x		
1 x		
1 x		100 mm
1 x		max. 2 kg
1 x		102 mm
1 x		
1 x		
1 x		
1 x		
1 x		12,5 x 200 mm

Socket set

- 6 point
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
917.0779	179 pcs	Socket set	9.00

13 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm
7 x		1/4": 4 - 5 - 6 - 7 - 8 - 9 - 10 mm
10 x		3/8": 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm
6 x		3/8": 10 - 11 - 12 - 13 - 14 - 15 mm
17 x		1/2": 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 30 - 32 mm
5 x		1/2": 16 - 17 - 18 - 19 - 22 mm
1 x		3/8": 18 mm
2 x		1/2": 16 - 21 mm
4 x		1/4": 4 - 5,5 - 6,5 - 7 mm
3 x		1/4": PH0 - PH1 - PH2
3 x		1/4": PZ0 - PZ1 - PZ2
4 x		1/4": 3 - 4 - 5 - 6 mm
8 x		1/4": T8 - T9 - T10 - T15 - T20 - T25 - T27 T30
8 x		1/4": TB8 - TB9 - TB10 - TB15 - TB20 TB25 TB27 - TB30
5 x		1/4": E4 - E5 - E6 - E7 - E8
6 x		3/8": E10 - E11 - E12 - E14 - E16 - E18
2 x		1/2": E20 - E24
11 x		1/4": T5 - T6 - T7 - T8 - T9 - T10 - T15 T20 - T25 - T27 - T30
1 x		1/4": TB7
3 x		1/4": M5 - M6 - M8
5 x		1/4": M5 - M6 - M7 - M8 - M9
8 x		1/4": TS10 - TS15 - TS20 - TS25 TS27 - TS30 - TS40 - TS45
3 x		5/16": 8 - 10 - 12 mm
5 x		5/16": 7 - 8 - 10 - 12 - 14 mm
2 x		5/16": PH3 - PH4
2 x		5/16": PZ3 - PZ4
6 x		5/16": T40 - T45 - T50 - T55 - T60 - T70
6 x		5/16": TB40 - TB45 - TB50 - TB55 TB60 - TB70

7 x		1,3 - 1,5 - 2 - 2,5 - 3 - 4 - 5 mm
1 x		1/4": 150 mm
1 x		1/4": 110 mm
2 x		1/4": 50 - 100 mm
1 x		3/8": 150 mm
2 x		1/2": 125 - 250 mm
3 x		1/4" - 3/8" - 1/2
1 x		1/4" x 1/4"
1 x		3/8" x 5/16"
1 x		1/2" x 5/16"
1 x		3/8"Fx1/2"M
3 x		1/4" - 3/8" - 1/2

3/8" POINT OF SALE DISPLAYS

Socket display

- 6-point
- FlankTraction-Profil
- Matt finis
- Chrome vanadium
- In point of sale display

3/8"

			kg
911.0340	169 pcs	Socket display	10.50

169 x		16 x (8 mm) 13 x (9 - 10 - 11 - 12 - 13 mm) 11 x (14 mm) 10 x (15 - 16 mm) 9 x (17 - 18 mm) 8 x (19 - 20 - 21 - 22 mm) 7 x (24 mm)

CHROME*plus*® socket display

- 6 point
- FlankTraction Profil
- Chrome plated and mirror polished
- Chrome vanadium
- In point of sale display

3/8"

			kg
918.0340	169 pcs	CHROME*plus*® socket display	10.50

169 x		16 x (8 mm) 13 x (9 - 10 - 11 - 12 - 13 mm) 11 x (14 mm) 10 x (15 - 16 mm) 9 x (17 - 18 mm) 8 x (19 - 20 - 21 - 22 mm) 7 x (24 mm)

Bit socket display

- Matt finis
- Chrome vanadium

3/8"

			kg
911.0350	229 pcs	Bit socket display	13.50

39 x		13 x (5,5 - 6,5 - 8 mm)
39 x		13 x (PH1 - PH2 - PH3)
39 x		13 x (PZ1 - PZ2 - PZ3)
91 x		13 x (TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40)
20 x		10 x (75 mm) 10 x (150 mm)

CHROME*plus*® Bit socket display

- Chrome plated and mirror polished
- Chrome vanadium

3/8"

			kg
918.0350	229 pcs	CHROME*plus*® Bit socket display	13.50

39 x		13 x (5,5 - 6,5 - 8 mm)
39 x		13 x (PH1 - PH2 - PH3)
39 x		13 x (PZ1 - PZ2 - PZ3)
91 x		13 x (TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40)
20 x		10 x (75 mm) 10 x (150 mm)

1/2“ SOCKETS

CLASSIC Hexagonal socket

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium



1/2"

	mm		D1 mm	D2 mm	L mm	T mm	g
917.1340	8,0		13.0	22.0	38.0	14.0	45
917.1341	9,0		14.0	22.0	38.0	14.0	48
917.1210	10,0		15.0	22.0	38.0	14.0	48
917.1211	11,0		16.0	22.0	38.0	14.0	51
917.1212	12,0		18.0	22.0	38.0	14.0	50
917.1213	13,0		19.0	22.0	38.0	14.0	54
917.1214	14,0		20.0	22.0	38.0	14.0	54
917.1215	15,0		21.0	22.0	38.0	14.0	51
917.1216	16,0		22.0	21.0	38.0	14.0	48
917.1217	17,0		24.0	22.0	38.0	14.0	63
917.1218	18,0		25.0	23.0	38.0	14.0	63
917.1219	19,0		26.0	23.0	38.0	17.0	63
917.1220	20,0		28.0	24.0	38.0	17.0	85
917.1221	21,0		28.0	25.0	38.0	17.0	77
917.1222	22,0		30.0	26.0	38.0	17.0	90
917.1223	23,0		32.0	28.0	38.0	17.0	114
917.1224	24,0		32.0	28.0	38.0	17.0	104
917.1342	25,0		34.0	30.0	42.0	20.0	130
917.1343	26,0		36.0	30.0	42.0	20.0	162
917.1227	27,0		36.0	30.0	42.0	20.0	150
917.1344	28,0		38.0	32.0	42.0	20.0	167
917.1345	29,0		38.0	32.0	42.0	20.0	185
917.1230	30,0		40.0	34.0	44.0	22.0	192
917.1225	31,0		42.0	36.0	44.0	22.0	254
917.1232	32,0		42.0	36.0	44.0	22.0	215
917.1346	34,0		44.0	36.0	45.0	22.0	177
917.1226	33,0		44.0	36.0	44.0	22.0	531
917.1347	36,0		48.0	40.0	45.0	22.0	270
917.1228		5/16”	13.0	22.0	38.0	14.0	45
917.1229		11/32”	14.0	22.0	38.0	14.0	48
917.1348		3/8”	15.0	22.0	38.0	14.0	50
917.1231		13/32””	15.0	22.0	38.0	14.0	50
917.1349		7/16”	17.0	22.0	38.0	14.0	51
917.1350		1/2”	19.0	22.0	38.0	14.0	54
917.1351		9/16”	20.0	22.0	38.0	14.0	54
917.1352		19/32”	22.0	20.0	38.0	14.0	51
917.1353		5/8”	22.0	21.0	38.0	14.0	48
917.1354		11/16”	24.0	22.0	38.0	14.0	63
917.1355		3/4”	26.0	23.0	38.0	15.0	63
917.1233		25/32”	26.0	23.0	38.0	17.0	70
917.1356		13/16”	28.0	26.0	38.0	16.0	77
917.1357		7/8”	30.0	26.0	38.0	16.0	90
917.1358		15/16”	32.0	28.0	38.0	17.0	104
917.1359		1”	34.0	30.0	42.0	20.0	123
917.1360		1.1/16”	36.0	31.0	42.0	22.0	123
917.1329		1.1/8”	38.0	33.0	43.0	22.0	268
917.1234		1.3/16”	40.0	34.0	44.0	22.0	192
917.1330		1.1/4”	42.0	36.0	44.0	22.0	371

CLASSIC Hexagonal socket set

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/2"

			kg
917.0635	10 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.72

CLASSIC Hexagonal socket, deep

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium



1/2"

	mm		D1 mm	D2 mm	L mm	T mm	g
917.1240	10,0		16.0	16.0	76.0	14.0	110
917.1241	11,0		17.0	17.0	76.0	13.0	110
917.1242	12,0		18.0	18.0	76.0	13.0	110
917.1243	13,0		20.0	19.0	76.0	13.0	120
917.1244	14,0		21.0	21.0	76.0	13.0	120
917.1245	15,0		22.0	22.0	76.0	15.0	140
917.1246	16,0		23.0	24.0	76.0	15.0	140
917.1247	17,0		24.0	24.0	76.0	15.0	140
917.1248	18,0		26.0	26.0	76.0	17.0	150
917.1249	19,0		27.0	27.0	76.0	17.0	150
917.1258	20,0		27.0	28.0	76.0	17.0	150
917.1259	21,0		27.0	28.0	76.0	19.0	190
917.1252	22,0		28.0	30.0	76.0	19.0	200
917.1257	24,0		30.0	32.0	76.0	19.0	250
917.1254	27,0		34.0	36.0	76.0	19.0	280
917.1255	30,0		35.0	37.0	76.0	21.0	290
917.1256	32,0		36.0	38.0	76.0	23.0	310
917.1235	34,0		45.0	36.5	76.0	37.0	430
917.1201		3/8“	15.0	16.0	76.0	15.0	90
917.1202		7/16“	17.0	17.0	76.0	13.0	100
917.1203		1/2“	19.0	19.0	76.0	13.0	120
917.1205		9/16“	21.0	21.0	76.0	13.0	130
917.1236		5/8“	22.5	24.0	76.0	16.0	120
917.1206		11/16“	25.0	24.0	76.0	17.0	150
917.1207		3/4“	27.0	40.0	76.0	17.0	180
917.1237		13/16“	28.5	28.5	76.0	22.0	195
917.1208		7/8“	31.0	30.0	76.0	19.0	240
917.1204		15/16“	33.0	32.0	76.0	19.0	250
917.1209		1“	35.0	34.0	76.0	19.0	270

CLASSIC Hexagonal socket set, deep

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail



1/2"

			kg
917.0615	10 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	1.50

CHROME*plus*® Hexagonal socket

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

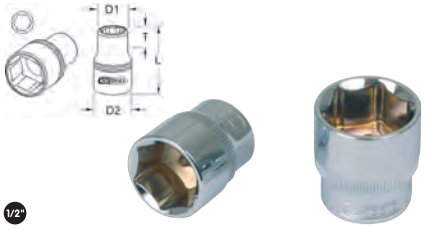

1/2"

	mm		D1 mm	D2 mm	L mm	T mm	g
918.1208	8,0		13.0	23.0	38.0	7.0	45
918.1209	9,0		14.0	23.0	38.0	8.0	48
918.1210	10,0		16.0	23.0	38.0	14.0	50
918.1211	11,0		17.0	23.0	38.0	13.0	53
918.1212	12,0		18.0	23.0	38.0	13.0	55
918.1213	13,0		19.0	23.0	38.0	13.0	60
918.1214	14,0		21.0	23.0	38.0	13.0	62
918.1215	15,0		22.0	24.0	40.0	15.0	65
918.1216	16,0		23.0	24.0	40.0	15.0	68
918.1217	17,0		24.0	23.0	40.0	15.0	70
918.1218	18,0		26.0	23.0	40.0	17.0	72
918.1219	19,0		27.0	24.0	40.0	17.0	80
918.1220	20,0		28.0	26.0	40.0	17.0	85
918.1221	21,0		30.0	26.0	42.0	19.0	95
918.1222	22,0		31.0	26.0	42.0	19.0	100
918.1223	23,0		32.0	28.0	42.0	19.0	105
918.1224	24,0		33.0	28.0	42.0	19.0	110
918.1225	25,0		34.0	29.0	42.0	19.0	120
918.1226	26,0		36.0	29.0	42.0	19.0	130
918.1227	27,0		37.0	30.0	42.0	19.0	150
918.1228	28,0		38.0	31.0	43.0	20.0	165
918.1229	29,0		39.0	31.0	43.0	20.0	180
918.1230	30,0		41.0	33.0	43.0	21.0	200
918.1231	31,0		42.5	28.0	47.0	22.0	210
918.1232	32,0		53.0	35.0	45.0	23.0	210
918.1233	33,0		44.0	36.0	45.0	23.0	210
918.1234	34,0		46.0	37.0	45.0	23.0	260
918.1236	36,0		48.0	38.0	45.0	23.0	260
918.1235		5/16"	13.0	23.0	38.0	8.0	48
918.1237		11/32"	14.0	23.0	38.0	15.0	58
918.1301		3/8"	15.0	16.0	16.0	9.0	50
918.1238		13/32""	16.0	23.0	38.0	14.0	50
918.1302		7/16"	16.0	17.0	17.0	9.0	50
918.1303		1/2"	19.0	19.0	19.0	13.0	60
918.1304		9/16"	20.0	21.0	21.0	13.0	60
918.1305		19/32"	22.0	22.0	22.0	14.0	60
918.1306		5/8"	24.0	24.0	24.0	14.0	60
918.1307		11/16"	24.0	24.0	24.0	16.0	70
918.1308		3/4"	27.0	27.0	27.0	16.0	90
918.1239		25/32"	28.0	25.0	40.0	17.0	85
918.1309		13/16"	28.0	28.0	28.0	17.0	90
918.1310		7/8"	30.0	30.0	30.0	18.0	120
918.1311		15/16"	32.0	32.0	32.0	19.0	130
918.1312		1"	34.0	34.0	34.0	19.0	150
918.1313		1.1/16"	36.0	36.0	36.0	20.0	170
918.1314		1.1/8"	38.0	38.0	38.0	20.0	170
918.1255		1.3/16"	41.0	33.0	43.0	21.0	200
918.1315		1.1/4"	40.0	42.0	42.0	21.0	240

CHROME*plus*® Hexagonal socket set

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
918.0650	10 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.72	

CHROME*plus*® Hexagonal socket, deep

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	mm		D1 mm	D2 mm	L mm	T mm	g
918.1240	10,0		16.0	16.0	76.0	13.0	110
918.1241	11,0		17.0	17.0	76.0	13.0	110
918.1242	12,0		18.0	18.0	76.0	13.0	110
918.1243	13,0		19.0	19.0	76.0	13.0	120
918.1244	14,0		21.0	21.0	76.0	13.0	120
918.1245	15,0		22.0	22.0	76.0	15.0	140
918.1246	16,0		23.0	24.0	76.0	15.0	140
918.1247	17,0		24.0	24.0	76.0	15.0	140
918.1248	18,0		26.0	26.0	76.0	17.0	150
918.1249	19,0		27.0	27.0	76.0	17.0	150
918.1260	20,0		27.0	28.0	76.0	17.0	150
918.1258	21,0		27.0	28.0	76.0	19.0	190
918.1252	22,0		28.0	30.0	76.0	19.0	200
918.1254	24,0		30.0	32.0	76.0	19.0	250
918.1257	27,0		34.0	36.0	76.0	19.0	280
918.1272	30,0		35.0	37.0	76.0	21.0	300
918.1273	32,0		36.0	38.0	76.0	23.0	310
918.1256	34,0		45.0	36.5	76.0	37.0	430
918.1318		3/8"	15.0	16.0	76.0	13.0	90
918.1319		7/16"	17.0	17.0	76.0	13.0	100
918.1320		1/2"	19.0	19.0	76.0	13.0	120
918.1321		9/16"	21.0	21.0	76.0	13.0	130
918.1269		5/8"	22.5	24.0	76.0	16.0	120
918.1322		11/16"	25.0	24.0	76.0	17.0	150
918.1323		3/4"	30.0	27.0	76.0	17.0	180
918.1283		13/16"	28.5	28.5	76.0	22.0	195
918.1324		7/8"	31.0	30.0	76.0	19.0	240
918.1325		15/16"	33.0	32.0	76.0	19.0	250
918.1326		1"	35.0	34.0	76.0	19.0	270

CHROME*plus*® Hexagonal socket set, deep

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
918.0612	10 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	1.50	

12 Point socket

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725-1
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

	mm		D1 mm	D2 mm	L mm	T mm	g
917.1361	8.0		13.0	23.0	38.0	7.0	45
917.1362	9.0		14.0	23.0	38.0	8.0	48
911.1570	10.0		16.0	23.0	38.0	14.0	50
911.1571	11.0		17.0	23.0	38.0	13.0	53
911.1572	12.0		18.0	23.0	38.0	13.0	55
911.1573	13.0		19.0	23.0	38.0	13.0	60
911.1574	14.0		21.0	23.0	38.0	13.0	62
911.1575	15.0		22.0	24.0	40.0	15.0	65
911.1576	16.0		23.0	24.0	40.0	15.0	68
911.1577	17.0		24.0	23.0	40.0	15.0	70
911.1578	18.0		26.0	23.0	40.0	17.0	72
911.1579	19.0		27.0	24.0	40.0	17.0	80
911.1580	20.0		28.0	26.0	42.0	17.0	85
911.1581	21.0		29.0	26.0	42.0	19.0	95
911.1582	22.0		31.0	26.0	42.0	19.0	100
911.1583	23.0		32.0	28.0	42.0	19.0	105
911.1584	24.0		33.0	28.0	42.0	19.0	110
917.1363	25.0		34.0	29.0	42.0	19.0	120
917.1364	26.0		36.0	29.0	42.0	19.0	130
911.1585	27.0		37.0	30.0	42.0	19.0	150
917.1365	28.0		38.0	31.0	43.0	20.0	165
917.1366	29.0		39.0	31.0	43.0	20.0	180
911.1586	30.0		41.0	33.0	43.0	21.0	200
917.1238	31.0		42.5	28.0	47.0	22.0	210
911.1587	32.0		43.0	35.0	45.0	23.0	210
917.1367	33.0		44.0	36.0	45.0	23.0	210
917.1239	34.0		46.0	37.0	45.0	23.0	260
911.1589	36.0		40.0	48.0	45.0	24.0	368
917.1368		5/16"	13.0	23.0	38.0	7.0	45
917.1369		11/32"	14.0	23.0	38.0	8.0	48
917.1370		3/8"	15.0	23.0	38.0	15.0	58
917.1371		13/32"	16.0	23.0	38.0	14.0	50
917.1372		7/16"	17.0	23.0	38.0	13.0	53
917.1373		1/2"	19.0	23.0	38.0	13.0	60
917.1374		9/16"	21.0	23.0	38.0	13.0	62
917.1375		19/32"	22.0	24.0	40.0	15.0	65
917.1376		5/8"	23.0	24.0	40.0	15.0	68
917.1377		11/16"	25.0	23.0	40.0	17.0	70
917.1378		3/4"	27.0	24.0	40.0	17.0	80
917.1379		25/32"	28.0	25.0	40.0	17.0	85
917.1380		13/16"	29.0	26.0	42.0	19.0	95
917.1381		7/8"	31.0	27.0	42.0	19.0	100
917.1382		15/16"	33.0	28.0	42.0	19.0	110
917.1383		1"	35.0	29.0	42.0	19.0	123
917.1384		1. 1/16"	37.0	30.0	42.0	19.0	150
917.1385		1. 1/8"	39.0	31.0	43.0	20.0	180
917.1386		1. 3/16"	41.0	33.0	43.0	21.0	200
917.1387		1. 1/4"	43.0	35.0	45.0	23.0	210

12 Point socket set

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725-1
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Short execution
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
911.1285	15 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 23 - 24 mm	1.20	

12 Point socket, deep

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725-1
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

	○ mm	○	D1 mm	D2 mm	L mm	T mm	g
917.1261	10.0		16.0	23.0	77.0	12.0	88
917.1285	11.0		17.0	17.0	76.0	13.0	110
917.1262	12.0		18.0	23.0	77.0	14.0	102
917.1263	13.0		19.0	23.0	77.0	16.0	109
917.1264	14.0		21.0	23.0	77.0	17.0	112
917.1265	15.0		22.0	23.0	77.0	17.0	105
917.1266	16.0		23.0	24.0	77.0	18.0	98
917.1267	17.0		24.0	24.0	77.0	18.0	140
917.1268	18.0		26.0	25.0	82.0	20.0	145
917.1269	19.0		27.0	26.0	82.0	22.0	139
917.1286	20.0		27.0	28.0	76.0	17.0	150
917.1270	21.0		29.0	29.0	82.0	24.0	156
917.1271	22.0		31.0	29.0	82.0	24.0	200
917.1272	24.0		33.0	29.0	82.0	26.0	250
917.1273	27.0		37.0	30.0	82.0	30.0	268
917.1274	30.0		41.0	33.0	82.0	33.0	333
917.1275	32.0		43.0	35.0	82.0	36.0	371
917.1276	34.0		46.0	37.0	82.0	37.0	455
917.1287		3/8"	15.0	16.0	76.0	13.0	90
917.1288		7/16"	17.0	17.0	76.0	13.0	100
917.1277		1/2"	19.0	23.0	77.0	16.0	109
917.1278		9/16"	21.0	23.0	77.0	17.0	112
917.1279		5/8"	23.0	24.0	77.0	18.0	94
917.1280		11/16"	25.0	25.0	77.0	18.0	122
917.1281		3/4"	27.0	26.0	82.0	22.0	139
917.1282		13/16"	29.0	29.0	82.0	22.0	156
917.1283		7/8"	31.0	29.0	82.0	24.0	179
917.1284		15/16"	33.0	29.0	82.0	26.0	250
917.1289		1"	35.0	34.0	76.0	19.0	270

12 Point socket set, deep

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725-1
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
917.1750	10 pcs	10 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 mm	1.50	

CHROME*plus*® 12 Point socket

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725-1
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

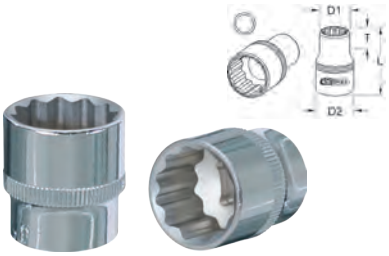

1/2"

	○ mm	○	D1 mm	D2 mm	L mm	T mm	g
918.1316	8.0		13.0	23.0	38.0	7.0	45
918.1327	9.0		14.0	23.0	38.0	8.0	48
918.1328	10.0		16.0	23.0	38.0	14.0	50
918.1329	11.0		17.0	23.0	38.0	13.0	53
918.1331	12.0		18.0	23.0	38.0	13.0	55
918.1332	13.0		19.0	23.0	38.0	13.0	60
918.1333	14.0		21.0	23.0	38.0	13.0	62
918.1334	15.0		22.0	24.0	40.0	15.0	65
918.1337	16.0		23.0	24.0	40.0	15.0	68
918.1338	17.0		24.0	23.0	40.0	15.0	70
918.1339	18.0		26.0	23.0	40.0	17.0	72
918.1341	19.0		27.0	24.0	40.0	17.0	80
918.1342	20.0		28.0	26.0	42.0	17.0	85
918.1343	21.0		29.0	26.0	42.0	19.0	95
918.1344	22.0		31.0	26.0	42.0	19.0	100
918.1345	23.0		32.0	28.0	42.0	19.0	105
918.1346	24.0		33.0	28.0	42.0	19.0	110
918.1347	25.0		34.0	29.0	42.0	19.0	120
918.1348	26.0		36.0	29.0	42.0	19.0	130
918.1351	27.0		37.0	30.0	42.0	19.0	150
918.1352	28.0		38.0	31.0	43.0	20.0	165
918.1353	29.0		39.0	31.0	43.0	20.0	180
918.1354	30.0		41.0	33.0	43.0	21.0	200
918.1355	31.0		42.5	28.0	47.0	22.0	210
918.1356	32.0		43.0	35.0	45.0	23.0	210
918.1357	33.0		44.5	45.0	47.0	22.0	215
918.1359	34.0		46.0	37.0	45.0	23.0	260
918.1361	36.0		48.0	38.0	45.0	23.0	260
918.1362		5/16"	13.0	23.0	38.0	7.0	45
918.1363		11/32"	14.0	23.0	38.0	8.0	48
918.1364		3/8"	15.0	23.0	38.0	15.0	58
918.1366		13/32"	16.0	23.0	38.0	14.0	50
918.1371		7/16"	17.0	23.0	38.0	13.0	53
918.1373		1/2"	19.0	23.0	38.0	13.0	60
918.1375		9/16"	21.0	23.0	38.0	13.0	62
918.1376		19/32"	22.0	24.0	40.0	15.0	65
918.1378		5/8"	23.0	24.0	40.0	15.0	68
918.1379		11/16"	25.0	23.0	40.0	17.0	70
918.1381		3/4"	27.0	24.0	40.0	17.0	80
918.1383		25/32"	28.0	25.0	40.0	17.0	85
918.1384		13/16"	29.0	26.0	42.0	19.0	95
918.1387		7/8"	31.0	27.0	42.0	19.0	100
918.1388		15/16"	33.0	28.0	42.0	19.0	110
918.1389		1"	35.0	29.0	42.0	19.0	123
918.1394		1.1/16"	37.0	30.0	42.0	19.0	150
918.1396		1.1/8"	39.0	31.0	43.0	20.0	180
918.1397		1.3/16"	41.0	33.0	43.0	21.0	200
918.1398		1.1/4"	43.0	35.0	45.0	23.0	210

CHROME*plus*® 12 Point socket set

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725-1
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
918.0655	10 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.72	

CHROME*plus*® 12 Point socket, deep

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725-1
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	○ mm	○	D1 mm	D2 mm	L mm	T mm	g
918.1666	10.0		16.0	16.0	76.0	13.0	110
918.1668	11.0		17.0	17.0	76.0	13.0	110
918.1678	12.0		18.0	18.0	76.0	13.0	110
918.1679	13.0		19.0	19.0	76.0	13.0	120
918.1683	14.0		21.0	21.0	76.0	13.0	120
918.1684	15.0		22.0	22.0	76.0	15.0	140
918.1698	16.0		23.0	24.0	76.0	15.0	140
918.1711	17.0		24.0	24.0	76.0	15.0	140
918.1712	18.0		26.0	26.0	76.0	17.0	150
918.1713	19.0		27.0	27.0	76.0	17.0	150
918.1714	20.0		27.0	28.0	76.0	17.0	150
918.1715	21.0		27.0	28.0	76.0	19.0	190
918.1716	22.0		28.0	30.0	76.0	19.0	200
918.1717	24.0		30.0	32.0	76.0	19.0	250
918.1718	27.0		34.0	36.0	76.0	19.0	280
918.1719	30.0		35.0	37.0	76.0	21.0	300
918.1731	32.0		36.0	38.0	76.0	23.0	310
918.1734	34.0		45.0	36.5	76.0	37.0	430
918.1735		3/8"	15.0	16.0	76.0	13.0	90
918.1736		7/16"	17.0	17.0	76.0	13.0	100
918.1737		1/2"	19.0	19.0	76.0	13.0	120
918.1285		9/16"	21.0	21.0	76.0	13.0	109
918.1284		5/8"	22.5	24.0	76.0	16.0	120
918.1286		11/16"	25.0	24.0	76.0	17.0	150
918.1287		3/4"	30.0	27.0	76.0	17.0	180
918.1288		13/16"	28.5	28.5	76.0	22.0	195
918.1289		7/8"	31.0	30.0	76.0	19.0	240
918.1738		15/16"	33.0	32.0	76.0	19.0	212
918.1298		1"	35.0	34.0	76.0	19.0	270

CHROME*plus*® 12 Point socket set, deep

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
918.0660	10 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm	0.74	

TX E Socket

- TX E
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

		L mm	D1 mm	D2 mm	T mm	g	
911.4333	E10	38.0	14.0	23.0	16.0	50	
911.4334	E11	38.0	14.0	23.0	16.0	50	
911.4335	E12	38.0	16.0	23.0	16.0	55	
911.4336	E14	38.0	17.0	23.0	13.0	55	
911.4322	E16	38.0	19.0	23.0	13.0	60	
911.4323	E18	40.0	21.0	25.0	14.0	65	
911.4324	E20	40.0	24.0	25.0	14.0	70	
911.4325	E22	40.0	26.0	25.0	14.0	80	
911.4326	E24	42.0	29.0	26.0	16.0	85	

TX E Socket set

- TX E
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium
- In durable metal case

1/2"

			kg	
911.4410	9 pcs	E10 - E11 - E12 - E14 - E16 - E18 - E20 - E22 - E24	1.00	

CHROME*plus*® TX E Socket

- TX E
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

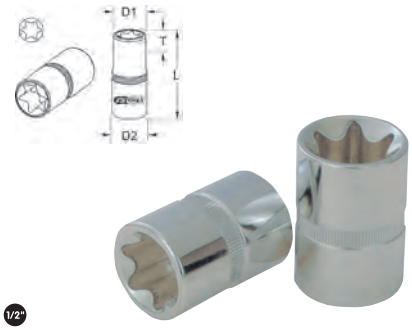

1/2"

		L mm	D1 mm	D2 mm	T mm	g	
918.1276	E10	38.0	14.0	23.0	16.0	50	
918.1733	E11	38.0	14.0	23.0	16.0	50	
918.1278	E12	38.0	16.0	23.0	16.0	55	
918.1277	E14	38.0	17.0	23.0	13.0	55	
918.1280	E16	38.0	19.0	23.0	13.0	60	
918.1281	E18	40.0	21.0	25.0	14.0	65	
918.1282	E20	40.0	24.0	25.0	14.0	70	
918.1294	E22	40.0	26.0	25.0	14.0	80	
918.1295	E24	42.0	29.0	26.0	16.0	85	

CHROME*plus*® TX E Socket set

- TX E
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- In durable metal case

1/2"

			kg	
918.4410	9 pcs	E10 - E11 - E12 - E14 - E16 - E18 - E20 - E22 - E24	1.00	

TX E Socket, deep

- TX E
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

		L mm	D1 mm	D2 mm	T mm	g	
911.4423	E10	78.0	14.0	25.0	8.0	100	
911.4424	E11	78.0	15.0	25.0	12.0	100	
911.4425	E12	78.0	16.0	25.0	12.0	110	
911.4426	E14	78.0	17.0	25.0	13.0	100	
911.4427	E16	78.0	18.0	25.0	14.0	115	
911.4428	E18	78.0	20.0	25.0	16.0	130	
911.4429	E20	78.0	24.0	25.0	17.0	160	
911.4430	E22	78.0	26.0	25.0	17.0	195	
911.4431	E24	78.0	28.0	25.0	18.0	230	

TX E Socket set, deep

- TX E
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium
- In durable plastic case

1/2"

			kg	
911.4420	8 pcs	E10 - E12 - E14 - E16 - E18 - E20 - E22 - E24	1.00	

CHROME*plus*® TX E Socket, deep

- TX E
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

		L mm	D1 mm	D2 mm	T mm	g	
918.1761	E10	78.0	14.0	25.0	8.0	100	
918.1762	E11	78.0	15.0	25.0	12.0	100	
918.1763	E12	78.0	16.0	25.0	12.0	110	
918.1764	E14	78.0	17.0	25.0	13.0	100	
918.1765	E16	78.0	18.0	25.0	14.0	115	
918.1766	E18	78.0	20.0	25.0	16.0	130	
918.1767	E20	78.0	24.0	25.0	17.0	160	
918.1768	E22	78.0	26.0	25.0	17.0	195	
918.1769	E24	78.0	28.0	25.0	18.0	230	

CHROME*plus*® TX E Socket set, deep

- TX E
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/2"

			kg	
918.4420	8 pcs	E10 - E12 - E14 - E16 - E18 - E20 - E22 - E24	1.00	

Socket for spark plugs

- DIN 3124 / ISO 3315
- Internal square to DIN 3120 / ISO 1174 with ball reception
- With rubber stop for holding the sparks plugs
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

	Profile	mm		D1 mm	D2 mm	L mm	T mm	g
911.1590		14,0		22.0	22.0	65.0	16.0	60
911.1205		16,0		22.0	22.0	65.0	26.0	60
911.1512		18,0		26.0	21.0	65.0	23.0	60
911.1206		21,0		28.0	24.0	65.0	26.0	60
911.1513			13/16"	28.0	24.0	65.0	23.0	60
911.1514			5/8"	22.0	22.0	65.0	18.0	60

CHROME*plus*® spark plug-socket

- DIN 3124 / ISO 3315
- Internal square to DIN 3120 / ISO 1174 with ball reception
- With rubber stop for holding the sparks plugs
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	Profile	mm		D1 mm	D2 mm	L mm	T mm	g
918.1390		14,0		22.0	22.0	65.0	16.0	60
918.1205		16,0		22.0	22.0	65.0	26.0	60
918.1207		18,0		26.0	21.0	65.0	23.0	60
918.1206		21,0		28.0	24.0	65.0	26.0	60
918.1391			5/8"	28.0	24.0	65.0	23.0	60
918.1392			13/16"	22.0	22.0	65.0	18.0	60

1/2" BIT SOCKETS

Bit socket for slotted screws

- Slotted
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

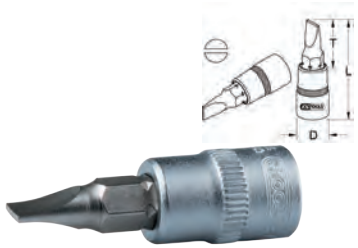

1/2"

	mm	D mm	L mm	T mm	g
917.1391	6.5	23.0	60.0	22.0	50
917.1392	8.0	23.0	60.0	22.0	55
917.1393	10.0	23.0	60.0	22.0	60
917.1394	12.0	23.0	60.0	22.0	65
917.1395	14.0	25.0	60.0	20.0	80
917.1396	16.0	28.0	60.0	20.0	95
917.1311	18.0	27.0	60.0	20.0	110

CHROME*plus*® Bit socket for slotted screws

- Slotted
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	mm	D mm	L mm	T mm	g
918.1790	7.0	23.0	60.0	22.0	50
918.1791	8.0	23.0	60.0	22.0	55
918.1792	10.0	23.0	60.0	22.0	60
918.1793	12.0	23.0	60.0	22.0	65
918.1794	14.0	25.0	60.0	20.0	80
918.1795	16.0	28.0	60.0	20.0	95
918.1796	18.0	27.0	60.0	20.0	110

Bit socket for phillips screws PH

- PH
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

		D mm	L mm	T mm	g
917.1397	PH 1	24.0	55.0	18.0	80
917.1398	PH 2	24.0	55.0	18.0	80
917.1399	PH 3	24.0	55.0	18.0	80
917.1301	PH 4	24.0	55.0	18.0	80

CHROME*plus*® Bit socket for phillips screws PH

- PH
- For Phillips head screw
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

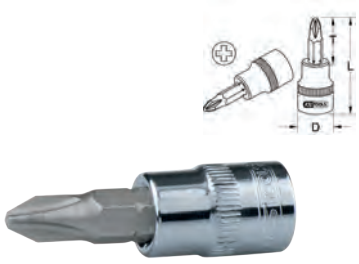

1/2"

		D mm	L mm	T mm	g
918.1635	PH 1	24.0	55.0	18.0	80
918.1636	PH 2	24.0	55.0	18.0	80
918.1637	PH 3	24.0	55.0	18.0	80
918.1739	PH 4	24.0	55.0	18.0	80

Bit socket for phillips screws PH, long

- PH
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

		D mm	L mm	T mm	g
917.1388	PH 1	22.0	110.0	72.0	120
917.1389	PH 2	22.0	110.0	72.0	120
917.1390	PH 3	22.0	110.0	72.0	120
917.1302	PH 4	22.0	110.0	72.0	125

CHROME*plus*® Bit socket for phillips screws PH, long

- PH
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

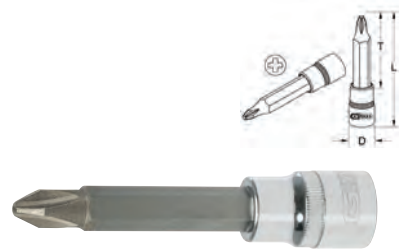

1/2"

		D mm	L mm	T mm	g
918.1685	PH 1	22.0	110.0	72.0	120
918.1686	PH 2	22.0	110.0	72.0	120
918.1687	PH 3	22.0	110.0	72.0	120
918.1756	PH 4	22.0	110.0	72.0	125

Bit socket for phillips screws PZ

- PZ
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

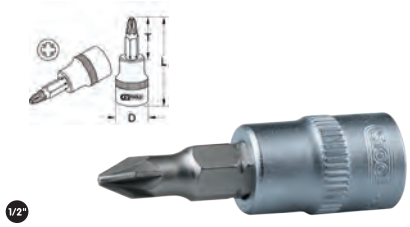

		D mm	L mm	T mm	g
917.1697	PZ 1	24.0	55.0	18.0	80
917.1698	PZ 2	24.0	55.0	18.0	80
917.1699	PZ 3	24.0	55.0	18.0	80
917.1303	PZ 4	24.0	55.0	18.0	85

CHROME*plus*® Bit socket for phillips screws PZ

- PZ
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

		D mm	L mm	T mm	g
918.1680	PZ 1	24.0	55.0	18.0	70
918.1681	PZ 2	24.0	55.0	18.0	70
918.1682	PZ 3	24.0	55.0	18.0	70
918.1757	PZ 4	24.0	55.0	18.0	85

Bit socket for phillips screws PZ, long

- PZ
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- Long execution
- For manual operation
- Matt finis
- Chrome vanadium

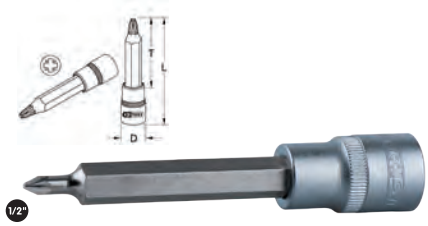

		D mm	L mm	T mm	g
917.1325	PZ 1	21.0	110.0	72.0	110
917.1326	PZ 2	21.0	110.0	72.0	110
917.1327	PZ 3	21.0	110.0	72.0	110
917.1305	PZ 4	21.0	110.0	72.0	110

CHROME*plus*® Bit socket for phillips screws PZ, long

- PZ
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- Long execution
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

		D mm	L mm	T mm	g
918.1688	PZ 1	22.0	110.0	72.0	110
918.1689	PZ 2	22.0	110.0	72.0	110
918.1690	PZ 3	22.0	110.0	72.0	110
918.1758	PZ 4	21.0	110.0	72.0	110

Bit socket for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

	mm		D mm	L mm	T mm	g
911.1304	4,0		22.0	55.0	17.0	90
911.1305	5,0		22.0	55.0	17.0	90
911.1306	6,0		22.0	55.0	17.0	90
911.1307	7,0		22.0	55.0	17.0	90
911.1308	8,0		22.0	55.0	17.0	90
911.1309	9,0		22.0	55.0	17.0	90
911.1310	10,0		22.0	55.0	17.0	90
911.1312	12,0		22.0	55.0	17.0	100
911.1314	14,0		22.0	55.0	17.0	120
911.1317	17,0		22.0	55.0	17.0	150
911.1319	19,0		22.0	55.0	17.0	200
911.1322	22,0		22.0	55.0	17.0	200
911.1324	24,0		22.0	55.0	17.0	200
917.1316		3/16"	22.0	55.0	17.0	60
917.1317		7/32"	22.0	55.0	17.0	70
917.1318		1/4"	22.0	55.0	17.0	70
917.1319		9/32"	22.0	55.0	17.0	70
917.1320		5/16"	22.0	55.0	17.0	85
917.1321		3/8"	22.0	55.0	17.0	90
917.1322		1/2"	22.0	55.0	17.0	100
917.1323		9/16"	22.0	55.0	17.0	110
917.1324		5/8"	22.0	55.0	17.0	150

Bit socket set for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

			kg
911.1320	7 pcs	5 - 6 - 7 - 8 - 10 - 12 - 14 mm	0.65

Bit socket set for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- In durable metal case

			kg
911.1321	9 pcs	4 - 5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 mm	2.30

CHROME*plus*® Bit socket for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

	mm		D mm	L mm	T mm	g
918.1604	4,0		22.0	55.0	17.0	70
918.1605	5,0		22.0	55.0	17.0	70
918.1606	6,0		22.0	55.0	17.0	70
918.1607	7,0		22.0	55.0	17.0	70
918.1608	8,0		22.0	55.0	17.0	70
918.1609	9,0		22.0	55.0	17.0	70
918.1610	10,0		22.0	55.0	17.0	80
918.1612	12,0		22.0	55.0	17.0	100
918.1614	14,0		22.0	55.0	17.0	110
918.1617	17,0		22.0	55.0	17.0	150
918.1619	19,0		22.0	55.0	17.0	170
918.1631	22,0		22.0	55.0	17.0	180
918.1633	24,0		22.0	55.0	17.0	190
918.1701		3/16"	22.0	55.0	17.0	60
918.1702		7/32"	22.0	55.0	17.0	70
918.1703		1/4"	22.0	55.0	17.0	70
918.1704		9/32"	22.0	55.0	17.0	70
918.1705		5/16"	22.0	55.0	17.0	85
918.1706		3/8"	22.0	55.0	17.0	90
918.1707		1/2"	22.0	55.0	17.0	100
918.1708		9/16"	22.0	55.0	17.0	110
918.1709		5/8"	22.0	55.0	17.0	150

CHROME*plus*® Bit socket set for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

			kg
918.1335	7 pcs	5 - 6 - 7 - 8 - 10 - 12 - 14 mm	0.65

CHROME*plus*® Bit socket set for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- In durable metal case

1/2"

			kg	
918.1330	9 pcs	4 - 5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 mm	2.30	

Bit socket for hexagon screws, long

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

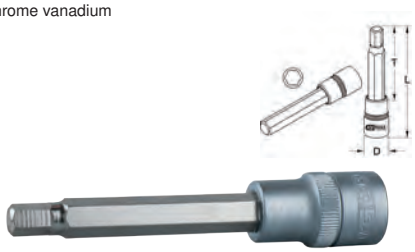

1/2"

	mm	D mm	L mm	T mm	g	
917.1331	4,0	22.0	110.0	72.0	120	
911.1325	5,0	22.0	110.0	72.0	120	
911.1326	6,0	22.0	110.0	72.0	120	
911.1327	7,0	22.0	110.0	72.0	120	
911.1328	8,0	22.0	110.0	72.0	120	
911.1329	9,0	22.0	110.0	72.0	120	
911.1330	10,0	22.0	110.0	72.0	120	
911.1332	12,0	22.0	110.0	72.0	140	
917.1332	14,0	22.0	110.0	72.0	180	
911.1337	17,0	22.0	110.0	72.0	260	
911.1339	19,0	22.0	110.0	72.0	400	

Bit socket set for hexagon screws, long

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
911.1336	6 pcs	5 - 6 - 7 - 8 - 10 - 12 mm	0.75	

CHROME*plus*® Bit socket for hexagon screws, long

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	mm	D mm	L mm	T mm	g	
918.1654	4,0	22.0	110.0	72.0	120	
918.1655	5,0	22.0	110.0	72.0	120	
918.1656	6,0	22.0	110.0	72.0	120	
918.1657	7,0	22.0	110.0	72.0	120	
918.1658	8,0	22.0	110.0	72.0	120	
918.1659	9,0	22.0	110.0	72.0	130	
918.1660	10,0	22.0	110.0	72.0	130	
918.1662	12,0	22.0	110.0	72.0	150	
918.1664	14,0	22.0	110.0	72.0	180	
918.1667	17,0	22.0	110.0	72.0	260	
918.1669	19,0	22.0	110.0	72.0	290	

CHROME*plus*® Bit socket set for hexagon screws, long

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
918.1336	6 pcs	5 - 6 - 7 - 8 - 10 - 12 mm	0.88	

Bit socket for hexagon screws with ball end, long

- Ball end hexagon socket
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted insert bit
- For manual operation
- Matt finis
- Chrome vanadium



1/2"

	mm	D mm	L mm	T mm	g	
911.1655	5,0	22.0	110.0	72.0	108	
911.1656	6,0	22.0	110.0	72.0	108	
911.1657	7,0	22.0	110.0	72.0	108	
911.1658	8,0	22.0	110.0	72.0	110	
911.1659	9,0	22.0	110.0	72.0	130	
911.1660	10,0	22.0	110.0	72.0	130	
911.1662	12,0	22.0	110.0	72.0	138	
911.1667	17,0	22.0	110.0	72.0	249	
911.1669	19,0	22.0	110.0	72.0	302	

Bit socket set for hexagon screws, long

- For Hexagon screws
- With ball end
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
911.1650	6 pcs	5 - 6 - 7 - 8 - 10 - 12 mm	0.88	

CHROME*plus*® Bit socket for hexagon screws with ball end, long

- Ball end hexagon socket
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

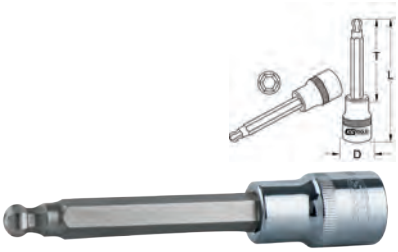

1/2"

	mm	D mm	L mm	T mm	g	
918.1771	5,0	22.0	110.0	72.0	104	
918.1772	6,0	22.0	110.0	72.0	105	
918.1773	7,0	22.0	110.0	72.0	106	
918.1774	8,0	22.0	110.0	72.0	107	
918.1775	9,0	22.0	110.0	72.0	130	
918.1776	10,0	22.0	110.0	72.0	130	
918.1777	12,0	22.0	110.0	72.0	138	
918.1778	17,0	22.0	110.0	72.0	248	
918.1779	19,0	22.0	110.0	72.0	300	

CHROME*plus*® Bit socket set for hexagon screws, long

- For Hexagon screws
- With ball end
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
918.1665	6 pcs	5 - 6 - 7 - 8 - 10 - 12 mm	0.88	

Bit socket for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

		D mm	L mm	T mm	g
917.1333	T10	22.0	55.0	17.0	80
917.1334	T15	22.0	55.0	17.0	80
911.1361	T20	22.0	55.0	17.0	70
911.1362	T25	22.0	55.0	17.0	700
911.1363	T27	22.0	55.0	17.0	710
911.1364	T30	22.0	55.0	17.0	710
911.1365	T40	22.0	55.0	17.0	730
911.1366	T45	22.0	55.0	17.0	90
911.1367	T50	22.0	55.0	17.0	90
911.1368	T55	22.0	55.0	17.0	770
911.1369	T60	22.0	55.0	17.0	90
911.1370	T70	22.0	55.0	17.0	110

Bit socket set for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- In durable steel storage case

			kg
911.1385	9 pcs	T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60	1.50

CHROME*plus*® Bit socket for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

		D mm	L mm	T mm	g
918.1620	T10	22.0	55.0	17.0	67
918.1621	T15	22.0	55.0	17.0	67
918.1622	T20	22.0	55.0	17.0	67
918.1623	T25	22.0	55.0	17.0	67
918.1624	T27	22.0	55.0	17.0	67
918.1625	T30	22.0	55.0	17.0	68
918.1626	T40	22.0	55.0	17.0	69
918.1627	T45	22.0	55.0	17.0	70
918.1628	T50	22.0	55.0	17.0	70
918.1629	T55	22.0	55.0	17.0	73
918.1630	T60	22.0	55.0	17.0	86
918.1632	T70	22.0	55.0	17.0	110

CHROME*plus*® Bit socket set for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- In durable metal case

			kg
918.1385	9 pcs	T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60	1.50

Bit socket for TX screws, long

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

		D mm	L mm	T mm	g
911.1518	T10	22.0	110.0	72.0	100
911.1519	T15	22.0	110.0	72.0	100
911.1521	T20	22.0	110.0	72.0	110
911.1522	T25	22.0	110.0	72.0	110
911.1523	T27	22.0	110.0	72.0	110
911.1524	T30	22.0	110.0	72.0	108
911.1525	T40	22.0	110.0	72.0	110
911.1526	T45	22.0	110.0	72.0	120
911.1527	T50	22.0	110.0	72.0	111
911.1528	T55	22.0	110.0	72.0	120
911.1529	T60	22.0	110.0	72.0	120
911.1517	T70	22.0	110.0	72.0	120

Bit socket set for TX screws, long

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

			kg
911.1520	9 pcs	T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60	1.24

CHROME*plus*® Bit socket for TX screws, long

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

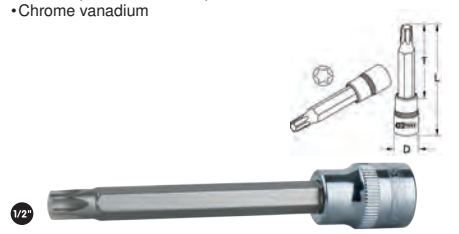

		D mm	L mm	T mm	g
918.1640	T10	22.0	110.0	72.0	120
918.1641	T15	22.0	110.0	72.0	120
918.1642	T20	22.0	110.0	72.0	120
918.1643	T25	22.0	110.0	72.0	120
918.1644	T27	22.0	110.0	72.0	120
918.1645	T30	22.0	110.0	72.0	120
918.1646	T40	22.0	110.0	72.0	120
918.1647	T45	22.0	110.0	72.0	120
918.1648	T50	22.0	110.0	72.0	120
918.1649	T55	22.0	110.0	72.0	130
918.1650	T60	22.0	110.0	72.0	150
918.1651	T70	22.0	110.0	72.0	180

CHROME*plus*® Bit socket set for TX screws, long

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

			kg
918.1317	9 pcs	T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60	1.24

Bit socket for TX tamperproof screws

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

		D mm	L mm	T mm	g
917.1335	TB10	22.0	55.0	17.0	65
917.1336	TB15	22.0	55.0	17.0	66
911.1371	TB20	22.0	55.0	17.0	90
911.1372	TB25	22.0	55.0	17.0	90
911.1373	TB27	22.0	55.0	17.0	90
911.1374	TB30	22.0	55.0	17.0	90
911.1375	TB40	22.0	55.0	17.0	90
911.1376	TB45	22.0	55.0	17.0	90
911.1377	TB50	22.0	55.0	17.0	90
911.1378	TB55	22.0	55.0	17.0	90
911.1379	TB60	22.0	55.0	17.0	90
911.1380	TB70	22.0	55.0	17.0	107

Bit socket set for TX tamperproof screws

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- In durable metal case

1/2"

			kg
911.1386	9 pcs	TB20 - TB25 - TB27 - TB30 - TB40 - TB45- TB50 - TB55 - TB60	1.50

CHROME*plus*® Bit socket for TX tamperproof screws

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

		D mm	L mm	T mm	g
918.1720	TB10	18.0	55.0	24.0	80
918.1721	TB15	18.0	55.0	24.0	80
918.1722	TB20	18.0	55.0	24.0	68
918.1723	TB25	18.0	55.0	24.0	68
918.1724	TB27	18.0	55.0	24.0	68
918.1725	TB30	18.0	55.0	24.0	68
918.1726	TB40	18.0	55.0	24.0	69
918.1727	TB45	18.0	55.0	24.0	70
918.1728	TB50	18.0	55.0	24.0	70
918.1729	TB55	18.0	55.0	24.0	72
918.1730	TB60	18.0	55.0	24.0	84
918.1732	TB70	18.0	55.0	24.0	107

CHROME*plus*® Bit socket set for TX tamperproof screws

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium metal steel storage case

1/2"

			kg
918.1386	9 pcs	TB20 - TB25 - TB27 - TB30 - TB40 - TB45- TB50 - TB55 - TB60	1.50

Bit socket for TX tamperproof screws, long

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

		D mm	L mm	T mm	g
917.1291	TB10	22.0	110.0	72.0	115
917.1292	TB15	22.0	110.0	72.0	115
917.1293	TB20	22.0	110.0	72.0	120
917.1294	TB25	22.0	110.0	72.0	120
917.1295	TB27	22.0	110.0	72.0	120
917.1296	TB30	22.0	110.0	72.0	130
917.1297	TB40	22.0	110.0	72.0	130
917.1298	TB45	22.0	110.0	72.0	130
917.1299	TB50	22.0	110.0	72.0	150
917.1251	TB55	22.0	110.0	72.0	150
917.1253	TB60	22.0	110.0	72.0	150
917.1304	TB70	22.0	110.0	72.0	155

Bit socket set for TX tamperproof screws, long

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/2"

			kg
917.1790	9 pcs	TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50 - TB55 - TB60	1.50

CHROME*plus*® Bit socket for TX tamperproof screws, long

- For tamperproof TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

		D mm	L mm	T mm	g
918.1740	TB10	22.0	110.0	72.0	115
918.1741	TB15	22.0	110.0	72.0	115
918.1742	TB20	22.0	110.0	72.0	120
918.1743	TB25	22.0	110.0	72.0	120
918.1744	TB27	22.0	110.0	72.0	120
918.1745	TB30	22.0	110.0	72.0	130
918.1746	TB40	22.0	110.0	72.0	130
918.1747	TB45	22.0	110.0	72.0	130
918.1748	TB50	22.0	110.0	72.0	150
918.1749	TB55	22.0	110.0	72.0	150
918.1750	TB60	22.0	110.0	72.0	150
918.1759	TB70	22.0	110.0	72.0	155

CHROME*plus*® Bit socket set for TX tamperproof screws, long

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- With press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/2"

			kg
918.1890	9 pcs	TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50 - TB55 - TB60	1.50

Bit socket for spline (XZN®) screws

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

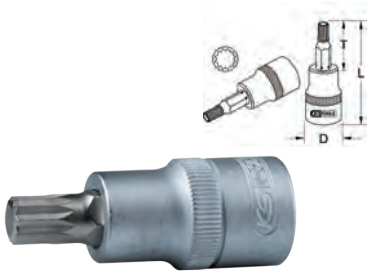

1/2"

		D mm	L mm	T mm	g
911.1340	M5	22.0	55.0	17.0	80
911.1341	M6	22.0	55.0	17.0	80
911.1347	M7	22.0	55.0	17.0	85
911.1342	M8	22.0	55.0	17.0	90
911.1313	M9	22.0	55.0	17.0	95
911.1343	M10	22.0	55.0	17.0	100
911.1344	M12	22.0	55.0	17.0	100
911.1345	M14	22.0	55.0	17.0	110
911.1346	M16	22.0	55.0	17.0	140

Bit socket for spline (XZN®) screws

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/2"

			kg
911.1349	6 pcs	M5 - M6 - M8 - M10 - M12 - M14	0.59

CHROME*plus*® Bit socket for spline (XZN®) screws

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium



1/2"

		D mm	L mm	T mm	g	
918.1671	M5	22.0	55.0	17.0	70	
918.1672	M6	22.0	55.0	17.0	70	
918.1673	M8	22.0	55.0	17.0	70	
918.1797	M9	22.0	55.0	17.0	95	
918.1674	M10	22.0	55.0	17.0	80	
918.1675	M12	22.0	55.0	17.0	100	
918.1676	M14	22.0	55.0	17.0	110	
918.1677	M16	22.0	55.0	17.0	140	

CHROME*plus*® Bit socket set for spline (XZN®) screws

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
918.1349	6 pcs	M5 - M6 - M8 - M10 - M12 - M14	0.59	

Bit socket for spline (XZN®) screws, long

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

		D mm	L mm	T mm	g	
911.1350	M5	22.0	110.0	72.0	107	
911.1351	M6	22.0	110.0	72.0	109	
911.1352	M8	22.0	110.0	72.0	109	
911.1359	M9	22.0	110.0	72.0	112	
911.1353	M10	22.0	110.0	72.0	112	
911.1354	M12	22.0	110.0	72.0	138	
911.1355	M14	22.0	110.0	72.0	179	
911.1356	M16	22.0	110.0	72.0	250	

Bit socket set for spline (XZN®) screws, long

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
911.1358	6 pcs	M5 - M6 - M8 - M10 - M12 - M14	0.75	

CHROME*plus*® Bit socket for spline (XZN®) screws, long

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- With press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium



1/2"

		D mm	L mm	T mm	g	
918.1691	M5	22.0	110.0	72.0	120	
918.1692	M6	22.0	110.0	72.0	120	
918.1693	M8	22.0	110.0	72.0	120	
918.1699	M9	22.0	110.0	72.0	130	
918.1694	M10	22.0	110.0	72.0	120	
918.1695	M12	22.0	110.0	72.0	150	
918.1696	M14	22.0	110.0	72.0	180	
918.1697	M16	22.0	110.0	72.0	190	

CHROME*plus*® Bit socket set for spline (XZN®) screws, long

- Spline (XZN®)
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

1/2"

			kg	
918.1358	6 pcs	M5 - M6 - M8 - M10 - M12 - M14	0.93	

Bit socket for RIBE® screws, long

- RIBE®
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium



1/2"

	D	L mm	D mm	T mm	g	
911.1921	M5	110.0	22.0	10.0	108	
911.1922	M6	110.0	22.0	10.0	108	
911.1923	M7	110.0	22.0	10.0	109	
911.1993	M7	240.0	22.0	10.0	175	
911.1924	M8	110.0	22.0	10.0	109	
911.1994	M8	240.0	22.0	10.0	175	
911.1925	M9	110.0	22.0	10.0	112	
911.1926	M10	110.0	22.0	10.0	112	
911.1980	M10	140.0	22.0	10.0	194	
911.1995	M12	110.0	24.0	14.0	175	
911.1996	M13	110.0	24.0	14.0	175	
911.1997	M14	110.0	24.0	14.0	175	

Bit socket set for RIBE® screws, long

- For tamperproof RIBE® profil
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

1/2"

				kg	
911.1335	9 pcs	M5 - M6 - M7 - M8 - M9 - M10 - M12 - M13 - M14	1.20		

CHROME*plus*® RIBE® Bit socket, long

- For RIBE® profil
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

	D	D mm	L mm	T mm	g
918.1806	M5	22.0	110.0	10.0	103
918.1807	M6	22.0	110.0	10.0	104
918.1808	M7	22.0	110.0	10.0	105
918.1811	M7	22.0	240.0	10.0	175
918.1809	M8	22.0	110.0	10.0	106
918.1812	M8	22.0	240.0	10.0	175
918.1810	M9	22.0	110.0	10.0	108
918.1818	M10	22.0	110.0	10.0	109
918.1813	M12	24.0	110.0	14.0	175
918.1814	M13	24.0	110.0	14.0	175
918.1815	M14	24.0	110.0	14.0	175

CHROME*plus*® Bit socket set for RIBE® screws, long

- For RIBE® profil
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- With press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

			kg
918.1340	9 pcs	M5 - M6 - M7 - M8 - M9 - M10 - M12 - M13 - M14	1.20

RIBE® Bit socket for tamperproof screws, long

- For tamperproof RIBE® profil
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

		D mm	L mm	T mm	g
911.3951	M5	22.0	110.0	72.0	120
911.3952	M6	22.0	110.0	72.0	120
911.3953	M7	22.0	110.0	72.0	120
911.3954	M8	22.0	110.0	72.0	120
911.3955	M9	22.0	110.0	72.0	130
911.3956	M10	22.0	110.0	72.0	130
911.3957	M12	22.0	110.0	72.0	150
911.3958	M13	22.0	110.0	72.0	180
911.3959	M14	22.0	110.0	72.0	180

RIBE® Bit socket set for tamperproof screws, long

- For tamperproof RIBE® profil
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted insert bit
- For manual operation
- Matt finis
- Chrome vanadium
- Includes storage rail

			kg
911.1630	9 pcs	M5 - M6 - M7 - M8 - M9 - M10 - M12 - M13 - M14	1.24

CHROME*plus*® RIBE® Bit socket for tamperproof screws, long

- For tamperproof RIBE® profil
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

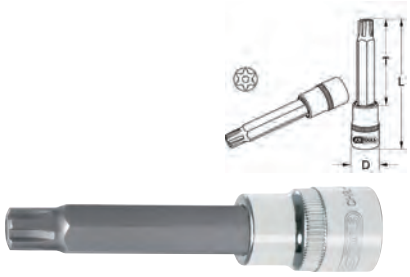

	D	D mm	L mm	T mm	g
918.1780	M5	22.0	110.0	72.0	120
918.1781	M6	22.0	110.0	72.0	120
918.1782	M7	22.0	110.0	72.0	120
918.1783	M8	22.0	110.0	72.0	120
918.1784	M9	22.0	110.0	72.0	130
918.1785	M10	22.0	110.0	72.0	130
918.1786	M12	22.0	110.0	72.0	150
918.1787	M13	22.0	110.0	72.0	180
918.1788	M14	22.0	110.0	72.0	180

CHROME*plus*® RIBE® bit socket set for tamperproof screws, long

- For tamperproof RIBE® profil
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- With press fi ted nickel plated insert bit
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- Includes storage rail

			kg
918.1895	9 pcs	M5 - M6 - M7 - M8 - M9 - M10 - M12 - M13 - M14	1.24

CHROME*plus*® Bit socket set

- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

			kg
918.1752	32 pcs	CHROME*plus*® Bit socket set	6.30

8 x		5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 mm
4 x		6 - 8 - 10 - 12 mm
8 x		T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60
4 x		T30 - T40 - T50 - T60
4 x		M5 - M6 - M8 - M10
4 x		M6 - M8 - M10 - M12

GO THROUGH SOCKETS

19 mm TRIPLE*plus*® Go through reversing ratchet

- 19 mm Hexagon drive
- Reversible
- With exact gearing 72 teeth ratchet mechanism
- Extremely slim head
- Dual component handle with soft zone
- Chrome plated and mirror polished
- Chrome vanadium

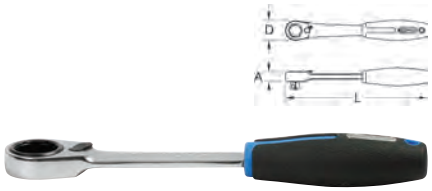

	A mm	D mm	L mm	g
918.4051	12.0	34.0	205.0	190

19 mm TRIPLE*plus*® Go through extension

- For manual operation TRIPLEplus® go through reversing ratchet 918.4051
- Chrome plated and mirror polished
- Chrome vanadium



	mm	L mm	g
918.4052	19,0	75.0	110

19 mm TRIPLE*plus*® Go through socket

- TRIPLEplus® profil
- For manual operation TRIPLEplus® go through reversing ratchet 918.4051
- Chrome plated and mirror polished
- Chrome vanadium





	mm	L mm	D1 mm	D2 mm	T mm	g
916.4060	10,0	32.0	16.0	16.0	12.0	40
916.4061	11,0	32.0	17.0	17.0	12.0	40
916.4062	12,0	32.0	18.0	18.0	12.0	40
916.4063	13,0	32.0	19.0	19.0	12.0	40
916.4064	14,0	32.0	21.0	21.0	12.0	40
916.4065	15,0	32.0	22.0	22.0	12.0	40
916.4066	16,0	32.0	24.0	24.0	12.0	40
916.4067	17,0	32.0	25.0	25.0	12.0	40
916.4068	18,0	32.0	26.0	26.0	12.0	40
916.4069	19,0	32.0	27.0	27.0	12.0	40
916.4071	21,0	32.0	29.0	29.0	12.0	40
916.4072	22,0	32.0	31.0	31.0	12.0	50
916.4074	24,0	32.0	33.0	33.0	12.0	50

19 mm TRIPLE*plus*® Go through socket adaptor

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- For manual operation TRIPLEplus® go through reversing ratchet 918.4051
- With a push button quick release function
- Chrome plated and mirror polished
- Chrome vanadium

3/8" 1/2"

	□	L mm	g
918.4053	3/8“	28.0	40
918.4054	1/2“	35.0	50

TRIPLE*plus*® Go through socket set

- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

3/8" 1/2"

			kg
916.4050	17 pcs	TRIPLE*plus*® Go through socket set	1.46

13 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 mm
1 x		75 mm
1 x		19 mm x 3/8“
1 x		19 mm x 1/2“
1 x		19 mm

1/2“ ADAPTERS

Bit adaptor socket

- Internal square to DIN 3120 / ISO 1174 with ball reception
- For 5/16" bits with external hexagon drive to DIN 3126 / ISO 1173
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

	■	○	L mm	D1 mm	D2 mm	T mm	g
911.1253	1/2“	5/16“	40.0	16.0	22.0	14.0	50

CHROME*plus*® Bit adaptor socket

- Internal square to DIN 3120 / ISO 1174 with ball reception
- For 5/16" bits with external hexagon drive to DIN 3126 / ISO 1173
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	□	○	L mm	D1 mm	D2 mm	T mm	g
918.1266	1/2“	5/16“	38.0	17.0	22.0	15.0	50

Bit adaptor socket with clamping ring

- Clamping ring
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For 10 mm bits with external hexagon drive to DIN 3126 / ISO 1173
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

	■	○	L mm	D1 mm	D2 mm	T mm	g
911.4312	1/2“	10mm	40.0	17.0	22.0	15.0	50
911.4351	1/2“	5/16“	38.0	17.0	22.0	20.0	25

CHROME*plus*® Bit adaptor socket with clamping ring

- Clamping ring
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For 10 mm Bits with external hexagon drive to DIN 3126 / ISO 1173
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	□	○	L mm	D1 mm	D2 mm	T mm	g
918.1271	1/2“	10mm	35.0	17.0	22.0	15.0	40
918.4351	1/2“	5/16“	38.0	17.0	22.0	14.0	59

Adaptor and reducing adaptor

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

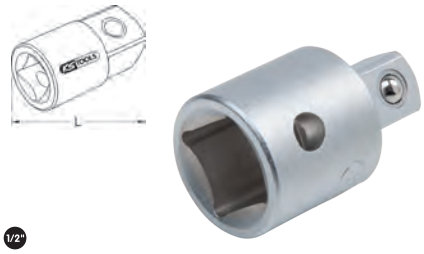

1/2"

	□	■	L mm	g
911.1233	1/2"	3/8"	46.0	50
911.1234	1/2"	3/4"	46.0	140

Adaptor and reducing adaptor set

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.0106	6 pcs	1/4" x 3/8" - 3/8" x 1/4" - 3/8" x 1/2" - 1/2" x 3/8" - 1/2" x 3/4" - 3/4" x 1/2"	0.66

CHROME*plus*® Adaptor and reducing adaptor

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	□	■	L mm	g
918.1753	1/2"	3/8"	46.0	50
918.1754	1/2"	3/4"	46.0	140

CHROME*plus*® adaptor and reducing adaptor set

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
918.0106	6 pcs	1/4" x 3/8" - 3/8" x 1/4" - 3/8" x 1/2" - 1/2" x 3/8" - 1/2" x 3/4" - 3/4" x 1/2"	0.66

Sliding adaptor and reducing adaptor

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- To the use with extensions
- Also usably as adaptors and/or reducing adaptors
- For manual operation
- Matt finis
- Chrome vanadium

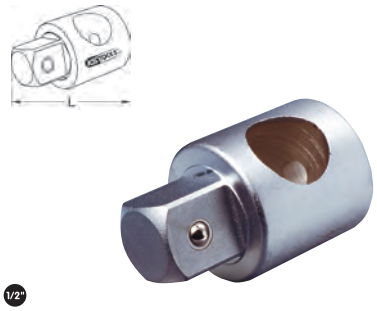

1/2"

	□	■	L mm	g
911.1207	3/8"	1/2"	40.0	60

CHROME*plus*® Sliding adaptor and reducing adaptor

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- To the use with extensions
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	□	■	L mm	g
918.1261	3/8"	1/2"	40.0	70

1/2" UNIVERSAL JOINTS

Universal joint

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Flexible joint
- Matt finis
- Chrome vanadium

1/2"

	□	■	L mm	g
911.1250	1/2"	1/2"	73.0	160

CHROME*plus*® Universal joint

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Flexible joint
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

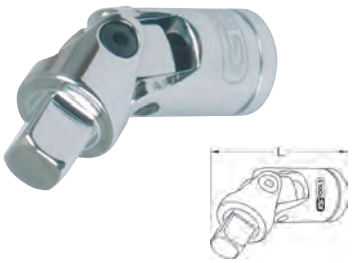

1/2"

	□	■	L mm	g
918.1250	1/2"	1/2"	73.0	170

Power universal ball joint

- Ideal for use with electric screwdriver
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Very low running rotation
- New joint construction
- Outstanding use of angles up to 45°
- Very resistant to breakage
- Can be used by hand or with electric screwdriver
- Matt finis
- Chrome vanadium

1/2"

	□	■	L mm	g
917.1250	1/2"	1/2"	70.0	160

CHROME*plus*® Power universal ball joint

- Ideal for use with electric screwdriver
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Very low running rotation
- New joint construction
- Outstanding use of angles up to 45°
- Very resistant to breakage
- Can be used by hand or with electric screwdriver
- Chrome plated and mirror polished
- Chrome vanadium



1/2"

	□	■	L mm	g
919.1250	1/2"	1/2"	70.0	160

1/2" T-HANDLES

Sliding T-handle

- DIN 3122 / ISO 3315
- Square drive according to DIN 3120 / ISO 1174 with with ball lock
- For manual operation
- Matt finis
- Chrome vanadium

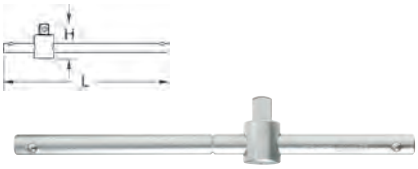

1/2"

	H mm	L mm	g
911.1204	42.0	250.0	440

CHROME*plus*® Sliding T-handle

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

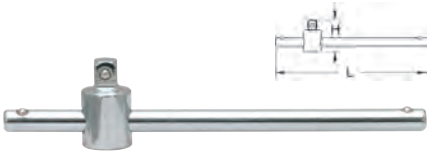

1/2"

	H mm	L mm	g
918.1263	42.0	250.0	360

1/2" EXTENSIONS

Extension

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

	L mm	g
911.1235	50.0	100
911.1201	75.0	120
911.1202	125.0	180
911.1315	180.0	260
911.1203	250.0	380
911.1316	305.0	410

Extension set

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- With hexagon drive
- For manual operation
- Matt finis
- Chrome vanadium

1/4" 3/8" 1/2"

			kg
911.0007	9 pcs	Extension set	1.22
3 x		1/4" : 50 - 100 - 250 mm	
4 x		3/8" : 45 - 75 - 150 - 200 mm	
2 x		1/2" : 125 - 250 mm	

CHROME*plus*® Extension

- DIN 3123 / ISO 3316
- Square drive to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	L mm	g
918.1274	50.0	90
918.1279	75.0	120
918.1202	125.0	180
918.1816	180.0	260
918.1203	250.0	420
918.1817	305.0	410

CHROME*plus*® Extension set

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2"

			kg
918.0007	9 pcs	CHROME*plus*® Extension set	1.22
3 x		1/4" : 50 - 100 - 250 mm	
4 x		3/8" : 45 - 75 - 150 - 200 mm	
2 x		1/2" : 125 - 250 mm	

Wobble extension

- Internal square to DIN 3120 / ISO 1174 with ball reception
- Wobble extension with ball lock
- 8° tilt angle to each side
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

	L mm	g
911.1381	50.0	90
911.1382	75.0	120
911.1383	125.0	180
911.1318	180.0	260
911.1384	250.0	340
911.1323	305.0	410

Wobble extension set

- Internal square to DIN 3120 / ISO 1174 with ball reception
- Wobble extension with ball lock
- 8° tilt angle to each side
- For manual operation
- Matt finis
- Chrome vanadium

1/4" 3/8" 1/2"

			kg
911.0009	9 pcs	Wobble extension set	1.22
3 x		1/4" : 50 - 100 - 250 mm	
4 x		3/8" : 45 - 75 - 150 - 200 mm	
2 x		1/2" : 125 - 250 mm	

CHROME*plus*® Wobble extension

- Internal square to DIN 3120 / ISO 1174 with ball reception
- Wobble extension with ball lock
- 8° tilt angle to each side
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

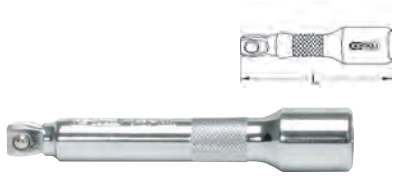

1/2"

	L mm	g
918.1264	50.0	90
918.1267	75.0	120
918.1201	125.0	180
918.1661	180.0	260
918.1204	250.0	420
918.1663	305.0	410

CHROME*plus*® Wobble extension set

- Internal square to DIN 3120 / ISO 1174 with ball reception
- Wobble extension with ball lock
- 8° tilt angle to each side
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2"

			kg
918.0009	9 pcs	CHROME*plus*® Wobble extension set	1.22
3 x		1/4" : 50 - 100 - 250 mm	
4 x		3/8" : 45 - 75 - 150 - 225 mm	
2 x		1/2" : 125 - 250 mm	

CHROME*plus*® Extension with interlock

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Interlocking mechanism against accidental loosening
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	L mm	g
919.1201	75.0	130
919.1203	125.0	220
919.1206	250.0	450

CHROME*plus*® Extension set with interlock

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Interlocking mechanism against accidental loosening
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

			kg
919.0123	3 pcs	75 - 125 - 250 mm	0.80

CHROME*plus*® Extension set with interlock

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Interlocking mechanism against accidental loosening
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 3/8" 1/2"

			kg
919.0007	7 pcs	CHROME*plus*® Extension set with interlock	1.24
2 x		1/4" : 100 - 150 mm	
3 x		3/8" : 75 - 150 - 250 mm	
2 x		1/2" : 125 - 250 mm	

1/2" MANUAL DRIVE TOOLS

L-Handle

- DIN 3122 / ISO 3315
- Square drive according to DIN 3120 / ISO 1174 with with ball lock
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

	L mm	g
911.1331	220.0	415

Speed brace

- DIN 3122 / ISO 3315
- Square drive according to DIN 3120 / ISO 1174 with with ball lock
- For manual operation
- Matt finis
- Chrome vanadium

1/2"

	L mm	g
911.1338	400.0	500

CHROME*plus*® Flexible head drive handle

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Ideal for diffi ult to access areas
- Protects ratchet and torque wrenches from overloading
- Burnished head
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

			L mm	head,spare	g
918.1291	A	1/2"	360.0	918.1292-1	660
918.1297	B	1/2"	460.0	918.1292-1	1115
918.1292	B	1/2"	600.0	918.1292-1	1420
918.1293	B	1/2"	760.0	918.1292-1	1630

1/2" RATCHETS

Reversible ratchet

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Exact gearing 45 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Matt finis
- Chrome vanadium

1/2"

	A mm	D mm	L mm	Repair set	g
911.1200	18.0	42.0	250.0	911.1299	580

CHROME*plus*® Reversible ratchet

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Exact gearing 45 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	A mm	D mm	L mm	Repair set	g
918.1200	18.0	42.0	250.0	911.1299	580

Reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Recessed reverse lever
- Matt finis
- Chrome vanadium

1/2"

	A mm	D mm	L mm	Repair set	g	
914.1290	20.5	40.0	250.0	914.1297	700	

CHROME*plus*® Reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Recessed reverse lever
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	A mm	D mm	L mm	Repair set	g	
918.1290	21.0	40.0	250.0	914.1297	600	

CHROME*plus*® Reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Recessed reverse lever
- Chrome plated and mirror polished
- Chrome vanadium

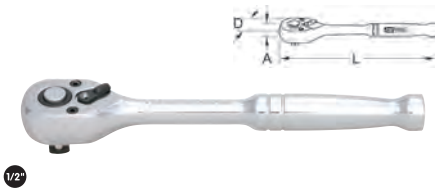

1/2"

	A mm	D mm	L mm	Repair set	g	
918.1393	21.0	40.0	250.0	914.1297	630	

SlimPOWER Reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- 710 N•m maximum load
- Reversible
- Extremely slim head
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle with soft zone
- Chrome plated and mirror polished
- Chrome vanadium

1/2"

	A mm	D mm	L mm	Repair set	g	
920.1290	34.0	32.0	245.0	920.1290-1	356	

SlimPOWER reversible ratchet set

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Extremely slim head
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle with soft zone
- Chrome plated and mirror polished
- Chrome vanadium

1/4" 1/2"

			g	
920.0002	2 pcs	1/4" + 1/2"	430	

Flexibel head reversible ratchet

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Extra long
- 180° revolving head
- Reversible
- Exact gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Recessed reverse lever
- Matt finis
- Chrome vanadium

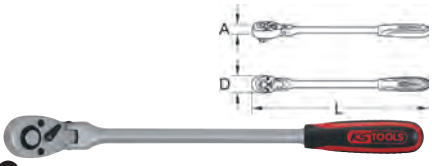

1/2"

	A mm	D mm	L mm	Repair set	g	
914.1296	20.0	40.0	440.0	914.1297	800	

CHROME*plus*® Telescopic reversible ratchet

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Exact gearing 36-teeth ratchet mechanism
- Infini ely variable
- Ejection mechanism on the ratchet head
- Ergonomic dual component handle
- Chrome plated and mirror polished
- Chrome vanadium

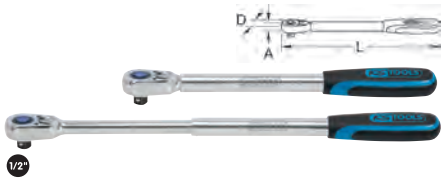

1/2"

	A mm	D mm	L mm	Repair set	g	
918.1270	19.0	43.0	380,0-500,0	918.1275	1200	

1/2“ SET ASSORTMENTS

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/2"

			kg	
911.0620	20 pcs	Socket set	3.30	

15 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19 - 22 - 24 - 27 - 30 - 32 mm
2 x		125 - 250 mm
1 x		1/2“
1 x		1/2“
1 x		250 mm

CHROME*plus*® Socket set

- Imperial sizes
- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/2"

			kg	
918.0830	30 pcs	CHROME*plus*® Socket set	3.40	

15 x		3/8“-7/16“-1/2“-9/16“-19/32“-5/8“-11/16“-3/4“ 13/16“-7/8“-15/16“-1“-1.1“/16“-1.1“/8“-1.1“/4“
7 x		1/2“ - 9/16“ - 11/16“ - 3/4“ - 7/8“ 15/16“ - 1“
2 x		5/8“ - 13/16“
2 x		125 - 250 mm
1 x		1/2“
1 x		F1/2“ x M3/8“
1 x		360 mm
1 x		250 mm

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/2"

			kg
918.0625	22 pcs	CHROME*plus*® Socket set	4.75
17 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 21 - 22 - 24 - 27 - 30 - 32 - 34 mm	
2 x		125 - 250 mm	
1 x		1/2“	
1 x		3/8“ x M1/2“	
1 x		380 - 500 mm	

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable metal case

1/2"

			kg
917.4024	24 pcs	Socket set	5.00
17 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 24 - 27 - 30 32 mm	
2 x		16 - 21 mm	
2 x		125 - 250 mm	
1 x		1/2“	
1 x		1/2“	
1 x		250 mm	

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/2"

			kg
918.0635	35 pcs	CHROME*plus*® Socket set	5.75
18 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 mm	
10 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19 mm	
2 x		16 - 21 mm	
2 x		125 - 250 mm	
1 x		1/2“	
1 x		F3/8“ x M1/2“	
1 x		250 mm	

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/2"

			kg
918.0623	23 pcs	CHROME*plus*® Socket set	2.40
18 x		10-11-12-13-14-15-16-17-18-19-20 21-22-24-27-30-32-34 mm	
2 x		125 - 250 mm	
1 x		1/2“	
1 x		3/8“ x M1/2“	
1 x		250 mm	

Socket set

- 12 point
- Matt finis
- Chrome vanadium
- In durable plastic case

1/2"

			kg
911.1595	24 pcs	Socket set	3.00
17 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm	
1 x		250 mm	
2 x		125 - 250 mm	
1 x		1/2“	
2 x		16 - 21 mm	
1 x		3/8“F x 1/2“M	

1/2“ SET ASSORTMENTS

TX Socket and bit set

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.4301-1	30 pcs	TX Socket and bit set	1.45
5 x		1/4“: E4 - E5 - E6 - E7 - E8	
4 x		3/8“: E10 - E11 - E12 - E14	
5 x		1/2“: E16 - E18 - E20 - E22 - E24	
2 x		3/8“ x 10 mm - 1/2“ x 10mm	
7 x		30 mm (T20 - T25 - T30 - T40 - T45 T50 - T55)	
7 x		75 mm (T20 - T25 - T30 - T40 - T45 T50 - T55)	

TX Bit socket set for TX tamperproof screws

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.4301-2	30 pcs	TX Bit socket set for TX tamper-proof screws	1.45
5 x		1/4": E4 - E5 - E6 - E7 - E8	
4 x		3/8": E10 - E11 - E12 - E14	
5 x		1/2": E16 - E18 - E20 - E22 - E24	
2 x		3/8" x 10 mm - 1/2" x 10mm	
7 x		30 mm (TB20 - TB25 - TB30 - TB40 TB45 - TB50 - TB55)	
7 x		75 mm (TB20 - TB25 - TB30 - TB40 TB45 - TB50 - TB55)	

TX Socket set

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.4302	31 pcs	TX Socket set	1.40
6 x		1/4": T10 - T15 - T20 - T25 - T27 - T30	
3 x		5/16": T40 - T45 - T50	
3 x		1/4": TB30 x 30 mm - TB25 x 75 mm - TB30 x 75 mm	
2 x		1/2": T55 - T60	
4 x		1/4": E5 - E6 - E7 - E8	
3 x		3/8": E10 - E12 - E14	
3 x		1/2": E16 - E18 - E20	
3 x		1/4" x 1/4" - 3/8" x 5/16" - 1/2" x 5/16"	
4 x		E6 x E8 - E7 x E11 - E10 x E12 E14 x E18 -	

TX Socket and bit set

- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.4305	57 pcs	TX Socket and bit set	2.00
2 x		3/8" x 10mm - 1/2" x 1/4"	
12 x		1/4": E4 - E5 - E6 - E7 - E8; 3/8": E10 - E11 - E12 - E14;1/2": E16 - E18 - E20	
7 x		4 - 5 - 6 - 7 - 8 - 10 - 12 mm	
9 x		TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50 - TB55 - TB60	
5 x		M5 - M6 - M8 - M10 - M12	
2 x		8 - 10 mm	
2 x		PH2 - PH3	
5 x		5 - 6 - 7 - 8 - 10 mm	
9 x		T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60	
4 x		M6 - M8 - M10 - M12	

Tool kit

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/2"

			kg
911.0650	50 pcs	Tool kit	5.20
9 x		10 - 11 - 12 - 13 - 14 - 15 - 17 - 19 22 mm	
1 x		1/4": PZ1 - PZ2 - T10 - T15 - T20 T25 - T30 - T40	
1 x		21 mm	
1 x		250 mm	
1 x		1/2"	
1 x		1/2"	
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	
1 x		250 mm	
3 x		4,5 - 5,5 - 6,5 mm	
2 x		PH1 - PH2	
1 x		200 mm	
1 x		150 - 250 V	
1 x		240 mm	
1 x		180 mm	
1 x		300 g	
8 x		8 - 10 - 11 - 12 - 13 - 14 - 17 - 19 mm	

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/4" - 1/2"

			kg
918.0678	78 pcs	CHROME*plus*® Socket set	6.30
13 x		1/4": 4-4,5-5-5,5-6-7-8-9-10-11-12 13-14 mm	
8 x		1/4": 6-7-8-9-10-11-12-13 mm	
15 x		1/2": 13-14-15-16-17-18-19-20-21-22 24-27-30-32-34 mm	
5 x		1/2": 14-15-17-19-22 mm	
3 x		1/2": 16-18-21 mm	
2 x		1/4": PH1-PH2	
2 x		1/4": PZ1-PZ2	
6 x		1/4": 3-4-5-6-7-8 mm	
7 x		1/4": T10-T15-T20-T25-T27 T30-T40	
6 x		1/4": M4-M5-M6-M7-M8-M10	
1 x		1/4"	
2 x		1/4": 50-100 mm	
1 x		1/4"	
1 x		1/4"	
1 x		1/4": 145 mm	
1 x		F3/8" x M1/2"	
2 x		1/2": 125-250 mm	
1 x		1/2"	
1 x		1/2": 250 mm	

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/4" - 1/2"

			kg
918.0694	94 pcs	CHROME*plus*® Socket set	6.38
13 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm	
8 x		1/4": 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	
18 x		1/2": 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 23 - 24 - 27 - 30 - 32 mm	
4 x		1/2": 14 - 15 - 17 - 19 mm	
2 x		1/2": 16 - 21 mm	
3 x		1/4": 4 - 5,5 - 7 mm	
2 x		1/4": PH1 - PH2	
2 x		1/4": PZ1 - PZ2	
4 x		1/4": 3 - 4 - 5 - 6 mm	
6 x		1/4": TB8 - TB10 - TB15 - TB20 TB25 - TB30	
2 x		1/4": 50 - 100 mm	
1 x		1/4": 150 mm	
3 x		5/16": 8 - 10 - 12 mm	
2 x		5/16": PH3 - PH4	
2 x		5/16": PZ3 - PZ4	
4 x		5/16": 8 - 10 - 12 - 14 mm	
4 x		5/16": T40 - T45 - T50 - T55	
1 x		1/4"	
1 x		1/4"	
1 x		1/4"	
1 x		1/4": 145 mm	
4 x		1 - 1,5 - 2 - 2,5 mm	
1 x		1/4"	
2 x		1/2": 125 - 250 mm	
1 x		F3/8" x M1/2"	
1 x		1/2"	
1 x		1/2" x 5/16"	
1 x		1/2": 250 mm	

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In a classy aluminium case

1/4" - 1/2"

			kg
918.0702	102 pcs	CHROME*plus*® Socket set	9.70
13 x		1/4": 4 - 4,5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm	
3 x		1/4": 8 - 10 - 13 mm	
13 x		1/2": 13 - 15 - 17 - 18 - 19 - 20 - 21 22 - 24 - 27 - 30 - 32 - 34 mm	
5 x		1/2": 14 - 15 - 17 - 19 - 22 mm	
3 x		1/4": PH1 - PH2 - PH3	
2 x		1/4": PZ1 - PZ2	
4 x		1/4": 3 - 4 - 5 - 6 mm	
7 x		1/4": T10 - T15 - T20 - T25 - T27 T30 - T40	
3 x		1/4": M4 - M5 - M6	
3 x		1/4": E6 - E7 - E8	
6 x		1/2": E10 - E12 - E14 - E16 - E18 E20	
2 x		1/2": 16 - 21 mm	
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	
1 x		5/16": PZ3	
2 x		5/16": 8 - 10 mm	
4 x		5/16": TB45 - TB50 - TB55 - TB60	
3 x		5/16": M8 - M10 - M12	
1 x		1/4"	
1 x		1/4"	
2 x		1/4": 50 - 100 mm	
2 x		1/2": 125 - 250 mm	
1 x		F3/8" x M1/2"	
1 x		1/2"	
1 x		1/2" x 5/16"	
2 x		1/4" - 1/2"	
7 x		7 - 8 - 10 - 12 - 13 - 17 - 19 mm	

CHROME*plus*® Socket set

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
918.0724	124 pcs	CHROME*plus*® Socket set	9.50
10 x		1/4": 4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 mm	
6 x		1/4": 5 - 6 - 7 - 8 - 9 - 10 mm	
11 x		3/8": 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm	
6 x		3/8": 10 - 11 - 12 - 13 - 14 - 15 mm	
8 x		3/8": E8 - E10 - E11 - E12 - E14 - E16 E18 - E20	
8 x		1/2": 20 - 21 - 22 - 24 - 27 - 30 - 32 34 mm	
6 x		1/2": 10 - 12 - 13 - 14 - 17 - 19 mm	
2 x		1/2": E22 - E24	
2 x		1/2": 16 - 21 mm	
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm	
2 x		3/8": 4 - 5,5 mm	
3 x		3/8": PH1 - PH2 - PH3	
3 x		3/8": PZ1 - PZ2 - PZ3	
5 x		3/8": 3 - 4 - 5 - 6 - 8 mm	
5 x		3/8": T20 - T30 - T40 - T45 - T50	
4 x		3/8": M4 - M5 - M6 - M8	
7 x		1/4": T10 - T15 - T20 - T25 - T27 T30 -T40	
1 x		1/4"	
1 x		1/4"	
1 x		1/4": 100 mm	
2 x		3/8": 75 - 150 mm	
2 x		1/2": 125 - 250 mm	
3 x		1/4" - 3/8" - 1/2"	
2 x		1/2": F1/2" x M 3/8"	
3 x		1/4" - 3/8" - 1/2"	

Socket set

- 6 point
- Matt finis
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

		kg
917.0779	179 pcs	Socket set	9.00

13 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm
7 x		1/4": 4 - 5 - 6 - 7 - 8 - 9 - 10 mm
10 x		3/8": 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm
6 x		3/8": 10 - 11 - 12 - 13 - 14 - 15 mm
17 x		1/2": 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 30 - 32 mm
5 x		1/2": 16 - 17 - 18 - 19 - 22 mm
1 x		3/8": 18 mm
2 x		1/2": 16 - 21 mm
4 x		1/4": 4 - 5,5 - 6,5 - 7 mm
3 x		1/4": PH0 - PH1 - PH2
3 x		1/4": PZ0 - PZ1 - PZ2
4 x		1/4": 3 - 4 - 5 - 6 mm
8 x		1/4": T8 - T9 - T10 - T15 - T20 - T25 - T27 T30
8 x		1/4": TB8 - TB9 - TB10 - TB15 - TB20 TB25 TB27 - TB30
5 x		1/4": E4 - E5 - E6 - E7 - E8
6 x		3/8": E10 - E11 - E12 - E14 - E16 - E18
2 x		1/2": E20 - E24
11 x		1/4": T5 - T6 - T7 - T8 - T9 - T10 - T15 T20 - T25 - T27 - T30
1 x		1/4": TB7
3 x		1/4": M5 - M6 - M8
5 x		1/4": M5 - M6 - M7 - M8 - M9
8 x		1/4": TS10 - TS15 - TS20 - TS25 TS27 - TS30 - TS40 - TS45
3 x		5/16": 8 - 10 - 12 mm
5 x		5/16": 7 - 8 - 10 - 12 - 14 mm
2 x		5/16": PH3 - PH4
2 x		5/16": PZ3 - PZ4
6 x		5/16": T40 - T45 - T50 - T55 - T60 - T70
6 x		5/16": TB40 - TB45 - TB50 - TB55 TB60 - TB70
7 x		1,3 - 1,5 - 2 - 2,5 - 3 - 4 - 5 mm
1 x		1/4": 150 mm
1 x		1/4": 110 mm
2 x		1/4": 50 - 100 mm
1 x		3/8": 150 mm
2 x		1/2": 125 - 250 mm
3 x		1/4" - 3/8" - 1/2
1 x		1/4" x 1/4"
1 x		3/8" x 5/16"
1 x		1/2" x 5/16"
1 x		3/8"Fx1/2"M
3 x		1/4" - 3/8" - 1/2

CHROME*plus*® Tool kit

- 6 point
- FlankTraction profil
- With removeable plastic storage trays
- Chrome plated and mirror polished
- Chrome vanadium
- Telescopic carrying handle
- In a classy aluminium trolley

1/4" - 1/2"

		kg
918.0690	90 pcs	CHROME*plus*® Tool kit	10.50

13 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm
10 x		1/2": 15 - 17 - 18 - 19 - 20 - 22 - 24 27 - 30 - 32 mm
2 x		1/2": 16 - 21 mm
1 x		1/4"
2 x		1/4": 50 - 100 mm
1 x		1/4"
1 x		1/4" x 1/4"
1 x		1/4": 185 mm
1 x		1/4"
1 x		1/4": 140 mm
2 x		1/2": 125 - 250 mm
1 x		1/2"
1 x		1/2": F3/8" - M1/2"
1 x		1/2": 250 mm
6 x		1/4": 3 - 4 - 5 - 6 - 7 - 8 mm
5 x		1/4": PH0 - PH1 - 2 x PH2 - PH3
5 x		1/4": PZ0 - PZ1 - 2 x PZ2 - PZ3
6 x		1/4": 3 - 4 - 5 - 6 - 7 - 8 mm
7 x		1/4": T10 - T15 - T20 - T25 - T27 T30 - T40
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm
7 x		7 - 8 - 10 - 12 - 13 - 17 - 19 mm
2 x		5,5 - 6,5 mm
2 x		PH1 - PH2
1 x		240 mm
1 x		180 mm

Universal tool kit

- 6 point
- Flank Traction profile
- With 3 drawers and upper insert storage
- Matt finis
- Chrome vanadium
- In durable steel tool chest

1/4" 1/2"

			kg
911.0100	100 pcs	Universal tool kit	19.80
12 x		1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 -9 - 10 11 - 12 - 13 mm	
12 x		1/2“: 14 - 15 - 16 - 17 - 18 - 19 - 20 22 - 24 - 27 - 30 - 32 mm	
2 x		1/2“: 16 - 21 mm	
1 x		1/4“: 911.2060	
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	
4 x		1/4“: 50 - 100 mm; 1/2“: 125 - 250 mm	
2 x		1/4“: 100 mm; 1/2“: 250 mm	
1 x		1/4“	
2 x		1/4“ - 1/2“	
2 x		1/4“: 145 mm; 1/2“: 250 mm	
12 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 17 19 - 22 mm	
4 x		4,0 x 100 mm - 4,5 x 100 mm 5,0 x 100 mm - 5,0 x 150 mm	
2 x		PH1 x 75 mm - PH2 x 100 mm	
1 x		160 mm	
1 x		180 mm	
1 x		200 mm	
1 x		10“	

CHROME*plus*® Universal tool set

- With 3 drawers and upper insert storage
- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable steel tool chest

1/4" 1/2"

		kg
918.0100	99 pcs	CHROME*plus*® Universal tool set 19.50
13 x		1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 - 14 mm
3 x		1/4“: 8 - 10 - 13 mm
1 x		1/4“: 50 mm
1 x		1/4“
1 x		1/4“: 110 mm
1 x		1/4“: 140 mm
3 x		1/4“: 4 - 5,5 - 7 mm
2 x		1/4“: PH1 - PH2
2 x		1/4“: PZ1 - PZ2
6 x		1/4“: 3 - 4 - 5 - 6 - 7 - 8 mm
7 x		1/4“: T10 - T15 - T20 - T25 - T27 T30 - T40
12 x		1/2“: 13 - 15 - 17 - 18 - 19 - 20 - 21 22 - 24 - 27 - 30 - 32 mm
2 x		1/2“: 17 - 19 mm
2 x		1/2“: 16 - 21 mm
2 x		1/2“: 125 - 250 mm
1 x		1/2“: F3/8“ x M 1/2“
1 x		1/2“
1 x		1/2“: 250 mm
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm
6 x		6 x 38 - 3 x 75 - 4 x 100 - 5,5 x 100 6,5 x 125 - 8 x 150 mm
4 x		PH2 x 38 mm - PH1 x 75 mm - PH2 x 100 mm - PH3 x 150 mm
1 x		160 mm
1 x		180 mm
1 x		200 mm
1 x		10“
1 x		250 mm
1 x		300 g

CHROME*plus*® Universal tool set

- With 3 drawers and upper insert storage
- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable steel tool chest

1/4" - 1/2"

		kg
918.0200	99 pcs	CHROME*plus*® Universal tool set 19.50
13 x		1/4“: 4 - 4,5 - 5 -5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm
3 x		1/4“: 8 - 10 - 13 mm
1 x		1/4“: 50 mm
1 x		1/4“
1 x		1/4“: 110 mm
1 x		1/4“: 145 mm
3 x		1/4“: 4 - 4,5 - 7 mm
2 x		1/4“: PH1 - PH2
2 x		1/4“: PZ1 - PZ2
6 x		1/4“: 3 - 4 - 5 - 6 - 7 - 8 mm
7 x		1/4“: T10 - T15 - T20 - T25 - T27 T30 - T40
12 x		1/2“: 13 - 15 - 17 - 18 - 19 - 20 - 21 22 - 24 - 27 - 30 - 32 mm
2 x		1/2“: 17 - 19 mm
2 x		1/2“: 16 - 21 mm
2 x		1/2“: 125 - 250 mm
1 x		1/2“: F3/8“ x M 1/2“
1 x		1/2“
1 x		1/2“: 250 mm
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm
6 x		6 x 38 mm - 3 x 75 mm - 4 x 100 mm 5,5 x 100 mm - 6,5 x 125 mm - 8 x 150 mm
4 x		PH2 x 38 mm - PH1 x 75 mm PH2 x 100 mm - PH3 x 150 mm
1 x		160 mm
1 x		180 mm
1 x		200 mm
1 x		10“
1 x		250 mm
1 x		300 g

CHROME*plus*® Universal tool set

- With 3 drawers and upper insert storage
- Imperial sizes
- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In durable steel tool chest

1/4" 1/2"

			kg
918.0150	99 pcs	CHROME*plus*® Universal tool set	25.60
13 x		1/4": 5/32" - 3/16" - 7/32" - 1/4" - 9/32" - 5/16" 11/32" - 3/8" - 13/32" - 7/16" - 15/32" - 1/2" - 9/16"	
3 x		1/4": 5/16" - 3/8" - 1/2"	
1 x		1/4": 50 mm	
1 x		1/4"	
1 x		1/4": 110 mm	
1 x		1/4": 140 mm	
3 x		1/4": 5/32" - 1/4" - 9/32"	
2 x		1/4": PH1 - PH2	
2 x		1/4": PZ1 - PZ2	
6 x		1/4": 1/8" - 5/32" - 3/16" - 7/32" - 1/4" - 5/16"	
7 x		1/4": T10 - T15 - T20 - T25 - T27 - T30 - T40	
12 x		1/2": 7/16" - 1/2" - 9/16" - 5/8" - 11/16" - 3/4" 13/16" - 7/8" - 15/16" 1.1/16" - 1.3/16" - 1.1/4"	
2 x		1/2": 11/16" - 3/4"	
2 x		1/2": 16 - 21 mm	
2 x		1/2": 125 - 250 mm	
1 x		1/2": F3/8" x M 1/2"	
1 x		1/2"	
1 x		1/2": 250 mm	
1 x		1/16" - 5/64" - 3/32" - 1/8" - 5/32" - 3/16" 7/32" - 1/4" - 5/16" - 3/8"	
12 x		1/4" - 5/16" - 3/8" - 7/16" - 1/2" - 9/16" - 5/8" 11/16" - 3/4" - 13/16" - 7/8" - 15/16"	
6 x		6 x 38 mm - 3 x 75 mm - 4 x 100 mm 5,5 x 100 mm - 6,5 x 125 mm - 8 x 150 mm	
4 x		PH2 x 38 mm - PH1 x 75 mm PH2 x 100 mm - PH3 x 150 mm	
1 x		125 mm	
1 x		180 mm	
1 x		200 mm	
1 x		10"	
1 x		250 mm	
1 x		300 g	

1/2" POINT OF SALE DISPLAYS

Socket display

- Superlock
- Matt finis
- Chrome vanadium

1/2"

			kg
911.0300	311 pcs	Socket display	39.30
228x		38mm: 10x(8-9-11-12-14-15-16-24-27-30-32mm) 20x(10-13-17-19mm) 8x(18mm) 15x(21-22mm)	
83x		75mm: 7x(10-11-12-13-14-15-16-17mm) 6x(18-19mm) 5x(21-22-24mm)	

CHROME*plus*® Socket display

- 6 point
- FlankTraction profil
- Chrome plated and mirror polished
- Chrome vanadium
- In point of sale display

1/2"

			kg
918.0300	311 pcs	CHROME*plus*® Socket display	39.90
228x		38mm: 10x(8-9-11-12-14-15-16-24-27-30-32mm) 20x(10-13-17-19mm) 8x(18mm) 15x(21-22mm)	
83x		75mm: 7x(10-11-12-13-14-15-16-17mm) 6x(18-19mm) 5x(21-22-24mm)	

Bit socket display

- Matt finis
- Chrome vanadium

1/2"

			kg
911.0310	385 pcs	Bit socket display	42.50
80 x		10 x (5-6-7-8-10-12-14-17 mm)	
28 x		7 x (7-8-10-12 mm)	
60 x		10 x (M5-M6-M8-M10-M12-M14)	
28 x		7 x (M8-M10-M12-M14)	
70 x		10 x (T20-T25-T27-T30-T40-T45-T50)	
70 x		10 x (TB20-TB25-TB27-TB30-TB40 TB45-TB50)	
49 x		7 x (T20-T25-T27-T30-T40-T45-T50)	

CHROME*plus*® Bit socket display

- Chrome plated and mirror polished
- Chrome vanadium

1/2"

			kg
918.0310	385 pcs	CHROME*plus*® Bit socket display	43.70
80 x		10 x (5-6-7-8-10-12-14-17 mm)	
28 x		7 x (7-8-10-12 mm)	
60 x		10 x (M5-M6-M8-M10-M12-M14)	
28 x		7 x (M8-M10-M12-M14)	
70 x		10 x (T20-T25-T27-T30-T40-T45-T50)	
70 x		10 x (TB20-TB25-TB27-TB30-TB40 TB45-TB50)	
49 x		7 x (T20-T25-T27-T30-T40-T45-T50)	

3/4“ SOCKETS

CLASSIC Hexagonal socket

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Short execution
- For manual operation
- Matt finis
- Chrome vanadium

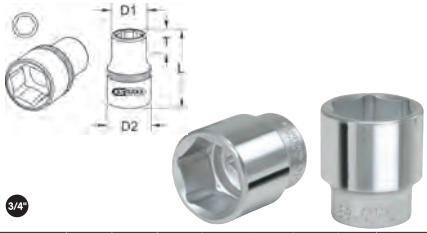

3/4"

	⬡ mm	□	D1 mm	D2 mm	L mm	T mm	g
911.3406	18,0		28.0	36.0	52.0	19.0	210
911.3419	19,0		30.0	36.0	52.0	19.0	210
911.3421	21,0		32.0	36.0	52.0	19.0	220
911.3422	22,0		33.0	36.0	52.0	19.0	220
911.3423	23,0		35.0	38.0	52.0	19.0	220
911.3424	24,0		36.0	38.0	52.0	20.0	220
911.3426	26,0		37.0	36.0	55.0	23.0	220
911.3427	27,0		40.0	36.0	55.0	24.0	230
911.3429	29,0		42.0	36.0	55.0	24.0	260
911.3430	30,0		43.0	38.0	58.0	26.0	290
911.3432	32,0		46.0	38.0	58.0	27.0	300
911.3407	33,0		47.0	40.0	58.0	26.0	355
911.3408	34,0		47.0	40.0	58.0	24.0	360
911.3435	35,0		50.0	40.0	60.0	27.0	400
911.3436	36,0		51.0	40.0	60.0	28.0	430
911.3438	38,0		53.0	41.0	60.0	28.0	490
911.3441	41,0		57.0	44.0	63.0	31.0	540
911.3446	46,0		63.0	44.0	66.0	33.0	630
911.3450	50,0		68.0	48.0	69.0	35.0	840
911.3409	55,0		75.0	53.0	68.0	33.0	960
911.3411	60,0		80.0	53.0	68.0	33.0	1050
911.3413		3/4“	28.0	34.0	50.0	16.0	175
911.3414		13/16“	31.0	35.0	50.0	16.0	190
911.3416		7/8“	33.5	36.0	52.0	19.0	225
911.3418		15/16“	35.0	38.0	52.0	20.0	260
911.3425		1“	38.0	36.0	52.0	22.0	225
911.3428		1.1/16“	40.0	36.0	55.0	24.0	250
911.3431		1.1/8“	41.0	36.0	55.0	24.0	260
911.3433		1.3/16“	43.0	38.0	57.0	24.0	270
911.3437		1.1/4“	45.0	38.0	58.0	26.0	330
911.3439		1.5/16“	47.0	40.0	58.0	26.0	375
911.3442		1.3/8“	50.0	40.0	60.0	28.0	405
911.3443		1.7/16“	51.0	40.0	60.0	28.0	410
911.3444		1.1/2“	53.0	40.0	60.0	28.0	430
911.3445		1.5/8“	57.0	44.0	63.0	30.0	530
911.3447		1.11/16“	59.0	44.0	63.0	30.0	565
911.3448		1.3/4“	61.0	44.0	65.0	32.0	625
911.3449		1.13/16“	63.0	44.0	65.0	32.0	630
911.3451		1.7/8“	65.0	44.0	65.0	32.0	660
911.3452		2“	69.0	48.0	68.0	34.0	810

12 Point socket

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Short execution
- For manual operation
- Matt finis
- Chrome vanadium

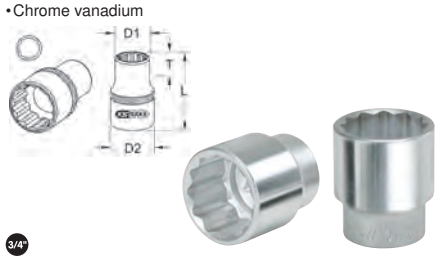

3/4"

	○ mm	□	D1 mm	D2 mm	L mm	T mm	g
911.3517	18.0		28.0	36.0	52.0	19.0	210
911.3518	19.0		30.0	36.0	52.0	19.0	210
911.3525	21.0		32.0	36.0	52.0	19.0	220
911.3528	22.0		33.0	36.0	52.0	19.0	220
911.3531	23.0		35.0	38.0	52.0	19.0	220
911.3533	24.0		36.0	38.0	52.0	20.0	220
911.3534	26.0		37.0	36.0	55.0	23.0	220
911.3537	27.0		40.0	36.0	55.0	24.0	230
911.3539	29.0		42.0	36.0	55.0	24.0	260
911.3542	30.0		43.0	38.0	58.0	26.0	290
911.3543	32.0		46.0	38.0	58.0	27.0	300
911.3544	33.0		47.0	40.0	58.0	26.0	355
911.3545	34.0		47.0	40.0	58.0	24.0	360
911.3547	35.0		50.0	40.0	60.0	27.0	400
911.3548	36.0		51.0	40.0	60.0	28.0	430
911.3549	38.0		53.0	41.0	60.0	28.0	490
911.3557	41.0		57.0	44.0	63.0	31.0	540
911.3598	46.0		63.0	44.0	66.0	33.0	630
911.3599	50.0		68.0	48.0	69.0	35.0	840
911.3453	55.0		75.0	53.0	68.0	33.0	960
911.3454	60.0		80.0	53.0	68.0	33.0	1050
911.3519		3/4“	29.0	35.0	50.0	16.0	210
911.3521		13/16“	31.0	35.0	51.0	17.0	220
911.3522		7/8“	33.0	35.0	51.0	18.0	220
911.3523		15/16“	34.0	35.0	51.0	19.0	220
911.3524		1“	37.0	38.0	52.0	20.0	220
911.3526		1.1/16“	39.0	38.0	54.0	20.0	220
911.3527		1.1/8“	41.0	38.0	57.0	20.0	230
911.3529		1.3/16“	43.0	38.0	57.0	21.0	260
911.3530		1.1/4“	45.0	38.0	58.0	22.0	290
911.3532		1.5/16“	47.0	40.0	59.0	24.0	300
911.3535		1.3/8“	49.0	40.0	59.0	24.0	400
911.3536		1.7/16“	50.0	40.0	60.0	27.0	430
911.3538		1.1/2“	52.0	41.0	64.0	30.0	490
911.3541		1.5/8“	56.0	40.0	67.0	30.0	540
911.3455		1.11/16“	59.0	44.0	63.0	30.0	565
911.3546		1.3/4“	60.0	40.0	70.0	32.0	630
911.3456		1.13/16“	63.0	44.0	65.0	32.0	630
911.3457		1.7/8“	65.0	44.0	65.0	32.0	660
911.3550		2“	67.0	40.0	80.0	34.0	840

3/4“ BIT SOCKETS

Bit socket for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium

3/4"

	⬡ mm	D mm	L mm	T mm	g
911.3458	14,0	38.0	80.0	25.0	350
911.3459	17,0	38.0	80.0	25.0	390
911.3461	19,0	38.0	80.0	25.0	430
911.3462	22,0	38.0	80.0	25.0	480

Bit socket for hexagon screws, long

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Long execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium



3/4"

	⬡ mm	D mm	L mm	T mm	g
911.3463	14,0	38.0	155.0	100.0	450
911.3464	17,0	38.0	155.0	100.0	540
911.3465	19,0	38.0	155.0	100.0	580
911.3466	22,0	38.0	155.0	100.0	610

Bit socket for TX screws

- TX
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium



3/4"

		D mm	L mm	T mm	g
911.3467	T60	38.0	80.0	25.0	340
911.3468	T70	38.0	80.0	25.0	380
911.3469	T80	38.0	80.0	25.0	415
911.3471	T90	38.0	80.0	25.0	450
911.3472	T100	38.0	80.0	25.0	460

3/4“ ADAPTERS

Reducing adaptor

- DIN 3123 / ISO 3316
- Square drive to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

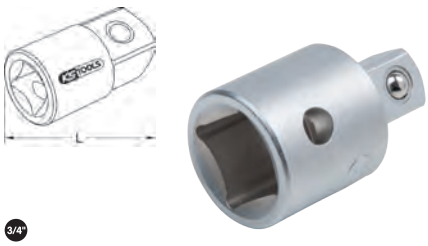

3/4"

	□	■	L mm	g
911.3412	3/4	1/2”	56.0	195

Adaptor and reducing adaptor

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

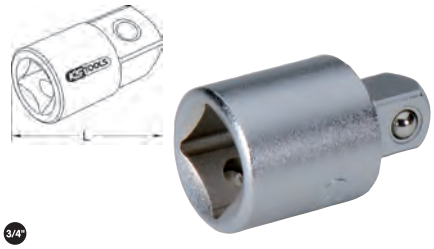

3/4"

	□	■	L mm	g
911.3473	3/4"	1"	60.0	335

Adaptor and reducing adaptor set

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium
- In durable plastic case

1/4" 3/8" 1/2"

			kg
911.0106	6 pcs	1/4" x 3/8" - 3/8" x 1/4" - 3/8" x 1/2" - 1/2" x 3/8" - 1/2" x 3/4" - 3/4" x 1/2"	0.66

CHROME*plus*® adaptor and reducing adaptor set

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

			kg
918.0106	6 pcs	1/4" x 3/8" - 3/8" x 1/4" - 3/8" x 1/2" - 1/2" x 3/8" - 1/2" x 3/4" - 3/4" x 1/2"	0.66

3/4“ T-HANDLES

Sliding T-handle

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- For manual operation
- Matt finis
- Chrome vanadium

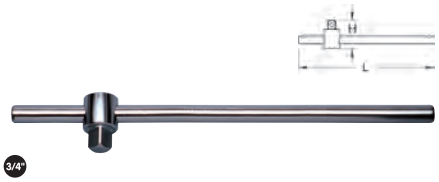

3/4"

	H mm	L mm	kg
911.3405	16.0	450.0	1.22

3/4“ EXTENSIONS

Extensions

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- For manual operation
- Matt finis
- Chrome vanadium

3/4"

	L mm	g
911.3402	100.0	420
911.3403	200.0	730
911.3404	400.0	1600

3/4“ MANUAL DRIVE TOOLS

CHROME*plus*® Flexible head drive handle

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Ideal for diffi ult to access areas
- Protects ratchet and torque wrenches from overloading
- Burnished head
- Chrome plated and mirror polished
- Chrome vanadium

3/4"

	L mm	head,spare	kg
918.1801	1030.0	918.1801-1	3.80

3/4“ RATCHETS

Reversible ratchet

- DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Fine gearing 72 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Ergonomic handle
- Matt finis
- Chrome vanadium

3/4"

	A mm	D mm	L mm	Repair set	kg
911.3400	21.0	55.0	500.0	911.3498	1.98

CHROME*plus*® Reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Exact gearing 24 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Knurled handle
- Recessed reverse lever
- Chrome plated and mirror polished
- Chrome vanadium

3/4"

	A mm	D mm	L mm	Repair set	kg
911.3401	30.0	63.0	500.0	911.3499	2.55

CHROME*plus*® Telescopic reversible ratchet

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Exact gearing 24 teeth ratchet mechanism
- Ejection mechanism on the ratchet head
- Knurled handle
- Recessed reverse lever
- Chrome plated and mirror polished
- Chrome vanadium

3/4"

	A mm	D mm	L mm	Repair set	kg
911.3490	30.0	63.0	510,0-730,0	911.3499	3.35

Reversible ratchet

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Maximum load capacity up to 1.750 N•m
- Reversible
- Exact gearing 24 teeth ratchet mechanism
- Extremely substaintial handle bar
- Ejection mechanism on the ratchet head
- Knurled handle
- Recessed reverse lever
- Ideally suited for extreme loads
- Burnished head
- Matt finis
- Chrome vanadium

3/4"

	A mm	D mm	L mm	Repair set	kg
911.3410	35.0	70.0	1000.0	911.3499	3.00

Adjustable lengths high torque ratchet

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Exact gearing 24-teeth ratchet mechanism
- Infini ely variable
- Chrome plated and mirror polished
- Chrome vanadium

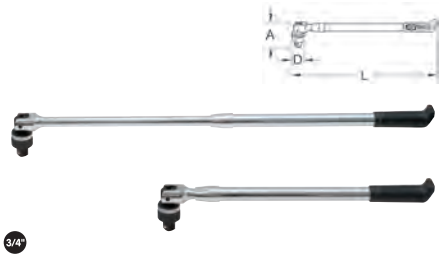

3/4"

	■	D mm	L mm	A mm	kg
918.1805	3/4"	46.0	610-915	96.0	3.00

3/4" SOCKETS

Socket set

- 6 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- In durable plastic storage case

3/4"

			kg
911.0721	21 pcs	Socket set	14.50
16 x		19 - 21 - 22 - 23 - 24 - 26 - 27 - 29 - 30 32 - 35 - 36 - 38 - 41 -46 - 50 mm	
3 x		100 - 200 - 400 mm	
1 x		450 mm	
1 x		500 mm	

Socket set

- Imperial sizes
- 6 point
- Matt finis
- Chrome vanadium
- In durable plastic case

3/4"

			kg
911.0752	21 pcs	Socket set	14.00
16 x		3/4" - 13/16" - 7/8" - 15/16" - 1" - 1.1/16" - 1.1/8" - 1.3/16" - 1.1/4" - 1.5/16" - 1.3/8" - 1.7/16" - 1.1/2" - 1.5/8" - 1.3/4" - 2"	
3 x		100 - 200 - 400 mm	
1 x		450 mm	
1 x		500 mm	

Socket set

- 12 point
- FlankTraction profile 12 point)
- Matt finis
- Chrome vanadium
- In durable plastic case

3/4"

			kg
911.0722	21 pcs	Socket set	14.00
16 x		19 - 21 - 22 - 23 - 24 - 26 - 27 - 29 - 30 32 - 35 - 36 - 38 - 41 - 46 - 50 mm	
3 x		100 - 200 - 400 mm	
1 x		450 mm	
1 x		500 mm	

Socket set

- Imperial sizes
- 12 point
- Matt finis
- Chrome vanadium
- In durable plastic case

3/4"

			kg
911.0751	21 pcs	Socket set	14.50
16 x		3/4"-13/16"-7/8"-15/16"-1"-1.1/16"-1.1/8"-1.3/16" 1.1/4"-1.5/16-1.3/8"-1.7/16"-1.1/2"-1.5/8"-1.3/4"-2"	
3 x		100 - 200 - 400 mm	
1 x		450 mm	
1 x		500 mm	

1“ SOCKETS

CLASSIC Hexagonal socket

- 6 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Short execution
- For manual operation
- Matt finis
- Chrome vanadium

1"

	mm		D1 mm	D2 mm	L mm	T mm	kg	
911.1036	36,0		51.0	45.0	66.0	25.0	0.51	
911.1038	38,0		54.0	45.0	66.0	26.0	0.54	
911.1041	41,0		57.0	45.0	70.0	30.0	0.55	
911.1046	46,0		65.0	50.0	75.0	30.0	0.80	
911.1050	50,0		70.0	57.0	76.0	31.0	1.00	
911.1054	54,0		74.0	57.0	81.0	32.0	1.10	
911.1055	55,0		76.0	57.0	81.0	32.0	1.20	
911.1058	58,0		79.0	57.0	81.0	32.0	1.26	
911.1060	60,0		82.0	57.0	85.0	40.0	1.40	
911.1063	63,0		86.0	57.0	87.0	40.0	1.50	
911.1065	65,0		88.0	57.0	87.0	40.0	1.63	
911.1067	67,0		90.0	57.0	88.0	40.0	1.70	
911.1070	70,0		94.0	68.0	93.0	44.0	2.00	
911.1071	71,0		95.0	68.0	93.0	45.0	2.10	
911.1075	75,0		100.0	68.0	97.0	45.0	2.20	
911.1077	77,0		101.0	68.0	101.0	50.0	2.25	
911.1080	80,0		105.0	68.0	103.0	51.0	2.25	
911.1022		1.7/16“	55.0	48.0	70.0	30.0	0.60	
911.1023		1.1/2“	56.0	48.0	70.0	30.0	0.65	
911.1024		1.5/8“	60.0	50.0	70.0	30.0	0.70	
911.1025		1.13/16“	66.0	50.0	75.0	33.0	0.83	
911.1026		1.7/8“	68.0	50.0	75.0	33.0	0.89	
911.1027		2“	72.0	50.0	75.0	5.0	0.94	
911.1028		2.1/16“	74.0	50.0	75.0	35.0	0.99	
911.1029		2.3/16“	78.0	50.0	80.0	37.0	1.18	
911.1031		2.1/4“	80.0	50.0	80.0	37.0	1.23	
911.1032		2.3/8“	84.0	50.0	85.0	41.0	1.39	
911.1033		2.7/16“	86.0	50.0	85.0	41.0	1.54	
911.1034		2.9/16“	90.0	59.5	88.0	44.5	1.79	
911.1035		2.5/8“	92.0	59.0	88.0	44.0	1.81	
911.1037		2.3/4“	96.0	59.0	92.0	48.0	2.06	
911.1039		2.13/16“	98.0	60.0	92.0	48.0	2.14	
911.1042		2.15/16“	102.0	60.0	95.0	51.0	2.30	
911.1043		3“	104.0	60.0	95.0	51.0	2.35	
911.1044		3.1/8“	109.0	60.0	97.0	54.0	2.56	

12 Point socket

- 12 point
- FlankTraction profil
- According to DIN 3124 / ISO 2725
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Short execution
- For manual operation
- Matt finis
- Chrome vanadium



1"

	mm		D1 mm	D2 mm	L mm	T mm	kg	
911.1045	36.0		54.0	48.0	70.0	30.0	0.51	
911.1047	38.0		56.0	48.0	70.0	30.0	0.60	
911.1048	41.0		60.0	50.0	70.0	31.0	0.64	
911.1049	46.0		66.0	50.0	75.0	34.0	0.90	
911.1051	50.0		71.0	50.0	75.0	35.0	1.10	
911.1052	54.0		75.0	50.0	80.0	36.0	1.14	
911.1053	55.0		80.0	50.0	80.0	38.0	1.30	
911.1056	58.0		83.0	50.0	85.0	40.0	1.40	
911.1057	60.0		85.0	50.0	85.0	41.0	1.50	
911.1059	63.0		86.0	60.0	88.0	43.0	1.68	
911.1061	65.0		88.0	60.0	88.0	45.0	1.74	
911.1062	67.0		90.0	60.0	88.0	46.0	1.85	
911.1064	70.0		92.0	60.0	92.0	48.0	2.00	
911.1066	71.0		94.0	60.0	92.0	50.0	2.13	
911.1068	75.0		95.0	60.0	95.0	51.0	2.28	
911.1069	77.0		93.0	60.0	96.0	52.0	2.40	
911.1072	80.0		97.0	60.0	97.0	54.0	2.58	
911.1073		1.7/16“	55.0	48.0	70.0	30.0	0.60	
911.1074		1.1/2“	56.0	48.0	70.0	30.0	0.65	
911.1076		1.5/8“	60.0	50.0	70.0	30.0	0.70	
911.1078		1.13/16“	66.0	50.0	75.0	33.0	0.83	
911.1079		1.7/8“	68.0	50.0	75.0	33.0	0.89	
911.1082		2“	72.0	50.0	75.0	5.0	0.94	
911.1083		2.1/16“	74.0	50.0	75.0	35.0	0.99	
911.1084		2.3/16“	78.0	50.0	80.0	37.0	1.18	
911.1093		2.1/4“	80.0	50.0	80.0	37.0	1.23	
911.1094		2.3/8“	84.0	50.0	85.0	41.0	1.39	
911.1095		2.7/16“	86.0	50.0	85.0	41.0	1.54	
911.1096		2.9/16“	90.0	59.5	88.0	44.5	1.79	
911.1097		2.5/8“	92.0	59.0	88.0	44.0	1.81	
911.1098		2.3/4“	96.0	59.0	92.0	48.0	2.06	
911.0801		2.13/16“	98.0	60.0	92.0	48.0	2.14	
911.0802		2.15/16“	102.0	60.0	95.0	51.0	2.30	
911.0803		3“	104.0	60.0	95.0	51.0	2.35	
911.0804		3.1/8“	109.0	60.0	97.0	54.0	2.56	

1" BIT SOCKETS

Bit socket for hexagon screws

- Hexagon socket
- In accordance with DIN 7422
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Short execution
- Press fi ted nickel plated insert bit
- For manual operation
- Matt finis
- Chrome vanadium



1"

	mm	D mm	L mm	T mm	g	
911.1805	14,0	43.0	85.0	25.0	390	
911.1806	17,0	43.0	85.0	25.0	415	
911.1807	19,0	43.0	85.0	25.0	445	
911.1808	22,0	48.0	90.0	25.0	660	
911.1809	24,0	48.0	90.0	25.0	720	
911.1811	27,0	49.0	90.0	25.0	830	

1“ T-HANDLES

Sliding adaptor

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- To the use with extensions
- For manual operation
- Matt finis
- Chrome vanadium



1"

	L mm	g	
911.1081	80.0	640	

Universal handle

- With ball lock
- For manual operation
- Matt finis
- Chrome vanadium

1"

	D mm	L mm	kg	
911.1021	28.0	540.0	2.55	

1“ EXTENSIONS

CHROME*plus*® Extension

- DIN 3123 / ISO 3316
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Internal square to DIN 3120 / ISO 1174 with ball reception
- Chrome plated and mirror polished
- Chrome vanadium

1"

	L mm	kg	
911.1020	200.0	1.33	
911.1040	400.0	2.35	

1/4“ MANUAL DRIVE TOOLS

CHROME*plus*® Flexible head drive handle

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Ideal for diffi ult to access areas
- Protects ratchet and torque wrenches from overloading
- Burnished head
- Chrome plated and mirror polished
- Chrome vanadium

1"

	L mm	head,spare	kg	
918.1802	1050.0	918.1802-1	3.80	

1“ RATCHETS

Reversible ratchet

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Exact gearing 24 teeth ratchet mechanism
- Lightweight recessed reverse lever
- Ideally suited for extreme loads
- Burnished head
- With handle
- Chrome plated and mirror polished
- Chrome vanadium

1"

	A mm	D mm	L mm	Replacement handle bar	Repair set	kg	
911.1019	35.0	70.0	210.0	911.1021	911.1099	4.60	

1“ SET ASSORTMENTS

Socket set

- 6 point
- Flank Traction profil
- Matt finis
- Chrome vanadium
- Robust 24 teeth ratchet mechanism
- In durable steel storage case

1"

			kg	
911.0815	15 pcs	36 - 41 - 46 - 50 - 55 - 60 - 65 - 70 - 75 - 80 mm	29.00	
911.0822	22 pcs	36 - 38 - 41 - 46 - 50 - 54 - 55 - 58 - 60 - 63 - 65 - 67 - 70 - 71 - 75 - 77 - 80 mm	43.50	

Socket set

- 12 point
- FlankTraction profil
- Matt finis
- Chrome vanadium
- Robust 24 teeth ratchet mechanism
- In durable steel storage case

1"

			kg	
911.0814	15 pcs	36 - 41 - 46 - 50 - 55 - 60 - 65 - 70 - 75 - 80 mm	29.00	
911.0824	22 pcs	36 - 38 - 41 - 46 - 50 - 54 - 55 - 58 - 60 - 63 - 65 - 67 - 70 - 71 - 75 - 77 - 80 mm	43.50	

1/4“ POWER SOCKETS

Hexagon impact socket

- 6 point
- According to DIN 3129 / ISO 2725-2
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/4"

	⬢ mm	⬢	L mm	D1 mm	D2 mm	T mm	g
515.1501	4,0		23.0	10.0	13.0	3.0	12
515.1502	4,5		23.0	10.0	13.0	3.0	12
515.1503	5,0		23.0	10.0	13.0	3.0	12
515.1541	5,5		23.0	10.0	13.0	3.0	14
515.1542	6,0		23.0	10.0	13.0	3.0	14
515.1543	7,0		23.0	11.0	13.0	3.0	14
515.1544	8,0		23.0	12.0	13.0	3.5	14
515.1545	9,0		23.0	13.0	13.0	4.0	16
515.1546	10,0		23.0	14.0	13.0	5.0	16
515.1547	11,0		23.0	16.0	13.0	6.0	19
515.1548	12,0		23.0	17.0	13.0	6.0	19
515.1549	13,0		23.0	19.0	13.0	6.0	21
515.1550	14,0		23.0	20.0	13.0	7.0	21
515.1552		3/16“	23.0	9.0	13.0	3.0	14
515.1553		1/4“	23.0	10.0	13.0	3.0	14
515.1554		5/16“	23.0	13.0	13.0	3.0	14
515.1505		11/32“	23.0	13.0	10.0	4.0	15
515.1555		3/8“	23.0	14.0	13.0	4.0	16
515.1556		7/16“	23.0	16.0	13.0	6.0	19
515.1525		1/2“	23.0	17.0	14.0	6.0	22

Spiral profile i pact socket

- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Rejuvenating special profile wi h aggressive spiral nut
- For turning off of screws with rounded or turned heads
- Bites firm y to give a firm onnection between stuck nut and head
- Phosphate finis
- Chrome molybdenum

1/4"

	⬢ mm	D mm	L mm	g
913.1473	6,0	17.0	32.0	40
913.1408	8,0	17.0	32.0	40
913.1410	10,0	17.0	32.0	40
913.1470	11,0	17.0	32.0	40
913.1412	12,0	17.0	32.0	40

Spiral profile i pact socket set

- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Rejuvenating special profile wi h aggressive spiral nut
- For turning off of screws with rounded or turned heads
- Bites firm y to give a firm onnection between stuck nut and head
- Drive out pin
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/4" 1/2"

			kg
913.1460	15 pcs	Spiral profile i pact socket set	1.10
8 x		1/2“: 13 - 14 - 15 - 17 - 19 - 21 - 24 - 27 mm	
5 x		1/4“: 6 - 8 - 10 - 11 - 12 mm	
2 x		1/4“	

1/4“ POWER EXTENSIONS

Impact extension

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage
- Phosphate finis
- Chrome molybdenum

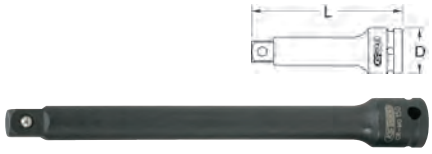

1/4"

	L mm	D mm	g
515.1560	50.0	13.0	25

1/4“ POWER ADAPTERS

Impact socket adapter

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/4"

	□	■	L mm	D mm	g
515.1530	1/4”	3/8”	26.0	13.0	16

Impact adaptor and reducing adaptor set

- Ideal set of compilation for adaptors and ball joints
- Chrome molybdenum
- In durable plastic case

1/4" 3/8" 1/2" 3/4"

			kg
515.0100	9 pcs	Impact adaptor and reducing adaptor set	1.78
1 x		1/4“F x 3/8“M	
1 x		3/8“F x 1/4“M	
1 x		3/8“F x 1/2“M	
1 x		1/2“F x 3/8“M	
1 x		1/2“F x 3/4“M	
1 x		3/4“F x 1/2“M	
1 x		3/8“	
1 x		1/2“	
1 x		3/4“	

1/4“ POWER SECURING ELEMENTS

O-Ring

- For impact drivers and impact sockets
- For safeguard

1/4"

	for sockets mm	D mm	B mm	g
515.1403	5,5-17	9.0	3.0	1

Connection pin for sockets

- For impact drivers and impact sockets
- For safeguard

1/4"

	for sockets mm	D mm	L mm	g
515.1404	5,5-17	1.5	10.0	1

3/8“ POWER SOCKETS

Hexagon impact socket

- 6 point
- According to DIN 3129 / ISO 2725-2
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

3/8“

	mm		L mm	D1 mm	D2 mm	T mm	g
515.1506	6,0		28.0	11.0	19.0	3.0	32
515.1507	7,0		32.0	12.0	19.0	3.5	32
515.1508	8,0		32.0	14.0	19.0	4.0	32
515.1509	9,0		32.0	15.0	19.0	4.0	32
515.1510	10,0		32.0	16.0	19.0	5.0	33
515.1511	11,0		32.0	17.0	19.0	6.0	35
515.1512	12,0		32.0	18.0	19.0	6.0	35
515.1513	13,0		32.0	20.0	19.0	6.0	46
515.1514	14,0		32.0	21.0	22.0	8.0	46
515.1515	15,0		32.0	22.0	22.0	8.0	50
515.1516	16,0		32.0	24.0	22.0	8.0	54
515.1517	17,0		32.0	24.0	22.0	8.0	54
515.1518	18,0		32.0	26.0	22.0	9.0	62
515.1519	19,0		32.0	28.0	22.0	9.0	70
515.1520	20,0		32.0	28.0	22.0	9.0	70
515.1521	21,0		32.0	30.0	22.0	10.0	70
515.1522	22,0		32.0	32.0	22.0	10.0	83
515.1523	23,0		32.0	32.0	22.0	12.0	120
515.1524	24,0		32.0	34.0	22.0	12.0	130
515.1526		5/16“	26.0	14.5	19.0	3.5	30
515.1527		3/8“	26.0	15.2	19.0	3.5	30
515.1528		7/16“	26.0	16.7	19.0	3.5	35
515.1529		1/2“	27.0	18.5	19.0	3.5	45
515.1551		9/16“	27.0	20.5	22.0	4.0	55
515.1557		7/8“	28.0	22.5	22.0	4.0	60
515.1558		5/8“	290.0	24.5	22.0	4.0	65
515.1559		11/16“	30.0	26.8	22.0	5.0	75
515.1561		3/4“	31.0	28.5	22.0	5.0	85
515.1562		13/16“	32.0	30.0	22.0	5.0	95

Hexagon impact socket set

- 6 point
- According to DIN 3129 / ISO 2725-2
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- On a socket rail

3/8“

			kg
515.0608	8 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 mm	1.49

Hexagon impact socket, deep

- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

3/8“

	mm	L mm	D1 mm	D2 mm	T mm	g
515.1606	6,0	63.0	11.0	19.0	4.0	75
515.1607	7,0	63.0	12.0	19.0	4.0	75
515.1608	8,0	63.0	14.0	19.0	4.0	75
515.1609	9,0	63.0	15.0	19.0	4.0	75
515.1610	10,0	63.0	16.0	19.0	5.0	75
515.1611	11,0	63.0	17.0	19.0	6.0	75
515.1612	12,0	63.0	18.0	19.0	6.0	80
515.1613	13,0	63.0	20.0	22.0	6.0	105
515.1614	14,0	63.0	21.0	22.0	8.0	105
515.1615	15,0	63.0	22.0	22.0	8.0	110
515.1616	16,0	63.0	24.0	22.0	8.0	125
515.1617	17,0	63.0	24.0	22.0	8.0	125
515.1618	18,0	63.0	26.0	22.0	9.0	135
515.1619	19,0	63.0	28.0	22.0	9.0	165
515.1620	20,0	63.0	28.0	22.0	9.0	220
515.1621	21,0	63.0	30.0	22.0	10.0	230
515.1622	22,0	63.0	32.0	22.0	10.0	240
515.1623	23,0	63.0	32.0	22.0	12.0	260
515.1624	24,0	63.0	34.0	22.0	12.0	260

Hexagont impact socket set, deep

- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- On a socket rail

3/8“

			kg
515.0648	8 pcs	10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 mm	1.00

12 point impact socket

- 12 point
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

3/8“

	mm		L mm	D1 mm	D2 mm	T mm	g
515.1563	6.0		28.0	11.3	19.0	3.0	32
515.1564	7.0		32.0	12.1	19.0	3.5	32
515.0958	8.0		28.0	14.0	19.0	4.0	40
515.0959	9.0		28.0	15.0	19.0	4.0	40
515.0960	10.0		28.0	16.0	19.0	5.0	40
515.0961	11.0		30.0	17.0	19.0	6.0	40
515.0962	12.0		30.0	18.0	19.0	6.0	40
515.0963	13.0		30.0	20.0	22.0	6.0	60
515.0964	14.0		30.0	21.0	22.0	8.0	60
515.0965	15.0		30.0	22.0	22.0	8.0	60
515.0966	16.0		30.0	24.0	22.0	8.0	70
515.0967	17.0		32.0	24.0	22.0	8.0	80
515.0968	18.0		32.0	26.0	22.0	9.0	80
515.0969	19.0		32.0	28.0	22.0	9.0	90
515.1565	20.0		32.0	27.8	22.0	9.0	70
515.1566	21.0		32.0	29.8	22.0	10.0	70
515.1567	22.0		32.0	31.8	22.0	10.0	83
515.1568	23.0		32.0	31.8	22.0	12.0	120
515.1569	24.0		32.0	33.8	22.0	12.0	130
515.1570		5/16“	26.0	14.5	19.0	3.5	30
515.1571		3/8“	26.0	15.2	19.0	3.5	30
515.1572		7/16“	26.0	16.7	19.0	3.5	35
515.1573		1/2“	27.0	18.5	19.0	3.5	45
515.1574		9/16“	27.0	20.5	22.0	4.0	55
515.1575		7/8“	28.0	22.5	22.0	4.0	60
515.1576		5/8“	290.0	24.5	22.0	4.0	65
515.1577		11/16“	30.0	26.8	22.0	5.0	75
515.1578		3/4“	31.0	28.5	22.0	5.0	85
515.1579		13/16“	32.0	30.0	22.0	5.0	95

12 Point impact socket

- 12 point
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

3/8“

			kg
515.0950	10 pcs	8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 mm	1.65

Spiral profile i pact socket

- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Rejuvenating special profile wi h aggressive spiral nut
- For turning off of screws with rounded or turned heads
- Bites firm y to give a firm onnection between stuck nut and head
- Phosphate finis
- Chrome molybdenum

3/8"

	mm	D mm	L mm	g	
913.3860	10,0	15.0	34.0	30	
913.3861	11,0	16.0	34.0	30	
913.3862	12,0	18.0	34.0	40	
913.3863	13,0	18.5	34.0	40	
913.3864	14,0	20.5	34.0	40	
913.3865	15,0	22.0	34.0	60	
913.3866	16,0	22.5	34.0	60	
913.3867	17,0	24.5	34.0	70	
913.3868	18,0	26.0	34.0	80	
913.3869	19,0	27.0	34.0	80	

Spiral profile i pact socket set

- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Rejuvenating special profile wi h aggressive spiral nut
- For turning off of screws with rounded or turned heads
- Bites firm y to give a firm onnection between stuck nut and head
- Drive out pin
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

3/8"

			g	
913.3855	10 pcs	Spiral profile i pact socket set	660	

consists of:

		g	
913.3860	3/8" Spiral profile so ket, 10 mm	30	
913.3861	3/8" Spiral profile so ket, 11 mm	30	
913.3862	3/8" Spiral profile so ket, 12 mm	40	
913.3863	3/8" Spiral profile so ket, 13 mm	40	
913.3864	3/8" Spiral profile so ket, 14 mm	40	
913.3865	3/8" Spiral profile so ket, 15 mm	60	
913.3866	3/8" Spiral profile so ket, 16 mm	60	
913.3867	3/8" Spiral profile so ket, 17 mm	70	
913.3869	3/8" Spiral profile so ket, 19 mm	80	
913.3870	Burr arbor	30	

TX E impact socket

- TX E profil
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

3/8"

		L mm	D1 mm	D2 mm	T mm	g	
515.0980	E5	30.0	8.0	19.0	4.0	30	
515.0981	E6	30.0	10.0	19.0	5.0	30	
515.0982	E7	30.0	10.0	19.0	6.0	30	
515.0983	E8	30.0	11.0	19.0	6.0	30	
515.0984	E10	30.0	13.0	19.0	8.0	37	
515.0985	E12	30.0	15.0	19.0	9.0	40	
515.0986	E14	30.0	17.0	19.0	10.0	50	

3/8“ POWER EXTENSIONS

Impact extension

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage
- Phosphate finis
- Chrome molybdenum

3/8"

	L mm	D mm	g	
515.1534	75.0	19.0	85	
515.1535	150.0	19.0	150	
515.1540	250.0	19.0	250	

3/8“ POWER BALL JOINTS

Impact universal ball joint

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- Suspension
- For machinery usage
- Phosphate finis
- Chrome molybdenum

3/8"

	□	■	L mm	D mm	g	
515.1533	3/8“	3/8“	53.0	24.0	105	

3/8“ POWER ADAPTERS

Impact adaptor

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage
- Phosphate finis
- Chrome molybdenum

3/8"

	□	■	L mm	D mm	g	
515.1531	3/8”	1/4”	32.0	22.0	20	
515.1532	3/8”	1/2”	36.0	22.0	62	

Impact adaptor and reducing adaptor set

- Ideal set of compilation for adaptors and ball joints
- Chrome molybdenum
- In durable plastic case

1/4" 3/8" 1/2" 3/4"

			kg	
515.0100	9 pcs	Impact adaptor and reducing adaptor set	1.78	
1 x		1/4“F x 3/8“M		
1 x		3/8“F x 1/4“M		
1 x		3/8“F x 1/2“M		
1 x		1/2“F x 3/8“M		
1 x		1/2“F x 3/4“M		
1 x		3/4“F x 1/2“M		
1 x		3/8“		
1 x		1/2“		
1 x		3/4“		

3/8“ POWER SECURING ELEMENTS

O-Ring

- For impact drivers and impact sockets
- For safeguard

3/8"

	for sockets mm	D mm	B mm	g	
515.1536	6-12	13.0	4.0	10	
515.1537	13-22	16.0	4.0	12	

Connection pin for sockets

- For impact drivers and impact sockets
- For safeguard

3/8"

	for sockets mm	D mm	L mm	g
515.1538	6-12	2.5	14.0	10
515.1539	13-22	2.5	16.0	14

1/2“ POWER SOCKETS

Hexagon impact socket

- 6 point
- According to DIN 3129 / ISO 2725-2
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

	mm		L mm	D1 mm	D2 mm	T mm	g
515.1008	8,0		38.0	15.0	24.0	8.0	57
515.1009	9,0		38.0	16.0	24.0	8.0	60
515.1010	10,0		38.0	17.0	24.0	10.0	60
515.1011	11,0		38.0	18.0	24.0	10.0	62
515.1012	12,0		38.0	20.0	24.0	10.0	64
515.1013	13,0		38.0	21.0	24.0	10.0	67
515.1014	14,0		38.0	22.0	24.0	11.0	69
515.1015	15,0		38.0	23.0	24.0	11.0	74
515.1016	16,0		38.0	25.0	24.0	11.0	72
515.1017	17,0		38.0	26.0	26.0	12.0	89
515.1018	18,0		38.0	27.0	28.0	13.0	111
515.1019	19,0		38.0	28.0	28.0	13.0	100
515.1020	20,0		38.0	30.0	30.0	13.0	121
515.1021	21,0		38.0	30.0	30.0	14.0	125
515.1022	22,0		38.0	32.0	30.0	14.0	130
515.1023	23,0		38.0	34.0	30.0	15.0	140
515.1024	24,0		38.0	34.0	30.0	15.0	138
515.1025	25,0		40.0	36.0	30.0	16.0	157
515.1026	26,0		40.0	38.0	30.0	16.0	158
515.1027	27,0		42.0	38.0	30.0	18.0	158
515.1028	28,0		42.0	40.0	30.0	18.0	189
515.1029	29,0		42.0	40.0	30.0	19.0	176
515.1030	30,0		42.0	42.0	30.0	19.0	202
515.1031	31,0		42.0	42.0	30.0	20.0	223
515.1032	32,0		44.0	44.0	30.0	20.0	226
515.0040		3/8“	38.0	17.0	24.0	9.0	70
515.0041		7/16“	38.0	18.0	24.0	9.0	70
515.0042		1/2“	38.0	21.0	24.0	13.0	75
515.0043		9/16“	38.0	22.0	24.0	13.0	80
515.0044		5/8“	38.0	25.0	24.0	14.0	115
515.0045		11/16“	38.0	26.0	26.0	16.0	120
515.0046		3/4“	38.0	28.0	28.0	16.0	120
515.0047		13/16“	38.0	30.0	30.0	17.0	120
515.0048		7/8“	38.0	32.0	30.0	18.0	130
515.0049		15/16“	38.0	34.0	30.0	19.0	135
515.0050		1“	40.0	36.0	30.0	19.0	140
515.0051		1.1/16“	42.0	38.0	30.0	20.0	180
515.0052		1.1/8“	42.0	40.0	30.0	20.0	200
515.0053		1.1/4“	42.0	44.0	30.0	21.0	220
515.0054		1.5/16“	44.0	44.0	30.0	22.0	230

Hexagon impact socket set

- 6 point
- According to DIN 3129 / ISO 2725-2
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/2"

			kg
515.0112	12 pcs	Hexagon impact socket set	2.40
10 x		10 - 11 - 13 - 14 - 17 - 19 - 21 - 22 23 - 24 mm	
1 x		1/2“	
1 x		125 mm	

Hexagon impact socket, deep

- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum



1/2"

	mm	L mm	D1 mm	D2 mm	T mm	g
515.1108	8,0	78.0	15.0	24.0	12.0	160
515.1109	9,0	78.0	16.0	24.0	12.0	160
515.1110	10,0	78.0	17.0	24.0	12.0	160
515.1111	11,0	78.0	18.0	24.0	13.0	160
515.1112	12,0	78.0	20.0	24.0	14.0	160
515.1113	13,0	78.0	21.0	24.0	14.0	180
515.1114	14,0	78.0	22.0	24.0	14.0	180
515.1115	15,0	78.0	23.0	24.0	15.0	210
515.1116	16,0	78.0	25.0	24.0	16.0	210
515.1117	17,0	78.0	26.0	26.0	17.0	220
515.1118	18,0	78.0	27.0	28.0	18.0	220
515.1119	19,0	78.0	28.0	28.0	20.0	220
515.1120	20,0	78.0	30.0	30.0	20.0	220
515.1121	21,0	78.0	30.0	30.0	22.0	220
515.1122	22,0	78.0	32.0	30.0	22.0	230
515.1123	23,0	78.0	34.0	30.0	24.0	230
515.1124	24,0	78.0	34.0	30.0	24.0	310
515.1125	25,0	78.0	36.0	30.0	24.0	340
515.1126	26,0	78.0	38.0	30.0	27.0	340
515.1127	27,0	78.0	38.0	30.0	27.0	410
515.1128	28,0	78.0	40.0	30.0	27.0	410
515.1129	29,0	78.0	40.0	30.0	27.0	410
515.1130	30,0	78.0	42.0	30.0	30.0	410
515.1131	31,0	78.0	42.0	30.0	31.0	410
515.1132	32,0	78.0	44.0	30.0	32.0	430

Hexagon impact socket set, deep

- 6 point
- According to DIN 3129 / ISO 2725-2
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finish
- Chrome molybdenum
- On a magnetic storage rail

1/2"

			kg
515.0612	13 pcs	Hexagon impact socket set, deep	2.69
10 x		12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm	
1 x		1/2“	
1 x		125 mm	

12 point impact socket

- 12 point
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

	mm		L mm	D1 mm	D2 mm	T mm	g
515.0987	8.0		78.0	14.6	25.0	12.0	160
515.0988	9.0		78.0	15.8	25.0	12.0	160
515.0910	10.0		38.0	17.0	24.0	6.0	100
515.0911	11.0		38.0	18.0	24.0	7.0	100
515.0912	12.0		38.0	20.0	24.0	7.0	100
515.0913	13.0		38.0	21.0	24.0	8.0	100
515.0914	14.0		38.0	22.0	24.0	8.0	100
515.0915	15.0		38.0	23.0	24.0	9.0	140
515.0916	16.0		38.0	25.0	24.0	9.0	140
515.0917	17.0		38.0	26.0	26.0	10.0	140
515.0918	18.0		38.0	27.0	28.0	10.0	140
515.0919	19.0		38.0	28.0	28.0	12.0	140
515.0920	20.0		38.0	30.0	30.0	12.0	140
515.0921	21.0		38.0	30.0	30.0	13.0	150
515.0922	22.0		38.0	32.0	30.0	14.0	150
515.0923	23.0		38.0	34.0	30.0	14.0	160
515.0924	24.0		38.0	34.0	30.0	16.0	160
515.0925	25.0		78.0	35.8	30.0	24.0	340
515.0926	26.0		78.0	37.0	30.0	27.0	340
515.0927	27.0		78.0	38.3	30.0	27.0	410
515.0928	28.0		78.0	39.5	30.0	27.0	410
515.0929	29.0		78.0	40.8	30.0	27.0	410
515.0930	30.0		78.0	42.1	30.0	30.0	410
515.0931	31.0		78.0	43.3	30.0	30.0	410
515.0933	32.0		78.0	44.6	30.0	32.0	430
515.0901		3/8“	38.0	17.0	25.0	6.0	70
515.0902		7/16“	38.0	18.5	25.0	8.0	70
515.0903		1/2“	38.0	20.5	25.0	8.0	75
515.0904		9/16“	38.0	23.0	25.0	8.0	80
515.0905		5/8“	38.0	24.5	30.0	9.0	115
515.0906		11/16“	38.0	27.0	30.0	9.0	120
515.0907		3/4“	38.0	28.0	30.0	10.0	120
515.0908		13/16“	38.0	30.0	30.0	12.0	120
515.0909		7/8“	38.0	31.8	30.0	12.0	130
515.0934		15/16“	38.0	33.8	30.0	14.0	135
515.0935		1“	40.0	35.8	30.0	14.0	140
515.0936		1.1/16“	43.0	37.8	30.0	14.0	180
515.0937		1.1/8“	43.0	39.8	30.0	16.0	200
515.0938		1.1/4“	43.0	43.8	30.0	18.0	220
515.0939		1.5/16“	46.0	44.8	30.0	18.0	230

12 Point impact socket set

- 12 point
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/2"

			kg
515.0900	13 pcs	10 - 12 - 13 - 14 - 15 - 16 - 17 - 19 - 20 - 21 - 22 - 23 - 24 mm	2.80

12 point impact socket, deep

- 12 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

	○ mm	L mm	D1 mm	D2 mm	T mm	g
515.0940	8.0	78.0	14.0	25.0	12.0	160
515.0941	9.0	78.0	15.8	25.0	12.0	160
515.0942	10.0	78.0	17.0	25.0	12.0	155
515.0943	11.0	78.0	18.4	25.0	13.0	160
515.0944	12.0	78.0	16.6	25.0	14.0	160
515.0945	13.0	78.0	18.4	25.0	12.0	160
515.0946	14.0	78.0	20.8	25.0	12.0	185
515.0947	15.0	78.0	23.3	30.0	15.0	210
515.0948	16.0	78.0	24.6	25.0	13.0	210
515.0949	17.0	78.0	25.8	30.0	17.0	230
515.0951	18.0	78.0	27.1	30.0	18.0	240
515.0952	19.0	78.0	28.3	30.0	20.0	250
515.0953	20.0	78.0	29.5	30.0	20.0	260
515.0954	21.0	78.0	30.8	30.0	22.0	275
515.0955	22.0	78.0	32.3	30.0	22.0	300
515.0956	23.0	78.0	33.3	30.0	24.0	230
515.0957	24.0	78.0	34.6	30.0	24.0	370
515.0971	25.0	78.0	35.8	30.0	24.0	340
515.0972	26.0	78.0	37.0	30.0	27.0	340
515.0973	27.0	78.0	38.3	30.0	27.0	430
515.0974	28.0	78.0	39.5	30.0	27.0	410
515.0975	29.0	78.0	40.8	30.0	27.0	410
515.0976	30.0	85.0	42.1	30.0	27.0	510
515.0977	31.0	85.0	43.3	30.0	31.0	410
515.0978	32.0	85.0	44.6	30.0	32.0	560

12 Point impact socket set, deep

- 12 point
- According to DIN 3129 / ISO 2725-2
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- On a magnetic storage rail

1/2"

			kg
515.1140	13 pcs	12 Point impact socket set, deep	2.70
10 x		12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm	
1 x		1/2"	
1 x		125 mm	

TX E impact socket, short

- TX E
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

		L mm	D1 mm	D2 mm	T mm	g
911.0958	E10	38.0	13.5	25.0	8.0	80
911.0959	E12	38.0	15.5	25.0	10.0	80
911.0961	E14	38.0	17.5	25.0	10.0	85
911.0962	E16	38.0	19.6	25.0	10.0	85
911.0963	E18	38.0	21.7	30.0	11.0	85
911.0964	E20	38.0	23.8	30.0	11.0	85
911.0969	E24	38.0	28.3	30.0	11.0	90

Impact socket set, short

- TX-E
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- Includes storage rail

1/2"

			kg
515.1106	7 pcs	E10 - E12 - E14 - E16 - E18 - E20 - E24	1.45

TX E impact socket, deep

- TX E
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

		L mm	D1 mm	D2 mm	T mm	g
515.1051	E10	75.0	13.0	22.0	8.0	150
515.1052	E11	75.0	14.0	22.0	21.0	150
515.1053	E12	75.0	16.0	22.0	21.0	150
515.1054	E14	75.0	16.0	22.0	18.0	170
515.1055	E16	75.0	19.0	22.0	20.0	180
515.1056	E18	75.0	20.0	22.0	19.0	200
515.1057	E20	75.0	24.0	22.0	20.0	240
515.1058	E22	75.0	26.0	24.0	34.0	280
515.1059	E24	75.0	28.0	26.0	21.0	320

Impact socket set

- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/2"

			kg
515.1050	9 pcs	E10 - E11 - E12 - E14 - E16 - E18 - E20 - E22 - E24	1.97

Spiral profile i pact socket

- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Rejuvenating special profile wi h aggressive spiral nut
- For turning off of screws with rounded or turned heads
- Bites firm y to give a firm onnection between stuck nut and head
- Phosphate finis
- Chrome molybdenum

1/2"

	mm	L mm	g
913.1469	12,0	34.0	40
913.1468	13,0	34.0	50
913.1467	14,0	34.0	70
913.1466	15,0	34.0	70
913.1465	17,0	34.0	70
913.1464	19,0	34.0	90
913.1249	19,0	50.0	90
913.1250	20,0	50.0	110
913.1463	21,0	34.0	90
913.1252	22,0	50.0	120
913.1253	23,0	50.0	130
913.1462	24,0	34.0	110
913.1255	25,0	50.0	150
913.1461	27,0	34.0	110

Spiral profile i pact socket set, extra deep

- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Rejuvenating special profile wi h aggressive spiral nut
- For turning off of screws with rounded or turned heads
- Bites firm y to give a firm onnection between stuck nut and head
- Drive out pin
- Phosphate finis
- In durable plastic case

1/2"

			g
913.1240	6 pcs	Spiral profile i pact socket set, extra deep	690

consists of:

		g
913.1249	1/2" Spiral-Profil -Socket, 19 mm	90
913.1250	1/2" Spiral-Profil -Socket, 20 mm	110
913.1252	1/2" Spiral-Profil -Socket, 22 mm	120
913.1253	1/2" Spiral-Profil -Socket, 23 mm	130
913.1255	1/2" Spiral-Profil -Socket, 25 mm	150

Spiral profile i pact socket set

- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Rejuvenating special profile wi h aggressive spiral nut
- For turning off of screws with rounded or turned heads
- Bites firm y to give a firm onnection between stuck nut and head
- Drive out pin
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/4" 1/2"

			kg
913.1460	15 pcs	Spiral profile i pact socket set	1.10

8 x		1/2": 13 - 14 - 15 - 17 - 19 - 21 - 24 - 27 mm
5 x		1/4": 6 - 8 - 10 - 11 - 12 mm
2 x		1/4"

1/2" WHEEL ASSEMBLY SOCKETS

Spiral profile i pact socket set

- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Rejuvenating special profile wi h aggressive spiral nut
- For turning off of screws with rounded or turned heads
- Bites firm y to give a firm onnection between stuck nut and head
- Phosphate finis
- Chrome molybdenum

1/2"

			g
913.1270	3 pcs	Spiral profile i pact socket set	600

consists of:

		g
913.1271	1/2" Spiral profile i pact socket 17 mm	140
913.1272	1/2" Spiral profile i pact socket 19 mm	200
913.1273	1/2" Spiral profile i pact socket 21 mm	210

Spiral profile i pact socket set

- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Rejuvenating special profile wi h aggressive spiral nut
- For turning off of screws with rounded or turned heads
- Bites firm y to give a firm onnection between stuck nut and head
- Phosphate finis
- Chrome molybdenum

1/2"

			g
913.1280	3 pcs	Spiral profile i pact socket set	600

consists of:

		g
913.1281	1/2" Spiral profile i pact socket 17 mm	130
913.1282	1/2" Spiral profile i pact socket 19 mm	170
913.1283	1/2" Socket Extension, 75 mm	160

Spiral profile i pact socket set, extra deep

- For example VAG and all vehicles with wheel nuts and/or bolt
- For loosening and unscrewing tight bolts and nuts with damaged or rounded heads
- Extra long execution 145 mm
- Internal square to DIN 3121 / ISO 1174 with ball reception
- For machinery usage
- Includes impact bar to extract or remove the damaged bolt or nut
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/2"

			kg
913.1290	4 pcs	Spiral profile i pact socket set, extra deep	1.50

consists of:

		g
913.1291	1/2" Spiral profile i pact socket 17 mm	300
913.1292	1/2" Spiral profile i pact socket 19 mm	320
913.1293	1/2" Spiral profile i pact socket 21 mm	340
913.1295	Impact bar	540

Hexagon impact socket set, deep

- 6 point
- According to DIN 3129 / ISO 2725-2
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- Includes storage rail

1/2"

			kg
515.0103	3 pcs	17 - 19 - 21 mm	0.86

Aluminium wheel impact socket, deep

- Specially for the wheel assembly and/or dismantling
- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Plastic sleeves for the damage free work on aluminum rims
- Plastic sleeves interchangeable
- Colour coded identifi s the socket size
- Chrome vanadium

1/2"

	Colour code	mm	L mm	D1 mm	D2 mm	T mm	Replacement sleeves	g
515.2015		15,0	85.0	21.0	25.0	23.0	515.2035	180
515.2017		17,0	85.0	24.0	30.0	23.0	515.2030	231
515.2019		19,0	85.0	26.0	30.0	23.0	515.2031	235
515.2021		21,0	85.0	28.0	30.0	23.0	515.2032	258
515.2022		22,0	85.0	30.0	32.0	23.0	515.2033	320

Aluminium wheel impact socket set, deep

- Specially for the wheel assembly and/or dismantling
- 6 point
- Internal square to DIN 3121 / ISO 1174 with ball reception
- For machinery usage
- Plastic sleeves for the damage free work on aluminum rims
- Plastic sleeves interchangeable
- Colour coded identifi s the socket size
- Chrome vanadium
- In durable plastic case

1/2"

			kg
515.1005	3 pcs	17 - 19 - 21 mm	0.86
515.1006	4 pcs	17 - 19 - 21 - 22 mm	1.45
515.1007	5 pcs	15 - 17 - 19 - 21 - 22 mm	1.40

Aluminium wheel impact socket, extra deep

- Specially for the wheel assembly and/or dismantling
- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Extra long execution
- For machinery usage
- Plastic sleeves for the damage free work on aluminum rims
- Plastic sleeves interchangeable
- Colour coded identifi s the socket size
- Chrome vanadium

1/2"

	Colour code	mm	L mm	D1 mm	D2 mm	T mm	Replacement sleeves	g
515.2040		17,0	150.0	28.0	30.0	31.0	515.2045	600
515.2041		19,0	150.0	29.5	30.0	31.0	515.2046	650
515.2042		21,0	150.0	31.0	30.0	31.0	515.2047	700

Aluminium wheel impact socket set, extra deep

- Specially for the wheel assembly and/or dismantling
- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Extra long execution
- For machinery usage
- Plastic sleeves for the damage free work on aluminum rims
- Plastic sleeves interchangeable
- Colour coded identifi s the socket size
- Chrome vanadium
- In durable plastic case

1/2"

			kg
515.1040	6 pcs	Aluminium wheel impact socket set, extra deep	1.45
3 x		17 mm - 19 mm - 21 mm	
3 x		17 mm - 19 mm - 21 mm	

Special aluminium wheel impact socket, extra deep

- Specially for the wheel assembly and/or dismantling on aluminium sports wheels with deep lying wheel screws
- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Extra long and thin walled execution
- For machinery usage
- Plastic sleeves for the damage free work on aluminum rims
- Plastic sleeves interchangeable
- Phosphate finis
- Chrome molybdenum

	mm	L mm	D1 mm	D2 mm	T mm	Replacement sleeves	g
515.2043	17,0	130.0	28.0	30.0	19.0	515.2044	350

Aluminium wheel impact socket, deep

- Robust execution
- Specially for the wheel assembly and/or dismantling
- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Plastic sleeves for the damage-free work on aluminium rims
- Plastic sleeve it protects the surfaces at the wheel screws/ nuts
- Plastic sleeves interchangeable
- Colour coded identifi s the socket size
- Phosphate finis
- Chrome molybdenum

1/2"

	Colour code	mm	L mm	D1 mm	D2 mm	T mm	Replacement sleeves	g
515.1072		15,0	85.0	24.4	25.0	23.0	515.2053	150
515.1073		17,0	85.0	26.5	30.0	23.0	515.2050	220
515.1075		19,0	85.0	28.5	30.0	23.0	515.2051	235
515.1076		21,0	85.0	30.5	30.0	23.0	515.2052	257
515.1077		22,0	85.0	31.6	32.0	23.0	515.2054	262

Aluminium wheel impact socket set, deep

- Robust execution
- Specially for the wheel assembly and/or dismantling
- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Plastic sleeves for the damage-free work on aluminium rims
- Plastic sleeve it protects the surfaces at the wheel screws/ nuts
- Plastic sleeves interchangeable
- Colour coded identifi s the socket size
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/2"

			kg
515.1070	3 pcs	17 - 19 - 21 mm	0.78

SlimPOWER Alloy rim impact socket, deep

- Very robust execution
- Specially for the wheel assembly and/or dismantling
- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Plastic sleeves for the damage-free work on aluminium rims
- Plastic sleeve it protects the surfaces at the wheel screws/ nuts
- Plastic sleeves interchangeable
- Colour coded identifi s the socket size
- Phosphate finis
- Chrome molybdenum

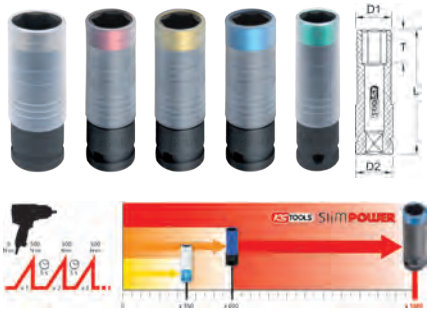

1/2"

	Colour code	mm	L mm	D1 mm	D2 mm	T mm	g
515.0991		15,0	86.0	24.5	23.5	20.0	155
515.0992		17,0	86.0	26.0	25.5	20.0	220
515.0993		19,0	86.0	26.0	27.5	20.0	207
515.0994		21,0	86.0	26.0	29.5	20.0	251
515.0995		22,0	86.0	32.0	30.0	20.0	266

SlimPOWER Alloy rim impact socket set, deep

- Very robust execution
- Specially for the wheel assembly and/or dismantling
- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Plastic sleeves for the damage-free work on aluminium rims
- Plastic sleeve it protects the surfaces at the wheel screws/ nuts
- Plastic sleeves interchangeable
- Colour coded identifi s the socket size
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/2"

			g
515.0989	2 pcs	17 - 19 mm	404
515.0990	3 pcs	17 - 19 - 21 mm	791

1/2" POWER BIT SOCKETS

Impact bit socket, hexagon

- Hexagon socket
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

	mm	L mm	D mm	g
911.0903	5,0	38.0	25.0	70
911.0904	6,0	38.0	25.0	72
911.0905	8,0	38.0	25.0	77
911.0906	10,0	38.0	25.0	80
911.0907	12,0	38.0	30.0	135
911.0908	14,0	43.0	30.0	145
911.0909	17,0	43.0	30.0	155
911.0911	19,0	43.0	30.0	155

Impact bit socket set for hexagon screws, short

- Hexagon socket
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- Includes storage rail

1/2"

			kg
515.1102	6 pcs	8 - 10 - 12 - 14 - 17 - 19 mm	1.45
515.1103	4 pcs	5 - 6 - 8 - 10 mm	1.00

Impact bit socket for hexagon screws, long

- Hexagon socket
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

	mm	L mm	D mm	g
911.0925	5,0	75.0	25.0	90
911.0926	6,0	75.0	25.0	92
911.0927	8,0	75.0	25.0	102
911.0928	10,0	75.0	25.0	130
911.0929	12,0	75.0	25.0	136
911.0930	14,0	75.0	25.0	136
911.0931	17,0	75.0	25.0	140
911.0932	19,0	75.0	25.0	210

Impact bit socket set for hexagon screws, long

- Hexagon socket
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- Includes storage rail

1/2"

			kg
515.1104	6 pcs	8 - 10 - 12 - 14 - 17 - 19 mm	1.70
515.1105	4 pcs	5 - 6 - 8 - 10 mm	1.35

Impact universal bit socket for internal hexangonal screws

- Hexagon socket
- Internal square drive to DIN 3121 / ISO 1174
- Suspension
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

	mm	L mm	D mm	T mm	g
911.0966	6,0	75.0	28.0	39.0	170
911.0967	7,0	75.0	28.0	39.0	170
911.0968	8,0	75.0	28.0	39.0	170
911.0970	10,0	75.0	28.0	39.0	180
911.0972	12,0	75.0	28.0	39.0	180
911.0974	14,0	75.0	28.0	39.0	190
911.0977	17,0	75.0	28.0	39.0	210
911.0979	19,0	75.0	28.0	39.0	230

Impact universal bit socket set

- Hexagon socket
- Internal square drive to DIN 3121 / ISO 1174
- Suspension
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/2"

			kg
911.0960	6 pcs	8 - 10 - 12 - 14 - 17 - 19 mm	1.48
911.0965	4 pcs	6 - 7 - 8 - 10 mm	1.03

Impact socket for TX® screws, short

- TX
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

		L mm	D mm	g
911.0912	T30	57.0	25.0	75
911.0913	T40	57.0	25.0	77
911.0914	T45	57.0	25.0	80
911.0924	T50	57.0	25.0	82
911.0933	T55	57.0	25.0	84
911.0955	T60	60.0	25.0	90
911.0956	T70	60.0	25.0	93
911.0957	T80	60.0	25.0	95

Impact bit socket set for TX screws, short

- TX
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/2"

			g
515.1107	8 pcs	T30 - T40 - T45 - T50 - T55 - T60 - T70 - T80	850

Impact socket for TX® screws, long

- TX
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

		L mm	D mm	g
911.0915	T30	75.0	25.0	100
911.0916	T40	75.0	25.0	83
911.0917	T45	75.0	25.0	110
911.0918	T50	75.0	25.0	133
911.0919	T55	75.0	25.0	145
911.0920	T60	75.0	25.0	160
911.0921	T70	75.0	25.0	180
911.0922	T80	75.0	25.0	200

Impact bit socket set for TX screws, long

- TX
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/2"

			kg
911.0901	8 pcs	T30 - T40 - T45 - T50 - T55 - T60 - T70 - T80	1.05

Impact socket for RIBE® screws, long

- For RIBE® screws
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

		L mm	D mm	g
911.0935	M5	75.0	25.0	90
911.0936	M6	75.0	25.0	90
911.0937	M7	75.0	25.0	90
911.0938	M8	75.0	25.0	90
911.0939	M9	75.0	25.0	90
911.0940	M10	75.0	25.0	100
911.0941	M12	75.0	25.0	110
911.0942	M13	75.0	25.0	120
911.0943	M14	75.0	25.0	130

Impact bit socket set for RIBE® screws, long

- RIBE®
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/2"

			kg
911.0934	9 pcs	M5 - M6 - M7 - M8 - M9 - M10 - M12 - M13 - M14	1.10

Impact bit socket for spline(XZN®) screws, long

- Spline (XZN®)
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

		L mm	D mm	T mm	g
911.0945	M4	75.0	25.0	45.0	90
911.0946	M5	75.0	25.0	45.0	90
911.0947	M6	75.0	25.0	45.0	90
911.0948	M8	75.0	25.0	45.0	90
911.0949	M9	75.0	25.0	45.0	100
911.0950	M10	75.0	25.0	45.0	100
911.0951	M12	75.0	25.0	45.0	110
911.0952	M14	75.0	25.0	45.0	130
911.0953	M16	75.0	25.0	45.0	150

Impact bit socket set for spline(XZN®) screws

- Spline (XZN®)
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

1/2"

			kg
911.0944	9 pcs	M 4 - M 5 - M 6 - M 8 - M 9 - M10 - M12 - M14 - M16	1.14

1/2“ POWER EXTENSIONS

Impact extension

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

	L mm	D mm	g
515.1134	75.0	25.0	220
515.1135	125.0	25.0	425
515.1136	250.0	25.0	440

Torque bar extension

- Ideal for controlled loosening of wheel screws and nuts with impact wrenches
- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3120 / ISO 1174
- For machinery usage
- Colour coded identifi s the max. torque
- Chrome molybdenum

1/2"

	Colour code	max N•m	L mm	D mm	g
515.1061		90	195.0	25.0	270
515.1062		100	195.0	25.0	270
515.1063		110	195.0	25.0	270
515.1064		120	195.0	25.0	270
515.1065		135	195.0	25.0	270

Torsion extension bar set, extra long

- Ideal for controlled loosening of wheel screws and nuts with impact wrenches
- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3120 / ISO 1174
- For machinery usage
- Colour coded identifi s the max. torque
- Chrome molybdenum
- In durable plastic case

1/2"

			kg
515.1060	5 pcs	90 - 100 - 110 - 120 - 135 N•m	1.37

1/2“ POWER BALL JOINTS

Impact universal ball joint

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- Suspension
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

	□	■	L mm	D mm	g
515.1133	1/2"	1/2"	67.0	28.0	159

1/2“ POWER ADAPTERS

Impact adaptor

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1/2"

	□	■	L mm	D mm	g
515.1143	1/2“	3/8“	38.0	25.0	72
515.1144	1/2“	3/4“	48.0	30.0	165

Impact adaptor and reducing adaptor set

- Ideal set of compilation for adaptors and ball joints
- Chrome molybdenum
- In durable plastic case

1/4" 3/8" 1/2" 3/4"

			kg
515.0100	9 pcs	Impact adaptor and reducing adaptor set	1.78

1 x		1/4“F x 3/8“M
1 x		3/8“F x 1/4“M
1 x		3/8“F x 1/2“M
1 x		1/2“F x 3/8“M
1 x		1/2“F x 3/4“M
1 x		3/4“F x 1/2“M
1 x		3/8“
1 x		1/2“
1 x		3/4“

1/2“ POWER SECURING ELEMENTS

O-Ring

- For impact drivers and impact sockets
- For safeguard

1/2"

	for sockets mm	D mm	B mm	g
515.1137	6-12	19.0	4.0	10
515.1138	15-32	24.0	4.0	12

Connection pin

- For impact drivers and impact sockets
- For safeguard

1/2"

	for sockets mm	D mm	L mm	g
515.1141	6-12	3.0	20.0	10
515.1142	15-32	3.0	26.0	14

3/4“ POWER SOCKETS

Hexagon impact socket

- 6 point
- According to DIN 3129 / ISO 2725-2
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

3/4"

	mm		L mm	D1 mm	D2 mm	T mm	g
515.1317	17,0		50.0	30.0	44.0	7.0	230
515.1318	18,0		50.0	31.0	44.0	7.0	230
515.1319	19,0		50.0	33.0	44.0	9.0	230
515.1320	20,0		50.0	34.0	44.0	11.0	240
515.1321	21,0		50.0	35.0	44.0	11.0	240
515.1322	22,0		50.0	36.0	44.0	14.0	250
515.1323	23,0		50.0	38.0	44.0	14.0	250
515.1324	24,0		50.0	39.0	44.0	14.0	250
515.1325	25,0		50.0	40.0	44.0	14.0	270
515.1326	26,0		50.0	41.0	44.0	14.0	270
515.1327	27,0		53.0	43.0	44.0	14.0	280
515.1328	28,0		53.0	44.0	44.0	15.0	320
515.1329	29,0		53.0	45.0	44.0	15.0	320
515.1330	30,0		53.0	46.0	44.0	15.0	370
515.1331	31,0		53.0	48.0	44.0	15.0	380
515.1332	32,0		56.0	49.0	44.0	15.0	380
515.1333	33,0		56.0	51.0	44.0	18.0	410
515.1334	34,0		56.0	51.0	44.0	18.0	410
515.1335	35,0		56.0	53.0	44.0	18.0	470
515.1336	36,0		56.0	54.0	44.0	18.0	470
515.1337	37,0		57.0	55.0	44.0	18.0	470
515.1338	38,0		57.0	57.0	44.0	18.0	470
515.1341	41,0		57.0	60.0	44.0	22.0	590
515.1346	46,0		62.0	66.0	44.0	24.0	770
515.1350	50,0		72.0	71.0	54.0	30.0	970
515.1355	55,0		74.0	78.0	54.0	30.0	1250
515.1360	60,0		75.0	84.0	54.0	30.0	1600
515.1365	65,0		78.0	88.0	54.0	33.0	1650
515.1370	70,0		83.0	96.0	54.0	35.0	1920
515.1386		13/16“	52.0	32.0	38.0	11.0	240
515.1387		7/8“	52.0	34.0	38.0	11.0	250
515.1388		15/16“	52.0	36.0	38.0	13.0	250
515.1389		1“	52.0	38.0	38.0	13.0	260
515.1390		1.1/16“	52.0	40.0	40.0	16.0	280
515.1391		1.1/8“	52.0	42.0	42.0	16.0	330
515.1392		1.1/4“	52.0	46.0	44.0	16.0	370
515.1393		1.5/16“	56.0	48.0	44.0	18.0	410
515.1394		1.3/8“	56.0	50.0	44.0	18.0	440
515.1395		1.7/16“	56.0	52.0	44.0	18.0	450
515.1396		1.1/2“	56.0	53.0	44.0	18.0	460
515.1397		1.5/8“	62.0	58.0	44.0	23.0	590
515.1398		1.11/16“	62.0	64.0	44.0	23.0	700
515.1399		1.3/4“	62.0	65.0	44.0	23.0	750
515.1401		1.7/8“	68.0	68.0	44.0	27.0	790
515.1402		2“	72.0	71.0	54.0	30.0	880

Hexagon impact socket set

- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable metal case

3/4"

			kg
515.0510	8 pcs	24 - 27 - 29 - 30 - 32 - 33 - 34 - 36 mm	4.20

Hexagon impact socket set

- 6 point
- According to DIN 3129 / ISO 2725-2
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable plastic case

3/4"

			kg
515.0208	8 pcs	26 - 27 - 29 - 30 - 32 - 35 - 36 - 38 mm	3.50

Hexagon impact socket, deep

- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

3/4"

	mm	L mm	D1 mm	D2 mm	T mm	g
515.1417	17,0	90.0	30.0	44.0	12.0	390
515.1418	18,0	90.0	31.0	44.0	12.0	590
515.1419	19,0	90.0	33.0	44.0	12.0	600
515.1420	20,0	90.0	34.0	44.0	12.0	610
515.1421	21,0	90.0	35.0	44.0	12.0	630

	mm	L mm	D1 mm	D2 mm	T mm	g	
515.1422	22,0	90.0	37.0	44.0	19.0	640	
515.1423	23,0	90.0	38.0	44.0	19.0	640	
515.1424	24,0	90.0	39.0	44.0	19.0	640	
515.1425	25,0	90.0	40.0	44.0	19.0	640	
515.1426	26,0	90.0	41.0	44.0	19.0	650	
515.1427	27,0	90.0	43.0	44.0	19.0	650	
515.1428	28,0	90.0	44.0	44.0	19.0	650	
515.1429	29,0	90.0	45.0	44.0	19.0	660	
515.1430	30,0	90.0	46.0	44.0	19.0	680	
515.1431	31,0	90.0	48.0	44.0	19.0	730	
515.1432	32,0	90.0	49.0	44.0	19.0	740	
515.1433	33,0	90.0	51.0	44.0	19.0	770	
515.1434	34,0	90.0	51.0	44.0	19.0	790	
515.1435	35,0	90.0	53.0	44.0	19.0	820	
515.1436	36,0	90.0	54.0	44.0	19.0	840	
515.1437	37,0	90.0	55.0	44.0	19.0	860	
515.1438	38,0	90.0	56.0	44.0	19.0	880	
515.1441	41,0	90.0	60.0	44.0	56.0	970	
515.1443	43	90.0	63.2	44.0	56.0	1150	
515.1446	46,0	90.0	66.0	44.0	56.0	1260	
515.1450	50,0	90.0	71.0	54.0	56.0	1650	

Hexagon impact socket, extra deep

- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Extra long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

	mm	L mm	D1 mm	D2 mm	T mm	kg	
515.1182	27,0	270.0	42.0	44.0	27.0	1.09	
515.1183	30,0	270.0	46.0	44.0	30.0	1.14	
515.1184	32,0	270.0	49.0	44.0	32.0	1.16	
515.1191	27,0	400.0	42.0	44.0	27.0	1.25	
515.1192	30,0	400.0	46.0	44.0	30.0	1.32	
515.1193	32,0	400.0	49.0	44.0	32.0	1.36	
515.1194	33,0	400.0	50.0	44.0	32.0	1.38	

TX E impact socket

- TX E
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

		L mm	D1 mm	D2 mm	T mm	g	
455.0081	E28	90.0	33.0	42.0	25.0	556	

TX E impact socket, deep

- TX E
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

		L mm	g	
455.0012	E18	110.0	620	
455.0013	E20	110.0	670	

TX E impact socket, deep

- TX E
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

		L mm	D mm	g	
450.0451	E18	140.0	44.0	672	
450.0452	E20	140.0	44.0	692	
450.0453	E22	140.0	44.0	700	
450.0454	E24	140.0	44.0	748	

3/4“ POWER BIT SOCKETS

Impact bit socket, hexagon

- Hexagon socket
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Matt finis
- Chrome molybdenum

	mm	L mm	D mm	g	
515.0001	14,0	60.0	40.0	140	
515.0002	17,0	60.0	40.0	280	
515.0003	19,0	60.0	40.0	340	
515.0004	21,0	60.0	40.0	340	
515.0005	22,0	60.0	40.0	340	
515.0006	24,0	60.0	40.0	340	

Impact bit socket for hexagon screws, long

- Hexagon socket
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

	mm	L mm	D mm	g	
450.0461	17,0	140.0	44.0	672	
450.0462	19,0	140.0	44.0	686	
450.0463	22,0	140.0	44.0	710	
450.0464	24,0	140.0	44.0	760	

Impact bit socket for TX, tamperproof, short

- TX tamperproof
- Square drive according to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Matt finis
- Chrome molybdenum

		L mm	D mm	g	
515.0016	TB70	60.0	40.0	270	
515.0017	TB80	60.0	40.0	270	
515.0018	TB90	60.0	40.0	280	
515.0019	TB100	60.0	40.0	290	

Impact socket for TX® screws, long

- For TX screws
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

		L mm	D mm	g	
450.0441	T60	140.0	44.0	630	
450.0442	T70	140.0	44.0	650	
450.0443	T80	140.0	44.0	656	
450.0444	T90	140.0	44.0	666	
450.0445	T100	140.0	44.0	680	

Impact bit socket, tamperproof, for spline(XZN®) screws

- Spline (XZN®) tamperproof
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Matt finis
- Chrome molybdenum

3/4"

		L mm	D mm	g	
515.0012	M16	60.0	40.0	270	
515.0013	M18	60.0	40.0	270	

Impact interchangeable bit set

- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable plastic storage case

3/4" 1"

			kg	
450.0420	16 pcs	Impact interchangeable bit set	6.00	

consists of:

		g	
450.0422	Impact bit socket hex adaptor, 107mm, 17mm	360	
450.0423	Impact bit socket hex adaptor, 107mm, 19mm	370	
450.0425	Impact bit socket hex adaptor, 107mm, 22mm	380	
450.0426	Impact bit socket hex adaptor, 107mm, 24mm	460	
450.0427	Impact bit socket TX adaptor, 107mm, T60	330	
450.0428	Impact bit socket TX adaptor, 107mm, T70	330	
450.0429	Impact bit socket TX adaptor, 107mm, T80	340	
450.0430	Impact bit socket TX adaptor, 107mm, T90	350	
450.0431	Impact bit socket TX adaptor, 107mm, T100	360	
450.0433	Impact bit socket TX E adaptor, 107mm, E18	470	
450.0434	Impact bit socket TX E adaptor, 107mm, E20	340	
450.0435	Impact bit socket TX E adaptor, 107mm, E22	370	
450.0436	Impact bit socket TX E adaptor, 107mm, E24	390	
450.0437	3/4" impact bit socket adaptor, 22mm	260	
450.0438	1" impact bit socket adaptor, 22mm	500	
151.2104	Ball ended hexagon key wrench, long, 4mm	10	

3/4“ POWER EXTENSIONS

Impact extension

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage
- Phosphate finis
- Chrome molybdenum

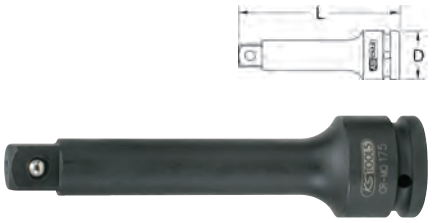

3/4"

	L mm	D mm	g	
515.1375	90.0	44.0	500	
515.1376	100.0	44.0	540	
515.1377	150.0	44.0	750	
515.1378	175.0	44.0	850	
515.1379	200.0	44.0	950	
515.1381	250.0	44.0	1110	

3/4“ POWER BALL JOINTS

Impact universal ball joint

- Square drive adaptor to DIN 3121 / ISO 1174
- Internal square drive to DIN 3121 / ISO 1174
- Suspension
- For machinery usage
- Phosphate finis
- Chrome molybdenum

3/4"

	□	■	L mm	D mm	g	
515.1374	3/4"	3/4"	108.0	44.0	700	

3/4“ POWER ADAPTERS

Impact socket adapter

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage
- Phosphate finis
- Chrome molybdenum

3/4"

	□	■	L mm	D mm	g	
515.1372	3/4"	1/2"	56.0	44.0	325	
515.1373	3/4"	1"	63.0	44.0	450	

Impact adaptor and reducing adaptor set

- Ideal set of compilation for adaptors and ball joints
- Chrome molybdenum
- In durable plastic case

1/4" 3/8" 1/2" 3/4"

			kg	
515.0100	9 pcs	Impact adaptor and reducing adaptor set	1.78	

1 x		1/4“F x 3/8“M
1 x		3/8“F x 1/4“M
1 x		3/8“F x 1/2“M
1 x		1/2“F x 3/8“M
1 x		1/2“F x 3/4“M
1 x		3/4“F x 1/2“M
1 x		3/8“
1 x		1/2“
1 x		3/4“

3/4“ POWER SECURING ELEMENTS

O-Ring

- For impact drivers and impact sockets
- For safeguard

3/4"

	for sockets mm	D mm	B mm	g	
515.1382	17 - 49	36.0	5.0	10	
515.1383	50 - 70	46.0	5.0	12	

Connection pin

- For impact drivers and impact sockets
- For safeguard

3/4"

	for sockets mm	D mm	L mm	g	
515.1384	17 - 49	4.0	36.0	10	
515.1385	50 - 70	4.0	46.0	14	

1“ POWER SOCKETS

Hexagon impact socket

- 6 point
- According to DIN 3129 / ISO 2725-2
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1“

	mm		L mm	D2 mm	D1 mm	T mm	kg	
515.1722	22,0		58.0	51.0	39.0	12.0	0.51	
515.1724	24,0		58.0	54.0	42.0	14.0	0.51	
515.1727	27,0		58.0	54.0	46.0	14.0	0.52	
515.1729	29,0		60.0	54.0	48.0	16.0	0.53	
515.1730	30,0		60.0	54.0	49.0	16.0	0.53	
515.1731	31,0		60.0	54.0	51.0	16.0	0.56	
515.1732	32,0		61.0	54.0	60.0	19.0	0.59	
515.1733	33,0		61.0	54.0	54.0	19.0	0.62	
515.1734	34,0		61.0	54.0	54.0	19.0	0.64	
515.1736	36,0		65.0	54.0	57.0	19.0	0.67	
515.1737	37,0		65.0	54.0	58.0	19.0	0.67	
515.1738	38,0		65.0	54.0	59.0	20.0	0.68	
515.1740	40,0		65.0	54.0	62.0	23.0	0.87	
515.1741	41,0		65.0	54.0	63.0	23.0	0.92	
515.1742	42,0		65.0	54.0	63.0	23.0	0.98	
515.1746	46,0		74.0	54.0	69.0	23.0	1.00	
515.1750	50,0		74.0	54.0	74.0	26.0	1.07	
515.1755	55,0		85.0	54.0	81.0	28.0	1.44	
515.1760	60,0		89.0	54.0	87.0	31.0	1.78	
515.1765	65,0		93.0	54.0	93.0	32.0	1.80	
515.1770	70,0		98.0	54.0	99.0	35.0	2.04	
515.1775	75,0		100.0	86.0	106.0	40.0	3.48	
515.1780	80,0		100.0	86.0	112.0	47.0	4.10	
515.1785	85,0		102.0	86.0	119.0	47.0	4.80	
515.1790	90,0		107.0	86.0	124.0	47.0	5.10	
515.1795	95,0		107.0	86.0	131.0	50.0	5.25	
515.1891		1“	58.0	51.0	42.0	14.0	0.52	
515.1892		1.1/4“	60.0	51.0	51.0	16.0	0.61	
515.1893		1.7/16“	62.0	52.0	56.0	20.0	0.64	
515.1894		1.1/2“	62.0	52.0	58.0	22.0	0.67	
515.1895		1.5/8“	62.0	52.0	62.0	22.0	0.92	
515.1896		1.13/16“	64.0	58.0	68.0	23.0	1.00	
515.1897		1.7/8“	66.0	58.0	70.0	24.0	1.08	
515.1898		2.1/4“	75.0	62.0	84.0	30.0	1.52	

Hexagon impact socket set

- 6 point
- According to DIN 3129 / ISO 2725-2
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable steel storage case

1“

			kg	
515.0610	8 pcs	27 - 29 - 30 - 32 - 33 - 34 - 36 - 38 mm	3.00	

Hexagon impact socket

- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Extra thick walled / long centre execution
- For machinery usage
- Phosphate
- Chrome molybdenum



1“

	mm	L mm	D1 mm	D2 mm	T mm	g	
515.2124	24,0	76.0	38.0	52.0	13.0	570	
515.2127	27,0	76.0	42.0	52.0	14.0	580	
515.2130	30,0	76.0	45.0	52.0	18.0	620	
515.2132	32,0	76.0	48.0	52.0	18.0	640	
515.2133	33,0	76.0	49.0	52.0	18.0	650	
515.2134	34,0	76.0	50.0	52.0	18.0	670	
515.2136	36,0	76.0	54.0	52.0	20.0	690	
515.2138	38,0	76.0	56.0	52.0	23.0	710	
515.2141	41,0	80.0	59.0	52.0	23.0	720	

Hexagon impact socket, deep

- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1“

	mm	L mm	D1 mm	D2 mm	T mm	kg	
515.1822	22,0	90.0	39.0	51.0	16.0	0.71	
515.1824	24,0	90.0	42.0	54.0	16.0	0.72	
515.1827	27,0	90.0	46.0	54.0	19.0	0.80	
515.1830	30,0	90.0	49.0	54.0	19.0	0.80	
515.1832	32,0	90.0	52.0	54.0	19.0	0.91	
515.1833	33,0	90.0	54.0	54.0	23.0	0.91	
515.1834	34,0	90.0	54.0	54.0	23.0	0.95	
515.1836	36,0	90.0	57.0	54.0	23.0	0.95	
515.1838	38,0	90.0	59.0	54.0	23.0	0.99	
515.1841	41,0	90.0	63.0	54.0	40.0	1.20	
515.1846	46,0	100.0	69.0	54.0	40.0	1.36	
515.1850	50,0	100.0	74.0	54.0	40.0	1.57	
515.1855	55,0	100.0	81.0	54.0	52.0	1.95	
515.1860	60,0	120.0	87.0	54.0	52.0	2.82	
515.1865	65,0	120.0	93.0	54.0	60.0	3.15	
515.1870	70,0	125.0	99.0	54.0	60.0	3.34	
515.1875	75,0	125.0	105.0	54.0	60.0	4.43	
515.1880	80,0	125.0	112.0	54.0	75.0	4.76	
515.1885	85,0	135.0	119.0	54.0	75.0	5.80	
515.1890	90,0	135.0	124.0	54.0	75.0	6.10	
515.1881	95,0	150.0	135.0	127.0	49.0	6.90	
515.1882	100,0	150.0	140.0	127.0	54.0	7.20	
515.1883	105,0	150.0	150.0	127.0	54.0	8.10	
515.1884	110,0	160.0	155.0	127.0	62.0	8.90	
515.1886	115,0	160.0	160.0	127.0	67.0	9.40	
515.1887	120,0	170.0	165.0	127.0	67.0	10.10	

Hexagon impact socket set, deep

- 6 point
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable steel storage case

1“

			kg	
515.0308	8 pcs	24 - 27 - 30 - 32 - 33 - 34 - 36 - 38 mm	4.20	

Hexagon torque impact socket, extra deep

- Ideal for controlled loosening of wheel screws and nuts with impact wrenches
- Internal square drive to DIN 3121 / ISO 1174
- Extra long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1“

	mm	max N·m	L mm	D mm	T mm	kg	
515.1461	24,0	350	300.0	54.0	24.0	1.38	
515.1462	27,0	350	300.0	54.0	27.0	1.40	
515.1463	27,0	450	300.0	54.0	27.0	1.58	
515.1464	30,0	500	300.0	54.0	30.0	1.56	
515.1465	32,0	450	300.0	54.0	32.0	1.60	
515.1466	32,0	550	300.0	54.0	32.0	1.60	
515.1467	32,0	600	300.0	54.0	33.0	1.60	
515.1468	33,0	550	300.0	54.0	33.0	1.64	
515.1469	33,0	600	300.0	54.0	36.0	1.64	

TX E impact socket, deep

- TX E
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1“

		L mm	D mm	g	
450.0481	E18	145.0	51.0	992	
450.0482	E20	145.0	51.0	1012	
450.0483	E22	145.0	51.0	1020	
450.0484	E24	145.0	51.0	1068	

1“ POWER BIT SOCKETS

Impact bit socket, hexagon

- Hexagon socket
- Internal square drive to DIN 3121 / ISO 1174
- Short execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1“

	mm	L mm	D mm	g	
450.0476	17,0	75.0	54.0	620	
450.0477	19,0	75.0	54.0	650	
450.0478	22,0	75.0	54.0	675	
450.0479	24,0	75.0	54.0	700	
450.0485	27,0	75.0	54.0	730	
450.0486	30,0	75.0	54.0	770	
450.0487	32,0	75.0	54.0	900	
450.0488	36,0	75.0	54.0	920	

Impact bit socket for hexagon screws, long

- Hexagon socket
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1“

	mm	L mm	D mm	g	
450.0491	17,0	145.0	51.0	0.99	
450.0492	19,0	145.0	51.0	1.01	
450.0493	22,0	145.0	51.0	1.03	
450.0494	24,0	145.0	51.0	1.08	
450.0495	27,0	145.0	51.0	2.00	
450.0496	30,0	145.0	51.0	2.03	
450.0497	32,0	145.0	51.0	2.07	
450.0498	36,0	145.0	51.0	2.11	

Impact socket for TX® screws, long

- TX
- Internal square drive to DIN 3121 / ISO 1174
- Long execution
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1“

		L mm	D mm	g	
450.0471	T60	145.0	51.0	950	
450.0472	T70	145.0	51.0	970	
450.0473	T80	145.0	51.0	976	
450.0474	T90	145.0	51.0	986	
450.0475	T100	145.0	51.0	1000	

Impact interchangeable bit set

- For machinery usage
- Phosphate finis
- Chrome molybdenum
- In durable plastic storage case

3/4“ 1“

			kg	
450.0420	16 pcs	Impact interchangeable bit set	6.00	

consists of:

		g	
450.0422	Impact bit socket hex adaptor, 107mm, 17mm	360	
450.0423	Impact bit socket hex adaptor, 107mm, 19mm	370	
450.0425	Impact bit socket hex adaptor, 107mm, 22mm	380	
450.0426	Impact bit socket hex adaptor, 107mm, 24mm	460	
450.0427	Impact bit socket TX adaptor, 107mm, T60	330	
450.0428	Impact bit socket TX adaptor, 107mm, T70	330	
450.0429	Impact bit socket TX adaptor, 107mm, T80	340	
450.0430	Impact bit socket TX adaptor, 107mm, T90	350	
450.0431	Impact bit socket TX adaptor, 107mm, T100	360	
450.0433	Impact bit socket TX E adaptor, 107mm, E18	470	
450.0434	Impact bit socket TX E adaptor, 107mm, E20	340	
450.0435	Impact bit socket TX E adaptor, 107mm, E22	370	
450.0436	Impact bit socket TX E adaptor, 107mm, E24	390	
450.0437	3/4“ impact bit socket adaptor, 22mm	260	
450.0438	1“ impact bit socket adaptor, 22mm	500	
151.2104	Ball ended hexagon key wrench, long, 4mm	10	

1/4“ POWER EXTENSIONS

Impact extension

- Square drive adaptor to DIN 3121 / ISO 1174
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1“

	L mm	D mm	kg	
515.1804	175.0	54.0	1.45	
515.1806	250.0	54.0	1.58	
515.1807	300.0	54.0	1.96	

1“ POWER BALL JOINTS

Impact universal ball joint

- Square drive adaptor to DIN 3121 / ISO 1174
- Internal square drive to DIN 3121 / ISO 1174
- Suspension
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1“

	□	■	L mm	D mm	kg	
515.1801	1“	1“	130.0	54.0	1.38	

1“ POWER ADAPTERS

Impact adaptor

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage
- Phosphate finis
- Chrome molybdenum

1“

	□	■	L mm	D mm	kg	
515.1798	1“	3/4“	75.0	54.0	0.57	
515.1799	1“	1.1/2“	82.0	54.0	1.00	

1“ POWER SECURING ELEMENTS

O-ring

- For impact drivers and impact sockets
- For safeguard

1“

	for sockets mm	D mm	B mm	g	
515.1809	22-70	45.0	5.0	10	

Connection pin

- For impact drivers and impact sockets
- For safeguard

1“

	for sockets mm	D mm	L mm	g	
515.1812	22-70	4.0	45.0	10	

3 TORQUE

KSTOOLS®

Innovation is our mission!

	PAGE
TORQUE SCREWDRIVERS	150 - 151
ROTARY ANGLE DISCS	151
TORQUE LIMITERS	151
ERGOTORQUE®*basic* TORQUE WRENCH	152
ERGOTORQUE®*precision* TORQUE WRENCH	153 - 155
ERGOTORQUE®*precision* TORQUE WRENCH TOOLKIT	155 - 157
ULTIMATE*precision* TORQUE WRENCH	158 - 160
ULTIMATE*precision* TORQUE WRENCH TOOLKIT	161 - 163
ALUTORQUE*precision* TORQUE WRENCH	164 - 168
SLIPPER TORQUE WRENCH	169
INDUSTRIAL TORQUE WRENCH	170
TORQUE WRENCH WITH QUICK-SET FEATURE	171
TORQUE WRENCH WITH CLOSE-GAP RELEASE	172
PRECISION TORQUE TESTING INSTRUMENT WITH DIAL INDICATOR	173
PUSH FIT TOOLS	174 - 176
PUSH FIT TOOLKIT	177
VDE TORQUE WRENCH	177
TORQUE CONVERTOR	178 - 180
TEST EQUIPMENT	180

TORQUE

The importance of torque control

Fastening a threaded fastener in a controlled manner is essential for operational safety and the long service life of screws and bolts. Manual fastening without any torque control is a safety risk. Depending on personal constitution, the screwed fi ting can be over-tightened and there is the risk of breakage or the screwed fi ting can become loose and open with very low application of force. A torque wrench that has been calibrated regularly
helps to achieve the specified astening torques or avoids over-tightening.

Competence and service

Our competence is expressed by the measuring instruments and test equipment used by us, which are monitored continuously and, if required, adjusted, by a laboratory that is accredited by the DKD (German Calibration Service).
They are calibrated by comparing them with standard reference units, which are traceable to the national standards. This ensures our competency in the fi ld of controlled fastening of screws and, in the long term, the quality of our torque wrenches and equipment.

Torque wrenches and torque test instruments are measuring tools; just as any other measuring tool, they must also be serviced regularly and calibrated with suitable measuring instruments and, if required, adjusted. The test interval periods depend on the frequency of use.

Our service includes the affordable requirement of both the normal calibration certifi ate in accordance with DIN EN ISO 6789 and on request, the calibration certifi ate in accordance with DKD (German Calibration Service) guidelines. We maintain, calibrate and adjust those of our own manufacture within 5 working days after goods are received in accordance with the DIN EN ISO 6789 standards including the factory test certifi ate and the control sticker.

Torque tools

Indicative torque wrench according to DIN6789 typ I

Torque screwdrivers

ESD torque screwdriver
- For controlled display in a clockwise and counter clockwise direction
- Torque screwdriver with a helical pressure spring
- Electro static discharge - electrostatically protected
- Range 20 - 500 c•N

Torque wrenches

Type torque wrench with dial indicator and drag indicator
- For controlled display in a clockwise and counter clockwise direction
- Display type torque wrench with dial indicator and drag indicator
- Using the torsion bar principle, and in contrast to conventional torque wrenches, it is possible to grip the torque wrench in any position
- Range 0,7 - 2.800 N•m

Triggering torque wrench according to DIN6789 typ II

Torque screwdrivers

ESD torque screwdriver
- For controlled fastening in clockwise and counter clockwise directions
- Clearly palpable release signal when the desired torque is achieved
- Electro static discharge - electrostatically protected
- Range 1 - 1.000 c•N

Mini torque wrenches
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- Clearly palpable release signal when the desired torque is achieved via close gap release
- Range 3 - 15 N•m

Torque screwdriver
- For controlled fastening in clockwise and counter clockwise directions
- Clearly palpable release signal when the desired torque is achieved
- Range 0,1 - 6,0 N•m

Torque wrenches

Torque wrench with quick-set feature
- With idle condition, resetting to the minimum value (0) is not necessary
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- Clearly palpable release signal when the desired torque is achieved via close gap release
- Torque setting is simple and quick by sliding the scale using the knurled-head screw
- Range 10 - 1.000 N•m

Torque wrench with close-gap release
- For controlled fastening in clockwise and counter clockwise directions
- The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece
- Clearly palpable release signal when the desired torque is achieved via close gap release
- Range 2,5 - 2.000 N•m

KS Ergotorque®*basic*
- For controlled fastening in clockwise and counter clockwise directions
- The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece
- Clearly palpable release signal when the desired torque is achieved via close gap release
- Range 10 - 320 N•m

KS Ergotorque®*precision*
- The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece
- Clearly palpable release signal when the desired torque is achieved via close gap release
- Range 1 - 1.000 N•m

KS Ultimate*precision*
- The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece
- Clearly palpable release signal when the desired torque is achieved via close gap release
- Range 1 - 1.000 N•m

Preset ratcheting torque wrench
- For controlled fastening in a clockwise direction
- Clearly palpable release signal when the desired torque is achieved
- It is not possible to over tighten the set value
- Range 1 -125 N•m



ALUTORQUE*precision* torque wrench
- Single or double square for controlled fastening in clockwise and counter clockwise directions
- Clearly palpable release signal when the desired torque is achieved via close gap release
- Light, robust and very workshop-friendly
- Range 6 - 2.000 N•m

Industrial torque wrench
- For controlled fastening in clockwise and counter clockwise directions
- Torque setting is easy using the locking knob in the handle end
- Clearly palpable release signal when the desired torque is achieved via close gap release
- Range 1 - 1.500 N•m

Torque testing

Type torque wrench with dial indicator and drag indicator
- For controlled display in a clockwise and counter clockwise direction
- Display type torque wrench with dial indicator and drag indicator
- Tool mounting using a three jaw chuck
- Range 1 - c•N - 9 N•m

Electronic torque wrench workshop tool
- High accuracy: +1 % tolerance for values within their range,
- For testing and adjusting torque wrenches and torque screwdrivers
- For controlled display in a clockwise and counter clockwise direction
- With autoreset and automatic switch-off
- Range 1 -1.000 N•m

Torque convertor

Universal torque converter
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle-regulated fastening with a torque wrench
- With single-stage precision planetary gear for both directions
- Range up to 2.700 N•m

Universal torque converter
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle-regulated fastening with a torque wrench
- With anti-backlash mechanism
- Range up to 9.500 N•m

TORQUE SCREWDRIVERS

**This torque screwdriver is fi ted with a friction clutch.
This enables it to ratchet when the set value is achieved.
As a result, it is not possible to over-tighten the screw.
The torque screwdriver has fastening function in clockwise
and counter clockwise directions and is adjusted with the help of a micrometer scale.**

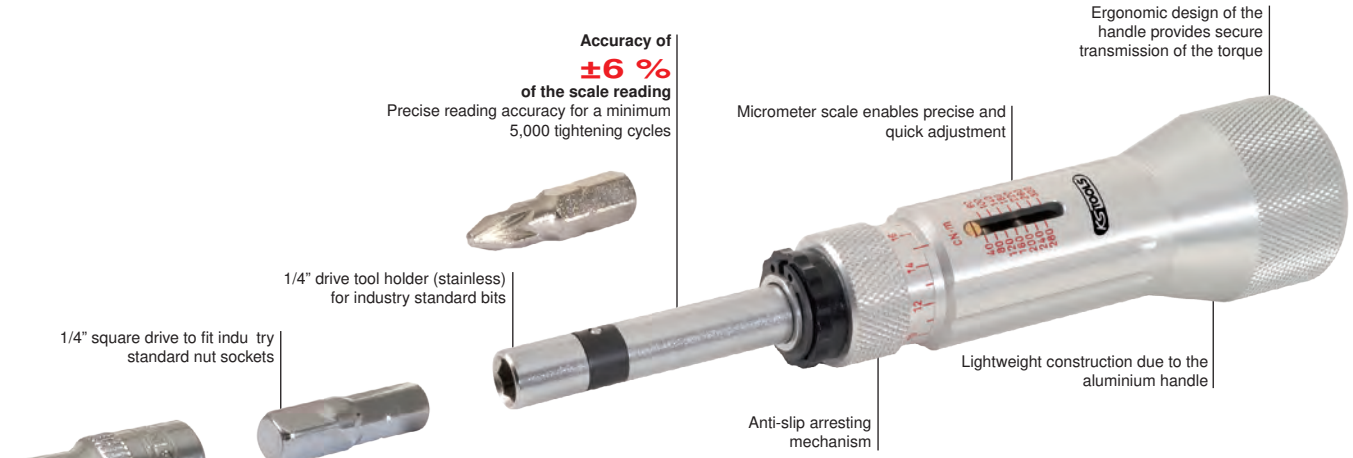

ESD

Tested and Certified to DIN EN ISO 6789 Certificate Precision

ESD Torque screwdriver with micrometer scale

- Actuation accuracy: ±6 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- With precision helical pressure spring
- Clearly palpable release signal when the desired torque is achieved
- It is not possible to over-tighten the set value
- Micrometer scale in N•m divisions for precise and fine a just-ment
- Ergonomic designed handle provides secure transmission of the torque
- Tool holder female hexagon 6 point to DIN 3126 - E6,3
- Electro static discharge - electrostatically protect
- Lightweight construction due to the aluminium handle
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 national standard



1/4" 6,3 mm

	Measuring range cN•m	Division cN•m	Division N•m	L1 mm	L2 mm	D1 mm	D2 mm	g
516.3210	1-15	0.1		111.0	26.0	16.0	10.0	60
516.3215	2-30	0.2		111.0	26.0	16.0	10.0	60
516.3220	5-60	0.5		111.0	26.0	25.0	10.0	99
516.3225	20-120	1.0		157.0	51.0	30.0	10.0	192
516.3235	40-300	1.0		157.0	51.0	34.0	10.0	214
516.3240	100-500	2.5		200.0	63.0	40.0	10.0	436
516.3245	400-1000		0.05	235.0	100.0	45.0	11.0	762

Torque screwdriver with micrometer scale

- Actuation accuracy: ±6 % tolerance from the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- With precision helical pressure spring
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Automatic reset in the initial position
- Including a micrometre scale in N•m divisions for precise and fine a justment
- Ergonomic designed rubber handle provides secure torque transmission
- Hexagon socket holder in accordance with DIN 3126 - E6,3
- Individual serial number for clear product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 - traceable to national standards



1/4" 6,3 mm

	Measuring range N•m	Division N•m	L mm	L2 mm	D1 mm	D2 mm	g
516.3250	0,1 - 1,2	0.01	180.0	28.0	30.0	11.0	230
516.3255	1 - 6	0.10	200.0	30.0	35.0	11.0	445

ESD Fixed adjustable torque screwdriver with colour coding

- Actuation accuracy: ±6 % tolerance from the set value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- With precision helical pressure spring
- Clearly palpable release signal when the desired torque is achieved
- It is not possible to over-tighten the set value
- Without scale - With a fi ed adjustable value
- Ergonomic designed handle provides secure transmission of the torque
- Tool holder female hexagon 6 point to DIN 3126 - E6,3
- Electro static discharge - electrostatically protect
- Lightweight construction due to the aluminium handle
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789 national standard



1/4" 6,3 mm

	Measuring range cN•m	L1 mm	L2 mm	D1 mm	D2 mm	Colour code	g
516.3910	1 - 15	92.0	22.0	16.0	8.0	-	45
516.3915	5 - 60	102.0	40.0	25.0	10.0	-	94
516.3920	40 - 200	111.0	49.0	30.0	10.0	green	170
516.3925	100 - 500	126.0	56.0	35.0	10.0	red	220

Pre-set torque screwdriver

- Actuation accuracy: ±6 % tolerance from the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Automatic reset in the initial position
- Without scale - with a fi ed adjustable value
- Ergonomic designed handle provides secure torque transmission
- Hexagon socket holder in accordance with DIN 3126 - E6,3
- Individual serial number for clear product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 - traceable to national standards



1/4" 6.3 mm

	Measuring range N·m	L mm	L2 mm	D1 mm	D2 mm	g
516.3930	0,2 - 1,2	132.0	25.0	30.0	11.0	185
516.3935	1 - 1,8	132.0	25.0	30.0	11.0	185
516.3940	1 - 6	200.0	25.0	30.0	11.0	445

ESD Dial indicating torque screwdriver with a drag indicator

- Display accuracy: ±6 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise and counter clockwise direction
- Torque screwdriver with a helical pressure spring
- Ergonomic designed handle provides secure transmission of the torque
- Tool holder female hexagon 6 point to DIN 3126 - E6,3
- Electro static discharge - electrostatically protect
- Lightweight construction due to the aluminium handle
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 national standard



1/4" 6.3 mm

	Measuring range cN·m	Division cN·m	L1 mm	L2 mm	D1 mm	D2 mm	g
516.3260	20 - 100	2.0	222.0	130.0	48.0	12.0	290
516.3265	50 - 200	5.0	242.0	130.0	48.0	12.0	320
516.3270	100 - 500	20.0	300.0	188.0	48.0	14.0	420

Stubby torque wrench with exact gearing reversible ratchet head

- Actuation accuracy: ±3 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- An audible and palpable signal when the desired torque value is achieved
- With exact gearing 72 teeth ratchet mechanism
- With ejection mechanism on the ratchet head
- Ergonomic designed handle provides secure transmission of the torque
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 national standard

1/4"

	■	Measuring range N·m	Division N·m	D mm	g
516.3280	1/4"	3 - 15	0.50	18.0	190

ROTARY ANGLE DISCS

Rotary angle disc

- For fastening screws at an angle
- Device for angle regulated fastening with a torque wrench
- Flexible arm
- Range 0° - 360°
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Optionally with a magnetic arm or claw arm

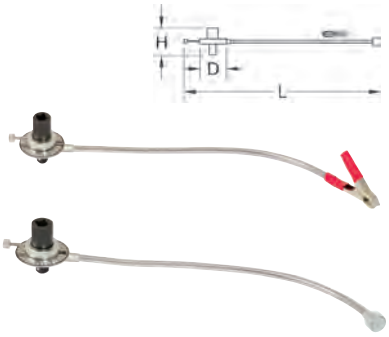

1/2" 3/4"

	□	■	Arm	Pitch	D mm	H mm	L mm	g
516.1195	1/2"	1/2"	magnet	2°	67.0	63.0	480.0	170
516.1196	1/2"	1/2"	claw	2°	67.0	63.0	538.0	60
516.1197	3/4"	3/4"	magnet	2°	80.0	63.0	500.0	170
516.1198	3/4"	3/4"	claw	2°	87.0	87.0	698.0	60

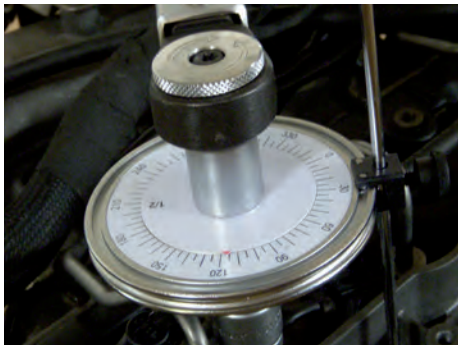

TORQUE LIMITERS

Torque limiter for spark plugs

- High accuracy
- For controlled fastening in a clockwise direction
- Clearly palpable release signal when the desired torque is achieved
- It is not possible to over-tighten the set value
- Without scale - With a fi ed adjustable value
- Can untighten without any torque restraint thanks to the anticlockwise latch
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock

3/8"

	■	□	N·m	D mm	L mm	g
516.1501	3/8"	3/8"	18	28.0	51.5	165
516.1502	3/8"	3/8"	24	28.0	52.0	166

Pre-set torque limiter with ball lock

- High accuracy
- For controlled fastening in clockwise and counter clockwise directions
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Automatic reset in the initial position
- Without scale - with a fi ed adjustable value
- Easy to operate
- For application with low torque
- Hexagon socket holder in accordance with DIN 3126 - E6,3
- Square drive in accordance with DIN 3120 - ISO 1174

3/8" 6.3 mm

	○	□	Measuring range N·m	D1 mm	D2 mm	L mm	g
516.1503	1/4"	3/8	0,5-5	22.0	11.0	75.0	90
516.1504	1/4"	3/8	5-10	22.0	11.0	75.0	90

Pre-set torque limiter with ball lock

- High accuracy
- For controlled fastening in clockwise and counter clockwise directions
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Automatic reset in the initial position
- Without scale - with a fi ed adjustable value
- Easy to operate
- For application with low torque
- Square drive in accordance with DIN 3120 - ISO 1174 with ball lock

3/8"

	■	□	Measuring range N·m	D1 mm	D2 mm	L mm	g
516.1507	3/8"	3/8"	0,5-5	22.0	10.0	75.0	95
516.1508	3/8"	3/8"	5-10	22.0	10.0	75.0	95

TORQUE WRENCH

con certificación
DIN EN ISO 6789
Certificación
Precisión del +/- 3%

Ratchet head:
A highly robust ratchet mechanism for clockwise and counter-clockwise movement is integrated in the polished ratchet head.
The direction of rotation can be changed by simply rotating the square drive. A sliding roller bearing mechanism in the interior of the wrench ensures the highest level of accuracy and long life. An audible and palpable signal indicates automatically that the desired torque value has been achieved.

Accuracy of
±3 %
of the scale reading
Precise reading accuracy for a minimum 5,000 tightening cycles

Corrosion:
The robust steel pipe body is coated with a powder coating protection in order to ensure durable corrosion-proof properties.

KS Ergotorque *Basic*
• Push through square (no mushroom heads)
• Large scale (no micro scale)
• Accuracy +/- 3%

KS Ultimate *precision*
• as for KS ERGOTORQUE®*precision* - only with a 2% triggering accuracy

Rotating ratchet head 1/4" - 1"

TECHNOLOGY

The desired torque can be adjusted and set by simply pulling the out locking knob, adjusting and then pushing in the locking knob at the end of the handle, using the ergonomic fi ger grips.
A black ring on the locking knob indicates that the wrench must be set and adjusted for the required torque and also prevents inadvertent maladjustment of the wrench when using it.

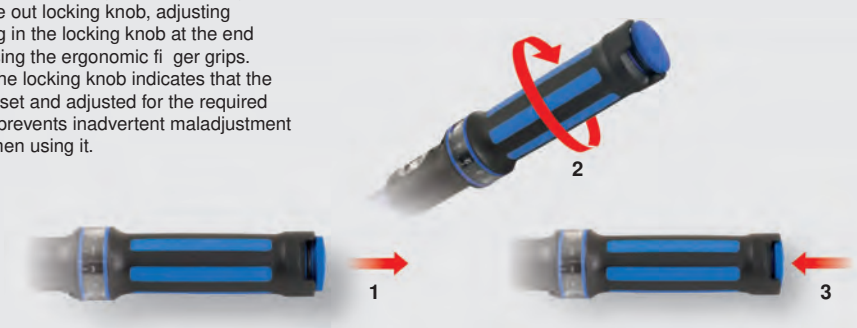

RATCHET HEADS

Scale with magnifying glass:
A double scale having N•m and Lbf•ft divisions that can be read easily, is concealed under a large sized vision panel, which enables particularly accurate adjustment of the desired torque value. In order to be able to read off the scale in an optimal and simple manner, a strong magnifying glass is integrated in the vision panel.

Two-component handle:
The new durable and ergonomic two-component handle ensures safe and effort-less working, whereby the softer component prevents the hand from slipping and provides maximum safety.

Serial number:
A permanent and unique serial number is applied on all torque wrenches, which provides unique product identifi ation.

Handle end:
The desired torque can be adjusted and set by simply pulling the out locking knob, adjusting and then pushing in the locking knob at the end of the handle, using the ergonomic fi ger grips. A black ring on the locking knob indicates that the wrench must be set and adjusted for the required torque and also prevents inadvertent maladjustment of the wrench when using it.

Micrometer scale:
Even fine a justments can be made with the help of the white micrometer scale. The vision panel has been sized liberally and ensures that the micrometer value can be read off the scale in an optimal and simple manner using the magnifying glass. Thus, depending on the model, divisions of 1/ 0,5/ 0,1 or 0,025 N•m can be adjusted accurately.

Reversible ratchet head 1/4" - 1/2"

Quick change tool system 9 x 12 mm



Quick change tool system 14 x 18 mm

PUSH BUTTON RELEASE

MUSHROOM HEAD WITH SQUARE

The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece. The torque wrenches can be upgraded to another drive size with the the range of accessories available.

QUICK CHANGE TOOL SYSTEM

The quick-change tool system has diverse drive options for various applications for clockwise and counter clockwise fastening with a safety connector for standard sizes of 9 x 12 or 14 x 18 mm push-fit ools provides the solution for all areas of industrial manufacturing.

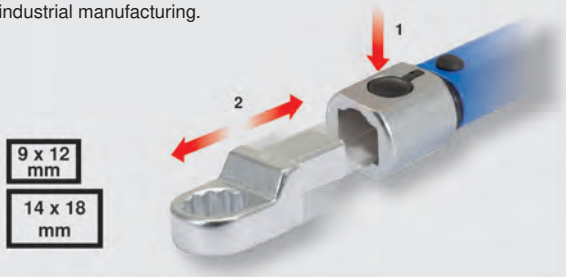

ERGOTORQUE® *basic* TORQUE WRENCH

T-handle box wrench

- Enables quick pre-fastening of the screw connections
- Especially for using in confined spa es
- Especially suitable for rapid screw tightening with the T-handle
- It is simply to be used in place of the standard box wrench
- Ergonomically shaped T-handle
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock

1/4" 3/8" 1/2"

	□	■	B mm	L mm	g
516.1404	3/8"	1/4"	83.0	72.0	51
516.1414	3/8"	3/8"	83.0	72.0	51
516.1424	1/2"	3/8"	100.0	83.0	97
516.1444	1/2"	1/2"	100.0	83.0	107

Rotary square box wrench

- Enables quick pre-fastening of the screw connections, espe-cially in constrained spaces
- Simple to be used in place of the standard box wrench
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock

1/4" 3/8" 1/2" 3/4" 1"

	□	■	D mm	L mm	g
516.1403	3/8"	1/4"	31.0	33.0	21
516.1413	3/8"	3/8"	31.0	33.0	21
516.1423	1/2"	3/8"	39.0	52.0	65
516.1443	1/2"	1/2"	39.0	52.0	65
516.1494	3/4"	3/4"	63.0	73.0	180
516.1491	1"	3/4"	83.0	78.0	380
516.1496	1"	1"	83.0	78.0	380

Insert type box wrench

- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock

3/8" 1/2"

	□	■	L mm	g
516.1933	1/2"	1/2"	43.0	49
516.1943	1/2"	3/8"	43.0	48

ERGOTORQUE® *basic* torque wrench with feed-through square ratchet head

- Actuation accuracy: ±3 % tolerance from the set scale value
- Precise reading accuracy for a minimum 5,000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece
- Double scale in N•m and lbf•ft divisions for precise adjustment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- With exact gearing 30 teeth ratchet mechanism
- Torque setting is quick and easy using the locking knob in the handle end
- Secure locking function within the handle
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identifi ation
- Including test certifi ate in accordance with DIN EN ISO 6789:2003 national standard

1/2"

	■	N•m	lbf•ft	Division N•m	L mm	D mm	H mm	kg
516.1932	1/2"	10-100	8 - 75	5.00	395.0	43.0	27.0	0.91
516.1942	1/2"	20-200	15 - 150	10.00	485.0	43.0	27.0	1.12
516.1972	1/2"	60-320	45 - 236	10.00	585.0	43.0	27.0	1.45

ERGOTORQUE® *precision* TORQUE WRENCH

ERGOTORQUE® *precision* torque wrench with rotary mushroom ratchet head

- Actuation accuracy: ±3 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Torque setting by pulling out and pushing in the slide in knob at the end of the handle
- The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece
- Double scale in N•m and lbf•ft divisions for precise adjustment
- Includes micrometer scale in N•m divisions for precise and fine a justment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- Exact gearing 30 teeth ratchet mechanism
- Torque setting is quick and easy using the locking knob in the handle end
- Secure locking function within the handle
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Individually marked with serial number unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 national standard

1/4" 3/8" 1/2" 3/4" 1"

	■	N•m	Division N•m	lbf•ft	L mm	D mm	H mm	kg
516.1412	1/4"	1-25	0.10	0,8 - 18	289.0	35.0	18.0	0.46
516.1422	3/8"	5-50	0.25	4 - 37	350.0	45.0	23.0	0.61
516.1432	1/2"	10-100	0.50	8 - 75	412.0	45.0	23.0	0.91
516.1442	1/2"	20-200	1.00	15 - 150	500.0	45.0	23.0	1.30
516.1472	1/2"	60-320	1.00	45 - 236	585.0	45.0	23.0	1.45
516.1482	1/2"	80-420	1.00	60 - 310	678.0	45.0	23.0	2.10
516.1490	3/4"	100-550	1.00	75 - 405	960.0	69.0	33.0	3.80
516.1493	3/4"	200-750	10.00	150 - 550	1250.0	69.0	33.0	7.30
516.1495	1"	300-1000	20.00	220 - 730	1500.0	90.0	36.0	5.80

ERGOTORQUE® *precision* torque wrench with reversible ratchet head

- Actuation accuracy: ±3 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- Double scale in N•m and lbf•ft divisions for precise adjustment
- Includes micrometer scale in N•m divisions for precise and fine a justment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- With exact gearing 36 teeth ratchet mechanism
- With ejection mechanism on the ratchet head
- Torque setting is quick and easy using the locking knob in the handle end
- Secure locking function within the handle
- Two-component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 national standard

1/4" 3/8" 1/2"

	■	N•m	lbf•ft	Division N•m	L mm	D mm	H mm	kg
516.1512	1/4"	1-25	0,8 -18	0.10	289.0	35.0	18.0	0.46
516.1522	3/8"	5-50	4 - 37	0.25	350.0	45.0	23.0	0.61
516.1532	1/2"	10-100	8 - 75	0.50	412.0	45.0	23.0	0.91
516.1542	1/2"	20-200	15 - 150	1.00	500.0	45.0	23.0	1.30
516.1572	1/2"	60-320	45 - 236	1.00	585.0	45.0	23.0	1.45
516.1582	1/2"	80-420	60 - 310	1.00	678.0	45.0	23.0	2.10

ERGOTORQUE® *precision* fine a justment torque wrench with retangular tool holder

- Actuation accuracy: ±3 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5,000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Easy to adjust from clockwise to counter clockwise by turning the torque wrench 180°
- Double scale in N•m and lbf•ft divisions for precise adjustment
- With additional micrometer scale in N•m divisions for precise and fine a justment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- Torque setting is quick and easy using the locking knob in the handle end
- Secure locking function within the handle
- Two-component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Snap lock tool holder available for replaceable 9x12 or 14x18 end tools
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 national standard

9x12 mm 14x18 mm

	□	N•m	lbf•ft	Division N•m	L mm	L mm	S mm	kg
516.1612	9x12	1-25	0,8 - 18	0.10	280.0	245,0	17,5	0.30
516.1622	9x12	5-50	4 - 37	0.25	335.0	295,0	17,5	0.45
516.1632	9x12	10-100	8 - 75	0.50	375.0	335,0	17,5	0.60
516.1633	14x18	10-100	8 - 75	0.50	375.0	335,0	17,5	1.02
516.1642	9x12	20-200	15 - 150	1.00	465.0	425,0	17,5	0.85
516.1652	14x18	20-200	15 - 150	1.00	470.0	435,0	25,0	0.90
516.1672	14x18	60-320	45 - 236	1.00	565.0	530,0	25,0	1.20
516.1682	14x18	80-420	60 - 310	1.00	650.0	435,0	25,0	1.60

ERGOTORQUE®*precision* fine a justment torque wrench with retangular tool holder

- Actuation accuracy: ±3 % tolerance from the set value
- Precise reading accuracy for a minimum 5,000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Without scale - With a fi ed adjustable value
- An audible and palpable signal when the desired torque value is achieved
- Two-component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Snap lock tool holder available for replaceable 9x12 or 14x18 end tools
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 national standard

	□	N•m	lbf•ft	L mm	L mm	S mm	g
516.1810	9x12	1-25	0,8 - 18	190.0	155,0	17,5	230
516.1820	9x12	5-50	4 - 37	250.0	210,0	17,5	300
516.1830	9x12	15-85	12 - 64	330.0	280,0	17,5	370
516.1840	14x18	20-200	15 - 150	410.0	370,0	25,0	780

ERGOTORQUE®*precision* TORQUE WRENCH TOOLKIT

ERGOTORQUE®*precision* torque wrench toolkit 1 - 25 N•m

- Set contents for universal applications
- Includes torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/4"

		kg
516.1415	35 pcs ERGOTORQUE®*precision* torque wrench toolkit 1 - 25 N•m	4.73
1 x	1 - 25 N•m	
4 x	50 - 75 - 100 - 150 mm	
13 x	4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm	
6 x	3 - 4 - 5 - 6 - 7 - 8 mm	
7 x	T10 - T15 - T20 - T25 - T27 - T30 T40	
2 x	3/8" x 1/4" ; 3/8"	
2 x	3/8" x 1/4" ; 3/8"	

ERGOTORQUE®*precision* torque wrench toolkit 1-25 N•m

- Set contents for universal applications
- Includes torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/4"

		kg
516.1515	31 pcs ERGOTORQUE®*precision* torque wrench toolkit 1-25 N•m	4.99
1 x	1 - 25 N•m	
4 x	50 - 75 - 100 - 150 mm	
13 x	4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm	
6 x	3 - 4 - 5 - 6 - 7 - 8 mm	
7 x	T10 - T15 - T20 - T25 - T27 - T30 T40	

ERGOTORQUE®*precision* torque wrench toolkit 5 - 50 N•m

- Set contents for universal applications
- Includes torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

3/8"

		kg
516.1425	44 pcs ERGOTORQUE®*precision* torque wrench toolkit 5 - 50 N•m	10.32
1 x	5 - 50 N•m	
3 x	75 - 150 - 250 mm	
18 x	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 mm	
7 x	3 - 4 - 5 - 6 - 7 - 8 - 10 mm	
11 x	T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55 - T60	
2 x	3/8" x 1/4" ; 3/8"	
2 x	3/8" x 1/4" ; 3/8"	

ERGOTORQUE®*precision* torque wrench toolkit 5-50 N•m

- Set contents for universal applications
- Includes torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

3/8"

		kg
516.1525	40 pcs ERGOTORQUE®*precision* torque wrench toolkit 5-50 N•m	6.62
1 x	5 - 50 N•m	
3 x	75 - 150 - 250 mm	
18 x	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 mm	
7 x	3 - 4 - 5 - 6 - 7 - 8 - 10 mm	
11 x	T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55 - T60	

ERGOTORQUE®*precision* torque wrench toolkit 10-100 N•m

- Set contents for universal applications
- Includes torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

		kg
516.1435	52 pcs ERGOTORQUE®*precision* torque wrench toolkit 10-100 N•m	13.48
1 x	10 - 100 N•m	
3 x	75 - 125 - 250 mm	
21 x	8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm	
11 x	4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 19 mm	
12 x	T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55 - T60 - T70	
2 x	1/2" x 3/8" ; 1/2"	
2 x	1/2" x 3/8" ; 1/2"	

ERGOTORQUE®*precision* torque wrench toolkit 20-200 N•m

- Set contents for universal applications
- Includes torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.1445	52 pcs	ERGOTORQUE®*precision* torque wrench toolkit 20-200 N•m	13.90 kg	
1 x		20 - 200 N•m		
3 x		75 - 125 - 250 mm		
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm		
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 19 mm		
12 x		T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55 - T60 - T70		
2 x		1/2" x 3/8" ; 1/2"		
2 x		1/2" x 3/8" ; 1/2"		

ERGOTORQUE®*precision* torque wrench toolkit 10-100 N•m

- Set contents for universal applications
- Includes torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.1535	48 pcs	ERGOTORQUE®*precision* torque wrench toolkit 10-100 N•m	13.61 kg	
1 x		10 - 100 N•m		
3 x		75 - 125 - 250 mm		
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm		
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 19 mm		
12 x		T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55 - T60 - T70		

ERGOTORQUE®*precision* torque wrench toolkit 60-320 N•m

- Set contents for universal applications
- Includes torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.1575	48 pcs	ERGOTORQUE®*precision* torque wrench toolkit 60-320 N•m	14.11 kg	
1 x		60 - 320 Nm		
3 x		75 - 125 - 250 mm		
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm		
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 19 mm		
12 x		T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55 - T60 - T70		

ERGOTORQUE®*precision* torque wrench toolkit 60-320 N•m

- Set contents for universal applications
- Includes torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.1475	52 pcs	ERGOTORQUE®*precision* torque wrench toolkit 60-320 N•m	13.98 kg	
1 x		60 - 320 N•m		
3 x		75 - 125 - 250 mm		
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm		
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 19 mm		
12 x		T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55 - T60 - T70		
2 x		1/2" x 3/8" ; 1/2"		
2 x		1/2" x 3/8" ; 1/2"		

ERGOTORQUE®*precision* torque wrench toolkit 20-200 N•m

- Set contents for universal applications
- Includes torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.1545	48 pcs	ERGOTORQUE®*precision* torque wrench toolkit 20-200 N•m	13.81 kg	
1 x		20 - 200 N•m		
3 x		75 - 125 - 250 mm		
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm		
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 19 mm		
12 x		T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55 - T60 - T70		

ERGOTORQUE®*precision* torque wrench toolkit 80-420 N•m

- Set contents for universal applications
- Includes torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.1585	48 pcs	ERGOTORQUE®*precision* torque wrench toolkit 80-420 N•m	14.51 kg	
1 x		80 - 420 N•m		
3 x		75 - 125 - 250 mm		
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm		
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 19 mm		
12 x		T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55 - T60 - T70		

ERGOTORQUE®*precision* torque wrench toolkit 1-25 N•m

- Set contents for universal applications
- Includes torque wrench with retangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

9x12 mm

516.1615	33 pcs	ERGOTORQUE®*precision* torque wrench toolkit 1-25 N•m	8.47	kg

1 x		1 - 25 N•m
13 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 mm
14 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 21 - 22 mm
2 x		1/4“ - 5/16“
1 x		9 x 12
2 x		1/4“ - 3/8“

ERGOTORQUE®*precision* torque wrench toolkit 10-100 N•m

- Set contents for universal applications
- Includes torque wrench with retangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

9x12 mm

516.1635	33 pcs	ERGOTORQUE®*precision* torque wrench toolkit 10-100 N•m	8.92	kg

1 x		10 - 100 N•m
13 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 mm
14 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 21 - 22 mm
2 x		1/4“ - 5/16“
1 x		9 x 12
2 x		1/4“ - 3/8“

ERGOTORQUE®*precision* torque wrench toolkit 60-320 N•m

- Set contents for universal applications
- Includes torque wrench with retangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

14x18 mm

516.1675	39 pcs	ERGOTORQUE®*precision* torque wrench toolkit 60-320 N•m	15.25	kg

1 x		60 - 320 N•m
19 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 26 - 27 - 29 - 30 - 32 - 34 - 36 - 38 - 41 mm
16 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 24 - 27 - 30 - 32 - 34 - 36 - 41 mm
1 x		5/16“
1 x		14 x 18
1 x		1/2“

ERGOTORQUE®*precision* torque wrench toolkit 5-50 N•m

- Set contents for universal applications
- Includes torque wrench with retangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

9x12 mm

516.1625	33 pcs	ERGOTORQUE®*precision* torque wrench toolkit 5-50 N•m	8.56	kg

1 x		5 - 50 N•m
13 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 mm
14 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 21 - 22 mm
2 x		1/4“ - 5/16“
1 x		9 x 12
2 x		1/4“ - 3/8“

ERGOTORQUE®*precision* torque wrench toolkit 20-200 N•m

- Set contents for universal applications
- Includes torque wrench with retangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

9x12 mm

516.1645	32 pcs	ERGOTORQUE®*precision* torque wrench toolkit 20-200 N•m	9.12	kg

1 x		20 - 200 N•m
13 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
14 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm
2 x		1/4“ - 5/16“
1 x		9 x 12
1 x		1/2“

ERGOTORQUE®*precision* torque wrench toolkit 80-420 N•m

- Set contents for universal applications
- Includes torque wrench with retangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

14x18 mm

516.1685	39 pcs	ERGOTORQUE®*precision* torque wrench toolkit 80-420 N•m	15.65	kg

1 x		80 - 420 N•m
19 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 26 - 27 - 29 - 30 - 32 - 34 - 36 - 38 - 41 mm
16 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 24 - 27 - 30 - 32 - 34 - 36 - 41 mm
1 x		5/16“
1 x		14 x 18
1 x		1/2“

ULTIMATE*precision* TORQUE WRENCH

- Accuracy of ±2 % of the scale value
- Precise reading accuracy for a minimum 10.000 tightening cycles
- Tested with certifi ation in accordance to DIN EN 6789
- Durable and ergonomic two-component handle
- Secure and clearly visible indentations in the handle
- Easily readable double scale with fine orque adjustment
- individually marked with serial number - unique product identifi ation
- Diverse drive options for differenrt types of applications
- Clearly audible and palpable release signal when the desired torque value has been achieved
- Durable corrosion-proof construction due to the robust and powder-coated steel pipe
- Overload gaurantee of ±125% of the maximum scale or torque value

Serial number:
A permanent and unique serial number is applied on all torque wrenches, which provides unique product identifi ation.

Ratchet head:
A highly robust ratchet mechanism 72 teeth for clockwise and counter clockwise movement is integrated in the polished ratchet head. The direction of rotation can be changed by simply rotating the square drive. A sliding roller bearing mechanism in the interior of the wrench ensures the highest level of accuracy and long life. An audible and palpable signal indicates automatically that the desired torque value has been achieved.

Accuracy of
±2 %
of the scale reading
Precise reading accuracy for a minimum 10.000 tightening cycles

Corrosion:
The robust steel pipe body is coated with a powder coating protection in order to ensure durable corrosion-proof properties.

TECHNOLOGY

The desired torque can be adjusted and set by simply pulling the out locking knob, adjusting and then pushing in the locking knob at the end of the handle, using the ergonomic fi ger grips. A red ring on the locking knob indicates that the wrench must be set and adjusted for the required torque and also prevents inadvertent maladjustment of the wrench when using it.

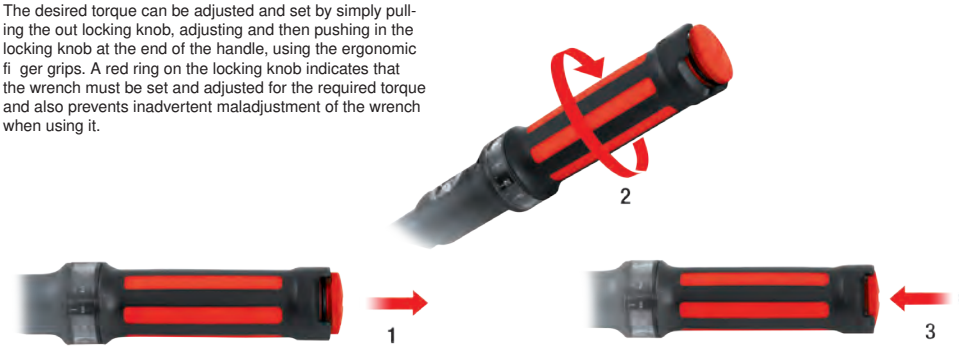

RATCHET HEAD

Reversible ratchet head 1/4" - 1"

Rotary ratchet head 1/4" - 1/2"

Tool-attachment bracket 9x12 mm

Tool-attachment bracket 14x18 mm

Scale with magnifying glass
A double scale having N•m and Lbf•ft divisions that can be read easily, is concealed under a large sized vision panel, which enables particularly accurate adjustment of the desired torque value. In order to be able to read off the scale in an optimal and simple manner, a strong magnifying glass is integrated in the vision panel.

Dual component handle
The durable and ergonomic two-component handle ensures safe and effortless working, whereby the softer component prevents the hand from slipping and provides maximum safety.

Handle end locking:
The desired torque can be adjusted and set by simply pulling the out locking knob, adjusting and then pushing in the locking knob at the end of the handle, using the ergonomic fi ger grips. A black ring on the locking knob indicates that the wrench must be set and adjusted for the required torque and also prevents inadvertent maladjustment of the wrench when using it.

Micrometer scale:
Even fine a justments can be made with the help of the white micrometer scale. The vision panel has been sized liberally and ensures that the micrometer value can be read off the scale in an optimal and simple manner using the magnifying glass. Thus, depending on the model, divisions of 1/ 0,5/ 0,1 or 0,025 N•m can be adjusted accurately.

PUSH BUTTON RELEASE

MUSHROOM HEAD WITH SQUARE

The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece. The torque wrenches can be upgraded to another drive size with the the range of accessories available.

Quick change tool system

The quick-change tool system has diverse drive options for various applications for clockwise and counter clockwise fastening with a safety connector for standard sizes of 9 x 12 or 14 x 18 mm push-fit ools provides the solution for all areas of industrial manufacturing.

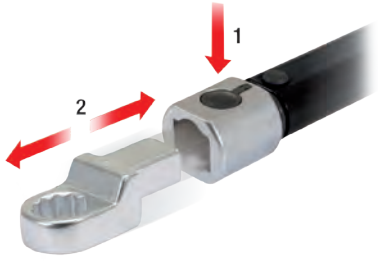

ULTIMATE*precision* TORQUE WRENCH

T-handle box wrench

- Enables quick pre-fastening of the screw connections
- Especially for using in confined spa es
- Especially suitable for rapid screw tightening with the T-handle
- It is simply to be used in place of the standard box wrench
- Ergonomically shaped T-handle
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock

1/4" 3/8" 1/2"

	□	■	B mm	L mm	g
516.1404	3/8"	1/4"	83.0	72.0	51
516.1414	3/8"	3/8"	83.0	72.0	51
516.1424	1/2"	3/8"	100.0	83.0	97
516.1444	1/2"	1/2"	100.0	83.0	107

Rotary square box wrench

- Enables quick pre-fastening of the screw connections, espe- cially in constrained spaces
- Simple to be used in place of the standard box wrench
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock



1/4" 3/8" 1/2" 3/4" 1"

	□	■	D mm	L mm	g
516.1403	3/8"	1/4"	31.0	33.0	21
516.1413	3/8"	3/8"	31.0	33.0	21
516.1423	1/2"	3/8"	39.0	52.0	65
516.1443	1/2"	1/2"	39.0	52.0	65
516.1494	3/4"	3/4"	63.0	73.0	180
516.1491	1"	3/4"	83.0	78.0	380
516.1496	1"	1"	83.0	78.0	380

ULTIMATE*precision* torque wrench with rotary mushroom ratchet head

- Actuation accuracy: ±2 % tolerance of the set scale value
- Precise reading accuracy for a minimum 10.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Torque setting by pulling out and pushing in the slide-in knob at the end of the handle
- For controlled fastening in both directions.
- Double scale in N•m and lbf•ft divisions for precise adjustment
- With additional micrometer scale in N•m divisions for precise and fine a justment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- With exact gearing 30 teeth ratchet mechanism
- Torque setting is quick and easy using the locking knob in the handle end
- Secure locking function within the handle
- Two-component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789 national standard

1/4" 3/8" 1/2" 3/4" 1"

	■	N•m	Division N•m	lbf•ft	L mm	D mm	H mm	kg
516.4012	1/4"	1-25	0.10	0,8 - 18	289.0	35.0	18.0	0.46
516.4022	3/8"	5-50	0.25	4 - 37	350.0	45.0	23.0	0.61
516.4032	1/2"	10-100	0.50	8 - 75	412.0	45.0	23.0	0.91
516.4042	1/2"	20-200	1.00	15 - 150	500.0	45.0	23.0	1.30
516.4072	1/2"	60-320	1.00	45 - 236	585.0	45.0	23.0	1.45
516.4082	1/2"	80-420	1.00	60 - 310	678.0	45.0	23.0	2.10
516.4090	3/4"	100-550	1.00	75 - 405	960.0	69.0	33.0	3.80
516.4093	3/4"	140-750	10.00	150 - 550	1250.0	69.0	33.0	4.80
516.4095	1"	300-1000	20.00	220 - 730	1500.0	90.0	36.0	5.80

ULTIMATE*precision* torque wrench with rotary mushroom ratchet head

- Actuation accuracy: ±2 % tolerance of the set scale value
- Precise reading accuracy for a minimum 10.000 tightening cycles
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- Double scale in N•m and lbf•ft divisions for precise adjustment
- With additional micrometer scale in N•m divisions for precise and fine a justment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- With exact gearing 36 teeth ratchet mechanism
- With ejection mechanism on the ratchet head
- Torque setting is quick and easy using the locking knob in the handle end
- Secure locking function within the handle
- Two-component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789 national standard

1/4" 3/8" 1/2"

	■	N•m	lbf•ft	Division N•m	L mm	D mm	H mm	kg
516.4912	1/4"	1-25	0,8 -18	0.10	289.0	35.0	18.0	0.46
516.4922	3/8"	5-50	4 - 37	0.25	350.0	45.0	23.0	0.61
516.4932	1/2"	10-100	8 - 75	0.50	412.0	45.0	23.0	0.91
516.4942	1/2"	20-200	15 - 150	1.00	500.0	45.0	23.0	1.30
516.4972	1/2"	60-320	45 - 236	1.00	585.0	45.0	23.0	1.45
516.4982	1/2"	80-420	60 - 310	1.00	678.0	45.0	23.0	2.10

ULTIMATE*precision* torque wrench with retangular tool holder

- Actuation accuracy: ±2 % tolerance of the set scale value
- Precise reading accuracy for a minimum 10.000 tightening cycles
- For controlled fastening in a clockwise and counter clockwise direction
- Easy to adjust from clockwise to counter clockwise by turning the torque wrench 180°
- Double scale in N•m and lbf•ft divisions for precise adjustment
- With additional micrometer scale in N•m divisions for precise and fine a justment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- Torque setting is quick and easy using the locking knob in the handle end
- Secure locking function within the handle
- Two-component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Snap lock tool holder available for replaceable 9x12 or 14x18 end tools
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789 national standard

9x12 mm 14x18 mm

	□	N•m	Division N•m	lbf•ft	L mm	L mm	S mm	kg
516.4212	9x12	1-25	0.10	0,8 - 18	280.0	245,0	17,5	0.30
516.4222	9x12	5-50	0.25	4,0 - 37	335.0	295,0	17,5	0.45
516.4232	9x12	10-100	0.50	8,0 - 75	375.0	335,0	17,5	0.60
516.4242	9x12	20-200	1.00	15,0 - 150	465.0	425,0	17,5	0.85
516.4252	14x18	20-200	1.00	15,0 - 150	470.0	435,0	25,0	0.90
516.4272	14x18	60-320	1.00	45,0 - 236	565.0	530,0	25,0	1.20
516.4282	14x18	80-420	1.00	60,0 - 310	650.0	435,0	25,0	1.60
516.4290	14x18	100-550	1.00	74,0 - 405	920.0	875,0	25,0	3.75
516.4293	14x18	200-750	1.00	148 - 553	1120.0	1155,0	25,0	5.27

ULTIMATE*precision* fine a justment torque wrench with retangular tool holder

- Actuation accuracy: ±2% tolerance from the set value
- Precise reading accuracy for a minimum 10.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Without scale - With a fi ed adjustable value
- An audible and palpable signal when the desired torque value is achieved
- Two-component handle with a soft zone, is ergonomic in design and comfortable in the hand
- With snap lock tool holder available for replaceable 9x12 or 14x18 end tools
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789 national standard

9x12 mm 14x18 mm

	□	N•m	lbf•ft	L mm	L mm	S mm	g
516.4810	9x12	1-25	0,8 - 18	190.0	155,0	17,5	230
516.4820	9x12	5-50	4 - 37	250.0	210,0	17,5	300
516.4830	9x12	15-85	12 - 64	330.0	280,0	17,5	370
516.4840	14x18	20-200	15 - 180	410.0	370,0	25,0	780

ULTIMATE*precision* TORQUE WRENCH TOOLKIT

ULTIMATE*precision* torque wrench toolkit 1-25 N•m

- Set contents for universal applications
- Includes Torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/4"

516.4015	35 pcs	ULTIMATE*precision* torque wrench toolkit 1-25 N•m	4.74 kg

1 x		1 - 25 N•m
4 x		50 - 75 - 100 - 150 mm
13 x		4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm
6 x		3 - 4 - 5 - 6 - 7 - 8 mm
7 x		T10 - T15 - T20 - T25 - T27 - T30 - T40
2 x		3/8“ x 1/4“ ; 3/8“ x 3/8“
2 x		3/8“ x 1/4“ ; 3/8“ x 3/8“

ULTIMATE*precision* torque wrench toolkit 5-50 N•m

- Set contents for universal applications
- Includes Torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

3/8"

516.4025	42 pcs	ULTIMATE*precision* torque wrench toolkit 5-50 N•m	10.33 kg

1 x		5 - 50 N•m
3 x		75 - 150 - 250 mm
18 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 mm
7 x		3 - 4 - 5 - 6 - 7 - 8 - 10 mm
11 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60
1 x		3/8“ x 1/2“

ULTIMATE*precision* torque wrench toolkit 10-100 N•m

- Set contents for universal applications
- Includes torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.4035	52 pcs	ULTIMATE*precision* torque wrench toolkit 10-100 N•m	13.49 kg

1 x		1 - 100 N•m
3 x		75 - 125 - 250 mm
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70
2 x		1/2“ x 3/8“ ; 1/2“ x 1/2“
2 x		3/8“ x 1/4“ ; 3/8“ x 3/8“

ULTIMATE*precision* torque wrench toolkit 1-25 N•m

- Set contents for universal applications
- Includes Torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/4"

516.4915	31 pcs	ULTIMATE*precision* torque wrench toolkit 1-25 N•m	4.60 kg

1 x		1 - 25 N•m
4 x		50 - 75 - 100 - 150 mm
13 x		4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm
6 x		3 - 4 - 5 - 6 - 7 - 8 mm
7 x		T10 - T15 - T20 - T25 - T27 - T30 - T40

ULTIMATE*precision* torque wrench toolkit 5-50 N•m

- Set contents for universal applications
- Includes Torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

3/8"

516.4925	40 pcs	ULTIMATE*precision* torque wrench toolkit 5-50 N•m	6.29 kg

1 x		5 - 50 N•m
3 x		75 - 150 - 250 mm
18 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 24 mm
7 x		3 - 4 - 5 - 6 - 7 - 8 - 10 mm
11 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60

ULTIMATE*precision* torque wrench toolkit 20-200 N•m

- Set contents for universal applications
- Includes Torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.4045	52 pcs	ULTIMATE*precision* torque wrench toolkit 20-200 N•m	13.88 kg

1 x		20 - 200 N•m
3 x		75 - 125 - 250 mm
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70
2 x		1/2“ x 3/8“ ; 1/2“ x 1/2“
2 x		1/2“ x 3/8“ ; 1/2“ x 1/2“

ULTIMATE*precision* torque wrench toolkit 60-320 N•m

- Set contents for universal applications
- Includes Torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.4075	52 pcs	ULTIMATE*precision* torque wrench toolkit 60-320 N•m	14.03	
1 x		60 - 320 N•m		
3 x		75 - 125 - 250 mm		
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm		
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm		
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70		
2 x		1/2" x 3/8" ; 1/2"		
2 x		1/2" x 3/8" ; 1/2"		

ULTIMATE*precision* torque wrench toolkit 10-100 N•m

- Set contents for universal applications
- Includes Torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.4935	48 pcs	ULTIMATE*precision* torque wrench toolkit 10-100 N•m	13.22	
1 x		10 - 100 N•m		
3 x		75 - 125 - 250 mm		
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 27 - 30 - 32 - 34 - 36 mm		
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm		
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70		

ULTIMATE*precision* torque wrench toolkit 60-320 N•m

- Set contents for universal applications
- Includes Torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.4975	48 pcs	ULTIMATE*precision* torque wrench toolkit 60-320 N•m	13.76	
1 x		60 - 320 N•m		
3 x		75 - 125 - 250 mm		
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 27 - 30 - 32 - 34 - 36 mm		
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm		
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70		

ULTIMATE*precision* torque wrench toolkit 80-420 N•m

- Set contents for universal applications
- Includes torque wrench with rotary mushroom ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.4085	52 pcs	ULTIMATE*precision* torque wrench toolkit 80-420 N•m	14.68	
1 x		80 - 420 N•m		
3 x		75 - 125 - 250 mm		
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm		
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm		
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70		
2 x		1/2" x 3/8" ; 1/2"		
2 x		1/2" x 3/8" ; 1/2"		

ULTIMATE*precision* torque wrench toolkit 20-200 N•m

- Set contents for universal applications
- Includes torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.4945	48 pcs	ULTIMATE*precision* torque wrench toolkit 20-200 N•m	13.61	
1 x		60 - 320 N•m		
3 x		75 - 125 - 250 mm		
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34 - 36 mm		
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm		
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70		

ULTIMATE*precision* torque wrench toolkit 80-420 N•m

- Set contents for universal applications
- Includes Torque wrench with reversible ratchet head
- Supplied in a metal carrying case with the tools clearly organised

1/2"

516.4985	48 pcs	ULTIMATE*precision* torque wrench toolkit 80-420 N•m	14.41	
1 x		80 - 420 N•m		
3 x		75 - 125 - 250 mm		
21 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 27 - 30 - 32 - 34 - 36 mm		
11 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 - 19 mm		
12 x		T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60 - T70		

ULTIMATEprecision torque wrench toolkit 1-25 N•m

- Set contents for universal applications
- Includes torque wrench with retangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

9x12 mm

516.4215	33 pcs	ULTIMATEprecision torque wrench toolkit 1-25 N•m	7.92	
1 x		1 - 25 N•m		
13 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm		
14 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm		
2 x		1/4“ - 5/16“		
1 x		9 x 12 mm		
2 x		1/4“ - 3/8“		

ULTIMATE*precision* torque wrench toolkit 10-100 N•m

- Set contents for universal applications
- Includes torque wrench with retangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

9x12 mm

516.4235	33 pcs	ULTIMATE*precision* torque wrench toolkit 10-100 N•m	8.22	
1 x		10 - 100 N•m		
13 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm		
14 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm		
2 x		1/4“ - 5/16“		
1 x		9 x 12 mm		
2 x		1/4“ - 3/8“		

ULTIMATE*precision* torque wrench toolkit 60-320 N•m

- Set contents for universal applications
- Includes torque wrench with retangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

14x18 mm

516.4275	39 pcs	ULTIMATE*precision* torque wrench toolkit 60-320 N•m	14.65	
1 x		60 - 320 N•m		
19 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 22 - 24 26 - 27 - 29 - 30 - 32 - 34 36 - 38 - 41mm		
16 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 22 - 24 - 27 - 30 - 32 - 34 - 36 - 41 mm		
1 x		5/16“		
1 x		14 x 18 mm		
1 x		1/2“		

ULTIMATE*precision* torque wrench toolkit 5-50 N•m

- Set contents for universal applications
- Includes Torque wrench with retangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

9x12 mm

516.4225	33 pcs	ULTIMATE*precision* torque wrench toolkit 5-50 N•m	8.07	
1 x		5 - 50 N•m		
13 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm		
14 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm		
2 x		1/4“ - 5/16“		
1 x		9 x 12 mm		
2 x		1/4“ - 3/8“		

ULTIMATE*precision* torque wrench toolkit 20-200 N•m

- Set contents for universal applications
- Includes torque wrench with retangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

9x12 mm

516.4245	33 pcs	ULTIMATE*precision* torque wrench toolkit 20-200 N•m	8.47	
1 x		20 - 200 N•m		
13 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm		
14 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm		
2 x		1/4“ - 5/16“		
1 x		9 x 12 mm		
2 x		1/4“ - 3/8“		

ULTIMATE*precision* torque wrench toolkit 80-420 N•m

- Set contents for universal applications
- Includes torque wrench with retangular tool holder
- Supplied in a metal carrying case with the tools clearly organised

14x18 mm

516.4285	39 pcs	ULTIMATE*precision* torque wrench toolkit 80-420 N•m	15.05	
1 x		80 - 420 N•m		
19 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 26 - 27 - 29 - 30 - 32 - 34 - 36 - 38 - 41 mm		
16 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 24 - 27 - 30 - 32 - 34 - 36 - 41 mm		
1 x		5/16“		
1 x		14 x 18 mm		
1 x		1/2“		

ALUTORQUE*precision*

Torque wrench made from high-strength aluminium alloy

Ratchet head:
A robust mechanism, optionally with a square drive for controlled fastening or with a double square for controlled clockwise and counter clockwise fastening is integrated into the head.
The ALUTORQUE*precision* torque wrench is also available with a rectangular reception and guarantees fl xible working through this.
The square drives can be expanded with pin ratchets so that the user can decide himself whether he wants to work with or without the ratcheting function.
An audible and palpable signal indicates automatically that the desired torque value has been achieved.

Accuracy of
±3 %
of the scale reading
Precise reading accuracy for a minimum 5,000 tightening cycles

The robust and durable body is ideal for use in harsh environments in industry.

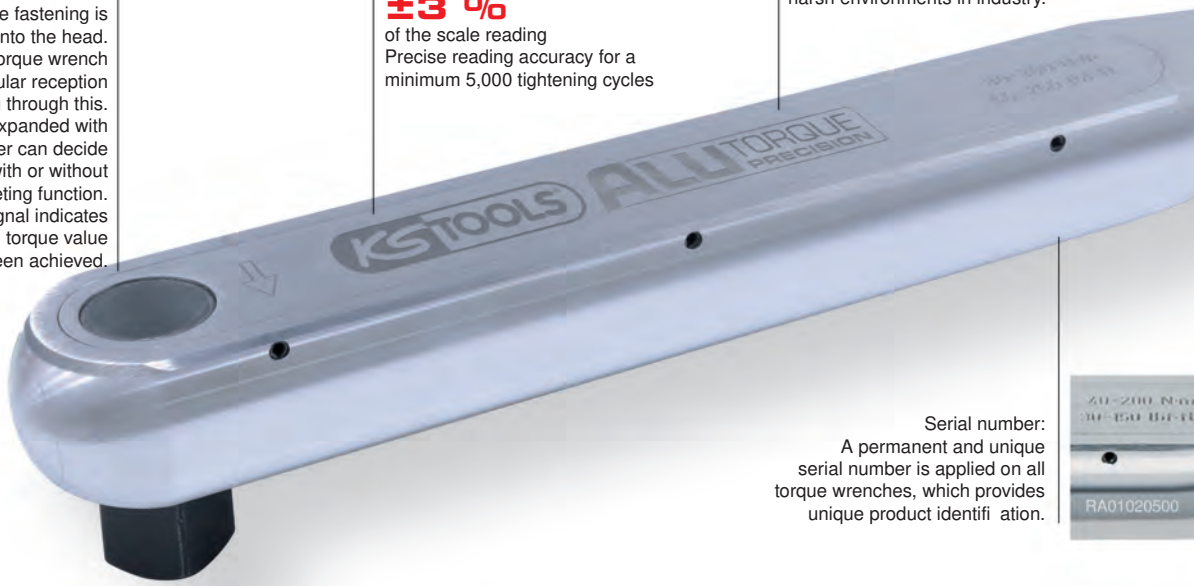

Serial number:
A permanent and unique serial number is applied on all torque wrenches, which provides unique product identifi ation.

TECHNOLOGY

The desired torque can be adjusted and set using the folding mechanism by simply pulling out and pushing in the captive hexagon key wrench in connection with the locking knob at the end of the handle.

All **ALUTORQUE*precision*** torque wrenches can be used permanently with safety.

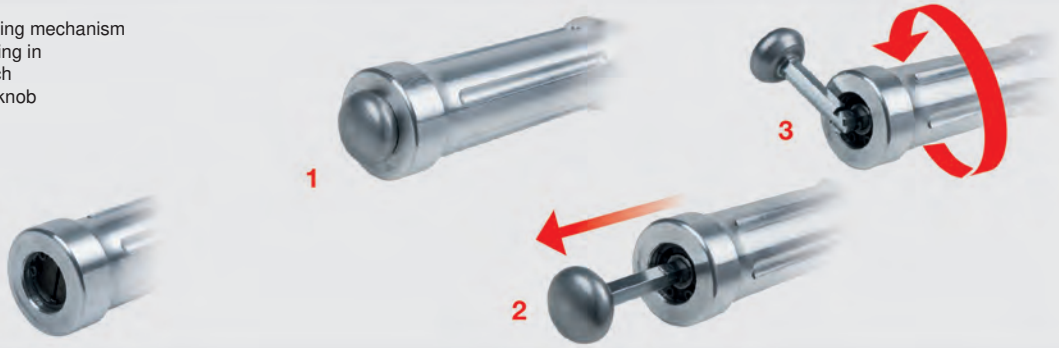

Scale:
A double scale having N.m and lbf.in/lbf.ft divisions that can be read easily, is concealed under a large sized vision panel, which enables particularly accurate adjustment of the desired torque value.

Aluminium handle:
The new light, durable and ergonomic aluminium handle ensures simple and secure operation.

The desired torque can be adjusted and set using the folding mechanism by simply pulling out and pushing in the captive hexagon key wrench in connection with the locking knob at the end of the handle.

Error-free operation:

The pivot of the drive lever and the drive square lie on one axis, meaning that in contrast to conventional torque wrenches, it is possible to grip the torque wrench in any position, either using both hands or with an extension bar. Thanks to the lever chain a shift in the value is ruled out. The absolute accuracy always remains preserved.

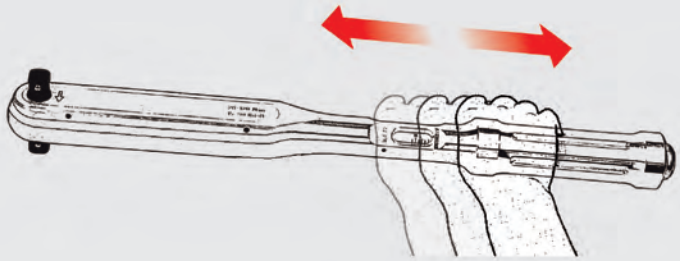

ALUTORQUE*precision* TORQUE WRENCH

ALUTORQUE*precision* torque wrench

- Release accuracy: ±3 % tolerance from the set scale value and better
- Use is almost all industrial production areas
- Depending on option with fast release function button
- Depending on option with robust ratchet mechanism
- Simple operation - fast and secure torque tightening
- Simple and/or double square for controlled fastening in clockwise and counter clockwise directions
- Double-scale Nm and lbf-ft and/or lbf-in division for precise adjustment
- Clear audible and noticeable torque release signal through close-gap release
- Secure locking possibility
- Ergonomic and hand-friendly handle
- Light, robust and very workshop friendly
- Long service-life and high holding times
- Highest precision and reliability even under tough long-term use
- Setting the torque by using the captive crank lever mechanism in the handle
- Comfortable setting through shapely, captive adjustment knob on the end of the handle
- Extendible to reduces the workload of the user
- Extremely low wear through force reductions through lever mechanism
- Square drive in accordance with DIN 3120 - ISO 1174 with ball lock
- Individual serial number for clear product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 - traceable to national standards





1/4" 3/8" 1/2" 3/4" 1" 1.1/2"

					N·m	Division N·m	lbf·in	lbf·ft	Division lbf·in	Division lbf·ft	L mm	H mm	L1 mm	L2 mm	L3 mm		kg	
516.5030				1/4"	6-30	1.00	50-270		10.0		207	30.0	268.0				0.58	
516.5031				1/4"	6-30	1.00	50-270		10.0		207	30.0	268.0				0.58	
516.5032				3/8"	8-40	5.00	70-350		50.0		263	30.0	338.0				1.00	
516.5033				3/8"	8-40	5.00	70-350		50.0		263	30.0	338.0				1.00	
516.5034		X		1/2"	20-120	5.00		15-90		5.0	374	30.0	462.0				1.50	
516.5035				1/2"	20-120	5.00		15-90		5.0	374	30.0	462.0				1.50	
516.5036		X		1/2"	40-200	5.00		30-150		5.0	463	30.0	551.0				1.40	
516.5037				1/2"	40-200	5.00		30-150		5.0	463	30.0	551.0				1.30	
516.5038			X	1/2"	40-200	5.00		30-150		5.0	463	35.0	554.0				1.40	
516.5039		X		1/2"	50-300	5.00		35-220		5.0	529	30.0	617.0				2.00	
516.5040				1/2"	50-300	5.00		35-220		5.0	529	30.0	671.0				2.00	
516.5041				3/4"	80-360	5.00		60-260		5.0	624	30.0	717.0				2.40	
516.5042				3/4"	80-360	5.00		60-260		5.0	624	30.0	717.0				2.40	
516.5043				3/4"	110-550	10.00		80-400		10.0	719	35.0	812.0				2.90	
516.5044				3/4"	110-550	10.00		80-400		10.0	719	35.0	812.0				2.90	
516.5045				3/4"	140-760	10.00		100-560		10.0	719	35.0	812.0				3.20	
516.5046				3/4"	140-760	10.00		100-560		10.0	719	35.0	812.0				3.20	
516.5047				3/4"	140-760	10.00		100-560		10.0	1297	35.0	812.0	1413.0	762.0	516.5059	5.00	
516.5048				3/4"	140-760	10.00		100-560		10.0	1297	35.0	812.0	1413.0	762.0	516.5059	5.00	
516.5049				3/4"	520-1000	10.00		380-730		10.0	1297	35.0	812.0	1413.0	762.0	516.5059	5.60	
516.5050				3/4"	520-1000	10.00		380-730		10.0	1297	35.0	812.0	1413.0	762.0	516.5059	5.60	
516.5051				1"	600-1500	25.00					1473	40.0	932.0	1608.0	925.0	516.5058	10.80	
516.5052				1"	600-1500	25.00					1473	40.0	932.0	1608.0	925.0	516.5058	10.80	
516.5053				1"	750-2000	50.00					2218	40.0	932.0	2353.0	925.0	516.5057+58	11.60	
516.5054				1"	750-2000	50.00					2218	40.0	932.0	2353.0	925.0	516.5057+58	11.60	
516.5055				1.1/2"	1500-3000	50.00					2313	40.0	1025.0	2463.0	925.0	516.5057+58	13.20	

ALUTORQUE*precision* Pre-set torque wrench

- Release accuracy: ±3 % tolerance from the set scale value and better
- Use is almost all industrial production areas
- Depending on option with fast release function button
- Simple operation - fast and secure torque tightening
- Simple and/or double square for controlled fastening in clockwise and counter clockwise directions
- Double-scale Nm and lbf-ft and/or lbf-in division for precise adjustment
- Clear audible and noticeable torque release signal through close-gap release
- Secure locking possibility
- Ergonomic and hand-friendly handle
- Light, robust and very workshop friendly
- Long service-life and high holding times
- Highest precision and reliability even under tough long-term use
- Setting the torque by using the captive crank lever mechanism in the handle
- Comfortable setting through shapely, captive adjustment knob on the end of the handle
- Extendible to reduces the workload of the user
- Extremely low wear through force reductions through lever mechanism
- Square drive in accordance with DIN 3120 - ISO 1174 with ball lock
- Individual serial number for clear product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 - traceable to national standards

1/4" 3/8" 1/2" 3/4" 1" 1.1/2"

				N·m	Division N·m	lbf·in	lbf·ft	Division lbf·in	Division lbf·ft	L mm	H mm	L1 mm	L2 mm	L3 mm	kg	
516.5100			1/4"	6-30	1.00	50-270		10.0		207	30.0	268.0			0.58	
516.5101			1/4"	6-30	1.00	50-270		10.0		207	30.0	268.0			0.58	
516.5102			3/8"	8-40	5.00	70-350		50.0		263	30.0	338.0			1.00	
516.5103			3/8"	8-40	5.00	70-350		50.0		263	30.0	338.0			1.00	
516.5104		X	1/2"	20-120	5.00		15-90		5.0	374	30.0	462.0			1.50	
516.5105			1/2"	20-120	5.00		15-90		5.0	374	30.0	462.0			1.50	
516.5106		X	1/2"	40-200	5.00		30-150		5.0	463	30.0	551.0			1.40	
516.5107			1/2"	40-200	5.00		30-150		5.0	463	30.0	551.0			1.30	
516.5108		X	1/2"	50-300	5.00		35-220		5.0	529	30.0	617.0			2.00	
516.5109			1/2"	50-300	5.00		35-220		5.0	529	30.0	617.0			2.00	
516.5110			3/4"	80-360	5.00		60-260		5.0	624	30.0	717.0			2.40	
516.5111			3/4"	80-360	5.00		60-260		5.0	624	30.0	717.0			2.40	
516.5112			3/4"	110-550	10.00		80-400		10.0	719	35.0	812.0			2.90	
516.5113			3/4"	110-550	10.00		80-400		10.0	719	35.0	812.0			2.90	
516.5114			3/4"	140-760	10.00		100-560		10.0	719	35.0	812.0			3.20	
516.5115			3/4"	140-760	10.00		100-560		10.0	719	35.0	812.0			3.20	
516.5116			3/4"	140-760	10.00		100-560		10.0	1297	35.0	812.0	1413.0	762.0	5.00	
516.5117			3/4"	140-760	10.00		100-560		10.0	1297	35.0	812.0	1413.0	762.0	5.00	
516.5118			3/4"	520-1000	10.00		380-730		10.0	1297	35.0	812.0	1413.0	762.0	5.60	
516.5119			3/4"	520-1000	10.00		380-730		10.0	1297	35.0	812.0	1413.0	762.0	5.60	
516.5120			1"	600-1500	25.00					1473	40.0	932.0	1608.0	925.0	10.80	
516.5121			1"	600-1500	25.00					1473	40.0	932.0	1608.0	925.0	10.80	
516.5122			1"	750-2000	50.00					2218	40.0	932.0	2353.0	925.0	11.60	
516.5123			1"	750-2000	50.00					2218	40.0	932.0	2353.0	925.0	11.60	
516.5124			1.1/2"	1500-3000	50.00					2313	40.0	1025.0	2453.0	925.0	13.20	

ALUTORQUE*precision* Socket pipe for torque wrench

- To reach the high torque values easier with the lever arm extension
- Option and secure connection to the aluminium torque wrench
- To extend the lever arm
- Made of zinc coated steel



	L mm	Suitable for	kg	
516.5056	400.0	516.5053	2.30	
516.5057	745.0	516.5053, 516.5055	3.60	
516.5058	762.0	516.5047, 516.5049	0.80	

ALUTORQUE*precision* aluminium extension pipe for torque wrench

- To reach the high torque values easier with the lever arm extension
- Option and secure connection to the aluminium torque wrench
- To extend the lever arm
- With slightly anodised clamping nut
- Made of aluminium



	L mm	Suitable for	kg	
516.5059	925.0	516.5051, 516.5053, 516.5055	3.40	

Ratchet adapter for aluminium torque wrench

- Robust ratchet adapter
- To be used in combination with aluminium torque wrench
- For controlled fastening in clockwise and counter clockwise directions
- Internal square in accordance with DIN 3120 / ISO 1174
- Square drive in accordance with DIN 3120 - ISO 1174 with ball lock
- For manual operation
- Matt finis
- Chrome vanadium

1/4" 3/8" 1/2" 3/4" 1"

	□	■	H mm	D mm	Format	Suitable for	kg	
516.5020	1/4"	1/4"	21.0	24.0	Right-handed rotation	516.5030	0.05	
516.5021	3/8"	3/8"	28.0	35.0	Right-handed rotation	516.5032	0.15	
516.5022	1/2"	1/2"	35.0	46.0	Right-handed rotation	516.5034, 516.5036, 516.5039	0.35	
516.5023	3/4"	3/4"	53.0	65.0	Right-handed rotation	516.5041, 516.4043, 516.5045, 516.5047, 516.5049	1.00	
516.5024	1"	1"	63.0	73.0	Right-handed rotation	516.5051, 516.5053	2.50	
516.5025	3/8"	3/8"	28.0	35.0	Left-handed rotation	516.5033	0.15	
516.5026	1/2"	1/2"	35.0	46.0	Left-handed rotation	516.5035, 516.5037, 516.5040	0.35	
516.5027	3/4"	3/4"	53.0	65.0	Left-handed rotation	516.5042, 516.5044, 516.5046, 516.5048, 516.5050	1.00	
516.5028	1"	1"	63.0	73.0	Left-handed rotation	516.5052, 516.5054	1.80	

ALUTORQUE*precision* Fixed pre-set torque wrench with plug-in tool holder

- Release accuracy: ±3 % tolerance from the set value
- Depending on tool use it is possible to work to the front (e.g. open-end wrench) or to the side (e.g. changeover ratchet and socket wrench set)
- Simple operation - fast and secure torque tightening
- Changing the operating direction takes place by turning the torque wrench
- Double-scale Nm and lbf-ft and/or lbf-in division for precise adjustment
- Clear audible and noticeable torque release signal through close-gap release
- With a fi ed adjustable value
- Secure locking possibility
- Ergonomic and hand-friendly handle
- Light, robust and very workshop friendly
- Long service-life and high holding times
- Highest precision and reliability even under tough long-term use
- With lock connector
- Setting the torque by using the captive crank lever mechanism in the handle
- Extremely low wear through force reductions through lever mechanism
- Individual serial number for clear product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 - traceable to national standards



Tested and Certified to DIN EN ISO 6789 Certificate Precision +/-3%

9x12 mm² 14x18 mm²

	□	N·m	Division N·m	lbf·in	lbf·ft	Division lbf·in	Division lbf·ft	L mm	L_k mm	S_k mm	H mm	kg	
516.5080	9x12	8-40	5.00	70-350		5.0		350.0	303	17,5	35.0	0.95	
516.5081	9x12	20-120	5.00		15-90		5.0	474.0	414	17,5	35.0	1.25	
516.5082	14x18	50-400	5.00		35-300		5.0	641.0	532	25,0	35.0	1.70	

ALUTORQUE*precision* Fixed pre-set torque wrench with plug-in tool holder

- Release accuracy: ±3 % tolerance from the set value
- Depending on tool use it is possible to work to the front (e.g. open-end wrench) or to the side (e.g. changeover ratchet and socket wrench set)
- Simple operation - fast and secure torque tightening
- Changing the operating direction takes place by turning the torque wrench
- Double-scale Nm and lbf-ft and/or lbf-in division for precise adjustment
- Clear audible and noticeable torque release signal through close-gap release
- Secure locking possibility
- Ergonomic and hand-friendly handle
- Light, robust and very workshop friendly
- Long service-life and high holding times
- Highest precision and reliability even under tough long-term use
- With lock connector
- Setting the torque by using the captive crank lever mechanism in the handle
- Extremely low wear through force reductions through lever mechanism
- Individual serial number for clear product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 - traceable to national standards



Tested and Certified to DIN EN ISO 6789 Certificate Precision +/-3%

9x12 mm² 14x18 mm²

	□	N·m	Division N·m	lbf·in	lbf·ft	Division lbf·in	Division lbf·ft	L mm	L_k mm	S_k mm	H mm	kg	
516.5085	9x12	8-40	5.00	70-350		50.0		361.0	303	17,5	35.0	0.95	
516.5086	9x12	20-120	5.00		15-90		5.0	485.0	414	17,5	35.0	1.25	
516.5087	14x18	50-400	5.00		35-300		5.0	653.0	582	25,0	35.0	1.70	

SLIPPER TORQUE WRENCH

Fixed preset ratchet torque wrench without scale with automatic trigger via slipping function – no overtightening possible.

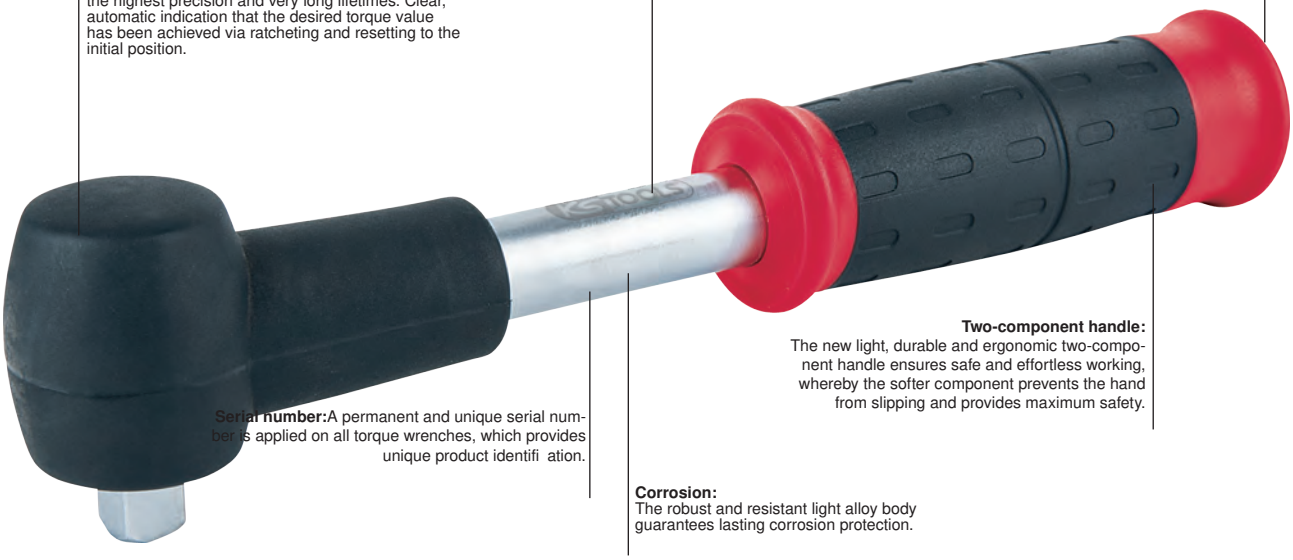

Tested and Certified to DIN EN ISO 6789 Certificate Precision +/-4%

Ratcheting operating principle

When a preset value is achieved the mechanism slips over the ball end (without the possibility of overtightening).
The ratcheting torque wrench can then be used immediately again.

TECHNOLOGY

Pre-set Slipper torque wrench

- Release accuracy ±6 % tolerance from the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For serial and/or conveyor assembly lines
- For controlled fastening in a clockwise direction
- Clearly noticeable torque release signal through ratchet
- It is not possible to over tighten the set value
- Automatic reset in the initial position
- Without scale - with a fi ed adjustable value
- Long service-life and high holding times
- Highest precision and reliability even under tough long-term use
- Ergonomic and hand-friendly rubber handle
- Square drive in accordance with DIN 3120 - ISO 1174 with ball lock
- Individual serial number for clear product identifi ation
- Includes test certifi ate in accordance with DIN / ISO 6789:2003 - traceable to national standards

1/4" 3/8" 1/2"

	■	Measuring range N•m	lbf·ft	L mm	D mm	H mm	kg	
516.5000	1/4"	1-5	0,8-4	182.5	15.5	34.3	0.22	
516.5001	1/4"	4-10	3-8	182.5	15.5	34.3	0.23	
516.5002	3/8"	5-20	4-19	214.0	35.0	49.5	0.48	
516.5003	3/8"	15-55	11-40	323.0	39.0	58.5	1.00	
516.5004	1/2"	25-125	19-93	464.0	40.0	67.3	1.85	

INDUSTRIAL TORQUE WRENCH

Torque wrench made from fully chromed, slim steel construction for clockwise and counter clockwise movement

Scale:
A double scale having N•m Lbf•in and Lbf•ft divisions that can be read easily, is concealed under the chromed steel pipe which enables particularly accurate adjustment of the desired torque value.

Handle end:
The desired torque can be adjusted and set by simply pulling out and pushing in the rotating assembly.

Micrometer scale:
Very precise adjustments can be made with the help of the white micrometer scale. The easily visible micrometer scale ensures optimal and simplified eading of the micrometer value. Thus, depending on the model, divisions of 5/ 1/ 0,5 N•m or lbf•in / lbf•ft can be adjusted accurately.

+/-3%

Accuracy of
±3 %
of the scale reading
Precise reading accuracy for a minimum 5,000 tightening cycles

Ratchet head:
.A highly robust 72-tooth ratchet mechanism for clockwise and counter-clockwise movement is integrated in the polished ratchet head. A robust bearing mechanism in the interior of the wrench ensures the highest level of accuracy and long life. An audible and palpable signal indicates automatically that the desired torque value has been achieved.

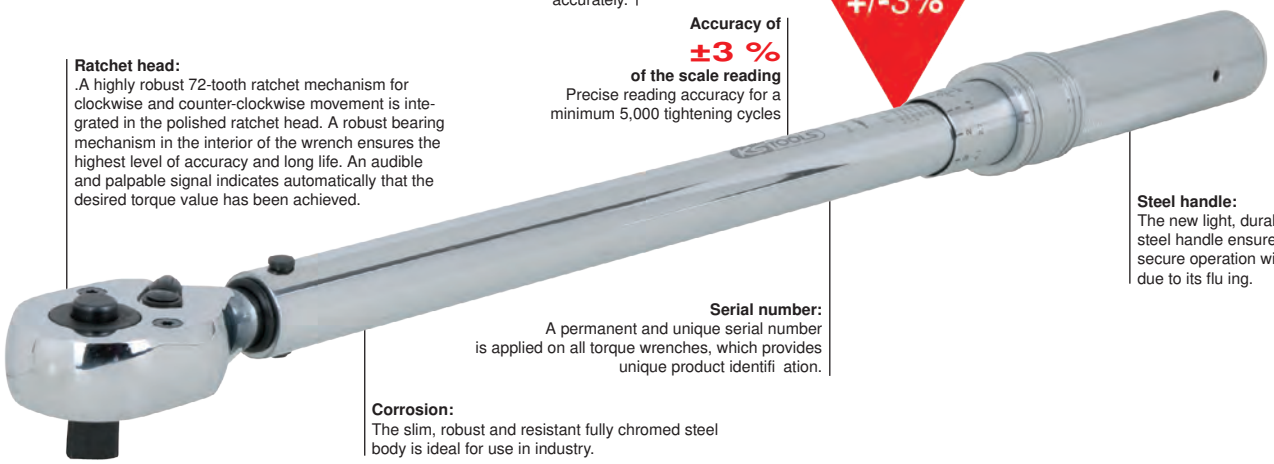

Steel handle:
The new light, durable and ergonomic steel handle ensures simple and secure operation without any wear due to its flu ing.

Serial number:
A permanent and unique serial number is applied on all torque wrenches, which provides unique product identifi ation.

Corrosion:
The slim, robust and resistant fully chromed steel body is ideal for use in industry.

Tested and Certified to DIN EN ISO 6789 Certificate Precision ±3%

Industrial torque wrench with reversible ratchet head

- Actuation accuracy: ±3 % tolerance from the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- Use is almost all industrial production areas
- For controlled fastening in clockwise and counter clockwise directions
- Double-scale Nm and lbf-ft and/or lbf-in division
- Including a micrometre scale in Nm divisions and lbf-ft and/or lbf-in for precise and fine a justment
- Clearly audible and noticeable torque release signal
- Setting the torque securely by turning the handle
- Secure locking function within the handle
- Long service-life and high holding times
- Highest precision and reliability even under tough long-term use
- Square drive adaptor in accordance with DIN 3120 - ISO 1174 with ball lock
- Individual serial number for clear product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 - traceable to national standards

1/4" 3/8" 1/2" 3/4" 1"

	■	Measuring range N•m	Tooth	Division N•m	lbf•in	lbf•ft	Division lbf•in	Division lbf•ft	D mm	L mm	kg
516.5150	1/4"	1-6	64	0.05	11.1-50.9		0.4		26.0	210.0	0.29
516.5151	1/4"	3-15	64	0.10	31-128		0.9		26.0	210.0	0.29
516.5152	1/4"	5-25	64	0.20	53-212		1.8		26.0	248.0	0.33
516.5153	3/8"	10-60	32	0.50		9.2-42.4		0.4	36.5	370.0	0.84
516.5154	3/8"	20-100	32	0.50		16.6-71.9		0.4	36.5	433.0	1.02
516.5155	1/2"	40-200	32	1.00		33-144		0.7	43.5	530.0	1.64
516.5156	1/2"	60-340	32	2.00		52-243		1.5	43.5	610.0	1.80
516.5157	3/4"	100-600	24	5.00		92-424		7.4	63.5	1050.0	4.98
516.5158	3/4"	150-800	24	5.00		129-572		7.4	63.5	1240.0	6.05
516.5159	3/4"	200-1000	24	5.00		166-719		7.4	63.5	1240.0	6.05
516.5160	1"	300-1500	24	10.00		258-1070		14.7	70.0	1850.0	10.51

Industrial torque wrench with plug-in tool holder

- Actuation accuracy: ±3 % tolerance from the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- Use is almost all industrial production areas
- For controlled fastening in clockwise and counter clockwise directions
- Double-scale Nm and lbf-ft and/or lbf-in division
- including a micrometre scale in Nm divisions and lbf-ft and/or lbf-in for precise and fine a justment
- Clearly audible and noticeable torque release sign
- Setting the torque securely by turning the handle
- Secure locking function within the handle
- Long service-life and high holding times
- Highest precision and reliability even under tough long-term use
- With lock connector for 9x12 and/or 14x18 plug-in tools
- Individual serial number for clear product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 - traceable to national standards

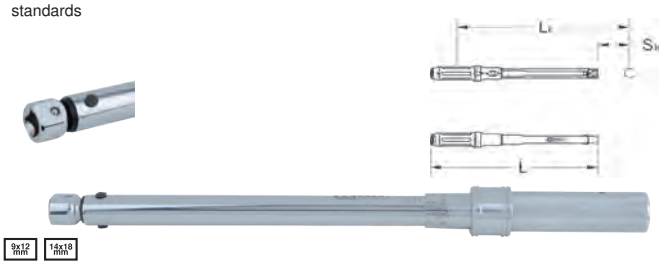

9x12 mm 14x18 mm

	□	Measuring range N•m	Division N•m	lbf•in	lbf•ft	Division lbf•in	Division lbf•ft	L mm	L mm	S mm	kg
516.5063	9x12	1-6	0.05	11.1-50.9		0.4		197.0	183	17,5	0.26
516.5061	9x12	3-15	0.10	31-128		0.4		197.0	183	17,5	0.26
516.5062	9x12	5-25	0.20	53-212		0.4		227.0	213	17,5	0.30
516.5064	9x12	10-60	0.50		9.2-42.4		0.4	340.0	373	17,5	1.29
516.5065	9x12	20-100	0.50		16.6-71.9		0.4	403.0	373	17,5	1.29
516.5066	14x18	10-60	0.50		9.2-42.4		0.4	362.0	402,5	25,0	1.29
516.5067	14x18	20-100	0.50		16.6-71.9		0.4	425.0	402,5	25,0	1.29
516.5068	14x18	40-200	1.00		33-144		0.7	503.0	474	25,0	1.46
516.5069	14x18	60-340	2.00		52-243		1.5	583.0	554	25,0	1.60

TORQUE WRENCH WITH QUICK-SET FEATURE

Torque wrench made from chromed rectangular steel tube construction for clockwise fastening and anticlockwise latch with quick scale setting - resetting the scale with idle condition is not necessary

1. Loosen knurled-head screw
2. Slide the scale
3. Fasten the knurled-head screw

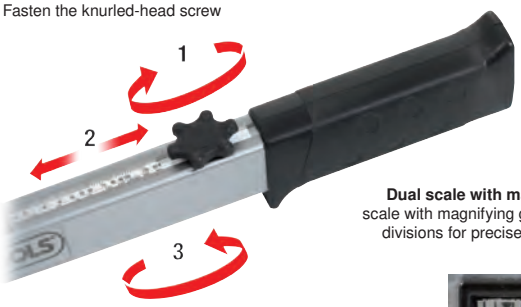

Adjustment: Fast adjustment is possible using the integrated opening (hex screw) without dismounting the wrench

Quick setting: Simple, effortless, quick setting of the torque by sliding the scale using the knurled-head screw

Dual scale with magnifying glass: Dual scale with magnifying glass in N•m and lbf•ft divisions for precise adjustment and clear selection

Idle condition: Resetting to the minimum value (0) is not necessary

Accuracy of ±3 % of the scale reading

Ratchet head:A highly robust 72 teeth ratchet mechanism is integrated in the ratchet head

Handle: Ergonomic handle designed for comforatble use

Serial number:A permanent and unique serial number is applied on all torque wrenches, which provides unique product identifi ation.

Long-term accuracy: Long-term accuracy and long life by means of a wear-free release system

Corrosion: Durable protection against corrosion using robust steel with a matt finish hrome-plated surface

Torque wrench with quick set feature, reversible

- Actuation accuracy: ±3 % tolerance of the set scale value
- Precise reading accuracy for a minimum 10.000 tightening cycles
- With idle condition, resetting to the minimum value (0) is not necessary
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- Double scale in N•m and lbf•ft divisions for precise adjustment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- With exact gearing 72 teeth ratchet mechanism
- Torque setting is simple and quick by sliding the scale using the knurled-head screw
- Secure locking function using the integrated hex screw
- Ergonomic handle designed for comfortable use
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789 national standard

1/2" 3/4"

	■	N•m	lbf•ft	L mm	D mm	H mm	kg
516.4522	1/2"	10-60	7,5 - 44	380.0	38.0	24.0	1.00
516.4532	1/2"	20-100	15 - 70	450.0	38.0	24.0	1.20
516.4542	1/2"	40-200	30 - 150	450.0	38.0	24.0	1.20
516.4572	1/2"	60-350	45 - 260	590.0	38.0	24.0	1.45
516.4590	3/4"	160-800	120 - 590	1140.0	70.0	37.0	6.70
516.4595	3/4"	200-1000	150 - 750	1340.0	70.0	37.0	7.40

Torque wrench with quick set feature and retangular tool holder

- Actuation accuracy: ±3 % tolerance of the set scale value
- Precise reading accuracy for a minimum 10.000 tightening cycles
- With idle condition, resetting to the minimum value (0) is not necessary
- For controlled fastening in clockwise and counter clockwise directions
- Easy to adjust from clockwise to counter clockwise by turning the torque wrench 180°
- Double scale in N•m and lbf•ft divisions for precise adjustment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- Torque setting is simple and quick by sliding the scale using the knurled-head screw
- Secure locking function using the integrated hex screw
- Ergonomic handle designed for comfortable use
- Snap lock tool holder available for replaceable 9x12 or 14x18 end tools
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789 national standard



9x12 mm 14x18 mm

	□	N•m	lbf•ft	L mm	Lk mm	Sk mm	kg
516.4622	9x12	10-60	7,5 - 44	380.0	345,0	17,5	1.00
516.4632	9x12	20-100	15 - 70	445.0	410,0	17,5	1.10
516.4642	14x18	40-200	30 - 150	450.0	425,0	25,0	1.10
516.4672	14x18	60-350	45 - 260	580.0	560,0	25,0	1.40

TORQUE WRENCH WITH CLOSE-GAP RELEASE

As a result of the close-gap release, the chance of over-tightening is reduced and, in addition, this mechanism enhances the accuracy when fastening the screw.

A palpable and acoustic snap indicates that the desired torque value has been achieved - in addition the mechanism resets automatically to the initial position.

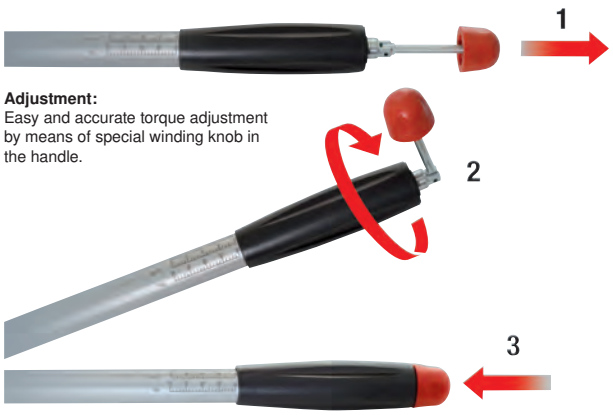

Adjustment:
Easy and accurate torque adjustment by means of special winding knob in the handle.

CLOCKWISE FASTENING

COUNTER CLOCKWISE FASTENING

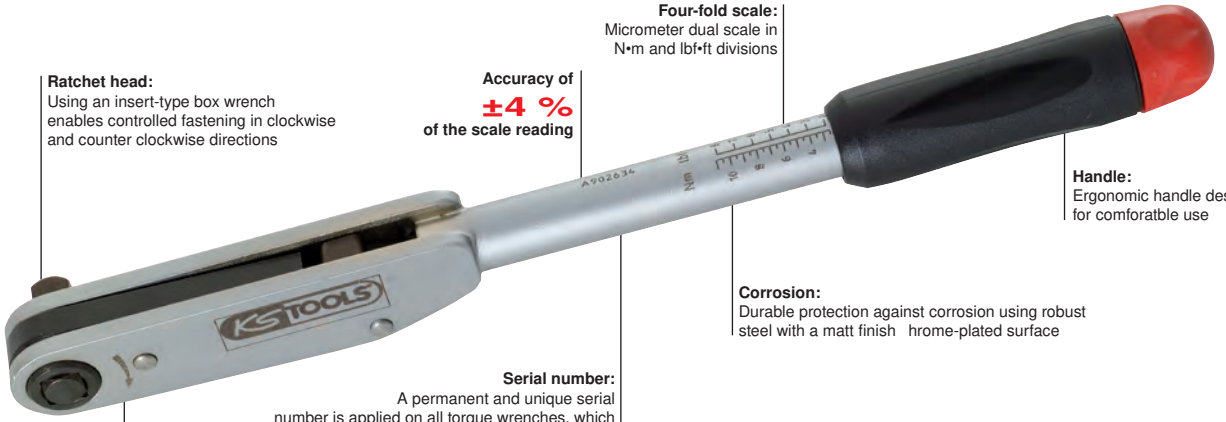

Four-fold scale:
Micrometer dual scale in N•m and lbf•ft divisions

Ratchet head:
Using an insert-type box wrench enables controlled fastening in clockwise and counter clockwise directions

Accuracy of
±4 %
of the scale reading

Handle:
Ergonomic handle designed for comforatble use

Corrosion:
Durable protection against corrosion using robust steel with a matt finish hrome-plated surface

Serial number:
A permanent and unique serial number is applied on all torque wrenches, which provides unique product identifi ation.

Signal:
An audible and palpable snap indicates that the desired torque has been achieved

Tested and Certified to DIN EN ISO 6789 Certificate Precision

Torque wrench with close gap release

- Actuation accuracy: ±4 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece
- Four fold scale in N•m, Kg•fm, lbf•in und lbf•ft divisions for precise adjustment
- An audible and palpable signal when the desired torque value is achieved
- Torque setting is easy by pulling out, adjusting and pushing in the winder in the handle
- Automatic reset in the initial position
- Ergonomic handle designed for comfortable use
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Individually marked with serial number unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 national standard



1/4" 3/8" 1/2" 3/4" 1"

	■	N·m	lbf·ft	Division N·m	Division lbf·ft	L mm	kg	
516.3510	3/8"	2.5-11	2 - 8	0.50	0.5	300.0	0.56	
516.3515	3/8"	5-33	4 - 24	1.00	1.0	405.0	0.69	
516.3520	3/8"	12-68	10 - 50	2.00	2.0	480.0	1.00	
516.3525	1/2"	12-68	10 - 50	2.00	2.0	480.0	1.00	
516.3530	1/2"	25-150	20 - 110	5.00	2.0	575.0	1.70	
516.3535	1/2"	50-250	40 - 180	10.00	5.0	605.0	2.30	
516.3540	1/2"	70-350	50 - 260	10.00	10.0	815.0	3.00	
516.3545	3/4"	140-800	120 - 580	20.00	20.0	935.0	6.50	
516.3550	1"	200-1000	150 - 750	25.00	25.0	1030.0	9.70	
516.3555	1"	500-2000	350 - 1500	50.00	50.0	1400.0	18.00	

PRECISION TORQUE TESTING INSTRUMENT WITH DIAL INDICATOR

Handle: Ergonomic handle designed for comforatble use

Adjustment: Fast adjustment is possible using the integrated opening without dismounting the wrench

Accuracy of
±4 %
of the scale reading

Signal: The wrenches 516.3655 and 516.3660 have optical and acoustic signals when the desired torque is reached, which enable the use of the wrench even in loud and dark places having poor visibility

Corrosion: Durable protection against corrosion using robust steel with a chrome-plated surface

Serial number:A permanent and unique serial number is applied on all torque wrenches, which provides unique product identifi ation.

Dual scale with magnifying glass: Dual scale with magnifying glass in N•m and lbf•ft divisions for precise adjustment and clear selection The dial gauge has one drag indicator and one main pointer. It is easy to read off the scale due to the clear design.

Ratchet head: Fixed box wrench for controlled fastening in clockwise and counter clockwise directions.

Tested and Certified to DIN EN ISO 6789 Certificate Precision +/-4%

ERROR-FREE OPERATION:

Using the torsion bar principle, and in contrast to conventional torque wrenches, it is possible to grip the torque wrench in any position, either using both hands or with an extension bar.
Any shift in the value is ruled out thanks to the direct measurement at the wrench head.

Dial Torque wrench with a drag indicator

- Display accuracy: ±4 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise and counter clockwise direction
- Display type torque wrench with dial indicator and drag indicator
- Double scale in N•m and lbf•ft divisions for precise adjustment
- Large vision panel for precise adjustment
- Ergonomic designed handle provides secure transmission of the torque
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789 national standard

1/4" 3/8" 1/2" 3/4" 1"

	■	N·m	In·lb	lbf·ft	Division N·m	Division in·lb	Division lbf·ft	L mm	Signal	kg	
516.3610	1/4"	0,7-3,5	6-30		0.10	1.0		270.0	-	0.73	
516.3615	1/4"	1,8-9	15-75		0.20	1.0		270.0	-	0.73	
516.3620	3/8"	3,6-18	30-150		0.50	2.0		270.0	-	0.73	
516.3625	3/8"	6-30	50-250		0.50	5.0		270.0	-	0.73	
516.3630	3/8"	14-70		10-50	2.00		1.0	270.0	-	0.73	
516.3635	1/2"	50-250		34-170	5.00		5.0	560.0	-	1.40	
516.3640	1/2"	70-350		50-250	10.00		5.0	560.0	-	1.40	
516.3645	3/4"	96-480		70-350	10.00		10.0	675.0	-	3.20	
516.3650	3/4"	160-800		120-600	25.00		10.0	1180.0	-	4.50	
516.3655	1"	280-1400		200-1000	25.00		20.0	1970.0	+	9.00	
516.3660	1"	560-2800		400-2000	50.00		40.0	3200.0	+	21.00	

ACCESSORIES - PLUG-IN TOOLS

We have a diverse range of plug-in tools within our range:

- Open
- Ring
- Ratchet
- Torx®
- Push-fit squa e mount
- Bit holder

In case our range does not have what you need, we would be pleased to manufacture push-fit ools based on your specifi ations.

INFO:

In case our range does not have what you need, we would be pleased to manufacture push-fit ools based on your specifi ations.

CAUTION:
The maximum torque loads of the push-fit ools are in line with DIN 899 and can be less than the maximum torque of the tool used.

CALCULATION OF CORRECTED DISPLAY AND SET VALUES

Push-fit j w wrench

- With a locking pin
- Chrome-plated

Code	□	mm	S mm	B mm	H mm	d
516.2213	14 x 18	13	25.0	30.0	7.0	120
516.2214	14 x 18	14	25,0	35.0	8.0	120
516.2215	14 x 18	15	25,0	35.0	8.0	120
516.2216	14 x 18	16	25,0	38.0	9.0	125
516.2217	14 x 18	17	25,0	38.0	9.0	130
516.2218	14 x 18	18	25,0	42.0	10.0	130
516.2219	14 x 18	19	25,0	42.0	10.0	130
516.2221	14 x 18	21	25,0	50.0	11.0	155
516.2222	14 x 18	22	27,5	50.0	11.0	150
516.2224	14 x 18	24	30,0	53.0	12.0	170
516.2226	14 x 18	26	30,0	60.0	13.0	180
516.2227	14 x 18	27	30,0	60.0	13.0	185
516.2229	14 x 18	29	30,0	66.0	14.0	210
516.2230	14 x 18	30	30,0	66.0	14.0	220
516.2232	14 x 18	32	32,5	66.0	14.0	239
516.2234	14 x 18	34	32,5	66.0	14.0	246
516.2236	14 x 18	36	32,5	74.0	15.0	265
516.2238	14 x 18	38	32,5	74.0	15.0	275
516.2241	14 x 18	41	32,5	82.0	15.0	307

Code	□	N·m	lbf·ft	Division N·m	L mm	L$_k$ mm	S$_k$ mm	d
516.1612	9 x 12	1 - 25	0,8 - 18	0.1	280.0	245,0	17,5	300
516.1622	9 x 12	5 - 50	4 - 37	0.3	335.0	295,0	17,5	450
516.1632	9 x 12	10 - 100	8 - 75	0.5	375.0	335,0	17,5	600
516.1633	14 x 18	10 - 100	8 - 75	0.5	375.0	335,0	17,5	600
516.1642	9 x 12	20 - 200	15 - 150	1.0	465.0	425,0	17,5	850
516.1652	14 x 18	20 - 200	15 - 150	1.0	470.0	435,0	25,0	900
516.1672	14 x 18	60 - 320	45 - 236	1.0	565.0	530,0	25,0	1200
516.1682	14 x 18	80 - 420	60 - 310	1.0	650.0	435,0	25,0	1600

Example: 516.2232 + 516.1672

Desired torque = 230 N•m

$$X_w = \frac{P_d \cdot L_k}{L_k - S_k + S} = \frac{230\ \text{N·m} \cdot 530\ \text{mm}}{530\ \text{mm} - 25\ \text{mm} + 32{,}5\ \text{mm}} = \frac{121900}{537{,}5} = 226{,}8\ \text{N·m}$$

Corrected set value: **226,8 N•m**

PUSH FIT TOOLS

CAUTION:
The maximum torque loads of the push-fit ools are in line with DIN 899 and can be less than the maximum torque of the tool used.

ERGOTORQUE®*plus* universal wrench without torque function - with retangular tool holder

- Ideal for loosening jammed screw connections
- Can untighten without any torque restraint
- Made of solid material
- Two-component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Snap lock tool holder available for replaceable 9x12 or 14x18 end tools

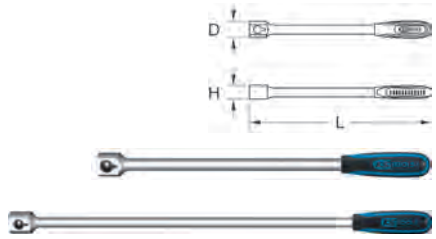

9x12 mm | 14x18 mm

		L mm	D mm	H mm	g
516.4890	9x12	405.0	26.0	20.0	872
516.4895	14x18	635.0	28.0	26.0	1350

Push fit fl ed wrench

- With a locking pin
- Chrome plated



9x12 mm

		mm	S mm	B mm	H mm	g
516.2107	9x12	7	17,5	22.0	5.0	35
516.2108	9x12	8	17,5	22.0	5.0	35
516.2109	9x12	9	17,5	26.0	5.5	35
516.2110	9x12	10	17,5	26.0	5.5	35
516.2111	9x12	11	17,5	26.0	5.5	35
516.2112	9x12	12	17,5	30.0	7.0	35
516.2113	9x12	13	17,5	30.0	7.0	35
516.2114	9x12	14	17,5	35.0	8.0	40
516.2115	9x12	15	17,5	35.0	8.0	40
516.2116	9x12	16	20,0*	38.0	8.5	45
516.2117	9x12	17	20,0*	38.0	8.5	50
516.2118	9x12	18	20,0*	42.0	9.0	60
516.2119	9x12	19	20,0*	42.0	9.0	60

Push fit ing spanner (box wrench)

- With a locking pin
- Chrome plated



9x12 mm

		mm	S mm	B mm	H mm	g
516.2307	9x12	7	17,5	13.0	8.0	30
516.2308	9x12	8	17,5	14.2	8.0	30
516.2310	9x12	10	17,5	17.2	9.0	30
516.2311	9x12	11	17,5	18.5	9.0	30
516.2312	9x12	12	17,5	20.0	12.0	35
516.2313	9x12	13	17,5	21.5	12.0	35
516.2314	9x12	14	17,5	23.0	12.0	40
516.2315	9x12	15	17,5	24.2	12.0	40
516.2316	9x12	16	17,5	25.7	13.0	40
516.2317	9x12	17	17,5	27.2	13.0	40
516.2318	9x12	18	17,5	28.5	13.0	40
516.2319	9x12	19	17,5	30.3	13.0	40
516.2321	9x12	21	17,5	33.0	15.0	50
516.2322	9x12	22	17,5	34.5	15.0	50

Open push fit ing spanner (box wrench)

- With a locking pin
- Chrome plated



9x12 mm

		mm	S mm	B mm	g
516.2510	9x12	10	17,5	21.0	40
516.2511	9x12	11	17,5	22.5	40
516.2512	9x12	12	17,5	23.7	40
516.2513	9x12	13	17,5	25.2	40
516.2514	9x12	14	17,5	27.0	50
516.2517	9x12	17	17,5	31.5	65
516.2518	9x12	18	17,5	33.0	65
516.2519	9x12	19	17,5	34.5	65
516.2522	9x12	22	20,0*	39.0	65

TX-E push fit ing spanner (box wrench)

- With a locking pin
- Chrome plated

9x12 mm

		mm	S mm	B mm	H mm	g
516.3006	9x12	E 6	17,5	13.0	8.0	40
516.3008	9x12	E 8	17,5	14.2	8.0	45
516.3010	9x12	E 10	17,5	17.2	9.0	50
516.3012	9x12	E 12	17,5	18.5	9.0	50
516.3014	9x12	E 14	17,5	21.5	10.0	60

Push fit fine oothed reversible ratchet head

- With a locking pin
- Fine toothed
- With release feature
- Chrome plated



9x12 mm

1/4" 3/8" 1/2"

		■	S mm	B mm	H mm	g
516.2614	9x12	1/4"	17,5	27.0	25.0	75
516.2638	9x12	3/8"	17,5	35.0	35.0	152
516.2612	9x12	1/2"	17,5	43.0	40.0	228

Push fit squa e mount

- With a locking pin
- Chrome plated



9x12 mm

1/4" 3/8" 1/2"

		■	S mm	B mm	H mm	g
516.2814	9x12	1/4"	17,5	20.0	14.0	70
516.2838	9x12	3/8"	17,5	20.0	14.0	76
516.2812	9x12	1/2"	17,5	20.0	14.0	80

* Please note the changed values on the torque wrench!

Push fit bit holde

- With a locking pin
- Chrome plated

9x12 mm

5/16" 1/4"

			S mm	B mm	H mm	g	
516.2005	9x12	1/4"	17,5	14.0	10.0	47	
516.2010	9x12	5/16"	17,5	16.0	12.5	47	

Push fit j w wrench

- Snap lock tool holder available for replaceable 9x12 or 14x18 end tools
- With a locking pin
- Chrome plated

9x12 mm 14x18 mm

			S mm	B mm	H mm	g	
516.2040	9x12	14 x 18	30,5*	31.0	26.0	120	
516.2050	14x18	9 x 12	27,0*	28.0	21.0	120	

Push fit eld on head

- With a locking pin
- Burnished

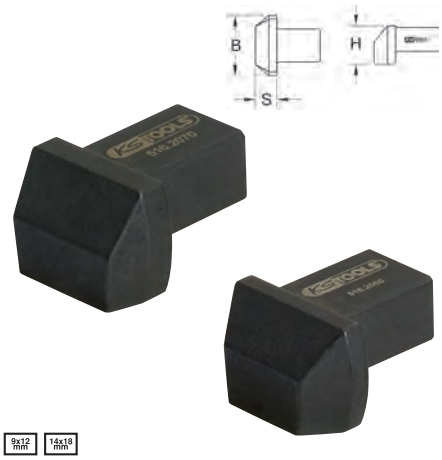

9x12 mm 14x18 mm

		Weld dimension mm	S mm	B mm	H mm	g	
516.2060	9x12	8 x 14	14,5*	14.0	14.5	47	
516.2070	14x18	11 x 25	12,0*	25.0	21.5	100	

Push fit fl ed wrench

- With a locking pin
- Chrome plated

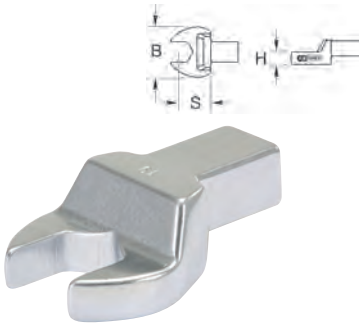

14x18 mm

		mm	S mm	B mm	H mm	g	
516.2213	14x18	13	25,0	30.0	7.0	120	
516.2214	14x18	14	25,0	35.0	8.0	120	
516.2215	14x18	15	25,0	35.0	8.0	120	
516.2216	14x18	16	25,0	38.0	9.0	125	
516.2217	14x18	17	25,0	38.0	9.0	130	
516.2218	14x18	18	25,0	42.0	10.0	130	
516.2219	14x18	19	25,0	42.0	10.0	130	
516.2221	14x18	21	25,0	50.0	11.0	155	
516.2222	14x18	22	25,0	50.0	11.0	160	
516.2224	14x18	24	27,5*	53.0	12.0	170	
516.2226	14x18	26	30,0*	60.0	13.0	180	
516.2227	14x18	27	30,0*	60.0	13.0	185	
516.2229	14x18	29	30,0*	66.0	14.0	210	
516.2230	14x18	30	30,0*	66.0	14.0	220	
516.2232	14x18	32	32,5*	66.0	14.0	239	
516.2234	14x18	34	32,5*	66.0	14.0	246	
516.2236	14x18	36	32,5*	74.0	15.0	265	
516.2238	14x18	38	32,5*	74.0	15.0	275	
516.2241	14x18	41	32,5*	82.0	15.0	307	

Push fit ing spanner (box wrench)

- With a locking pin
- Chrome plated

14x18 mm

		mm	S mm	B mm	H mm	g	
516.2413	14x18	13	25,0	21.5	11.0	120	
516.2414	14x18	14	25,0	23.0	11.0	120	
516.2415	14x18	15	25,0	24.2	11.0	115	
516.2416	14x18	16	25,0	25.7	12.0	125	
516.2417	14x18	17	25,0	27.2	12.0	125	
516.2418	14x18	18	25,0	28.5	12.0	125	
516.2419	14x18	19	25,0	30.5	12.0	125	
516.2421	14x18	21	25,0	33.0	15.0	140	
516.2422	14x18	22	25,0	34.5	15.0	140	
516.2424	14x18	24	25,0	37.5	15.0	140	
516.2427	14x18	27	25,0	41.5	17.0	150	
516.2430	14x18	30	25,0	45.0	19.0	160	
516.2432	14x18	32	25,0	47.5	19.0	165	
516.2434	14x18	34	28,0*	50.5	19.0	195	
516.2436	14x18	36	28,0*	53.0	19.0	195	
516.2441	14x18	41	30,0*	59.0	20.0	225	

TX-E Push fit ing spanner (box wrench)

- With a locking pin
- Chrome plated



14x18 mm

			S mm	B mm	H mm	g	
516.3114	14x18	E 14	25,0	22.5	11.0	130	
516.3118	14x18	E 18	25,0	24.0	11.0	135	
516.3120	14x18	E 20	25,0	29.0	13.0	150	
516.3124	14x18	E 24	25,0	30.5	13.0	150	

Push fit fine oothed reversible ratchet head

- With a locking pin
- Fine toothed
- With release feature
- Chrome plated

14x18 mm

1/2" 3/4"

			S mm	B mm	H mm	g	
516.2712	14x18	1/2"	25,0	43.0	43.0	260	
516.2734	14x18	3/4"	25,0	70.0	60.0	795	

Push fit squa e mount

- With a locking pin
- Chrome plated

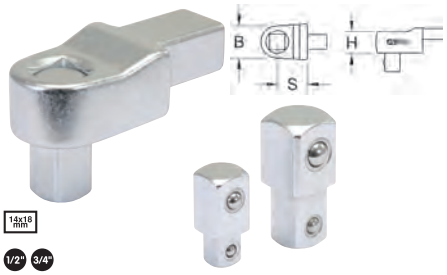

14x18 mm

1/2" 3/4"

			S mm	B mm	H mm	g	
516.2912	14x18	1/2"	25,0	27.0	18.0	210	
516.2934	14x18	3/4"	25,0	40.0	25.0	400	

Push fit bit holde

- With a locking pin
- Chrome plated

14x18 mm

5/16"

			S mm	B mm	H mm	g	
516.2020	14x18	5/16"	25,0	16.0	12.5	115	

* Please note the changed values on the torque wrench!

PUSH FIT TOOLKIT

Air conditioning toolkit 10-100 N•m

- Set contents ideal for air conditioning and refrigeration engineers
- With snap lock retangular tool holder for 14x18 range of end tools
- Supplied in a metal carrying case with the tools clearly organised

14x18 mm 1/2"

			kg
516.1225	8 pcs	Air conditioning toolkit 10-100 N•m	3.40
1 x		10 - 100 N•m	
6 x		17 - 22 - 24 - 26 - 27 - 29 mm	
1 x		1/2"	

Torque tool set with plug in tools

- Set contents for universal applications
- With snap lock retangular tool holder for 9x12 range of end tool
- Supplied in a metal carrying case with the tools clearly organised

9x12 mm 3/8"

			kg
516.1720	29 pcs	Torque tool set with plug in tools	2.20
1 x		5 - 50 N•m	
11 x		7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 mm	
10 x		7 - 8 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 mm	
6 x		10 - 11 - 12 - 13 - 14 - 17 mm	
1 x		3/8"	

Torque tool set with plug in tools

- Set contents for universal applications
- With snap lock retangular tool holder for 14x18 range of end tools
- Supplied in a metal carrying case with the tools clearly organised

14x18 mm 1/2"

			kg
516.1730	31 pcs	Torque tool set with plug in tools	5.80
1 x		20 - 200 N•m	
13 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 22 - 24 - 27 - 30 - 32 mm	
16 x		13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 22 - 24 - 27 - 30 - 32 - 34 - 36 - 41 mm	
1 x		1/2"	

VDE TORQUE WRENCH

Insulated pre set torque wrench

- Actuation accuracy: ±3 % tolerance from the set value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- An audible and palpable signal when the desired torque value is achieved
- Without scale - With a fi ed adjustable value
- Tool holder female hexagon 6 point to DIN 3126 - E6,3
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789 national standard

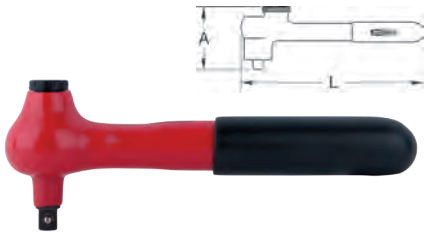

3/8" 1/2"

		N•m	A mm	L mm		g
117.3922	3/8"	5-35	78.0	210.0	1000V	420
117.1001	1/2"	5-35	78.0	250.0	1000V	420

Insulated mini torque wrench with reversible ratchet head

- Insulated handle to IEC 60900
- For working enviroment of voltages AC 1000 V and DC 1500 V
- Actuation accuracy: ±3 % tolerance of the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- An audible and palpable signal when the desired torque value is achieved
- With exact gearing 30 teeth ratchet mechanism
- Ergonomic designed handle provides secure transmission of the torque
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 national standard



1/4" 3/8" 1/2"

	■	N•m	D mm	H mm	L mm		g
117.1400	1/4"	2-12	40.0	41.0	200.0	1000V	400
117.1402	1/4"	5-25	40.0	41.0	200.0	1000V	420
117.1184	3/8"	5-25	40.0	42.0	200.0	1000V	440
117.1185	1/2"	5-25	40.0	42.0	200.0	1000V	440

Insulated torque wrench with reversible ratchet head

- Insulated handle to IEC 60900
- For working enviroment of voltages AC 1000 V and DC 1500 V
- Actuation accuracy: ±3 % tolerance of the set scale value and better
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise direction
- Can untighten without any torque restraint thanks to the anticlockwise latch
- Scale in N•m divisions for precise adjustment
- Large vision panel for precise adjustment
- An audible and palpable signal when the desired torque value is achieved
- With exact gearing 30 teeth ratchet mechanism
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 national standard



3/8" 1/2"

	■	N•m	H mm	L mm		kg
117.3805	3/8"	2-27	51.0	280.0	1000V	0.92
117.3810	3/8"	5-50	51.0	370.0	1000V	1.07
117.1301	1/2"	2-27	61.0	280.0	1000V	0.93
117.1300	1/2"	5-50	61.0	370.0	1000V	1.10
117.1302	1/2"	20-100	61.0	460.0	1000V	1.20
117.1303	1/2"	40-220	61.0	530.0	1000V	1.30

TORQUE CONVERTOR

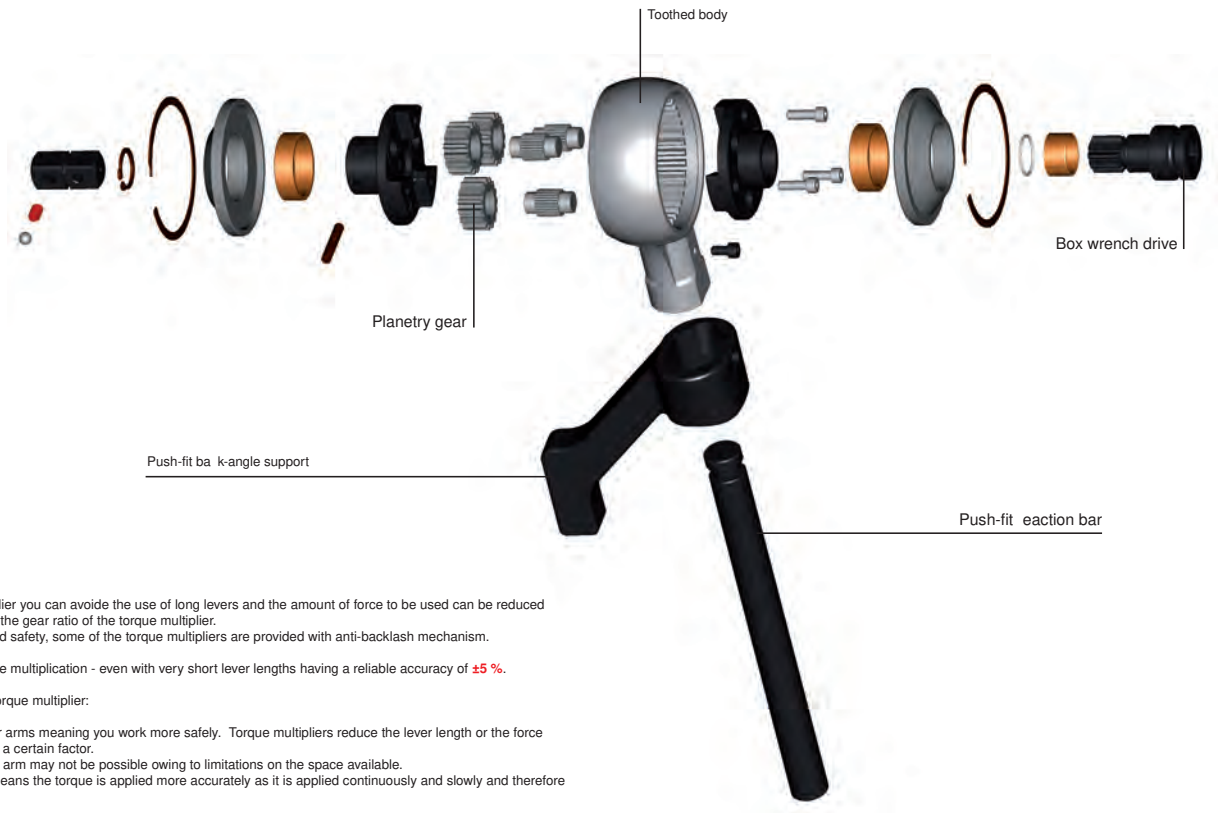

By using a torque multiplier you can avoide the use of long levers and the amount of force to be used can be reduced by a factor equivalent to the gear ratio of the torque multiplier.
For the sake of enhanced safety, some of the torque multipliers are provided with anti-backlash mechanism.

Ideal for controlled torque multiplication - even with very short lever lengths having a reliable accuracy of **±5 %**.

Advantages of using a torque multiplier:

- Avoidance of long lever arms meaning you work more safely. Torque multipliers reduce the lever length or the force required by the user by a certain factor.
- The use of a long lever arm may not be possible owing to limitations on the space available.
- The torque multiplier means the torque is applied more accurately as it is applied continuously and slowly and therefore more accuratly.

Torque multiplier set

- Robust loosening
- Designed for use with the crank handle supplied
- With integrated, adjustable support device
- Square drive adaptor to DIN 3120 / ISO 1174
- 1:64 Torque ratio
- 3.800 N•m maximum output torque
- Includes sockets and extension
- Indispensable as essential equipment on service vehicles
- Not suited for use in industry
- Not suited for use with impact wrenches
- In durable plastic storage case

1"

			kg	
516.1180	7 pcs	Torque multiplier set	8.00	

consists of:

516.1181	Toque multiplier, 1:64	5.98	
516.1182	1" socket, hexagonal, SW27	0.55	
516.1184	1" socket, hexagonal, SW30	0.59	
516.1185	1" socket, hexagonal, SW32	0.65	
516.1186	1" socket, hexagonal, SW33	0.65	
516.1187	Extensions	0.30	
516.1188	Adapter nut	0.35	

Torque multiplier set

- Robust loosening
- Designed for use with the crank handle supplied
- With intergrated support device
- Square drive adaptor to DIN 3120 / ISO 1174
- 1:64 Torque ratio
- 4,000 N•m maximum output torque
- Including crank handle and one extension
- Indispensable as essential equipment on service vehicles
- Ideal for trucks, construction machines and agricultural machines
- Not suited for use with impact wrenches
- In durable plastic storage case

1"

			kg	
516.1151	3 pcs	Torque multiplier set	8.54	

consists of:

516.1152	Crank handle for Impact torque converter	0.50	
516.1153	Extension for Impact torque converter, 210 mm	0.30	

Universal torque convertor

- Accuracy: ±5 % Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle regulated fastening with a torque wrench
- Single stage precision planetary gear for both directions
- Two support devices
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Not suited for use with impact wrenches
- Supplied in a metal storage case

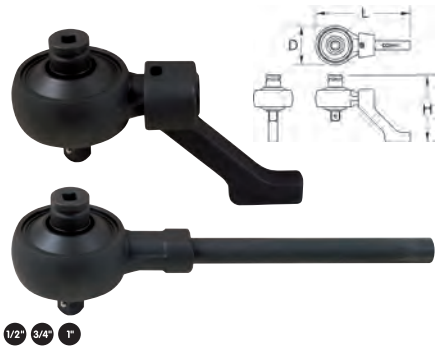

1/2" 3/4" 1"

	□	○	■	→ Nm	⟲ Nm	D mm	L mm	H mm	kg	
516.3700	1/2"	5 : 1	3/4"	260	1300	110.0	395.0	127.0	4.20	
516.3705	3/4"	5 : 1	1"	540	2700	110.0	395.0	127.0	4.40	

Torque convertor, 1680 N•m

- High accuracy: ±5 % Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle-regulated fastening with a torque wrench
- With anti-backlash mechanism
- Encapsulated precision planetary gearing
- With straight strut
- Housing with angle scale ring
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- In durable plastic case incl. spare anti/backlash mechanism

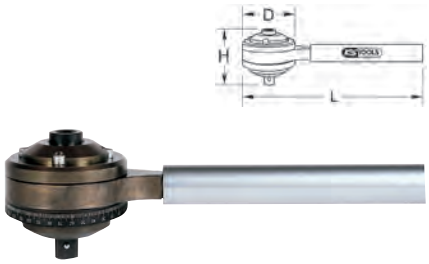

1/2" 3/4"

				→ Nm	← Nm	D mm	L mm	H mm	kg
516.3740	1/2"	6:1	3/4"	280	1680	100.0	128.0	106.0	4.90

accessories:

		kg
516.3742	Spare square for 516.3740	0.10
516.3743	Straight strut for 516.3740	1.00
516.3744	Extension for straight strut for 516.3740	1.17

Torque convertor, 3500 N•m

- High accuracy: ±5 % Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle-regulated fastening with a torque wrench
- With anti-backlash mechanism
- Encapsulated precision planetary gearing
- Moving strut with 1" socket mounting
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- In durable plastic case incl. spare anti/backlash mechanism



3/4" 1"

			→ Nm	← Nm	D mm	L mm	H mm	kg
516.3750	3/4"	4,5:1	1"	770	3500	108.0	264.0	130.0	7.30

accessories:

		g
516.3752	Spare square for 516.3750	280

Torque convertor, 2700 N•m

- High accuracy: ±5 % Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle-regulated fastening with a torque wrench
- With anti-backlash mechanism
- Encapsulated precision planetary gearing
- With adjustable angular strut
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- In durable plastic case incl. spare anti/backlash mechanism



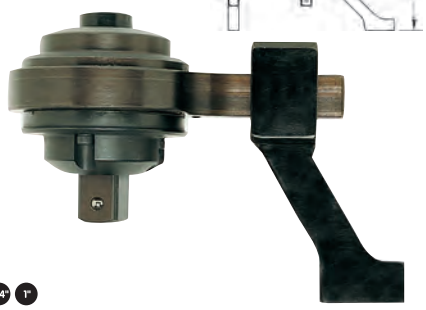

3/4" 1"

				→ Nm	← Nm	D mm	L mm	H mm	kg
516.3745	3/4"	5,4:1	1"	500	2700	115.0	201.0	126.0	6.34

accessories:

		kg
516.3747	Spare square for 516.3745	0.24
516.3748	Angular strut for 516.3745	1.42

Torque convertor, 4500 N•m

- High accuracy: ±5 % Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle-regulated fastening with a torque wrench
- With anti-backlash mechanism
- Encapsulated precision planetary gearing
- With straight strut
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- In durable plastic case incl. spare anti/backlash mechanism



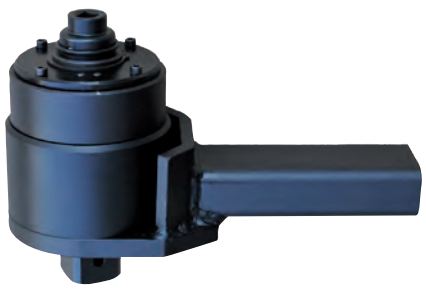

1/2"

			→ Nm	← Nm	D mm	L mm	H mm	kg
516.3755	1/2"	20:1	1.1/2"	225	4500	120.0	312.0	204.8	8.30

Torque convertor, 6000 N•m

- High accuracy: ±5 % Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle-regulated fastening with a torque wrench
- With anti-backlash mechanism
- Encapsulated precision planetary gearing with backstop
- With adjustable strut
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- In durable plastic case incl. spare anti/backlash mechanism

1/2" 1/2"

				→ Nm	← Nm	D mm	L mm	H mm	kg	
516.3760	1/2"	26:1	1.1/2"	230	6000	130.0	328.0	216.3	15.70	

accessories:

		g	
516.3762	Replacement shear pin for 516.3760	9	

Torque convertor, 9500 N•m

- High accuracy: ±5 % Tolerance
- For controlled fastening in clockwise and counter clockwise directions
- Device for angle-regulated fastening with a torque wrench
- With anti-backlash mechanism
- Encapsulated precision planetary gearing with backstop
- With adjustable strut
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Not suited for use with impact wrenches
- In durable plastic case incl. spare anti/backlash mechanism



1/2" 1/2"

				→ Nm	← Nm	D mm	L mm	H mm	kg	
516.3765	1/2"	26:1	1.1/2"	365	9500	184.0	505.0	214.9	30.30	

accessories:

		g	
516.3767	Replacement shear pin for 516.3765	9	

TEST EQUIPMENT

Precision torque testing instrument with dial indicator and drag indicator

- Display accuracy: ±6 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in a clockwise and counter clockwise direction
- For testing, measuring, checking and making adjustments
- Display torque testing instrument with drag indicator
- Large vision panel for precise adjustment
- Tool mounting using a three jaw chuck
- Individually marked with serial number - unique product identifi ation
- Includes test certifi ate in accordance with DIN EN ISO 6789:2003 national standard



	Measuring range mN•m	Measuring range cN•m	Division mN•m	Division cN•m	Tightening chuck Ø mm	L mm	g	
516.3310	1-9		0,2		1-6,5	83.0	290	
516.3315	2-15		0,2		1-6,5	83.0	290	
516.3320	4-30		0,5		1-6,5	83.0	290	
516.3325	5-60		1		1-6,5	83.0	290	
516.3330	10-120		2		1-6,5	83.0	290	
516.3335	20-240		5		1-6,5	83.0	290	
516.3410		1-15		0.2	1-8,5	102.0	600	
516.3415		2-24		0.2	1-8,5	102.0	600	
516.3420		4-36		0.5	1-8,5	102.0	600	
516.3425		5-60		1.0	1-8,5	102.0	600	
516.3430		10-90		2.0	1-8,5	102.0	600	
516.3435		10-150		2.0	1-8,5	102.0	600	

Electronic workshop tester for torque wrenches

- High display accuracy: +1 % tolerance of the scale values, +/- 1 digit
- For checking or adjusting torque wrenches and torque screwdrivers
- For controlled display in a clockwise and counter clockwise direction
- Simple electronic tester with integrated torsion transducer
- Digital scale in N·m divisions for precise adjustment
- Display mode: First Peak (detection of fi st peak)
- Large LCD display for clear reading of the values
- With automatic reset and automatic shutdown
- Simple and comfortable operating
- Square drive by means of square adaptor
- Individually marked with serial number - unique product identifi ation
- Including test certifi ate in accordance with DIN EN ISO 6789:2003 national standard
- No main power required – includes 4 x AA 1.5 V LR46 batteries
- Includes reinforcement screw
- In durable plastic storage case





1/4" 3/8" 1/2" 3/4" 1"

		Measuring range N•m	L mm	B mm	H mm	kg	
516.0100	1/4" + 3/8" + 1/2" + 3/4"	5 - 500	180,0	130.0	147.0	4.82	
516.0200	1/4" + 3/8" + 1/2" + 3/4"	500 - 1000	180,0	130.0	147.0	4.82	

KS TOOLS®

Innovation is our mission!

TORQUE TOOLS

ALU TORQUE PRECISION

ULTIMATE PRECISION

ERGOTORQUE plus PRECISION

4 BITS

KSTOOLS®

Innovation is our mission!

	PAGE
BIT HOLDERS	186
ADAPTOR	186 - 187
SCREWDRIVER BITS	187
RATCHET BIT SCREWDRIVER	188
BIT RATCHETS	188 - 189
1/4“ SCREWDRIVING TOOLS	189
MICRO BITS	189 - 190
1/4" CLASSIC BITS 25 mm	190 - 193
1/4" CLASSIC BIT SETS 25 mm	193 - 197
1/4“ CLASSIC BITS 50 mm	198 - 199
1/4“ CLASSIC BITS 75 mm	199 - 201
1/4“ CLASSIC BIT SETS 75 mm	201
1/4" TIN BITS 25 mm	202
1/4" TIN BITS 50 mm	202 - 203
1/4" TORSION*power* BITS 25 mm	203
1/4" TORSION*power* BITS 75 mm	204
1/4" TORSION*power* BIT SETS	205
5/16“ CLASSIC BITS	205 - 206
5/16“ CLASSIC BIT SETS	206
10 mm CLASSIC BITS 30 mm	206 - 207
10 mm CLASSIC BITS 75 mm	207
10 mm CLASSIC BITS 120 mm	207
10 mm CLASSIC BIT SETS	207 - 208

BITS Composition

- Cold formed
- S2 special steel for optimal hardness and elasticity
- Good torque transmission
- Optimal positive seating in DIN screws
- Grooved for fixi g into a holder
- Suited for all screw applications for manual and machine usage
- Precision finished a cording to DIN/ISO

- With torsion zone
- To cushion high level torque
- Longer service life
- Turned and precision milled
- S2 special steel for optimal hardness and elasticity
- Highest torque transmission
- Optimal positive seating in DIN screws
- With colour coding for quick Identifi ation of the suitable profil
- Grooved for fixi g into a holder
- Suited for all screw applications for manual and machine usage
- Precision finished a cording to DIN/ISO



- Good torque transmission
- Especially for constant load during industrial applications
- Cold formed
- S2 special steel for optimal hardness and elasticity
- Optimal positive seating in DIN screws
- Grooved for fixi g into a holder
- Suited for all screw applications for manual and machine usage
- Precision finished a cording to DIN/ISO

Surfaces

Phosphate

- Phosphating = chemical /electro-chemical process
- Dip coating or spraying method
- Intention is the generation of phosphate layer, which is immovable on the base metal
- The surface receives therefore a very good absorption capacity for oil and wax
- Reliable corrosion protection
- To be bound to phosphated tools when oiled

Nickel plated

- The chrome layer is manufactured by electroplating in a electro bath process
- There are several steps that are passed through
- Nickel offers avery good corresion protection and is resistant against air, water, diluted acids and most treatments of alkaline solution.
- The light gold optics are typical

TiN coated

- A titanium nitride coating is applied to the tough steel core
- There are several steps that are passed through
- For heavy loading in permanent use
- The gold optics are typical

Bit case

- Quick and direct bit adaptor
- Practical pocket sized
- With switchable, fin -toothed ratchet mechanism
- Ideal for work on assembly lines and frameworks
- Spring loaded design

Bit profil

MICRO

- Surface nickel-plated
- Manufactured from S2 special steel
- Cold formed
- Extra short execution
- Precision finished a cording to DIN/ISO

CLASSIC

- Surface sand-blasted, phosphate or nickel plated
- Manufactured from S2 special steel
- Cold formed
- Precision finished a cording to DIN/ISO

TORSION power

- Surface nickel-plated
- Turned and precision milled
- Manufactured from S2 special steel
- Precision finished a cording to DIN/ISO

TINBits

- Titanium nitride coated
- Turned and precision milled
- Manufactured from S2 special steel
- Precision finished a cording to DIN/ISO

Bits that are too hard break, those that are too soft wear out.
The screw and the bit must be compatible. If this is not the case, even the best bit or screw is ruined.
This basic rule is unfortunately neglected time and again by many tradesmen.
The increase in variety of screw types does not make it easy.
Therefore you can find a omprehensive range of bits and bit holders on the following pages.

For all areas of application:

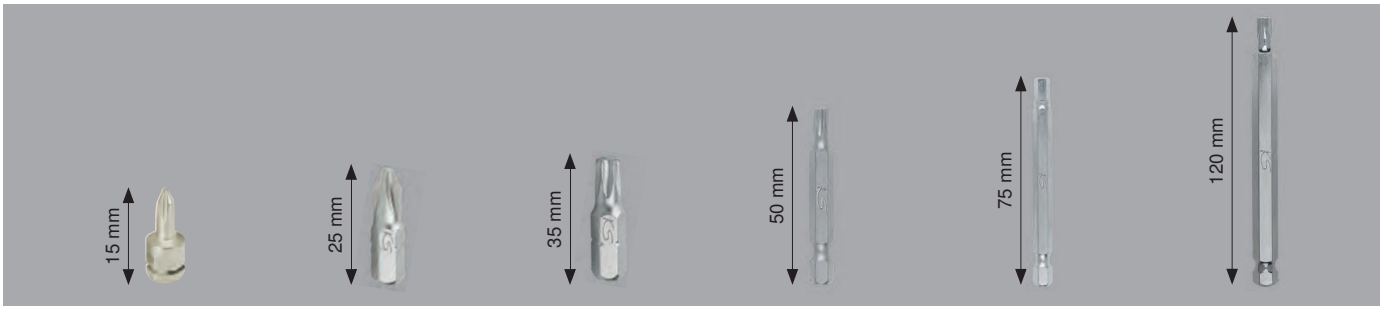

Drive profil

BIT HOLDERS

Magnetic bit holder

- DIN 7427
- Magnetic
- For 1/4" Bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand, electric screwdriver and drills
- Ideally suited for fi tings in trade and industry
- Special steel

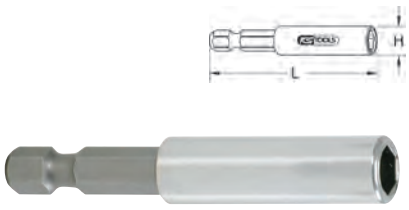

1/4"

	⬢	○	H mm	L mm	g	
514.1102	1/4"	1/4"	10.0	50.0	50	
514.1103	1/4"	1/4"	10.0	100.0	60	

Magnetic bit holder with depth adjustment

- Ideally suited for working in dry lining
- Magnetic
- Depth adjustment
- For 1/4" Bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand, electric screwdriver and drills
- Ideally suited for fi tings in trade and industry
- Special steel

1/4"

	⬢	○	H mm	L mm	g	
514.1109	1/4"	1/4"	15.0	57-63	20	

1/4" Quick change bitholder, magnetic, with locking system

- Magnetic
- Quick change function and locking device
- For 1/4" Bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand, electric screwdriver and drills
- Ideally suited for fi tings in trade and industry
- Special steel

1/4"

	⬢	○	H mm	L mm	g	
514.1104	1/4"	1/4"	15.0	50.0	50	
514.1110	1/4"	1/4"	15.0	150.0	130	
514.1111	1/4"	1/4"	15.0	305.0	250	

Magnetic quick release bit holder

- Magnetic
- Quick change function and locking device
- For 1/4" Bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand, electric screwdriver and drills
- Ideally suited for fi tings in trade and industry
- Special steel

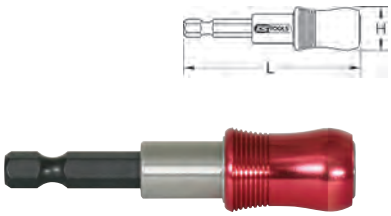

1/4"

	⬢	○	H mm	L mm	g	
514.1114	1/4"	1/4"	16.0	65.0	50	

STAINLESS STEEL quick release bit holder

- With quick change function and locking device
- For 1/4" Bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand, electric screwdriver and drills
- Ideally suited for fi tings in trade and industry
- Suitable for use at extremely low temperatures
- Extreme resistance to intergranular corrosion and oxidation
- Extremely long service life
- Autoclavable (heating of the tools to over 100 °C to kill germs)
- Rust-proof and acid resistant
- Stainless steel

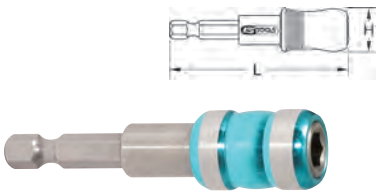

1/4"

	⬢	○	H mm	L mm	g	
910.1114	1/4"	1/4"	16.0	65.0	50	

Auto slimlock magnetic quick release bit holder

- Extremely slim design - ideal for hard to access areas
- Magnetic
- Quick change function and locking device
- For 1/4" Bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand, electric screwdriver and drills
- Ideally suited for fi tings in trade and industry
- Special steel

1/4"

	⬢	○	H mm	L mm	g	
514.1113	1/4"	1/4"	11.5	68.0	30	

ADAPTOR

Square drive adaptor

- External hexagon drive
- 1/4" square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Ideally suited for fi tings in trade and industry
- Chrome plated
- Special steel

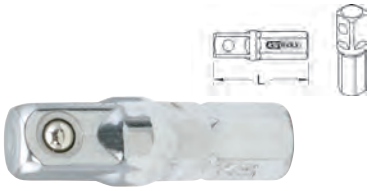

1/4"

	⬢	■	L mm	g	
911.1452	1/4"	1/4"	25.0	10	
503.8232	5/16"	1/4"	21.0	8	
503.8233	10,0	1/4"	24.5	10	

Square drive adaptor

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Square drive adaptor to DIN3120 / ISO 1174 with ball lock
- Ideally suited for fi tings in trade and industry
- For using in electric drivers and drills
- Sand blasted
- Special steel

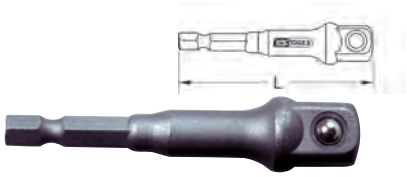

1/4"

	■	⬢	L mm	g	
514.1106	1/4"	1/4"	65.0	20	
514.1107	3/8"	1/4"	65.0	30	
514.1108	1/2"	1/4"	70.0	40	

Socket drive adaptor set

- External hexagon drive to DIN 3126 / ISO 1173
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Ideally suited for fi tings in trade and industry
- For using in electric drivers and drills
- Sand blasted
- Special steel

1/4"

			g	
514.1105	3 pcs	1/4" - 3/8" - 1/2"	100	

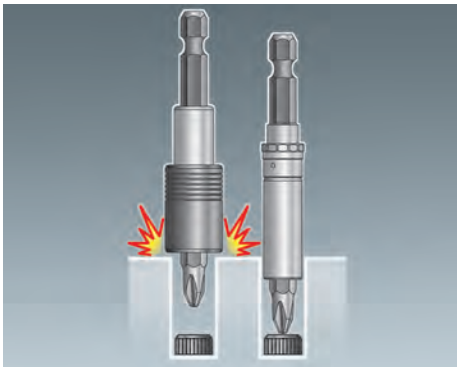

Magnetic SDS bit holder

- SDS adaptor
- Magnetic
- For 1/4" Bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Ideally suited for fi tings in trade and industry
- For using in electric drivers and drills with SDS adaptor
- Special steel

1/4"

	○	H mm	L mm	g	
514.1130	1/4"	11.0	75.0	35	

Magnetic SDS quick release bit holder

- SDS adaptor
- Magnetic
- Quick change function and locking device
- For 1/4" Bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Ideally suited for fi tings in trade and industry
- For using in electric drivers and drills with SDS adaptor
- Special steel

1/4"

	○	H mm	L mm	g	
514.1131	1/4"	14.0	78.0	40	

SDS socket drive adaptor

- SDS adaptor
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Ideally suited for fi tings in trade and industry
- For using in electric drivers and drills with SDS adaptor
- Sand blasted
- Special steel

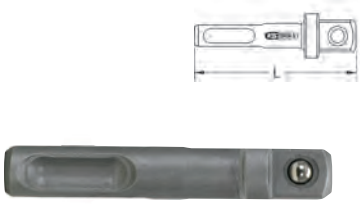

	■	L mm	g	
514.1132	3/8"	60.0	20	
514.1133	1/2"	65.0	50	

SDS chuck adaptor

- SDS adaptor
- Thread 1/2" x 20 Pitch
- Ideally suited for fi tings in trade and industry
- For using in electric drivers and drills with SDS adaptor
- Special steel

	H mm	L mm	g	
514.1134	18.0	65.0	40	

SCREWDRIVER BITS

ERGOTORQUE® bit screwdriver

- Extra short execution
- Magnetic
- One component handle
- Optimal power transmission
- 1/4" hexagonal holder for bits
- Hanging hole

1/4"

	○	L mm	g	
911.1190	1/4"	63.0	30	

ERGOTORQUE® bit screwdriver

- One component handle
- Optimal power transmission
- Magnetic
- For bits to DIN 3126 / C 6,3
- Hanging hole
- Blade made of chrome vanadium

1/4"

	○	L1 mm	L2 mm	L3 mm	g	
911.1198	1/4"	200.0	100.0	100.0	90	
911.1199	1/4"	250.0	150.0	100.0	100	

ERGOTORQUE® quick change bit screwdriver

- Locking and fast change device
- One component handle
- Optimal power transmission
- Magnetic
- For bits to DIN 3126 / C 6,3
- Hanging hole
- Blade made of chrome vanadium

1/4"

	○	L1 mm	L2 mm	L3 mm	g	
911.1145	1/4"	200.0	100.0	100.0	100	

ERGOTORQUE® bit screwdriver

- Flexible
- Limited torque
- Double spiral shaft
- One component handle
- Plastic protective coating
- 1/4" hexagonal holder for bits
- Hanging hole

1/4"

	○	L1 mm	L2 mm	L3 mm	L4 mm	g	
911.1129	1/4"	200.0	150.0	50.0	8.0	200	

ERGOTORQUE*plus*® bit screwdriver, extra long

- Flexible blade with double spiral shaft
- Limited torque
- For bits to DIN 3126 / C 6,3
- Plastic protective coating
- Two component handle
- Hanging hole

1/4"

	○	L1 mm	L2 mm	L3 mm	L4 mm	g	
911.1172	1/4"	614.0	500.0	114.0	43.0	280	

ERGOTORQUE*plus*® bit screwdriver

- Two component handle
- Optimal power transmission
- Magnetic
- For bits to DIN 3126 / C 6,3
- Hanging hole
- Blade made of chrome vanadium

1/4"

	○	L1 mm	L2 mm	L3 mm	g	
159.1198	1/4"	205.0	100.0	105.0	90	

RATCHET BIT SCREWDRIVER

Ratchet bit screwdriver

- Robust gearing with 24 teeth
- Ratchet function
- 180° multi ajustable blade
- For bits to DIN 3126 / C 6,3
- Magnetic
- Integrated bit magazine with 13 bits
- Ergonomically designed handle



1/4"

	○	D mm	L1 mm	L2 mm	L3 mm	g
911.2470	1/4"	10.0	190.0	82.0	108.0	380

T-handle ratchet bit screwdriver

- Robust gearing with 24 teeth
- Ratchet function
- Locking and fast change device
- 45° two way revolving head
- For bits to DIN 3126 / C 6,3
- Fast change bit stop function
- Magnetic
- Integrated bit magazine with 5 bits
- Two component handle



1/4"

	○	D mm	L1 mm	L2 mm	L3 mm	g
911.2475	1/4"	15.0	140.0	26.0	114.0	380

Mini ratchet screwdriver

- Exact gearing with 72 teeth
- Ratchet function
- For bits to DIN 3126 / C 6,3
- Magnetic
- Two component handle
- Blade mirror polished chrome

1/4"

	○	L1 mm	L2 mm	L3 mm	g
159.2061	1/4"	95.0	27.0	68.0	140

Revolver ratchet bit screwdriver

- Exact gearing with 72 teeth
- Ratchet function
- Handle with double function (standard and pistol handle)
- For bits to DIN 3126 / C 3,6
- Magnetic
- 40 Nm maximum torque
- Integrated bit magazine
- Two component handle
- Blade mirror polished chrome

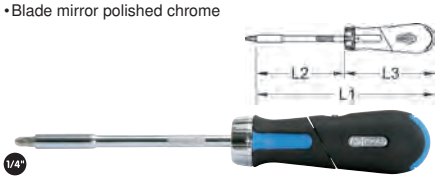

1/4"

	○	L1 mm	L2 mm	L3 mm	g
159.2051	1/4"	260.0	130.0	130.0	450

BIT RATCHETS

Bit ratchet reversible with adaptor for sockets

- With 1/4" square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- For bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Switchable
- Gearing with 72-teeth
- Extremely fl t construction form
- Matt finished hrome
- Special steel

1/4"

	L mm	○	■	g
918.1595	2 pcs	100.0	1/4"	1/4"	98

CHROME*plus*® bit reversing ratchet

- For bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Reversible
- Gearing with 72 teeth
- Two component handle
- Chrome plated and mirror polished
- Special steel

1/4"

	A mm	D mm	L mm	Repair set	g
918.1495	18.5	22.0	115.0	914.1494	160

Bit reversing ratchet

- For bits with 10 mm external hexagon drive
- Reversible
- Gearing with 72 teeth
- Two component handle
- Mirror polished
- Special steel

10 mm

	A mm	D mm	L mm	Repair set	g
914.3893	30.0	32.0	120.0	914.3494	180

GEAR*plus*® mini reversible ratcheting spanner

- Especially handy and compact
- Rotating assembly
- One way angled head
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

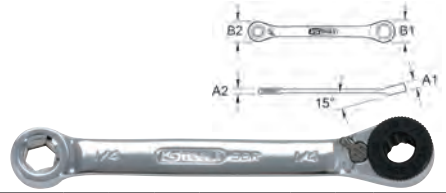

	○	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4691	1/4" x 1/4"	9.7	7.8	12.6	14.2	90.0	40

GEAR*plus*® Double ratchet ring spanner

- FlankTraction profile 12 point)
- In accordance to DIN 3110 / ISO 3318
- Straight form
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

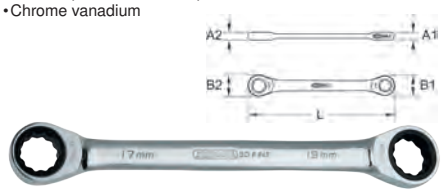

	mm	A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4511	8x10	7.3	6.5	20.0	17.0	128.0	40



GEARplus® mini reversible ratcheting spanner

- Especially handy and compact
- Rotating assembly
- One way angled head
- Exact gearing with 72 teeth
- Chrome plated and mirror polished
- Chrome vanadium

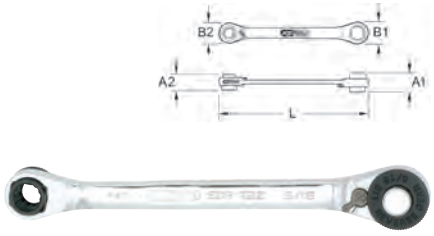

		A1 mm	A2 mm	B1 mm	B2 mm	L mm	g
503.4678	1/4" x 10mm	13.5	9.7	19.3	14.2	124.5	40
503.4679	1/4" x 5/16"	10.2	9.7	17.2	14.2	115.0	40

1/4" SCREWDRIVING TOOLS

CLASSIC drive socket, magnetic

- Magnetic
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- For a damage free inserting boring and unscrewing bolts
- Ideally suited for fi tings in trade and industry
- Sand blasted
- Special steel

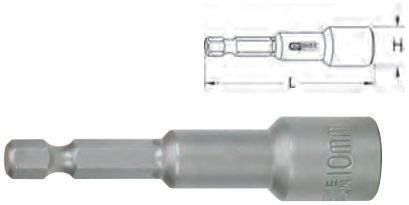

1/4"

	mm	L mm	H mm	g
122.2171	5,0	60.0	11.0	28
122.2172	6,0	60.0	11.0	28
122.2101	7,0	60.0	11.0	30
122.2102	8,0	60.0	12.0	30
122.2103	10,0	60.0	15.0	40
122.2173	12,0	60.0	18.0	49
122.2104	13,0	60.0	18.0	50

CLASSIC stud screwdriver

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- For a damage free inserting and unscrewing bolts from floo
- Ideally suited for fi tings in trade and industry
- Sand blasted
- Special steel

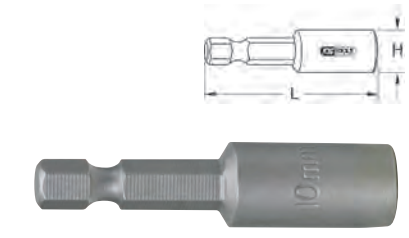

1/4"

		L mm	H mm	g
122.2105	M6	50.0	12.0	20
122.2106	M8	50.0	12.0	20
122.2107	M10	50.0	12.0	20
122.2108	M12	50.0	14.0	20

CLASSIC bit and drive socket set

- Ideal set of compilation for plumbing heating and air conditioning
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Includes magnetic drive sockets and stud screwdrivers for a damage free inserting borin and unscrewing bolts and stud bolts
- Orderly arrangement of the popular 1/4" bits and drive sockets
- Sand blasted
- Special steel
- In durable plastic storage case

1/4"

			kg
122.2100	31 pcs	CLASSIC bit and drive socket set	0.67

4 x		7 - 8 - 10 - 13 mm
4 x		M6 - M8 - M10 - M12
1 x		50 mm
5 x		PH1 - 3 x PH2 - PH3
5 x		PZ1 - 3 x PZ2 - PZ3
2 x		5,5 - 6,5 mm
3 x		4 - 5 - 6 mm
7 x		T10 - T15 - T20 - T25 - T27 - T30 - T40

CLASSIC bit and drive socket display

- Ideal set of compilation for plumbing heating and air conditioning
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Includes magnetic drive sockets and stud screwdrivers for a damage free inserting boring and unscrewing bolts and stud bolts
- Orderly arrangement of the popular 1/4" bits and drive sockets
- Special steel
- Supplied in counter sales display

1/4"

			kg
122.2100D	10 pcs	10 x 122.2100	7.00

MICRO BITS

Micro bit for slotted screws

- Slotted
- External hexagon drive and locking ring
- For hand usage with a GEARplus spanner 503.4511
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

	mm		L mm	Content	g
503.8221	4.0	8,0	15.0	1	10

Micro bit for hexagon screws

- Hexagon socket
- External hexagon drive and locking ring
- For hand usage with a GEARplus spanner 503.4511
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

	mm		L mm	Content	g
503.8131	4,0	8,0	15.0	1	10
503.8132	5,0	8,0	15.0	1	10
503.8133	6,0	10,0	15.0	1	10
503.8134	7,0	10,0	15.0	1	10
503.8135	8,0	10,0	15.0	1	10

Micro bit for phillips screws PH

- PH
- External hexagon drive and locking ring
- For hand usage with a GEARplus spanner 503.4511
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel



			L mm	Content	g
503.8101	PH0	8,0	20.0	1	10
503.8102	PH1	8,0	20.0	1	10
503.8103	PH2	8,0	20.0	1	10

Micro bit for spline screws

- Spline
- External hexagon drive and locking ring
- For hand usage with a GEARplus spanner 503.4511
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel



		○	L mm	Content	
503.8152	M5	8,0	23.0	1	10
503.8153	M6	10,0	23.0	1	10
503.8154	M8	10,0	23.0	1	10
503.8155	M10	10,0	23.0	1	10

TORX® MICRO bits

- TX
- External hexagon drive and locking ring
- For hand usage with a GEARplus spanner 503.4511
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

		○	L mm	Content	
503.8170	T8	8,0	23.0	1	5
503.8171	T10	8,0	23.0	1	10
503.8172	T15	8,0	23.0	1	10
503.8173	T20	8,0	23.0	1	10
503.8174	T25	8,0	23.0	1	10
503.8175	T27	8,0	23.0	1	10
503.8176	T30	8,0	23.0	1	10
503.8177	T40	10,0	23.0	1	10
503.8178	T45	10,0	23.0	1	10

TORX® MICRO bits, tamper proof

- For tamperproof TX
- External hexagon drive and locking ring
- For hand usage with a GEARplus spanner 503.4511
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

		○	L mm	Content	
503.8200	TB8	8,0	23.0	1	5
503.8201	TB10	8,0	23.0	1	10
503.8202	TB15	8,0	23.0	1	10
503.8203	TB20	8,0	23.0	1	10
503.8204	TB25	8,0	23.0	1	10
503.8205	TB27	8,0	23.0	1	10
503.8206	TB30	8,0	23.0	1	10
503.8207	TB40	10,0	23.0	1	10
503.8208	TB45	10,0	23.0	1	10

Micro bit set

- External hexagon drive and locking ring
- For manual operation
- Includes reversing GEAR*plus*® bit ratchet ring spanner
- Ideally suited for fi tings in trade and industry
- Precise and orderly arrangement of the popular micro-bits
- Nickel plated
- Special steel

503.4670	32 pcs	Micro bit set	520
1 x		8 x 10 mm	
1 x		4 mm	
3 x		PH0 - PH1 - PH2	
5 x		4 - 5 - 6 - 7 - 8 mm	
4 x		5 - 6 - 8 - 10 mm	
9 x		T8 - T10 - T15 - T20 - T25 - T27 - T30 T40 - T45	
9 x		TB8 - TB10 - TB15 - TB20 - TB25 TB27 - TB30 - TB40 - TB45	

1/4" CLASSIC BITS 25 mm

CLASSIC bit for slotted screws

- Slotted
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

1/4"

	mm	L mm	Content	
911.3303	3.0	25.0	1	5
911.3304	3.0	25.0	5	35
911.3305	3.5	25.0	1	5
911.3306	3.5	25.0	5	35
911.2237	4.0	25.0	1	6
911.2238	4.0	25.0	5	40
911.2240	4.5	25.0	1	6
911.2241	4.5	25.0	5	40
911.2392	5.0	25.0	1	5
911.2492	5.0	25.0	5	35
911.2243	5.5	25.0	1	6
911.2244	5.5	25.0	5	40
911.2246	6.0	25.0	1	6
911.2247	6.0	25.0	5	40
911.2249	6.5	25.0	1	6
911.2250	6.5	25.0	5	40
911.3307	7.0	25.0	1	6
911.3308	7.0	25.0	5	40
911.2252	8.0	25.0	1	9
911.2253	8.0	25.0	5	58
911.3309	9.0	25.0	1	10
911.3310	9.0	25.0	5	66
911.3311	10.0	25.0	1	12
911.3312	10.0	25.0	5	74
911.3313	11.0	25.0	1	12
911.3314	11.0	25.0	5	74

CLASSIC bit for hexagon screws

- Hexagon socket
- With external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

1/4"

	mm		L mm	Content	g
911.3558	1,5		25.0	1	6
911.3559	1,5		25.0	5	40
911.2377	2		25.0	1	5
911.3561	2		25.0	5	6
911.2386	2,5		25.0	1	5
911.3563	2,5		25.0	5	40
911.2255	3		25.0	1	5
911.2256	3		25.0	5	35
911.2258	4		25.0	1	5
911.2259	4		25.0	5	35
911.2261	5		25.0	1	6
911.2262	5		25.0	5	40
911.2264	6		25.0	1	6
911.2265	6		25.0	5	40
911.2267	7		25.0	1	6
911.2268	7		25.0	5	40
911.2270	8		25.0	1	9
911.2271	8		25.0	5	58
911.2399	10		25.0	1	10
911.3565	10		25.0	5	58
911.3566		1/16"	25.0	1	40
911.3611		1/16"	25.0	5	40
911.3567		5/64"	25.0	1	40
911.3612		5/64"	25.0	5	40
911.3568		3/32"	25.0	1	40
911.3613		3/32"	25.0	5	40
911.3569		7/64"	25.0	1	40
911.3614		7/64"	25.0	5	40
911.3570		1/8"	25.0	1	40
911.3615		1/8"	25.0	5	40
911.3571		9/64"	25.0	1	40
911.3616		9/64"	25.0	5	40
911.3572		5/32"	25.0	1	40
911.3617		5/32"	25.0	5	40
911.3573		3/16"	25.0	1	40
911.3618		3/16"	25.0	5	40
911.3574		7/32"	25.0	1	40
911.3619		7/32"	25.0	5	40
911.3575		1/4"	25.0	1	40
911.3620		1/4"	25.0	5	40
911.3576		5/16"	25.0	1	42
911.3621		5/16"	25.0	5	40
911.3577		3/8"	25.0	1	58
911.3622		3/8"	25.0	5	40

CLASSIC Bit for hexagon tamperproof screws

- Tamperproof hexagon
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

1/4"

	mm		L mm	Content	g
911.2934	2,0		25.0	1	5
911.2935	2,0		25.0	5	35
911.2937	2,5		25.0	1	5
911.2938	2,5		25.0	5	35
911.2940	3,0		25.0	1	5
911.2941	3,0		25.0	5	35
911.2943	4,0		25.0	1	5
911.2944	4,0		25.0	5	35
911.2946	5,0		25.0	1	6
911.2947	5,0		25.0	5	40
911.2949	6,0		25.0	1	6
911.2950	6,0		25.0	5	40
911.2952		1/8"	25.0	1	5
911.2953		1/8"	25.0	5	35
911.2955		3/32"	25.0	1	5
911.2956		3/32"	25.0	5	35
911.2958		5/32"	25.0	1	5
911.2959		5/32"	25.0	5	35
911.2961		5/64"	25.0	1	5
911.2962		5/64"	25.0	5	35
911.2964		7/64"	25.0	1	5
911.2965		7/64"	25.0	5	35
911.2967		9/64"	25.0	1	5
911.2968		9/64"	25.0	5	35
911.3582		1/16"	25.0	1	6
911.3583		1/16"	25.0	5	40
911.3584		3/16"	25.0	1	6
911.3585		3/16"	25.0	5	40
911.3586		7/32"	25.0	1	6
911.3587		7/32"	25.0	5	40
911.3588		1/4"	25.0	1	6
911.3589		1/4"	25.0	5	40
911.3590		5/16"	25.0	1	9
911.3591		5/16"	25.0	5	58
911.3592		3/8"	25.0	1	10
911.3593		3/8"	25.0	5	66

CLASSIC bit for hexagon screws with ball end

- Hexagon socket with ball end
- With external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

1/4"

	mm		L mm	Content	g
911.3700	2,5		25.0	1	6
911.3701	2,5		25.0	5	40
911.3702	3		25.0	1	6
911.3703	3		25.0	5	40
911.3704	4		25.0	1	6
911.3705	4		25.0	5	40
911.3706	5		25.0	1	6
911.3707	5		25.0	5	40
911.3708	6		25.0	1	6
911.3709	6		25.0	5	40
911.3710		3/32"	25.0	1	6
911.3711		3/32"	25.0	5	40
911.4651		7/64"	25.0	1	6
911.3713		7/64"	25.0	5	6
911.3714		1/8"	25.0	1	40
911.3715		1/8"	25.0	5	6
911.4652		9/64"	25.0	1	6
911.3717		9/64"	25.0	5	40
911.3718		5/32"	25.0	1	6
911.3719		5/32"	25.0	5	40
911.3720		3/16"	25.0	1	6
911.3721		3/16"	25.0	5	40
911.3722		7/32"	25.0	1	6
911.3723		7/32"	25.0	5	40
911.3724		1/4"	25.0	1	6
911.3725		1/4"	25.0	5	40

CLASSIC bit for Phillips screws PH

- PH
- With external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

1/4"

		L mm	Content	g
911.3333	PH000	25.0	1	6
911.3334	PH000	25.0	5	40
911.3335	PH00	25.0	1	6
911.3336	PH00	25.0	5	40
911.2396	PH0	25.0	1	5
911.2394	PH0	25.0	5	35
911.2201	PH1	25.0	1	5
911.2202	PH1	25.0	5	35
911.2204	PH2	25.0	1	5
911.2205	PH2	25.0	5	35
911.2207	PH3	25.0	1	6
911.2208	PH3	25.0	5	40
911.3337	PH4	25.0	1	6
911.3338	PH4	25.0	5	40

CLASSIC bit for Phillips screws PZ

- PZ
- With external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

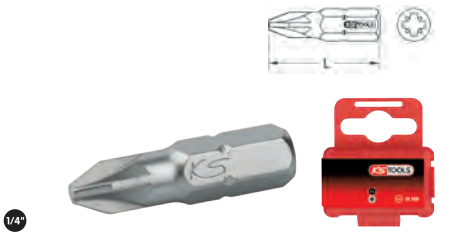

		L mm	Content	g	
911.2397	PZ0	25.0	1	5	
911.2393	PZ0	25.0	5	5	
911.2219	PZ1	25.0	1	5	
911.2220	PZ1	25.0	5	35	
911.2222	PZ2	25.0	1	5	
911.2223	PZ2	25.0	5	35	
911.2225	PZ3	25.0	1	6	
911.2226	PZ3	25.0	5	40	
911.3345	PZ4	25.0	1	12	
911.3346	PZ4	25.0	5	74	

CLASSIC bit for TX screws

- TX
- With external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

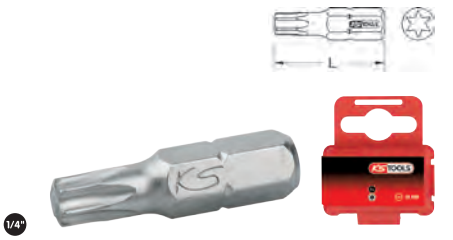

		L mm	Content	g	
911.3351	T1	25.0	1	6	
911.3352	T1	25.0	5	40	
911.3353	T2	25.0	1	6	
911.3354	T2	25.0	5	40	
911.3355	T3	25.0	1	6	
911.3356	T3	25.0	5	40	
911.3357	T4	25.0	1	6	
911.3358	T4	25.0	5	40	
911.3359	T5	25.0	1	6	
911.3360	T5	25.0	5	40	
911.2334	T6	25.0	1	5	
911.2335	T6	25.0	5	35	
911.2303	T7	25.0	1	5	
911.2304	T7	25.0	5	35	
911.2306	T8	25.0	1	5	
911.2307	T8	25.0	5	35	
911.2309	T9	25.0	1	5	
911.2310	T9	25.0	5	35	
911.2312	T10	25.0	1	5	
911.2313	T10	25.0	5	35	
911.2315	T15	25.0	1	5	
911.2316	T15	25.0	5	35	
911.2318	T20	25.0	1	5	
911.2319	T20	25.0	5	35	
911.2321	T25	25.0	1	6	
911.2322	T25	25.0	5	40	
911.2324	T27	25.0	1	6	
911.2325	T27	25.0	5	40	
911.2327	T30	25.0	1	6	
911.2328	T30	25.0	5	40	
911.2330	T40	25.0	1	8	
911.2331	T40	25.0	5	50	
911.3363	T45	25.0	1	8	
911.3364	T45	25.0	5	50	

CLASSIC bit for TX PLUS screws

- TX PLUS
- With external hexagon drive to DIN 3126 / ISO 1173 Form C 8
- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Nickel plated
- Special steel

		L mm	Content	g	
911.3240	IP 10	30.0	1	5	
911.3241	IP 15	30.0	1	6	
911.3242	IP 20	30.0	1	5	
911.3243	IP 25	30.0	1	5	
911.3244	IP 30	30.0	1	5	

CLASSIC bit for TX screws with ball end

- TX with ball end
- With external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

		L mm	Content	g	
911.3389	T10	25.0	1	6	
911.3390	T10	25.0	5	40	
911.3391	T15	25.0	1	6	
911.3392	T15	25.0	5	40	
911.3393	T20	25.0	1	6	
911.3394	T20	25.0	5	40	
911.3395	T25	25.0	1	6	
911.3396	T25	25.0	5	40	
911.3397	T30	25.0	1	6	
911.3398	T30	25.0	5	40	
911.3399	T40	25.0	1	6	
911.3500	T40	25.0	5	40	

CLASSIC bit for TX tamperproof screws

- For tamperproof TX
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

		L mm	Content	g	
911.2833	TB5	25.0	1	5	
911.2836	TB6	25.0	1	35	
911.2273	TB7	25.0	1	5	
911.2274	TB7	25.0	5	35	
911.2276	TB8	25.0	1	5	
911.2277	TB8	25.0	5	35	
911.2279	TB9	25.0	1	5	
911.2280	TB9	25.0	5	35	
911.2282	TB10	25.0	1	5	
911.2283	TB10	25.0	5	35	
911.2285	TB15	25.0	1	5	
911.2286	TB15	25.0	5	35	
911.2288	TB20	25.0	1	5	
911.2289	TB20	25.0	5	35	
911.2291	TB25	25.0	1	6	
911.2292	TB25	25.0	5	40	
911.2294	TB27	25.0	1	6	
911.2295	TB27	25.0	5	40	
911.2297	TB30	25.0	1	6	
911.2298	TB30	25.0	5	40	
911.2300	TB40	25.0	1	8	
911.2301	TB40	25.0	5	50	

CLASSIC Bit for tamperproof fi e star bits

- Five star bit, tamperproof
- With external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

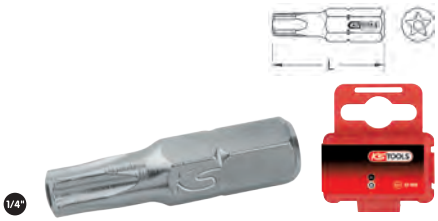

		L mm	Content	g	
911.3101	TS10	30.0	1	5	
911.3111	TS10	30.0	5	35	
911.3102	TS15	30.0	1	5	
911.3112	TS15	30.0	5	35	
911.3103	TS20	30.0	1	5	
911.3113	TS20	30.0	5	35	
911.3104	TS25	30.0	1	6	
911.3114	TS25	30.0	5	40	
911.3105	TS27	30.0	1	6	
911.3115	TS27	30.0	5	40	
911.3106	TS30	30.0	1	6	
911.3116	TS30	30.0	5	50	
911.3107	TS40	30.0	1	8	
911.3117	TS40	30.0	5	50	

CLASSIC bit for spline screws

- Spline
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

		L mm	Content	g	
911.2341	M4	25.0	1	5	
911.2342	M4	25.0	5	35	
911.2344	M5	25.0	1	5	
911.2345	M5	25.0	5	35	
911.2347	M6	25.0	1	6	
911.2348	M6	25.0	5	40	
911.2350	M8	25.0	1	9	
911.2351	M8	25.0	5	58	
911.2353	M10	25.0	1	10	

CLASSIC bit for security screws

- Security
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

	mm	L mm	Content	g
911.2910	4.0	25.0	1	5
911.2911	4.0	25.0	5	35
911.2913	6.0	25.0	1	6
911.2914	6.0	25.0	5	40
911.2916	8.0	25.0	1	9
911.2917	8.0	25.0	5	58
911.2919	10.0	25.0	1	10
911.2920	10.0	25.0	5	63
911.3594	12.0	25.0	1	8
911.3595	12.0	25.0	5	56

CLASSIC bit for RIBE® screws

- RIBE®
- External hexagon drive to DIN 3126 / ISO 1173 form C 8
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Phosphate finis
- Special steel

		L mm	Content	g
911.5260	M4	25.0	1	6
911.5261	M5	25.0	1	6
911.5262	M6	25.0	1	6
911.5263	M7	25.0	1	6
911.5264	M8	25.0	1	8
911.5265	M9	25.0	1	8

CLASSIC bit for TRIWING® screws

- TRIWING®
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

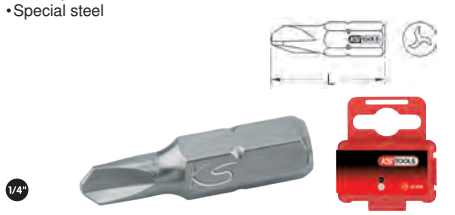

	mm	L mm	Content	g
911.3625	1,0	25.0	1	6
911.3626	1,0	25.0	5	40
911.3627	2,0	25.0	1	6
911.3628	2,0	25.0	5	40
911.3629	3,0	25.0	1	6
911.3630	3,0	25.0	5	40
911.2922	4,0	25.0	1	5
911.2923	4,0	25.0	5	35
911.3596	5,0	25.0	1	6
911.3597	5,0	25.0	5	40
911.2925	6,0	25.0	1	6
911.2926	6,0	25.0	5	40
911.2928	8,0	25.0	1	6
911.2929	8,0	25.0	5	40
911.2931	10,0	25.0	1	8
911.2932	10,0	25.0	5	50

CLASSIC bit for Torq® screws

- Torq®
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

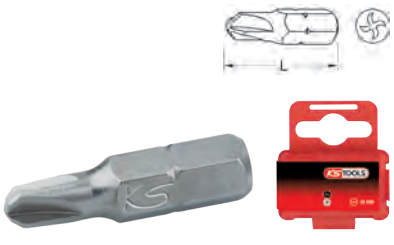

	mm	L mm	Content	g
911.3631	1.0	25.0	1	6
911.3632	1.0	25.0	5	40
911.3633	2.0	25.0	1	6
911.3634	2.0	25.0	5	40
911.3635	3.0	25.0	1	6
911.3636	3.0	25.0	5	40
911.3637	4.0	25.0	1	6
911.3638	4.0	25.0	5	40
911.3639	5.0	25.0	1	6
911.3640	5.0	25.0	5	40
911.2901	6.0	25.0	1	6
911.2902	6.0	25.0	5	40
911.2904	8.0	25.0	1	9
911.2905	8.0	25.0	5	58
911.2907	10.0	25.0	1	10
911.2908	10.0	25.0	5	63

1/4" CLASSIC BIT SETS 25 mm

CLASSIC mini bit case

- Compact and handy design - fi s into shirt or trouser pocket
- Ergonomic form for fatigue free working
- Integrated hexagon drive in the magazine can be used as an auxiliary screwdriver
- Folding bit magazine
- Includes AUTO SLIMLOCK bitholder with magnet and extension
- Extremly slim ideal in confined spa es
- Precise and orderly arrangement of the popular 1/4" bits
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Nickel plated bits
- Bits made of special steel
- Box made from impact resistant plastic

			g
911.2840	11 pcs	CLASSIC mini bit case	130
2 x		5,5 - 6,5 mm	
4 x		PH1 - 2 x PH2 - PH3	
4 x		PZ1 - 2 x PZ2 - PZ3	
1 x		1/4“	

CLASSIC mini bit case display

- Compact and handy design - fi s into shirt or trouser pocket
- Ergonomic form for fatigue free working
- Integrated hexagon drive in the magazine can be used as an auxiliary screwdriver
- Folding bit magazine
- Includes AUTO SLIMLOCK bitholder with magnet and extension
- Extremly slim ideal in confined spa es
- Precise and orderly arrangement of the popular 1/4" bits
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Nickel plated bits
- Bits made of special steel
- Box made from impact resistant plastic
- Supplied in counter sales display

			kg
911.2840D	12 pcs	12 x 911.2840D	1.85

CLASSIC mini bit case

- Compact and handy design - fi s into shirt or trouser pocket
- Ergonomic form for fatigue free working
- Integrated hexagon drive in the magazine can be used as an auxiliary screwdriver
- Folding bit magazine
- Includes AUTO SLIMLOCK bitholder with magnet and extension
- Extremly slim ideal in confined spa es
- Precise and orderly arrangement of the popular 1/4" bits
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Nickel plated bits
- Bits made of special steel
- Box made from impact resistant plastic

			g
911.2845	11 pcs	CLASSIC mini bit case	130
4 x		T15 - T20 - T25 - T30	
3 x		PH1 - PH2 - PH3	
3 x		PZ1 - PZ2 - PZ3	
1 x		1/4“	

CLASSIC mini bit case display

- Compact and handy design - fi s into shirt or trouser pocket
- Ergonomic form for fatigue free working
- Integrated hexagon drive in the magazine can be used as an auxiliary screwdriver
- Folding bit magazine
- Includes AUTO SLIMLOCK bitholder with magnet and extension
- Extremly slim ideal in confined spa es
- Precise and orderly arrangement of the popular 1/4" bits
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Bits with external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Nickel plated bits
- Bits made of special steel
- Box made from impact resistant plastic
- Supplied in counter sales display

1/4"

			kg
911.2845D	12 pcs	12 x 911.2845	1.85

CHROME*plus*® bit set

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes reversing GEARplus® bit ratchet ring spanner and 1/4" socket adaptor
- Ideally suited for fi tings in trade and industry
- Precise and orderly arrangement of the popular 1/4" bits
- Chrome plated
- Special steel
- Includes mirror polished chrome box

1/4"

			kg
918.4520	20 pcs	CHROME*plus*® bit set	0.32
1 x		1/4“ x 1/4“	
1 x		1/4“	
3 x		PH1 - PH2 - PH3	
3 x		PZ1 - PZ2 - PZ3	
3 x		4,5 - 5,5 - 6,5 mm	
3 x		4 - 5 - 6 mm	
6 x		TB10 - TB15 - TB20 - TB25 - TB30 - TB40	

CHROME*plus*® bit set display

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes reversing GEARplus® bit ratchet ring spanner and 1/4" socket adaptor
- Ideally suited for fi tings in trade and industry
- Precise and orderly arrangement of the popular 1/4" bits
- Chrome plated
- Special steel
- Includes mirror polished chrome box
- Supplied in counter sales display

1/4"

			kg
918.4520D	12 pcs	12 x 918.4520	3.20

CHROME*plus*® bit set

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes magnetic quick release bit holder and 1/4" socket adapter
- Ideally suited for fi tings in trade and industry
- Precise and orderly arrangement of the popular 1/4" bits
- Nickel plated
- Special steel
- Includes mirror polished chrome box

1/4"

			kg
911.2070	30 pcs	CHROME*plus*® bit set	0.26
1 x		1/4“	
1 x		1/4“	
4 x		PH1 - 2 x PH2 - PH3	
4 x		PZ1 - 2 x PZ2 - PZ3	
3 x		4,5 - 5,5 - 6,5 mm	
3 x		4 - 5 - 6 mm	
7 x		TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	
7 x		T10 - T15 - T20 - T25 - T27 - T30 - T40	

CLASSIC bit set

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes magnetic quick release bit holder and 1/4" socket adapter
- Practical belt holder
- Ideally suited for fi tings in trade and industry
- Precise and orderly arrangement of the popular 1/4" bits
- Nickel plated
- Special steel
- In durable plastic storage case

1/4"

			kg
911.2060	32 pcs	CLASSIC bit set	0.30
1 x		1/4“	
1 x		1/4“	
3 x		PH1 - PH2 - PH3	
6 x		2 x PZ1 - 2 x PZ2 - 2 x PZ3	
3 x		5,5 - 6,5 - 8 mm	
3 x		4 - 5 - 6 mm	
15 x		2 x TB10 - 3 x TB15 - 2 x TB20 - 3 x TB25 - 3 x TB30 - 2 x TB40	

CHROME*plus*® bit set

- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Precise arrangement of the popular 1/4" bits
- Exact gearing with 72 teeth
- Offset angle 5°
- Matt finis
- Chrome vanadium
- In high quality chrome box

1/4"

			kg
918.4600	31 pcs	CHROME*plus*® bit set	0.60
1 x		1/4“	
1 x		1/4“	
1 x		1/4“	
4 x		PH 1 - 2 x PH 2 - PH 3	
4 x		PZ 1 - 2 x PZ 2 - PZ 3	
3 x		4,5 - 5,5 - 6,5 mm	
3 x		4 - 5 - 6 mm	
7 x		T10 - T15 - T20 - T25 - T27 - T30 T40	
7 x		TB10 - TB15 - TB20 - TB25 - TB27 TB30 - TB40	

CHROME*plus*® bit set

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes CHROMEplus® mini bit reversing ratchet and 1/4" socket adaptor
- Ideally suited for fi tings in trade and industry
- Precise and orderly arrangement of the popular 1/4" bits
- Chrome plated
- Special steel
- Includes mirror polished chrome box

1/4"

			kg
918.4500	31 pcs	CHROME*plus*® bit set	0.60
1 x		1/4“ x 1/4“	
1 x		1/4“	
1 x		1/4“	
3 x		PH1 - PH2 - PH3	
3 x		PZ1 - PZ2 - PZ3	
3 x		4,5 - 5,5 - 6,5 mm	
3 x		4 - 5 - 6 mm	
7 x		TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	
7 x		T10 - T15 - T20 - T25 - T27 - T30 - T40	

CHROME*plus*® bit set display

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes CHROMEplus® bit reversing ratchet and 1/4" socket adaptor
- Ideally suited for fi tings in trade and industry
- Precise and orderly arrangement of the popular 1/4" bits
- Chrome plated
- Special steel
- Includes mirror polished chrome box and belt pouch
- Supplied in counter sales display

1/4"

			kg
918.4500D	11 pcs	11 x 918.4500	6.60

CLASSIC bit set

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes quick release screwdriver bits and 1/4" socket adapter
- Ideally suited for fi tings in trade and industry
- Precise and orderly arrangement of the popular 1/4" security bits
- Nickel plated
- Special steel
- In durable steel storage case

1/4"

			kg
911.2029	29 pcs	CLASSIC bit set	0.88
1 x		1/4“	
1 x		1/4“	
9 x		TB8 - TB9 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	
6 x		2 - 2,5 - 3 - 4 - 5 - 6 mm	
4 x		4 - 6 - 8 - 10 mm	
4 x		4 - 6 - 8 - 10 mm	
3 x		6 - 8 - 10 mm	
1 x		1/4“	

CLASSIC bit and drive socket set

- Ideal set of compilation for plumbing heating and air conditioning
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Includes magnetic drive sockets and stud screwdrivers for a damage free inserting borin and unscrewing bolts and stud bolts
- Orderly arrangement of the popular 1/4" bits and drive sockets
- Sand blasted
- Special steel
- In durable plastic storage case

1/4"

			kg
122.2100	31 pcs	CLASSIC bit and drive socket set	0.67
4 x		7 - 8 - 10 - 13 mm	
4 x		M6 - M8 - M10 - M12	
1 x		50 mm	
5 x		PH1 - 3 x PH2 - PH3	
5 x		PZ1 - 3 x PZ2 - PZ3	
2 x		5,5 - 6,5 mm	
3 x		4 - 5 - 6 mm	
7 x		T10 - T15 - T20 - T25 - T27 - T30 - T40	

CLASSIC bit and drive socket display

- Ideal set of compilation for plumbing heating and air conditioning
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Includes magnetic drive sockets and stud screwdrivers for a damage free inserting boring and unscrewing bolts and stud bolts
- Orderly arrangement of the popular 1/4" bits and drive sockets
- Special steel
- Supplied in counter sales display

1/4"

			kg
122.2100D	10 pcs	10 x 122.2100	7.00

CLASSIC bit set

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes bitholder and 1/4" socket adapter
- Ideally suited for fi tings in trade and industry
- Orderly arrangement of the popular 1/4" bits
- Sand blasted
- Special steel
- In durable plastic storage case

1/4"

			kg
911.2026	100 pcs	CLASSIC bit set	0.75
1 x		50 mm	
2 x		30 - 50 mm	
1 x		1/4“	
1 x		1/4“	
9 x		3 - 4 - 4,5 - 5 - 5,5 - 6 - 6,5 - 7 - 8 mm	
8 x		PH0 - PH1 - 5 x PH2 - PH3	
8 x		PZ0 - PZ1 - 5 x PZ2 - PZ3	
9 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 5,5 - 6 - 8 mm	
10 x		1/16“ - 5/64“ - 3/32“ - 7/64“ - 1/8“ - 9/64“ - 5/32“ - 3/16“ - 7/32“ - 1/4“	
6 x		2 - 2,5 - 3 - 4 - 5 - 6 mm	
6 x		5/64“ - 3/32“ - 7/64“ - 1/8“ - 9/64“ - 5/32“	
9 x		T8 - T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45	
9 x		TB8 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB35 - TB40	
3 x		M5 - M6 - M8	
3 x		#1 - #2 - #3	
4 x		#1 - #2 - #3 - #4	
4 x		4 - 6 - 8 - 10 mm	
3 x		6 - 8 - 10 mm	
4 x		#0 - #1 - #2 - #3	

CLASSIC bit set

- With external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes bit holder, bit ratchet, 1/4" socket adaptor and 1/4" mini-bit-screwdriver
- Ideally suited for fi tings in trade and industry
- Precise and orderly arrangement of the popular 1/4" bits
- Sand-blasted
- Special steel
- In durable plastic storage case

1/4"

			kg
911.2080	99 pcs	CLASSIC bit set	0.75
1 x		1/4“	
1 x		1/4“	
1 x		1/4“	
1 x		1/4“	
9 x		3 - 4 - 4,5 - 5 - 5,5 - 6 - 6,5 - 7 - 8 mm	
8 x		PH0 - PH1 - 5 x PH2 - PH3	
8 x		PZ0 - PZ1 - 5 x PZ2 - PZ3	
9 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 5,5 - 6 - 8 mm	
10 x		5/64“ - 7/64“ - 9/64“ - 3/32“ - 5/32“ - 7/32“ - 3/16“ - 1/16“ - 1/8“ - 1/4“	
6 x		2 - 2,5 - 3 - 4 - 5 - 6 mm	
6 x		5/64“ - 7/64“ - 9/64“ - 3/32“ - 1/8“ - 5/32“	
9 x		T8 - T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45	
9 x		TB8 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB35 - TB40	
3 x		M5 - M6 - M8	
3 x		#1 - #2 - #3	
4 x		#1 - #2 - #3 - #4	
4 x		4 - 6 - 8 - 10 mm	
3 x		6 - 8 - 10 mm	
4 x		#0 - #1 - #2 - #3	

CLASSIC Bit set

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes bit holder, bit ratchet, 1/4" socket adaptor and 1/4" bit screwdriver
- Ideally suited for fi tings in trade and industry
- Precise and orderly arrangement of the popular 1/4" bits
- Sand blasted
- Special steel
- In durable plastic storage case

1/4"

			kg
911.2085	122 pcs	CLASSIC Bit set	1.15
1 x		1/4“	
1 x		1/4“	
1 x		1/4“	
2 x		30 - 50 mm	
1 x		1/4“	
10 x		4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm	
10 x		5/32“ - 3/16“ - 7/32“ - 1/4“ - 9/32“ - 5/16“ - 1/2“	
9 x		3 - 4 - 4,5 - 5 - 5,5 - 6 - 6,5 - 7 - 8 mm	
5 x		PH0 - PH00 - PH1 - PH2 - PH3	
5 x		PZ0 - PZ00 - PZ1 - PZ2 - PZ3	
9 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 5,5 - 6 - 8 mm	
10 x		1/16“ - 5/64“ - 3/32“ - 7/64“ - 1/8“ - 9/64“ - 5/32“ - 3/16“ - 7/32“ - 1/4“	
6 x		2 - 2,5 - 3 - 4 - 5 - 6 - 8 mm	
13 x		T5 - T6 - T7- T8 - T9 - T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45	
9 x		TB8 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB35 - TB40	
3 x		M5 - M6 - M8	
3 x		#1 - #2 - #3	
4 x		4 - 6 - 8 - 10 mm	
4 x		4 - 6 - 8 - 10 mm	
3 x		6 - 8 - 10 mm	
4 x		#0 - #1 - #2 - #3	
9 x		TS10 - TS15 - TS20 - TS25 - TS27 - TS30 - TS40 - TS45 - TS50	

CLASSIC bit set

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes bitholder and 1/4" socket adapter
- Ideally suited for fi tings in trade and industry
- Orderly arrangement of the popular 1/4" bits
- Sand blasted
- Special steel
- In durable plastic storage case

1/4"

			kg
911.2027	99 pcs	CLASSIC bit set	0.75
1 x		1/4"	
1 x		1/4"	
1 x		1/4"	
9 x		3 - 4 - 4,5 - 5 - 5,5 - 6 - 6,5 - 7 - 8	
5 x		PH0 - PH1 - 2 x PH2 - PH3	
5 x		PZ0 - PZ1 - 2 x PZ2 - PZ3	
9 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 5,5 - 6 - 8	
6 x		2 - 2,5 - 3 - 4 - 5 - 6	
6 x		5/64" - 3/32" - 7/64" -1/8" - 9/64" - 5/32"	
9 x		T8 - T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45	
9 x		TB8 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB35 - TB40	
3 x		M5 - M6 - M8	
3 x		#1 - #2 - #3	
4 x		#1 - #2 - #3 - #4	
4 x		4 - 6 - 8 - 10 mm	
3 x		6 - 8 - 10 mm	
4 x		#0 - #1 - #2 - #3	
3 x		4 - 5 - 6 mm	
3 x		TB15 - TB20 - TB30	
4 x		#1 - #2 - #3 - 4 #	
4 x		4 - 6 - 8 - 10 mm	
3 x		6 - 8 - 10 mm	

CLASSIC bit set

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes quick release bit holder
- Ideally suited for fi tings in trade and industry
- Orderly arrangement of the popular 1/4" bits
- Sand blasted
- Special steel
- In durable plastic storage case

1/4"

			kg
911.2031	113 pcs	CLASSIC bit set	1.17
1 x		1/4"	
1 x		1/4"	
3 x		PH2	
3 x		PZ2	
7 x		T10 - T15 - 3 x T20 - T25 - T30	
14 x		7 x 4 - 7 x 6 mm	
21 x		7 x PH1 - 7 x PH2 - 7 x PH3	
21 x		7 x PZ1 - 7 x PZ2 - 7 x PZ3	
21 x		7 x 4 - 7 x 5 - 7 x 6 mm	
14 x		2 x T10 - 2 x T15 - 2 x T20 - 2 x T25 - 2 x T27 - 2 x T30 - 2 x T40	
7 x		TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	

CLASSIC bit display

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Contains the most current 1/4" bits and bit holder
- Nickel plated
- Special steel
- In durable plastic storage bit magazine
- 30 Drawers with labels
- Magazine can be placed or can secured to the wall
- Polypropylene housing
- Drawers out of polystyrene

1/4"

			kg
911.2200	280 pcs	CLASSIC bit display	6.60
10 x		5 x 50 - 5 x 100 mm	
5 x		65 mm	
5 x		65 mm	
30 x		10 x 4 - 10 x 5,5 - 10 x 6,5 mm	
30 x		10 x 4 - 10 x 5 - 10 x 6 mm	
30 x		10 x PH1 - 10 x PH2 - 10 x PH3	
30 x		10 x PZ1 - 10 x PZ2 - 10 x PZ3	
70 x		10 x (T10 - T15 - T20 - T25 - T27 - T30 - T40)	
70 x		10 x (TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40)	

CLASSIC bit display

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Contains the most current 1/4" bits and bit holder
- Nickel plated
- Special steel
- In durable clear acrylic counter display with a push cover

1/4"

			kg
911.2000	1580 pcs	CLASSIC bit display	10.10
10 x		60 mm	
10 x		65 mm	
200 x		50 x PH1 - 100 x PH2 - 50 x PH3	
200 x		50 x PZ1 - 100 x PZ2 - 50 x PZ3	
230 x		50 x 4 mm - 100 x 5,5 mm - 50 x 6,5 mm - 30 x 8 mm	
230 x		50 x (3 - 4 - 5 - 6 mm) - 30 x 8 mm	
350 x		50 x (T10 - T15 - T20 - T25 - T27 T30 - T40)	
350 x		50 x (TB10 - TB15 - TB20 - TB25 TB27 - TB30 - TB40)	

1/4“ CLASSIC BITS 50 mm

CLASSIC bit for slotted screws

- Slotted
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

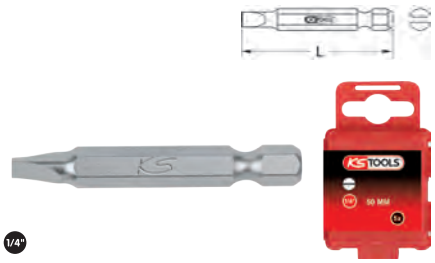

1/4"

	mm	L mm	Content	g	
911.3315	1.5	50.0	1	10	
911.3316	1.5	50.0	5	60	
911.3317	2.0	50.0	1	10	
911.3318	2.0	50.0	5	60	
911.3319	2.5	50.0	1	10	
911.3320	2.5	50.0	5	60	
911.2746	3.0	50.0	1	10	
911.2747	3.0	50.0	5	60	
911.3321	3.5	50.0	1	10	
911.3322	3.5	50.0	5	60	
911.2749	4.0	50.0	1	10	
911.2750	4.0	50.0	5	60	
911.2752	4.5	50.0	1	10	
911.2753	4.5	50.0	5	60	
911.2755	5.0	50.0	1	10	
911.2756	5.0	50.0	5	60	
911.2758	5.5	50.0	1	10	
911.2759	5.5	50.0	5	60	
911.2761	6.0	50.0	1	10	
911.2762	6.0	50.0	5	60	
911.2764	6.5	50.0	1	12	
911.2765	6.5	50.0	5	74	
911.2767	7.0	50.0	1	12	
911.2768	7.0	50.0	5	74	
911.3323	8.0	50.0	1	17	
911.3324	8.0	50.0	5	106	
911.3325	9.0	50.0	1	18	
911.3326	9.0	50.0	5	114	
911.3327	10.0	50.0	1	20	
911.3328	10.0	50.0	5	124	
911.3329	11.0	50.0	1	20	
911.3330	11.0	50.0	5	124	
911.3331	12.0	50.0	1	22	
911.3332	12.0	50.0	5	133	

CLASSIC bit for hexagon screws

- Hexagon socket
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

1/4"

	mm	L mm	Content	g	
911.2800	1,5	50.0	1	10	
911.2801	1,5	50.0	5	60	
911.2803	2,0	50.0	1	10	
911.2804	2,0	50.0	5	60	
911.2806	2,5	50.0	1	10	
911.2807	2,5	50.0	5	60	
911.2809	3,0	50.0	1	10	
911.2810	3,0	50.0	5	60	
911.2812	4,0	50.0	1	10	
911.2813	4,0	50.0	5	60	
911.2815	5,0	50.0	1	10	
911.2816	5,0	50.0	5	60	
911.2818	5,5	50.0	1	10	
911.2819	5,5	50.0	5	60	
911.2821	6,0	50.0	1	10	
911.2822	6,0	50.0	5	60	
911.2824	7,0	50.0	1	12	
911.2825	7,0	50.0	5	74	
911.3578	8,0	50.0	1	17	
911.3579	8,0	50.0	5	100	
911.3580	10,0	50.0	1	20	
911.3581	10,0	50.0	5	116	

CLASSIC bit for phillips screws PH

- PH
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

1/4"

		L mm	Content	g	
911.3339	PH0	50.0	1	10	
911.3340	PH0	50.0	5	60	
911.2210	PH1	50.0	1	10	
911.2211	PH1	50.0	5	60	
911.2213	PH2	50.0	1	10	
911.2214	PH2	50.0	5	60	
911.2216	PH3	50.0	1	10	
911.2217	PH3	50.0	5	60	
911.3341	PH4	50.0	1	12	
911.3342	PH4	50.0	5	74	

CLASSIC bit for phillips screws PZ

- PZ
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Ideally suited for fi tings in trade and industry
- Can be used by hand or with and electric screwdriver
- Nickel plated
- Special steel

1/4"

		L mm	Content	g	
911.3347	PZ0	50.0	1	10	
911.3348	PZ0	50.0	5	60	
911.2228	PZ1	50.0	1	10	
911.2229	PZ1	50.0	5	60	
911.2231	PZ2	50.0	1	10	
911.2232	PZ2	50.0	5	60	
911.2234	PZ3	50.0	1	10	
911.2235	PZ3	50.0	5	60	
911.3349	PZ4	50.0	1	12	
911.3350	PZ4	50.0	5	74	

CLASSIC bit for spline screws

- Spline
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Ideally suited for fi tings in trade and industry
- Can be used by hand or with and electric screwdriver
- Nickel plated
- Special steel

1/4"

		L mm	Content	g	
911.2701	M3	50.0	1	10	
911.2702	M3	50.0	5	60	
911.2704	M4	50.0	1	10	
911.2705	M4	50.0	5	60	
911.2707	M5	50.0	1	10	
911.2708	M5	50.0	5	60	
911.2710	M6	50.0	1	10	
911.2711	M6	50.0	5	64	
911.2713	M8	50.0	1	15	
911.2714	M8	50.0	5	89	

CLASSIC bit for TX screws

- TX
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Ideally suited for fi tings in trade and industry
- Can be used by hand or with and electric screwdriver
- Nickel plated
- Special steel

1/4"

		L mm	Content	g
911.3365	T1	50.0	1	10
911.3366	T1	50.0	5	60
911.3367	T2	50.0	1	10
911.3368	T2	50.0	5	60
911.3369	T3	50.0	1	10
911.3370	T3	50.0	5	60
911.3371	T4	50.0	1	10
911.3372	T4	50.0	5	60
911.3373	T5	50.0	1	10
911.3374	T5	50.0	5	60
911.3375	T6	50.0	1	10
911.3376	T6	50.0	5	60
911.2716	T7	50.0	1	10
911.2717	T7	50.0	5	60
911.2719	T8	50.0	1	10
911.2720	T8	50.0	5	60
911.2722	T9	50.0	1	10
911.2723	T9	50.0	5	60
911.2725	T10	50.0	1	10
911.2726	T10	50.0	5	60
911.2728	T15	50.0	1	10
911.2729	T15	50.0	5	60
911.2731	T20	50.0	1	10
911.2732	T20	50.0	5	60
911.2734	T25	50.0	1	10
911.2735	T25	50.0	5	60
911.2737	T27	50.0	1	10
911.2738	T27	50.0	5	60
911.2740	T30	50.0	1	12
911.2741	T30	50.0	5	74
911.2743	T40	50.0	1	12
911.2744	T40	50.0	5	74

CLASSIC bit for TX tamperproof screws

- For tamperproof TX
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Ideally suited for fi tings in trade and industry
- Can be used by hand or with and electric screwdriver
- Nickel plated
- Special steel

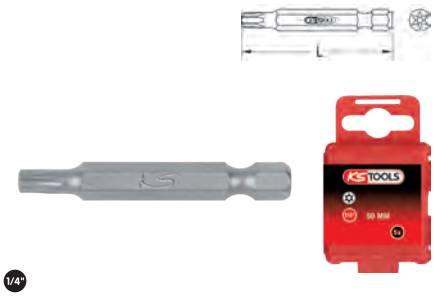

1/4"

		L mm	Content	g
911.2770	TB7	50.0	1	10
911.2771	TB7	50.0	5	60
911.2773	TB8	50.0	1	10
911.2774	TB8	50.0	5	60
911.2776	TB9	50.0	1	10
911.2777	TB9	50.0	5	60
911.2779	TB10	50.0	1	10
911.2780	TB10	50.0	5	60
911.2782	TB15	50.0	1	10
911.2783	TB15	50.0	5	60
911.2785	TB20	50.0	1	10
911.2786	TB20	50.0	5	60
911.2788	TB25	50.0	1	10
911.2789	TB25	50.0	5	60
911.2791	TB27	50.0	1	10
911.2792	TB27	50.0	5	60
911.2794	TB30	50.0	1	12
911.2795	TB30	50.0	5	74
911.2797	TB40	50.0	1	12
911.2798	TB40	50.0	5	74

1/4“ CLASSIC BITS 75 mm

CLASSIC bit for slotted screws

- Slotted
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

1/4"

	mm	L mm	Content	g
911.7533	3.0	75.0	1	20
911.7733	3.0	75.0	5	110
911.7534	4.0	75.0	1	20
911.7734	4.0	75.0	5	110
911.7535	5.0	75.0	1	20
911.7735	5.0	75.0	5	110
911.7536	6.0	75.0	1	20
911.7736	6.0	75.0	5	110
911.7537	7.0	75.0	1	17
911.7737	7.0	75.0	5	108

CLASSIC bit for hexagon screws

- Hexagon socket
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

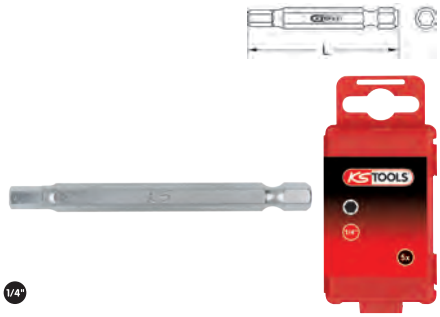

1/4"

	mm	L mm	Content	g
911.7558	2,0	75.0	1	20
911.7758	2,0	75.0	5	110
911.7559	2,5	75.0	1	20
911.7759	2,5	75.0	5	110
911.7560	3,0	75.0	1	20
911.7760	3,0	75.0	5	110
911.7561	4,0	75.0	1	20
911.7761	4,0	75.0	5	110
911.7562	5,0	75.0	1	20
911.7762	5,0	75.0	5	110
911.7563	6,0	75.0	1	20
911.7763	6,0	75.0	5	110

CLASSIC bit for phillips screws PH

- PH
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

1/4"

		L mm	Content	g
911.7530	PH1	75.0	1	20
911.7730	PH1	75.0	5	110
911.7531	PH2	75.0	1	20
911.7731	PH2	75.0	5	110
911.7539	PH3	75.0	1	20
911.7739	PH3	75.0	5	110

CLASSIC bit for phillips screws PZ

- PZ
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

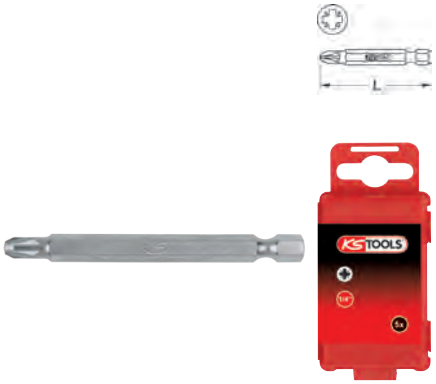

1/4"

		L mm	Content	g	
911.7527	PZ1	75.0	1	20	
911.7727	PZ1	75.0	5	110	
911.7528	PZ2	75.0	1	20	
911.7728	PZ2	75.0	5	110	
911.7529	PZ3	75.0	1	20	
911.7729	PZ3	75.0	5	110	

CLASSIC bit for TX screws

- TX
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

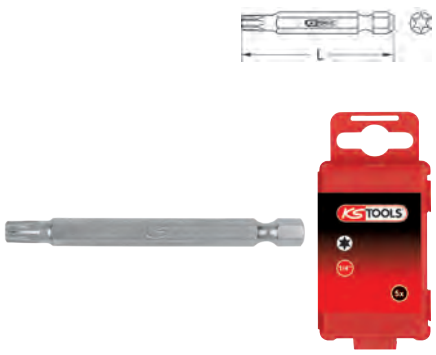

1/4"

		L mm	Content	g	
911.3377	T7	75.0	1	20	
911.3378	T7	75.0	5	110	
911.3379	T8	75.0	1	20	
911.3380	T8	75.0	5	110	
911.3381	T9	75.0	1	20	
911.3382	T9	75.0	5	110	
911.7551	T10	75.0	1	20	
911.7751	T10	75.0	5	110	
911.7552	T15	75.0	1	20	
911.7752	T15	75.0	5	110	
911.7553	T20	75.0	1	20	
911.7753	T20	75.0	5	110	
911.7554	T25	75.0	1	20	
911.7754	T25	75.0	5	110	
911.7555	T27	75.0	1	20	
911.7755	T27	75.0	5	110	
911.7556	T30	75.0	1	17	
911.7756	T30	75.0	5	108	
911.7557	T40	75.0	1	18	
911.7757	T40	75.0	5	108	

CLASSIC bit for TX tamperproof screws

- For tamperproof TX
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

1/4"

		L mm	Content	g	
911.7501	TB8	75.0	1	20	
911.7701	TB8	75.0	5	110	
911.7502	TB10	75.0	1	20	
911.7702	TB10	75.0	5	110	
911.7503	TB15	75.0	1	20	
911.7703	TB15	75.0	5	110	
911.7504	TB20	75.0	1	20	
911.7704	TB20	75.0	5	110	
911.7505	TB25	75.0	1	20	
911.7705	TB25	75.0	5	110	
911.7506	TB27	75.0	1	20	
911.7706	TB27	75.0	5	110	
911.7507	TB30	75.0	1	18	
911.7707	TB30	75.0	5	107	
911.7508	TB35	75.0	1	18	
911.7708	TB35	75.0	5	107	
911.7509	TB40	75.0	1	18	
911.7709	TB40	75.0	5	107	

CLASSIC bit for hexagon tamperproof screws

- Tamperproof hexagon
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

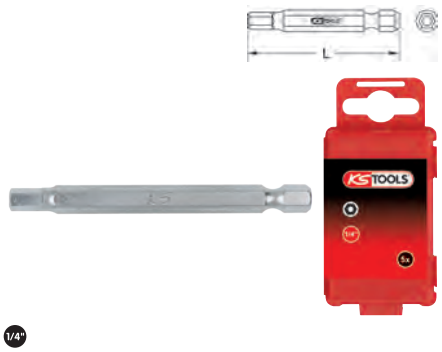

1/4"

	mm	L mm	Content	g	
911.7510	2,0	75.0	1	20	
911.7710	2,0	75.0	5	110	
911.7511	2,5	75.0	1	20	
911.7711	2,5	75.0	5	110	
911.7512	3,0	75.0	1	20	
911.7712	3,0	75.0	5	110	
911.7513	4,0	75.0	1	20	
911.7713	4,0	75.0	5	110	
911.7514	5,0	75.0	1	20	
911.7714	5,0	75.0	5	110	
911.7515	6,0	75.0	1	20	
911.7715	6,0	75.0	5	110	

CLASSIC bit for security screws

- Security
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

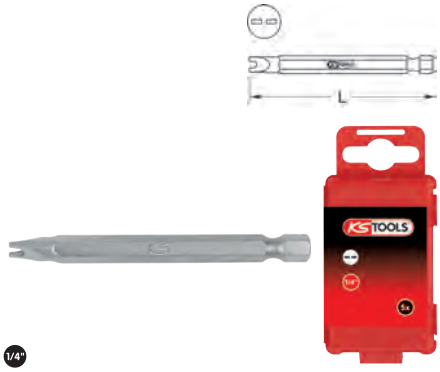

1/4"

	mm	L mm	Content	g	
911.7523	4.0	75.0	1	20	
911.7723	4.0	75.0	5	110	
911.7524	6.0	75.0	1	20	
911.7724	6.0	75.0	5	110	
911.7525	8.0	75.0	1	18	
911.7725	8.0	75.0	5	108	
911.7526	10.0	75.0	1	18	
911.7726	10.0	75.0	5	108	

CLASSIC bit for Torq® screws

- Torq®
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

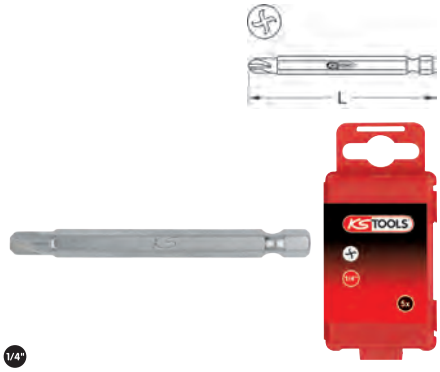

1/4"

	mm	L mm	Content	g	
911.7516	6.0	75.0	1	20	
911.7716	6.0	75.0	5	110	
911.7517	8.0	75.0	1	17	
911.7717	8.0	75.0	5	18	
911.7518	10.0	75.0	1	18	
911.7718	10.0	75.0	5	18	

CLASSIC bit for TRIWING® scr ews

- TRIWING®
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Nickel plated
- Special steel

1/4"

	mm	L mm	Content	g
911.7519	4,0	75.0	1	20
911.7719	4,0	75.0	5	110
911.7520	6,0	75.0	1	20
911.7720	6,0	75.0	5	110
911.7521	8,0	75.0	1	18
911.7721	8,0	75.0	5	18
911.7522	10,0	75.0	1	18
911.7722	10,0	75.0	5	20

1/4“ CLASSIC BIT SETS 75 mm

CLASSIC bit set

- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Orderly arrangement of the popular 1/4" bits
- Nickel plated
- Special steel
- In durable plastic storage case

1/4"

		kg
911.7550	32 pcs CLASSIC bit set	0.67
4 x	4 - 5 - 6 - 7 mm	
6 x	1 x PH1 - 3 x PH2 - 2 x PH3	
9 x	2 x PZ1 - 4 x PZ2 - 3 x PZ3	
6 x	2 - 2,5 - 3 - 4 - 5 - 6 mm	
7 x	T10 - T15 - T20 - T25 - T27 - T30 - T40	

CLASSIC bit set

- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Orderly arrangement of the popular 1/4" security bits
- Nickel plated
- Special steel
- In durable plastic storage case

1/4"

		kg
911.7532	32 pcs CLASSIC bit set	0.65
1 x	6 mm	
2 x	PH1 - PH2	
3 x	PZ1 - PZ2 - PZ3	
6 x	2 - 2,5 - 3 - 4 - 5 - 6 mm	
9 x	TB8 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB35 - TB40	
4 x	#1 - #2 - #3 - #4	
4 x	4 - 6 - 8 - 10 mm	
3 x	6 - 8 - 10 mm	

CLASSIC bit set

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes quick release bit holder
- Ideally suited for fi tings in trade and industry
- Orderly arrangement of the popular 1/4" bits
- Sand blasted
- Special steel
- In durable plastic storage case

1/4"

		kg
911.2031	113 pcs CLASSIC bit set	1.17
1 x	1/4“	
1 x	1/4“	
3 x	PH2	
3 x	PZ2	
7 x	T10 - T15 - 3 x T20 - T25 - T30	
14 x	7 x 4 - 7 x 6 mm	
21 x	7 x PH1 - 7 x PH2 - 7 x PH3	
21 x	7 x PZ1 - 7 x PZ2 - 7 x PZ3	
21 x	7 x 4 - 7 x 5 - 7 x 6 mm	
14 x	2 x T10 - 2 x T15 - 2 x T20 - 2 x T25 - 2 x T27 - 2 x T30 - 2 x T40	
7 x	TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	

CLASSIC bit set

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Includes bitholder and 1/4” socket adapter
- Ideally suited for fi tings in trade and industry
- Orderly arrangement of the popular 1/4” bits
- Sand blasted
- Special steel
- In durable plastic storage case

1/4"

		kg
911.2027	99 pcs CLASSIC bit set	0.75
1 x	1/4“	
1 x	1/4“	
1 x	1/4“	
9 x	3 - 4 - 4,5 - 5 - 5,5 - 6 - 6,5 - 7 - 8	
5 x	PH0 - PH1 - 2 x PH2 - PH3	
5 x	PZ0 - PZ1 - 2 x PZ2 - PZ3	
9 x	1,5 - 2 - 2,5 - 3 - 4 - 5 - 5,5 - 6 - 8	
6 x	2 - 2,5 - 3 - 4 - 5 - 6	
6 x	5/64“ - 3/32“ - 7/64“ -1/8“ - 9/64“ - 5/32“	
9 x	T8 - T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45	
9 x	TB8 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB35 - TB40	
3 x	M5 - M6 - M8	
3 x	#1 - #2 - #3	
4 x	#1 - #2 - #3 - #4	
4 x	4 - 6 - 8 - 10 mm	
3 x	6 - 8 - 10 mm	
4 x	#0 - #1 - #2 - #3	
3 x	4 - 5 - 6 mm	
3 x	TB15 - TB20 - TB30	
4 x	#1 - #2 - #3 - 4 #	
4 x	4 - 6 - 8 - 10 mm	
3 x	6 - 8 - 10 mm	

1/4" TIN BITS 25 mm

TIN bit for slotted screws

- Slotted
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Extreme hard coating
- Especially for constant load during industrial applications
- Titanium nitride coated
- Special steel

1/4"

		L mm	Content	g
911.2620	4,0	25.0	1	5
911.2621	4,0	25.0	5	35
911.2622	5,5	25.0	1	6
911.2623	5,5	25.0	5	40
911.2632	6,5	25.0	1	6
911.2633	6,5	25.0	5	40
911.2634	8,0	25.0	1	6
911.2635	8,0	25.0	5	40

TIN bit for hexagon screws

- Hexagon socket
- With external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Extreme hard coating
- Especially for constant load during industrial applications
- Titanium nitride coated
- Special steel

1/4"

	mm	L mm	Content	g
911.3664	2,0	25.0	1	6
911.3665	2,0	25.0	5	40
911.3666	2,5	25.0	1	6
911.3667	2,5	25.0	5	40
911.3668	3,0	25.0	1	6
911.3669	3,0	25.0	5	40
911.3670	4,0	25.0	1	6
911.3671	4,0	25.0	5	40
911.3672	5,0	25.0	1	6
911.3673	5,0	25.0	5	40
911.3674	6,0	25.0	1	6
911.3675	6,0	25.0	5	40
911.3676	8,0	25.0	1	8
911.3677	8,0	25.0	5	55
911.3678	10,0	25.0	1	10
911.3679	10,0	25.0	5	65

TIN bit for Phillips screws PH

- PH
- With external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Extreme hard coating
- Especially for constant load during industrial applications
- Titanium nitride coated
- Special steel

1/4"

		L mm	Content	g
911.2636	PH1	25.0	1	5
911.2637	PH1	25.0	5	35
911.2638	PH2	25.0	1	6
911.2639	PH2	25.0	5	40
911.2640	PH3	25.0	1	6
911.2641	PH3	25.0	5	40

TIN bit for Phillips screws PZ

- PZ
- With external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Extreme hard coating
- Especially for constant load during industrial applications
- Titanium nitride coated
- Special steel

1/4"

		L mm	Content	g
911.2648	PZ1	25.0	1	5
911.2649	PZ1	25.0	5	35
911.2624	PZ2	25.0	1	6
911.2625	PZ2	25.0	5	40
911.2626	PZ3	25.0	1	6
911.2627	PZ3	25.0	5	40

TIN bit for TX screws

- TX
- With external hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Extreme hard coating
- Especially for constant load during industrial applications
- Titanium nitride coated
- Special steel

1/4"

		L mm	Content	g
911.3650	T10	25.0	1	6
911.3651	T10	25.0	5	40
911.3652	T15	25.0	1	6
911.3653	T15	25.0	5	40
911.3654	T20	25.0	1	6
911.3655	T20	25.0	5	40
911.3656	T25	25.0	1	6
911.3657	T25	25.0	5	40
911.3658	T27	25.0	1	6
911.3659	T27	25.0	5	40
911.3660	T30	25.0	1	6
911.3661	T30	25.0	5	40
911.3662	T40	25.0	1	6
911.3663	T40	25.0	5	40

1/4" TIN BITS 50 mm

TIN bit for phillips screws PH

- PH
- External hexagon drive to DIN 3126 / ISO 1173 form C 8
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Extreme hard coating
- Especially for constant load during industrial applications
- Titanium nitride coated
- Special steel

1/4"

		L mm	Content	g
911.2642	PH1	50.0	1	10
911.2643	PH1	50.0	5	60
911.2644	PH2	50.0	1	10
911.2645	PH2	50.0	5	60
911.2646	PH3	50.0	1	10
911.2647	PH3	50.0	5	60

TIN bit for phillips screws PZ

- PZ
- External hexagon drive to DIN 3126 / ISO 1173 - E 6,3
- Can be used by hand or with and electric screwdriver
- Ideally suited for fi tings in trade and industry
- Extreme hard coating
- Especially for constant load during industrial applications
- Titanium nitride coated
- Special steel

1/4"

		L mm	Content	g
911.3641	PZ1	50.0	1	10
911.3642	PZ1	50.0	5	60
911.3643	PZ2	50.0	1	10
911.3644	PZ2	50.0	5	60
911.3645	PZ3	50.0	1	10
911.3646	PZ3	50.0	5	60

1/4" TORSION*power* BITS 25 mm

TORSION*power* bit for slotted screws

- Slotted
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Colour coding
- Ideally suited for fi tings in trade and industry
- With torsion zone
- To cushion high level torque
- Longer service life
- Nickel plated
- Special steel

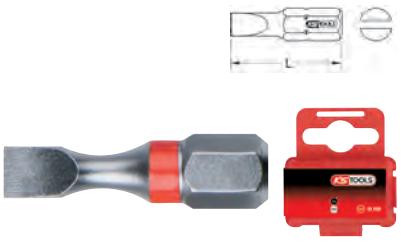

1/4"

	mm	L mm	Content	g
918.3305	3.0	25.0	1	4
918.3306	3.0	25.0	5	40
918.3310	4.0	25.0	1	4
918.3311	4.0	25.0	5	40
918.3315	5.0	25.0	1	5
918.3316	5.0	25.0	5	40
918.3320	6.0	25.0	1	5
918.3321	6.0	25.0	5	40

TORSION*power* bit for hexagon screws

- Hexagon socket
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Colour coding
- Ideally suited for fi tings in trade and industry
- With torsion zone
- To cushion high level torque
- Longer service life
- Nickel plated
- Special steel

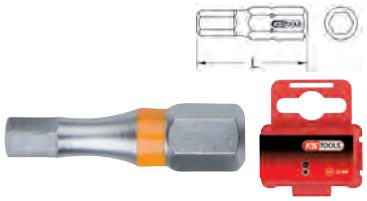

1/4"

	mm	L mm	Content	g
918.3405	3	25.0	1	10
918.3406	3	25.0	5	40
918.3410	4	25.0	1	4
918.3411	4	25.0	5	40
918.3415	5	25.0	1	6
918.3416	5	25.0	5	40
918.3420	6	25.0	1	6
918.3421	6	25.0	5	40

TORSION*power* bit for phillips screws PH

- PH
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Colour coding
- Ideally suited for fi tings in trade and industry
- With torsion zone
- To cushion high level torque
- Longer service life
- Nickel plated
- Special steel

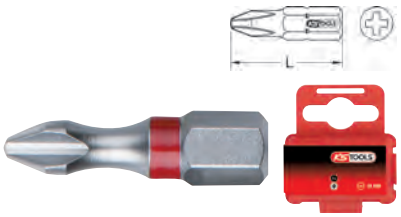

1/4"

		L mm	Content	g
918.3105	PH1	25.0	1	4
918.3106	PH1	25.0	5	28
918.3110	PH2	25.0	1	4
918.3111	PH2	25.0	5	40
918.3115	PH3	25.0	1	5
918.3116	PH3	25.0	5	40

TORSION*power* bit for phillips screws PZ

- PZ
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Colour coding
- Ideally suited for fi tings in trade and industry
- With torsion zone
- To cushion high level torque
- Longer service life
- Nickel plated
- Special steel

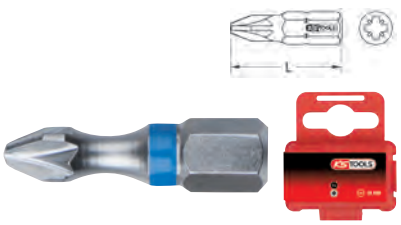

1/4"

		L mm	Content	g
918.3205	PZ1	25.0	1	4
918.3206	PZ1	25.0	5	40
918.3210	PZ2	25.0	1	4
918.3211	PZ2	25.0	5	40
918.3215	PZ3	25.0	1	5
918.3216	PZ3	25.0	5	40

TORSION*power* bit for TX screws

- TX
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Colour coding
- Ideally suited for fi tings in trade and industry
- With torsion zone
- To cushion high level torque
- Longer service life
- Nickel plated
- Special steel

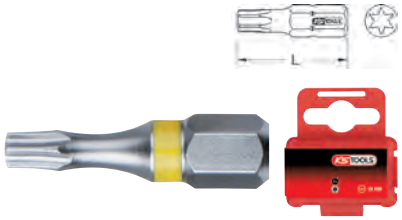

1/4"

		L mm	Content	g
918.3505	T10	25.0	1	4
918.3506	T10	25.0	5	40
918.3510	T15	25.0	1	4
918.3511	T15	25.0	5	40
918.3515	T20	25.0	1	4
918.3516	T20	25.0	5	40
918.3520	T25	25.0	1	4
918.3521	T25	25.0	5	40
918.3525	T27	25.0	1	5
918.3526	T27	25.0	5	40
918.3530	T30	25.0	1	5
918.3531	T30	25.0	5	34
918.3535	T40	25.0	1	6
918.3536	T40	25.0	5	37

TORSION*power* bit for TX tamperproof screws

- For tamperproof TX
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Tamperproof
- Colour coding
- Ideally suited for fi tings in trade and industry
- With torsion zone
- To cushion high level torque
- Longer service life
- Nickel plated
- Special steel

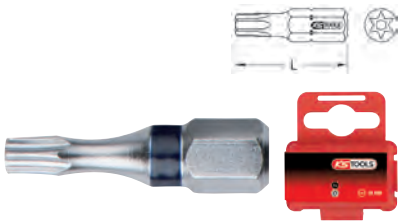

1/4"

		L mm	Content	g
918.3605	TB10	25.0	1	4
918.3606	TB10	25.0	5	40
918.3610	TB15	25.0	1	4
918.3611	TB15	25.0	5	40
918.3615	TB20	25.0	1	4
918.3616	TB20	25.0	5	40
918.3620	TB25	25.0	1	4
918.3621	TB25	25.0	5	40
918.3625	TB27	25.0	1	5
918.3626	TB27	25.0	5	40
918.3630	TB30	25.0	1	5
918.3631	TB30	25.0	5	32
918.3635	TB40	25.0	1	6
918.3636	TB40	25.0	5	36

1/4" TORSION*power* BITS 75 mm

TORSION*power* bit for slotted screws

- Slotted
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Colour coding
- Ideally suited for fi tings in trade and industry
- With torsion zone
- To cushion high level torque
- Longer service life
- Nickel plated
- Special steel

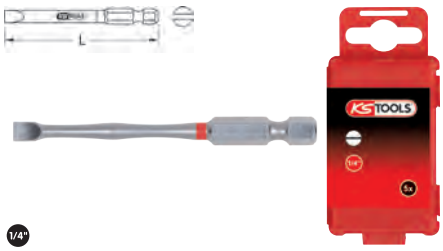

1/4"

	mm	L mm	Content	g	
918.3350	3.0	75.0	1	20	
918.3351	3.0	75.0	5	9	
918.3355	4.0	75.0	1	20	
918.3356	4.0	75.0	5	9	
918.3360	5.0	75.0	1	20	
918.3361	5.0	75.0	5	11	
918.3365	6.0	75.0	1	20	
918.3366	6.0	75.0	5	14	

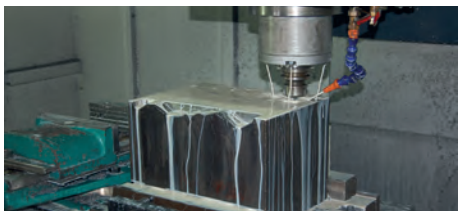

TORSION*power* bit for hexagon screws

- Hexagon socket
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Colour coding
- Ideally suited for fi tings in trade and industry
- With torsion zone
- To cushion high level torque
- Longer service life
- Nickel plated
- Special steel

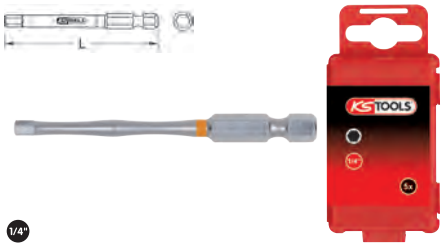

1/4"

	mm	L mm	Content	g	
918.3450	3	75.0	1	20	
918.3451	3	75.0	5	1	
918.3455	4	75.0	1	20	
918.3456	4	75.0	5	12	
918.3460	5	75.0	1	20	
918.3461	5	75.0	5	15	
918.3465	6	75.0	1	20	
918.3466	6	75.0	5	18	

TORSION*power* bit for phillips screws PH

- PH
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Colour coding
- Ideally suited for fi tings in trade and industry
- With torsion zone
- To cushion high level torque
- Longer service life
- Nickel plated
- Special steel

1/4"

		L mm	Content	g	
918.3150	PH1	75.0	1	20	
918.3151	PH1	75.0	5	69	
918.3155	PH2	75.0	1	20	
918.3156	PH2	75.0	5	81	
918.3160	PH3	75.0	1	20	
918.3161	PH3	75.0	5	89	

TORSION*power* bit for phillips screws PZ

- PZ
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Colour coding
- Ideally suited for fi tings in trade and industry
- With torsion zone
- To cushion high level torque
- Longer service life
- Nickel plated
- Special steel

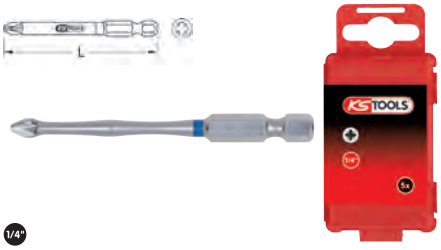

1/4"

		L mm	Content	g	
918.3250	PZ1	75.0	1	20	
918.3251	PZ1	75.0	5	69	
918.3255	PZ2	75.0	1	20	
918.3256	PZ2	75.0	5	80	
918.3260	PZ3	75.0	1	20	
918.3261	PZ3	75.0	5	89	

TORSION*power* bit for TX screws

- TX
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Colour coding
- Ideally suited for fi tings in trade and industry
- With torsion zone
- To cushion high level torque
- Longer service life
- Nickel plated
- Special steel

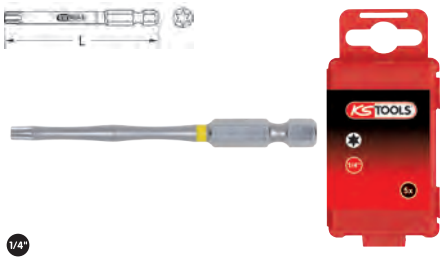

1/4"

		L mm	Content	g	
918.3550	T10	75.0	1	20	
918.3551	T10	75.0	5	27	
918.3555	T15	75.0	1	20	
918.3556	T15	75.0	5	28	
918.3560	T20	75.0	1	20	
918.3561	T20	75.0	5	29	
918.3565	T25	75.0	1	20	
918.3566	T25	75.0	5	30	
918.3570	T27	75.0	1	20	
918.3571	T27	75.0	5	33	
918.3575	T30	75.0	1	15	
918.3576	T30	75.0	5	90	
918.3580	T40	75.0	1	17	
918.3581	T40	75.0	5	103	

TORSION*power* bit for TX tamperproof screws

- For tamperproof TX
- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Tamperproof
- Colour coding
- Ideally suited for fi tings in trade and industry
- With torsion zone
- To cushion high level torque
- Longer service life
- Nickel plated
- Special steel

1/4"

		L mm	Content	g	
918.3650	TB10	75.0	1	20	
918.3651	TB10	75.0	5	65	
918.3655	TB15	75.0	1	20	
918.3656	TB15	75.0	5	65	
918.3660	TB20	75.0	1	20	
918.3661	TB20	75.0	5	71	
918.3665	TB25	75.0	1	20	
918.3666	TB25	75.0	5	78	
918.3670	TB27	75.0	1	20	
918.3671	TB27	75.0	5	86	
918.3675	TB30	75.0	1	15	
918.3676	TB30	75.0	5	89	
918.3680	TB40	75.0	1	17	
918.3681	TB40	75.0	5	101	

1/4" TORSION*power* BIT SETS

TORSION*power* Bit-Box

- External hexagon drive to DIN 3126 / ISO 1173 - C 6,3
- Can be used by hand or with and electric screwdriver
- Colour coding
- Includes magnetic quick release bit holder and 1/4" socket adapter
- Ideally suited for fi tings in trade and industry
- Practical belt holder
- Precise and orderly arrangement of the popular 1/4" bits
- Nickel plated
- Special steel
- Includes durable two component storage case

1/4"

			g	
918.3010	32 pcs	TORSION*power* Bit-Box	353	

1 x		1/4“
1 x		1/4“
4 x		3 - 4 - 5 - 6 mm
4 x		1 x PH1 - 2 x PH2 - 1 x PH3
4 x		1 x PZ1 - 2 x PZ2 - 1 x PZ3
4 x		3 - 4 - 5 - 6 mm
7 x		T10 - T15 - T20 - T25 - T27 - T30 - T40
7 x		TB10 - TB15 - TB20 - TB25 - TB27 TB30 - TB40

5/16“ CLASSIC BITS

CLASSIC bit for slotted screws

- Slotted
- External hexagon drive to DIN 3126 / ISO 1173 form C 8
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Nickel plated
- Special steel

5/16"

	mm	L mm	Content	g	
911.3680	5.5	30.0	1	10	
911.3681	6.5	30.0	1	10	
911.3682	7.0	30.0	1	10	
911.5141	8.0	30.0	1	10	
911.3683	9.0	30.0	1	10	
911.5142	10.0	30.0	1	10	
911.5143	12.0	30.0	1	10	
911.3684	14.0	30.0	1	10	
911.3685	16.0	30.0	1	10	
911.3686	18.0	30.0	1	10	
911.3687	20.0	30.0	1	10	

CLASSIC bit for phillips screws PH

- PH
- External hexagon drive to DIN 3126 / ISO 1173 form C 8
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Nickel plated
- Special steel

5/16"

		L mm	Content	g	
911.5132	PH1	30.0	1	10	
911.5133	PH2	30.0	1	10	
911.5134	PH3	30.0	1	10	
911.5135	PH4	30.0	1	10	

CLASSIC bit for phillips screws PZ

- PZ
- External hexagon drive to DIN 3126 / ISO 1173 form C 8
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Nickel plated
- Special steel

5/16"

		L mm	Content	g	
911.5121	PZ1	30.0	1	10	
911.5122	PZ2	30.0	1	10	
911.5123	PZ3	30.0	1	10	
911.5124	PZ4	30.0	1	10	

CLASSIC bit for hexagon screws

- Hexagon socket
- External hexagon drive to DIN 3126 / ISO 1173 form C 8
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Nickel plated
- Special steel

5/16"

	mm	L mm	Content	g	
911.3695	3,0	30.0	1	10	
911.3696	4,0	30.0	1	10	
911.3697	5,0	30.0	1	10	
911.5126	6,0	30.0	1	10	
911.5127	7,0	30.0	1	10	
911.5128	8,0	30.0	1	10	
911.5129	10,0	30.0	1	10	
911.5130	12,0	30.0	1	10	
911.5131	14,0	30.0	1	10	

CLASSIC bit for spline screws

- Spline
- External hexagon drive to DIN 3126 / ISO 1173 form C 8
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Nickel plated
- Special steel

5/16"

		L mm	Content	g	
911.5154	M4	30.0	1	10	
911.5155	M5	30.0	1	10	
911.5156	M6	30.0	1	10	
911.5157	M8	30.0	1	10	
911.5158	M10	30.0	1	10	
911.5159	M12	30.0	1	10	
911.3698	M14	30.0	1	10	

CLASSIC bit for TX screws

- TX
- External hexagon drive to DIN 3126 / ISO 1173 form C 8
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Nickel plated
- Special steela

5/16"

		L mm	Content	g	
911.3688	T20	30.0	1	10	
911.3689	T25	30.0	1	10	
911.3690	T27	30.0	1	10	
911.3691	T30	30.0	1	10	
911.5144	T40	30.0	1	10	
911.5145	T45	30.0	1	10	
911.5146	T50	30.0	1	10	
911.5147	T55	30.0	1	10	
911.5148	T60	30.0	1	10	
911.5149	T70	30.0	1	15	

CLASSIC bit for TX tamperproof screws

- For tamperproof TX
- External hexagon drive to DIN 3126 / ISO 1173 form C 8
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Nickel plated
- Special steel

5/16"

		L mm	Content	g	
911.3692	TB25	30.0	1	10	
911.3693	TB27	30.0	1	10	
911.3694	TB30	30.0	1	10	
911.5136	TB40	30.0	1	10	
911.5137	TB45	30.0	1	10	
911.5138	TB50	30.0	1	10	
911.5139	TB55	30.0	1	10	
911.5140	TB60	30.0	1	10	
911.5152	TB70	30.0	1	15	

CLASSIC bit for RIBE® screws

- RIBE®
- External hexagon drive to DIN 3126 / ISO 1173 form C 8
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Phosphate finis
- Special steel

5/16"

		L mm	Content	g
911.3699	M4	38.0	1	10
911.5165	M5	38.0	1	10
911.5166	M6	38.0	1	10
911.5167	M7	38.0	1	10
911.5168	M8	38.0	1	20
911.5169	M10	38.0	1	20
911.5170	M12	38.0	1	30
911.3754	M14	38.0	1	30

CLASSIC bit for RIBE® screws

- RIBE®
- External hexagon drive to DIN 3126 / ISO 1173 form C 8
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Phosphate finis
- Special steel

5/16"

		L mm	Content	g
911.5171	M7	100.0	1	40
911.5172	M8	100.0	1	50
911.5173	M9	100.0	1	60
911.5174	M10	100.0	1	70
911.5175	M12	100.0	1	80
911.5176	M13	100.0	1	90
911.5177	M14	100.0	1	100

5/16“ CLASSIC BIT SETS

CLASSIC Bit set

- Ideal set compilation for RIBE® screws
- External hexagon drive to DIN 3126 / ISO 1173 form C 8
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Precise arrangement of the popular 5/16" RIBE® bits
- Phosphate finis
- Special steel
- In durable plastic storage case

5/16"

			kg
911.4306	14 pcs	CLASSIC Bit set	0.82
1 x		1/2“	
6 x		M5 - M6 - M7 - M8 - M10 - M12	
7 x		M7 - M8 - M9 - M10 - M12 - M13 M14	

10 mm CLASSIC BITS 30 mm

CLASSIC bit for slotted screws

- Slotted
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

10 mm

	mm	L mm	Content	g
930.3015	8.0	30.0	1	40
930.3016	10.0	30.0	1	40

CLASSIC bit for phillips screws PH

- PH
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced executionv
- Sand-blasted
- Special steel

10 mm

		L mm	Content	g
930.3019	PH1	30.0	1	40
930.3017	PH2	30.0	1	40
930.3018	PH3	30.0	1	40

CLASSIC bit for phillips screws PZ

- PZ
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

10 mm

		L mm	Content	g
930.3020	PZ1	30.0	1	40
930.3021	PZ2	30.0	1	40
930.3022	PZ3	30.0	1	40

CLASSIC bit for hexagon screws

- Hexagon socket
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

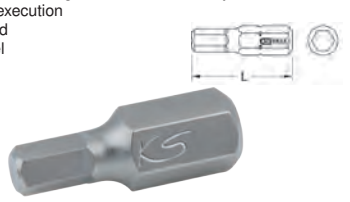

10 mm

	mm	L mm	Content	g
930.1004	4,0	30.0	1	40
930.1005	5,0	30.0	1	40
930.1006	6,0	30.0	1	40
930.1007	7,0	30.0	1	40
930.1008	8,0	30.0	1	40
930.1010	10,0	30.0	1	40
930.1012	12,0	30.0	1	40

CLASSIC bit for spline screws

- Spline
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

10 mm

		L mm	Content	g
930.3005	M5	30.0	1	40
930.3006	M6	30.0	1	12
930.3008	M8	30.0	1	40
930.3010	M10	30.0	1	40
930.3012	M12	30.0	1	40

CLASSIC bit for TX screws

- TX
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

10 mm

		L mm	Content	g
930.2010	T10	30.0	1	40
930.2015	T15	30.0	1	40
930.2020	T20	30.0	1	40
930.2025	T25	30.0	1	40
930.2027	T27	30.0	1	40
930.2030	T30	30.0	1	40
930.2040	T40	30.0	1	40
930.2045	T45	30.0	1	40
930.2050	T50	30.0	1	40
930.2055	T55	30.0	1	40
930.2060	T60	30.0	1	40

CLASSIC bit for TX PLUS screws

- TX PLUS
- With external hexagon drive to DIN 3126 / ISO 1173 Form C 8
- Can be used by hand or with an electric screwdriver
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

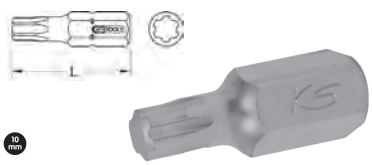

10 mm

		L mm	Content	g
911.3260	IP 40	30.0	1	13
911.3261	IP 45	30.0	1	14
911.3262	IP 50	30.0	1	16
911.3263	IP 55	30.0	1	20
911.3264	IP 60	30.0	1	25

CLASSIC bit for TX tamperproof screws

- For tamperproof TX
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

		L mm	Content	g	
930.2110	TB10	30.0	1	40	
930.2115	TB15	30.0	1	40	
930.2120	TB20	30.0	1	40	
930.2125	TB25	30.0	1	40	
930.2127	TB27	30.0	1	40	
930.2130	TB30	30.0	1	40	
930.2140	TB40	30.0	1	40	
930.2145	TB45	30.0	1	40	
930.2150	TB50	30.0	1	40	
930.2155	TB55	30.0	1	40	
930.2160	TB60	30.0	1	40	

CLASSIC bit for tamper proof fi e star bits

- Five star bit, tamperproof
- With 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

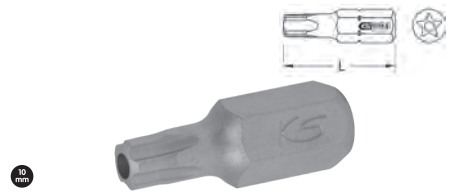

		L mm	Content	g	
911.3121	TS40	30.0	1	10	
911.3122	TS45	30.0	1	11	
911.3123	TS50	30.0	1	11	
911.3124	TS55	30.0	1	13	
911.3125	TS60	30.0	1	22	

10 mm CLASSIC BITS 75 mm

CLASSIC bit for hexagon screws

- Hexagon socket
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

	mm	L mm	Content	g	
975.1004	4,0	75.0	1	70	
975.1005	5,0	75.0	1	70	
975.1006	6,0	75.0	1	43	
975.1007	7,0	75.0	1	70	
975.1008	8,0	75.0	1	70	
975.1010	10,0	75.0	1	70	
975.1012	12,0	75.0	1	70	

CLASSIC bit for spline screws

- Spline
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

		L mm	Content	g	
975.3005	M5	75.0	1	70	
975.3006	M6	75.0	1	70	
975.3008	M8	75.0	1	70	
975.3010	M10	75.0	1	70	
975.3012	M12	75.0	1	70	

CLASSIC bit for TX screws

- TX
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

		L mm	Content	g	
975.2010	T10	75.0	1	70	
975.2015	T15	75.0	1	70	
975.2020	T20	75.0	1	70	
975.2025	T25	75.0	1	70	
975.2027	T27	75.0	1	70	
975.2030	T30	75.0	1	70	
975.2040	T40	75.0	1	70	
975.2045	T45	75.0	1	70	
975.2050	T50	75.0	1	70	
975.2055	T55	75.0	1	70	
975.2060	T60	75.0	1	70	
975.2075	T70	75.0	1	70	

CLASSIC bit for TX tamperproof screws

- For tamperproof TX
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

		L mm	Content	g	
975.2110	TB10	75.0	1	70	
975.2115	TB15	75.0	1	70	
975.2120	TB20	75.0	1	70	
975.2125	TB25	75.0	1	70	
975.2127	TB27	75.0	1	70	
975.2130	TB30	75.0	1	70	
975.2140	TB40	75.0	1	70	
975.2145	TB45	75.0	1	70	
975.2150	TB50	75.0	1	70	
975.2155	TB55	75.0	1	70	
975.2160	TB60	75.0	1	70	

10 mm CLASSIC BITS 120 mm

CLASSIC bit for TX screws

- TX
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Sand-blasted
- Special steel

		L mm	Content	g	
975.4040	T40	120.0	1	80	
975.4045	T45	120.0	1	80	
975.4050	T50	120.0	1	80	
975.4055	T55	120.0	1	80	

10 mm CLASSIC BIT SETS

CLASSIC bit set

- Ideal set compilation for TX screws
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Includes 1/2" socket adapter for 10 mm bits
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Precise arrangement of the popular 10 mm TX bits
- Sand-blasted
- Special steel
- In durable steel storage case

			kg	
911.5020	15 pcs	CLASSIC bit set	0.58	
1 x		1/2" x 10 mm		
7 x		T20 - T25 - T30 - T40 - T45 - T50 - T55		
7 x		T20 - T25 - T30 - T40 - T45 - T50 - T55		

CLASSIC bit set

- Ideal set compilation for hexagon socket screws
- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Includes 1/2" socket adapter for 10 mm bits
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Precise arrangement of the popular 10 mm hexagon socket bits
- Sand-blasted
- Special steel
- In durable steel storage case

				kg
911.5040	15 pcs	CLASSIC bit set		0.58
1 x			1/2“ x 10 mm	
7 x			4 - 5 - 6 - 7 - 8 - 10 - 12 mm	
7 x			4 - 5 - 6 - 7 - 8 - 10 - 12 mm	

CLASSIC bit set

- Ideal set for spline screws
- With 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Includes 1/2" socket adapter for 10 mm bits
- Ideally suited for fi tings in trade and industry
- Sand-blasted
- Special steel
- In durable plastic storage case

				kg
911.5030	11 pcs	CLASSIC bit set		0.60
1 x			1/2“ x 10 mm	
5 x			M5 - M6 - M8 - M10 - M12	
5 x			M5 - M6 - M8 - M10 - M12	

CLASSIC bit set

- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Includes 3/8" + 1/2" socket adapter for 10 mm bits
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Precise arrangement of the popular 10 mm bits
- Sand-blasted
- Special steel
- In durable steel storage case

				kg
911.4304	42 pcs	CLASSIC bit set		1.60
2 x			3/8“ - 1/2“	
7 x			4 - 5 - 6 - 7 - 8 - 10 - 12 mm	
8 x			T20 - T25 - T30 - T40 - T45 - T50 T55 - T60	
5 x			M5 - M6 - M8 - M10 - M12	
2 x			8 - 10 mm	
2 x			PH2 - PH3	
4 x			5 - 6 - 8 - 10 mm	
8 x			T20 - T25 - T30 - T40 - T45 - T50 T55 - T60	
4 x			M6 - M8 - M10 - M12	

TX Socket and bit set

- Matt finis
- Chrome vanadium
- In durable plastic case

				kg
911.4305	57 pcs	TX Socket and bit set		2.00
2 x			3/8“ x 10mm - 1/2“ x 1/4“	
12 x			1/4“: E4 - E5 - E6 - E7 - E8; 3/8“: E10 - E11 - E12 - E14;1/2“: E16 - E18 - E20	
7 x			4 - 5 - 6 - 7 - 8 - 10 - 12 mm	
9 x			TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50 - TB55 - TB60	
5 x			M5 - M6 - M8 - M10 - M12	
2 x			8 - 10 mm	
2 x			PH2 - PH3	
5 x			5 - 6 - 7 - 8 - 10 mm	
9 x			T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60	
4 x			M6 - M8 - M10 - M12	

CLASSIC bit set

- 10 mm external hexagon
- Can be used by hand, electric screwdriver and impact drivers
- Includes 10 mm reversing ratchet
- Ideally suited for fi tings in trade and industry
- Reinforced execution
- Rrecise arrangement of the popular 10 mm bits and sockets
- Sand-blasted
- Special steel
- In durable ABS storage case

				kg
911.4310	37 pcs	CLASSIC bit set		1.60
1 x			10 mm	
6 x			5 - 6 - 7 - 8 - 10 - 12 mm	
8 x			TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50 - TB55	
5 x			M5 - M6 - M8 - M10 - M12	
2 x			PH2 - PH3	
8 x			T20 - T25 - T27 - T30 - T40 - T45 - T50 - T55	
4 x			M6 - M8 - M10 - M12	
3 x			T40 - T45 - T50	

KS TOOLS®

Innovation is our mission!

BITS

MICRO

CLASSIC

TORSION power

TIN Bits

5 HEXAGON KEY WRENCHES

KSTOOLS®

Innovation is our mission!

	PAGE
OFFSET SCREWDRIVER	214
HEXAGON KEY WRENCHES	214 - 215
HEXAGON KEY WRENCH SETS	215 - 216
HEXAGON SOCKET KEY WRENCH DISPLAYS	216 - 217
BALL ENDED HEXAGON KEY WRENCHES	217 - 218
BALL ENDED HEXAGON KEY WRENCH SETS	218 - 219
BALL ENDED HEXAGON KEY WRENCH DISPLAYS	219
TX-HEXAGON KEY WRENCH	219
TX TAMPERPROOF HEXAGON KEY WRENCH SETS	220
TX-HEXAGON KEY WRENCH DISPLAYS	220
TX BALL ENDED HEXAGON KEY WRENCH	220
TX BALL ENDED HEXAGON KEY WRENCH SETS	221
TX BALL ENDED HEXAGON KEY DISPLAYS	221
TX TAMPERPROOF HEXAGON KEY WRENCH	221
TX TAMPERPROOF KEY WRENCH SETS	221 - 222
TX TAMPERPROOF KEY WRENCH DISPLAYS	222
FIVE STAR PROFILE TAMPERPROOF KEY WRENCH	222
FIVE STAR PROFILE TAMPERPROOF KEY WRENCH SETS	222
RIBE KEY WRENCH	222
RIBE HEXAGON KEY WRENCH SETS	223
SPLINE-HEXAGON KEY WRENCH (XZN®)	223
SPLINE-HEXAGON KEY WRENCH SETS (XZN®)	223
T-HANDLE NUT SCREWDRIVER	223
T-HANDLE NUT SCREWDRIVER SETS	223
T-HANDLE HEXAGON SOCKET KEY WRENCH	223
T-HANDLE HEXAGON SOCKET KEY WRENCH SETS	224
T-HANDLE BALL ENDED-HEXAGON KEY WRENCHES	224
T-HANDLE BALL ENDED HEXAGON SOCKET KEY WRENCH SETS	224
T-HANDLE TX-KEY WRENCH	224
T-HANDLE TX-HEXAGON KEY WRENCH SETS	225
T-HANDLE TX-BALL ENDED KEY WRENCH	225
T-HANDLE TX TAMPERPROOF KEY WRENCH	225
T-HANDLE TX TAMPERPROOF KEY WRENCH SETS	225

HEXAGON KEY WRENCHES Composition

Hexagon key wrenches

- Wrench with a narrow bend radius drawn out hexagon profile
- Wrench made of S2 special steel - continuous hardened and matt chrome finish
- Precision finished according to DIN/ISO
- Surface finished in matt chrome
- Extra long execution for high leverage
- Ball head with a working angle of up to 20° which allows working in narrow areas

Folding holder

- Hanger for storage
- Foldable through 270° - pivot mechanism
- Perfect for mobile use

2 Component handle

- Hard blue core with soft black component with micro structured surface
- Blade surface chrome plated and mirror polished

T handle wrench

- Wrench made of S2 special steel - continuous hardened and matt chrome finish
- Black blade tip for high precision

2 Component handle

- Hard blue core with soft black component with micro structured surface
- Blade surface finished in matt chrome
- Hanging eyelet

Surfaces

Phosphate

- Phosphating = chemical /electro-chemical process
- Dip coating or spraying method
- Intention is the generation of phosphate layer, which is immovable on the base metal
- The surface receives therefore a very good absorption capacity for oil and wax
- Reliable corrosion protection
- To be bound to phosphated tools when oiled

Nickel plated

- The chrome layer is manufactured by electroplating in a electro bath process
- There are several steps that are passed through
- Nickel offers avery good corresion protection and is resistant against air, water, diluted acids and most treatments of alkaline solution.
- The light gold optics are typical

Profil s

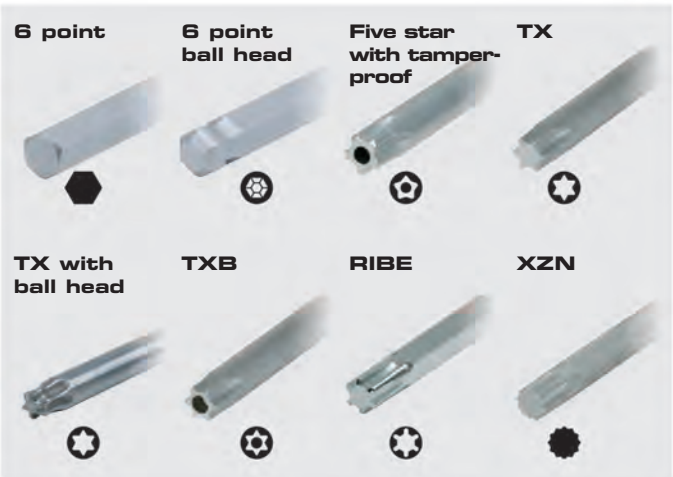

Hexagon key wrench profil

CLASSIC

- Surface finished in matt chrome
- Blade manufactured from S2 special steel
- Precision finished according to DIN/ISO

CHROME plus

- Surface finished in mirror polished chrome
- 2 Component handle
- Black/Blue
- Handle with hanging eyelet
- Blade manufactured from S2 special steel
- Precision finished according to DIN/ISO

Holder

System holder

Round holder 3 in 1

Multi handle holder 3 in 1

Folding holder

OFFSET SCREWDRIVER

Offset screwdriver, slotted

- Short execution
- DIN / ISO 8764
- Continuous hardened
- Matt chrome
- Special steel

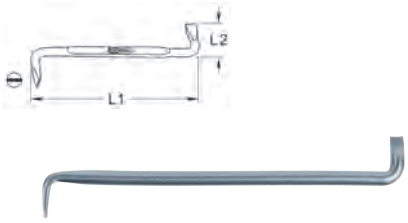

	D mm	L1 mm	L2 mm	g	
151.2674	3,5	90.0	12.4	10	
151.2675	4,0	100.0	15.3	12	
151.2676	5,5	125.0	20.4	25	
151.2677	8,0	150.0	24.8	50	
151.2678	10,0	175.0	32.8	135	
151.2679	12,0	200.0	42.4	228	

Offset screwdriver, PH

- Short execution
- DIN / ISO 8764
- Continuous hardened
- Matt chrome
- Special steel

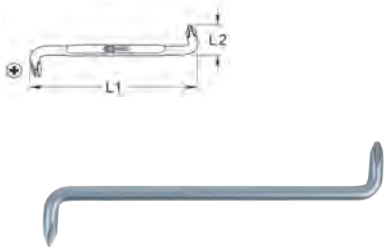

		L1 mm	L2 mm	g	
151.2680	PH 1 - PH 2	100.0	25.4	40	
151.2681	PH 2 - PH 3	150.0	33.1	77	
151.2682	PH 3 - PH 4	200.0	38.6	77	

Offset screwdriver, PZ

- Short execution
- DIN / ISO 8764
- Continuous hardened
- Matt chrome
- Special steel

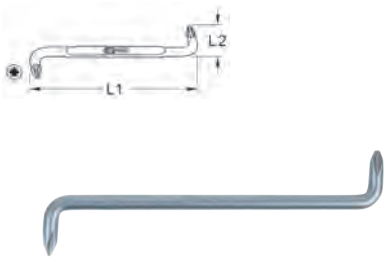

		L1 mm	L2 mm	g	
151.2683	PZ 1 - PZ 2	125.0	24.4	40	
151.2684	PZ 3 - PZ 4	200.0	37.9	156	

HEXAGON KEY WRENCHES

Hexagon key wrench

- Short execution
- In accordance to DIN / ISO 2936
- Continuous hardened
- Phosphate finis
- Special steel

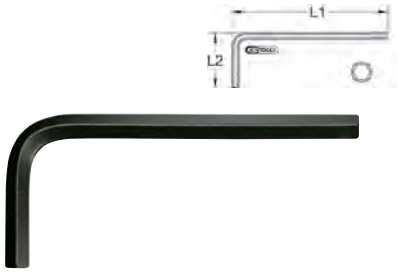

	mm		L1 mm	L2 mm	g	
151.26007	0,7		33.0	7.0	10	
151.26009	0,9		33.0	11.0	10	
151.26013	1,3		41.0	13.0	10	
151.26015	1,5		46.5	15.5	10	
151.2602	2,0		52.0	18.0	10	
151.26025	2,5		58.5	20.5	10	
151.2603	3,0		66.0	23.0	10	
151.26035	3,5		69.5	25.5	10	
151.2604	4,0		74.0	29.0	10	
151.26045	4,5		80.0	30.5	20	
151.2605	5,0		85.0	33.0	20	
151.26055	5,5		90.0	35.0	20	
151.2606	6,0		96.0	38.0	30	
151.2607	7,0		102.0	41.0	40	
151.2608	8,0		108.0	44.0	60	
151.2609	9,0		114.0	47.0	80	
151.2610	10,0		122.0	50.0	110	
151.2611	11,0		129.0	53.0	150	
151.2612	12,0		137.0	57.0	170	
151.2613	13,0		145.0	63.0	250	
151.2614	14,0		154.0	70.0	270	
151.2616	16,0		168.0	76.0	400	
151.2617	17,0		177.0	80.0	440	
151.2618	18,0		188.0	84.0	600	
151.2619	19,0		199.0	89.0	630	
151.2621	21,0		211.0	96.0	700	
151.2622	22,0		222.0	102.0	750	
151.2624	24,0		248.0	114.0	820	
151.2650	27,0		277.0	127.0	1802	
151.2651	30,0		315.0	142.0	2522	
151.2652	32,0		347.0	157.0	3175	
151.2653	36,0		391.0	176.0	4521	
151.2654		3/64"	45.0	14.0	10	
151.2630		1/32"	45.0	14.0	10	
151.2631		1/16"	45.0	15.0	10	
151.2632		5/64"	50.0	16.0	10	
151.2633		3/32"	51.0	17.0	10	
151.2634		7/64"	54.0	20.0	10	
151.2635		1/8"	57.0	22.0	10	
151.2636		9/64"	63.0	23.0	10	
151.2637		5/32"	65.0	25.0	10	
151.2638		3/16"	70.0	29.0	20	
151.2639		7/32"	80.0	32.0	30	
151.2640		1/4"	87.0	32.0	40	
151.2655		9/32"	95.0	35.0	43	
151.2641		5/16"	98.0	40.0	80	
151.2642		3/8"	110.0	45.0	110	
151.2643		7/16"	124.0	48.0	130	
151.2644		1/2"	133.0	50.0	150	
151.2645		9/16"	152.0	57.0	250	
151.2646		5/8"	160.0	59.0	400	
151.2647		3/4"	180.0	70.0	620	
151.2648		7/8"	200.0	80.0	740	
151.2649		1"	248.0	114.0	820	

Hexagon key wrench

- Short execution
- DIN / ISO 2936
- Continuous hardened
- Matt chrome
- Special steel

	mm		L1 mm	L2 mm	g	
151.20213	1,3		41.0	13.0	10	
151.20215	1,5		46.5	15.5	10	
151.2022	2,0		52.0	18.0	10	
151.20225	2,5		58.5	20.5	10	
151.2023	3,0		66.0	23.0	10	
151.20235	3,5		69.5	25.5	10	
151.2024	4,0		74.0	29.0	10	
151.20245	4,5		80.0	30.5	10	
151.2025	5,0		85.0	33.0	20	
151.20255	5,5		90.0	35.0	20	
151.2026	6,0		96.0	38.0	30	
151.2027	7,0		102.0	41.0	40	
151.2028	8,0		108.0	44.0	60	
151.2029	9,0		114.0	47.0	80	
151.2030	10,0		122.0	50.0	110	
151.2031	12,0		137.0	57.0	170	
151.2038	13,0		145.0	63.0	250	
151.2032	14,0		154.0	70.0	270	
151.2039	16,0		168.0	76.0	400	
151.2033	17,0		177.0	80.0	440	
151.2034	19,0		199.0	89.0	630	
151.2036	22,0		222.0	102.0	750	
151.2082		1/16"	45.0	15.0	10	
151.2083		5/64"	50.0	16.0	10	
151.2084		3/32"	51.0	17.0	10	
151.2085		7/64"	54.0	20.0	10	
151.2086		1/8"	57.0	22.0	10	
151.2087		9/64"	63.0	23.0	10	
151.2088		5/32"	65.0	25.0	10	
151.2089		3/16"	70.0	29.0	20	
151.2090		7/32"	80.0	32.0	30	
151.2091		1/4"	87.0	32.0	40	
151.2092		5/16"	98.0	40.0	80	
151.2093		3/8"	110.0	45.0	110	
151.2094		7/16"	124.0	48.0	130	
151.2095		1/2"	133.0	50.0	150	
151.2096		9/16"	152.0	57.0	250	
151.2097		5/8"	160.0	59.0	400	
151.2098		3/4"	180.0	70.0	620	
151.2099		7/8"	200.0	80.0	740	

Hexagon key wrench, long

- Long execution
- In accordance to DIN ISO 2936
- Continuous hardened
- Phosphate finis
- Special steel

	mm		L1 mm	L2 mm	g	
151.27013	1,3		70.0	15.0	10	
151.27015	1,5		75.0	15.0	10	
151.2702	2,0		83.0	17.0	10	
151.27025	2,5		90.0	20.0	10	

	mm		L1 mm	L2 mm	g	
151.2703	3,0		97.0	20.0	10	
151.27035	3,5		100.0	22.0	10	
151.2704	4,0		110.0	27.0	20	
151.27045	4,5		116.0	26.0	30	
151.2705	5,0		122.0	29.0	30	
151.2706	6,0		140.0	34.0	40	
151.2707	7,0		151.0	36.0	60	
151.2708	8,0		162.0	38.0	80	
151.2709	9,0		170.0	40.0	110	
151.2710	10,0		185.0	45.0	150	
151.2656	11,0		210.0	51.0	240	
151.2712	12,0		217.0	56.0	250	
151.2714	14,0		240.0	65.0	390	
151.2717	17,0		200.0	69.0	620	
151.2719	19,0		210.0	77.0	880	
151.2720		1/16"	75.0	16.0	10	
151.2721		5/64"	82.0	17.0	10	
151.2722		3/32"	90.0	18.0	10	
151.2723		7/64"	93.0	20.0	10	
151.2724		1/8"	103.0	24.0	10	
151.2725		9/64"	100.0	23.0	10	
151.2726		5/32"	111.0	26.0	10	
151.2727		3/16"	120.0	25.0	20	
151.2728		7/32"	129.0	32.0	30	
151.2729		1/4"	139.0	36.0	40	
151.2730		5/16"	163.0	40.0	80	
151.2731		3/8"	180.0	44.0	110	
151.2732		1/2"	192.0	58.0	150	
151.2733		9/16"	194.0	62.0	250	
151.2734		5/8"	200.0	63.0	390	
151.2735		3/4"	210.0	78.0	620	

Hexagon key wrench, long

- Long execution
- DIN / ISO 2936
- Continuous hardened
- Matt chrome
- Special steel

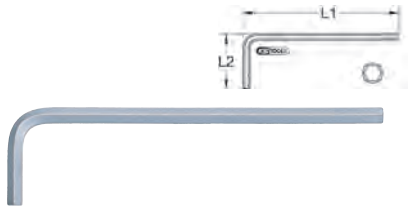

	mm		L1 mm	L2 mm	g	
151.20413	1,3		63.5	13.0	10	
151.20415	1,5		63.5	15.5	10	
151.2042	2,0		77.0	18.0	10	
151.20425	2,5		87.5	20.5	10	
151.2043	3,0		93.0	23.0	10	
151.20435	3,5		98.5	25.5	10	
151.2044	4,0		104.0	29.0	10	
151.20445	4,5		114.5	30.5	20	
151.2045	5,0		120.0	33.0	30	
151.20455	5,5		128.0	35.0	30	
151.2046	6,0		141.0	38.0	40	
151.2047	7,0		147.0	41.0	60	
151.2048	8,0		158.0	44.0	80	
151.2049	9,0		169.0	47.0	110	
151.2050	10,0		180.0	50.0	150	
151.2052	12,0		202.0	57.0	250	
151.2054	14,0		229.0	70.0	390	
151.2057	17,0		262.0	80.0	620	
151.2059	19,0		290.0	89.0	880	
151.2061		1/16"	63.0	15.5	10	
151.2062		5/64"	77.0	18.0	10	
151.2063		3/32"	87.5	20.5	10	
151.2064		7/64"	93.0	23.0	10	
151.2065		1/8"	93.0	23.0	10	
151.2066		9/64"	98.5	25.5	10	
151.2067		5/32"	104.0	29.0	10	
151.2068		3/16"	120.0	33.0	20	
151.2069		7/32"	128.0	35.0	30	
151.2071		1/4"	141.0	38.0	40	
151.2072		5/16"	158.0	44.0	80	
151.2073		3/8"	180.0	50.0	110	
151.2074		1/2"	202.0	57.0	150	
151.2075		9/16"	229.0	70.0	250	
151.2076		5/8"	240.0	76.0	390	
151.2077		3/4"	290.0	89.0	620	

Hexagon key wrench, extra long

- Extra long execution
- In accordance to DIN / ISO 2936
- Continuous hardened
- Phosphate finis
- Special steel

	mm		L1 mm	L2 mm	g	
151.28015	1,5		91.5	15.5	10	
151.2802	2,0		102.0	18.0	10	
151.28025	2,5		114.5	20.5	10	
151.2803	3,0		129.0	23.0	10	
151.2804	4,0		144.0	29.0	20	
151.2805	5,0		156.0	30.5	30	
151.28055	5,5		165.0	33.0	40	
151.2806	6,0		186.0	38.0	50	
151.2807	7,0		197.0	41.0	80	
151.2808	8,0		208.0	44.0	100	
151.2657	9,0		219.0	47.0	110	
151.2810	10,0		234.0	50.0	180	
151.2812	12,0		262.0	57.0	290	
151.2814	14,0		294.0	70.0	460	
151.2817	17,0		337.0	80.0	750	
151.2819	19,0		360.0	89.0	1070	
151.2820		1/16"	91.0	15.5	10	
151.2821		5/64"	102.0	18.0	10	
151.2822		3/32"	114.5	20.5	10	
151.2823		1/8"	129.0	23.0	20	
151.2824		5/32"	144.0	29.0	20	
151.2825		3/16"	156.0	30.5	30	
151.2826		1/4"	186.0	38.0	50	
151.2827		5/16"	208.0	44.0	80	
151.2828		3/8"	234.0	50.0	150	
151.2829		1/2"	267.0	63.0	300	
151.2830		9/16"	294.0	70.0	460	

Hexagon key wrench, extra long

- Extra long execution
- DIN / ISO 2936
- Continuous hardened
- Matt chrome
- Special steel



	mm		L1 mm	L2 mm	g	
151.31315	1,5		91.5	15.5	10	
151.3132	2,0		102.0	18.0	10	
151.31325	2,5		114.5	20.5	10	
151.3133	3,0		129.0	23.0	10	
151.3134	4,0		144.0	29.0	20	
151.3135	5,0		156.0	30.5	30	
151.3136	6,0		186.0	38.0	50	
151.3137	7,0		197.0	41.0	80	
151.3138	8,0		208.0	44.0	100	
151.2658	9,0		219.0	47.0	143	
151.3140	10,0		234.0	50.0	180	
151.3142	12,0		262.0	57.0	290	
151.3144	14,0		294.0	70.0	460	
151.3147	17,0		337.0	80.0	750	
151.3149	19,0		360.0	89.0	1070	
151.3150		1/16"	91.0	15.5	10	
151.3151		5/64"	102.0	18.0	10	
151.3152		3/32"	114.5	20.5	10	
151.3153		1/8"	129.0	23.0	20	
151.3154		5/32"	144.0	29.0	20	
151.3155		3/16"	156.0	30.5	30	
151.3170		7/32"	165.0	33.0	40	
151.3156		1/4"	186.0	38.0	50	
151.3157		5/16"	208.0	44.0	80	
151.3158		3/8"	234.0	50.0	180	
151.3159		1/2"	267.0	63.0	300	
151.3160		9/16"	294.0	70.0	460	

HEXAGON KEY WRENCH SETS

CHROME*plus*® He xagon key wrench set

- In accordance to DIN / ISO 2936
- Continuous hardened
- Chrome plated and mirror polished
- Special steel
- In a durable folding holder with two component housing

			g	
158.3540	8 pcs	2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm	440	

Hexagon key wrench set in a folding holder

- Short execution
- DIN / ISO 2936
- Continuous hardened
- Matt chrome
- Special steel

			g	
151.3210	9 pcs	1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	260	

3 in 1 Hexagon key wrench set

- Short execution
- DIN / ISO 2936
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel
- In a folding holder with two component handle

			g	
920.2000	10 pcs	1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm	350	

3 in 1 Hexagon key wrench set

- Short execution
- DIN / ISO 2936
- Imperial sizes
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel
- In a folding holder with two component handle

			g	
920.2050	10 pcs	1/16" - 5/64" - 3/32" - 1/8" - 5/32" - 3/16" - 7/32" - 1/4" - 5/16" - 3/8"	500	

Hexagon key wrench set on a ring

- In accordance to DIN / ISO 2936
- Storage ring
- Continuous hardened
- Phosphate finish
- Special steel

151.3250	8 pcs	2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	330

3 in 1 Hexagon key wrench set

- Long execution
- DIN / ISO 2936
- Handle with double function (holder / T-handle)
- Continuous hardened
- Matt chrome
- Special steel

151.2040	8 pcs	2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	340

3 in 1 Hexagon key wrench set

- Long execution
- DIN / ISO 2936
- Imperial sizes
- Handle with double function (holder / T-handle)
- Continuous hardened
- Matt chrome
- Special steel

151.2070	8 pcs	5/64" - 3/32" - 1/8" - 5/32" - 3/16" - 1/4" - 5/16" - 3/8"	360

3 in 1 Hexagon key wrench set

- Long execution
- DIN / ISO 2936
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel
- In a folding holder with two component handle

920.2100	10 pcs	1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm	700

3 in 1 Hexagon key wrench set

- Long execution
- DIN / ISO 2936
- Imperial sizes
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel
- In a folding holder with two component handle

920.2150	10 pcs	1/16" - 5/64" - 3/32" - 1/8" - 5/32" - 3/16" - 7/32" - 1/4" - 5/16" - 3/8"	800

3 in 1 Hexagon key wrench set

- Extra long execution
- DIN / ISO 2936
- Handle with double function (holder / T handle)
- Continuous hardened
- Matt chrome
- Special steel

151.2080	8 pcs	2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	420

3 in 1 Hexagon key wrench set

- Extra long execution
- DIN / ISO 2936
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel
- In a folding holder with two component handle

920.2300	10 pcs	1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm	800

3 in 1 Hexagon key wrench set

- Extra long execution
- DIN / ISO 2936
- Imperial sizes
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel
- In a folding holder with two component handle

920.2350	10 pcs	1/16" - 5/64" - 3/32" - 1/8" - 5/32" - 3/16" - 7/32" - 1/4" - 5/16" - 3/8"	800

HEXAGON SOCKET KEY WRENCH DISPLAYS

CHROME*plus*® Hexagon key wrench display

- In accordance to DIN / ISO 2936
- Continuous hardened
- Chrome plated and mirror polished
- Special steel
- In a durable folding holder with two component housing

158.3540D	12 pcs	12 x 158.3540	4.98

3 in 1 Hexagon key wrench display

- Long execution
- DIN / ISO 2936
- Handle with double function (holder / T-handle)
- Continuous hardened
- Matt chrome
- Special steel

151.2040D	24 pcs	24 x 151.2040	9.00

3 in 1 Hexagon key wrench display

- Long execution
- DIN / ISO 2936
- Imperial sizes
- Handle with double function (holder / T handle)
- Continuous hardened
- Matt chrome
- Special steel

151.2070D	24 pcs	24 x 151.2070	9.00

3 in 1 Hexagon key wrench display

- Extra long execution
- DIN / ISO 2936
- Handle with double function (holder / T handle)
- Continuous hardened
- Matt chrome
- Special steel

			kg	
151.2080D	18 pcs	18 x 151.2080	8.00	

BALL ENDED HEXAGON KEY WRENCHES

Ball ended hexagon key wrench, short

- Short execution
- DIN / ISO 2936
- Ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Matt chrome
- Special steel

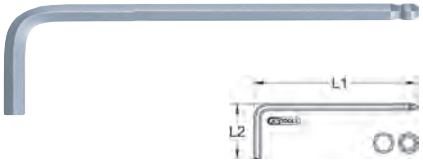

	mm		L1 mm	L2 mm	g	
151.21615	1,5		46.5	15.5	10	
151.2162	2,0		52.0	18.0	10	
151.21625	2,5		58.5	20.5	10	
151.2163	3,0		66.0	23.0	10	
151.2164	4,0		74.0	29.0	10	
151.2165	5,0		85.0	33.0	20	
151.2166	6,0		96.0	38.0	30	
151.2168	8,0		108.0	44.0	60	
151.2170	10,0		122.0	50.0	110	
151.2172	12,0		137.0	57.0	170	
151.2174	14,0		154.0	70.0	270	

Ball ended hexagon key wrench, long

- Long execution
- In accordance to DIN / ISO 2936
- Ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Phosphate finish
- Special steel

	mm		L1 mm	L2 mm	g	
151.29013	1,3		63.5	13.0	10	
151.29015	1,5		63.5	15.5	10	
151.2902	2,0		77.0	18.0	10	
151.29025	2,5		87.5	20.5	10	
151.2903	3,0		93.0	23.0	10	
151.29035	3,5		98.5	25.5	10	
151.2904	4,0		104.0	29.0	10	
151.29045	4,5		114.5	30.5	10	
151.2905	5,0		120.0	33.0	30	
151.29055	5,5		128.0	35.0	30	
151.2906	6,0		141.0	38.0	40	
151.2907	7,0		147.0	41.0	40	
151.2908	8,0		158.0	44.0	80	
151.2910	10,0		180.0	50.0	150	
151.2912	12,0		202.0	57.0	250	
151.2914	14,0		229.0	70.0	260	
151.2920		1/16"	63.5	15.5	10	
151.2921		5/64"	77.0	18.0	10	
151.2922		3/32"	87.5	20.5	10	
151.2923		7/64"	93.0	23.0	10	
151.2924		1/8"	93.0	23.0	20	
151.2925		9/64"	98.5	25.5	20	
151.2926		5/32"	104.0	29.0	30	
151.2927		3/16"	120.0	33.0	30	
151.2928		7/32"	128.0	35.0	30	
151.2929		1/4"	141.0	38.0	50	
151.2930		5/16"	158.0	44.0	50	
151.2931		3/8"	180.0	50.0	140	
151.2932		1/2"	202.0	57.0	160	
		9/16"	229.0	70.0	270	

Ball ended hexagon key wrench, long

- Long execution
- DIN / ISO 2936
- Ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Matt chrome
- Special steel



	mm		L1 mm	L2 mm	g	
151.21013	1,3		63.5	13.0	10	
151.21015	1,5		63.5	15.5	10	
151.2102	2,0		77.0	18.0	10	
151.21025	2,5		87.5	20.5	10	
151.2103	3,0		93.0	23.0	10	
151.21035	3,5		98.5	25.5	10	
151.2104	4,0		104.0	29.0	10	
151.21045	4,5		114.5	30.5	10	
151.2105	5,0		120.0	33.0	30	
151.21055	5,5		128.0	30.0	32	
151.2106	6,0		141.0	38.0	40	
151.2107	7,0		147.0	41.0	40	
151.2108	8,0		158.0	44.0	80	
151.2110	10,0		180.0	50.0	150	
151.2112	12,0		202.0	57.0	250	
151.2114	14,0		229.0	70.0	260	
151.2131		1/16"	63.5	15.5	10	
151.2132		5/64"	77.0	18.0	10	
151.2133		3/32"	87.5	20.5	10	
151.2134		7/64"	93.0	23.0	10	
151.2135		1/8"	93.0	23.0	20	
151.2136		9/64"	98.5	25.5	20	
151.2137		5/32"	104.0	29.0	30	
151.2138		3/16"	120.0	33.0	30	
151.2139		7/32"	128.0	35.0	30	
151.2140		1/4"	141.0	38.0	50	
151.2141		5/16"	158.0	44.0	50	
151.2142		3/8"	180.0	50.0	140	
151.2143		1/2"	202.0	57.0	160	
151.2144		9/16"	229.0	70.0	270	

Ball ended hexagon key wrench, extra long

- Extra long execution
- In accordance to DIN / ISO 2936
- Ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Phosphate finish
- Special steel



	mm		L1 mm	L2 mm	g	
151.30013	1,3		81.0	13.0	10	
151.30015	1,5		91.5	15.5	10	
151.3002	2,0		102.0	18.0	10	
151.30025	2,5		114.5	20.5	20	
151.3003	3,0		129.0	23.0	20	
151.30035	3,5		140.0	25.5	20	
151.3004	4,0		144.0	29.0	20	
151.30045	4,5		156.0	30.5	20	
151.3005	5,0		165.0	33.0	30	
151.30055	5,5		165.0	33.0	40	
151.3006	6,0		186.0	38.0	50	
151.3007	7,0		197.0	41.0	60	
151.3008	8,0		208.0	44.0	80	
151.3010	10,0		234.0	50.0	150	
151.3012	12,0		262.0	57.0	250	
151.3014	14,0		294.0	70.0	350	
151.3017	17,0		337.0	80.0	350	
151.3019	19,0		360.0	89.0	400	
151.3020		1/16"	91.0	15.5	10	
151.3021		5/64"	102.0	18.0	10	
151.3022		3/32"	114.5	20.5	10	
151.3023		7/64"	129.0	23.0	30	
151.3024		1/8"	129.0	23.0	50	
151.3025		9/64"	140.0	25.5	50	
151.3026		5/32"	144.0	29.0	80	
151.3027		3/16"	156.0	30.5	120	
151.3028		7/32"	165.0	33.0	150	
151.3029		1/4"	186.0	38.0	180	
151.3030		5/16"	208.0	35.0	104	
151.3031		3/8"	234.0	50.0	220	
151.3032		1/2"	267.0	63.0	250	
151.3033		9/16"	294.0	70.0	350	

Ball ended hexagon key wrench, extra long

- Extra long execution
- DIN / ISO 2936
- Ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Matt chrome
- Special steel



	mm		L1 mm	L2 mm	g	
151.31013	1,3		81.0	13.0	10	
151.31015	1,5		91.5	15.5	10	
151.3102	2,0		102.0	18.0	10	
151.31025	2,5		114.5	20.5	10	
151.3103	3,0		129.0	23.0	10	
151.3104	4,0		144.0	29.0	20	
151.3105	5,0		165.0	33.0	30	
151.31055	5,5		165.0	33.0	40	

	mm		L1 mm	L2 mm	g	
151.3106	6,0		186.0	38.0	50	
151.3107	7,0		197.0	41.0	80	
151.3108	8,0		208.0	44.0	100	
151.3110	10,0		234.0	50.0	150	
151.3112	12,0		262.0	57.0	250	
151.3114	14,0		294.0	70.0	270	
151.3117	17,0		337.0	80.0	300	
151.3119	19,0		360.0	89.0	350	
151.3301		1/16"	91.0	15.5	10	
151.3302		5/64"	102.0	18.0	10	
151.3303		3/32"	114.5	20.5	10	
151.3304		7/64"	129.0	23.0	30	
151.3305		1/8"	129.0	23.0	50	
151.3306		9/64"	140.0	25.5	50	
151.3307		5/32"	144.0	29.0	80	
151.3308		3/16"	156.0	30.5	120	
151.3309		7/32"	165.0	33.0	150	
151.3311		1/4"	186.0	38.0	180	
151.3312		5/16"	208.0	44.0	200	
151.3313		3/8"	234.0	50.0	220	
151.3314		1/2"	267.0	63.0	250	
151.3315		9/16"	294.0	70.0	350	

BALL ENDED HEXAGON KEY WRENCH SETS

CHROME*plus*® Ball ended hexagon key wrench set

- In accordance to DIN / ISO 2936
- With ball end
- Ideal for difficult to access screws
- Continuous hardened
- Chrome plated and mirror polished
- Special steel
- In a durable folding holder with two component housing

			g	
158.3520	8 pcs	2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm	440	

3 in 1 Ball ended hexagon key wrench set

- Long execution
- DIN / ISO 2936
- Ball head on the long end
- Ideal for difficult to access screws
- Handle with double function (holder / T-handle)
- Continuous hardened
- Matt chrome
- Special steel

			g	
151.2100	8 pcs	2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	330	

3 in 1 Ball ended hexagon key wrench set

- Long execution
- DIN / ISO 2936
- Imperial sizes
- Ball head on the long end
- Ideal for difficult to access screws
- Handle with double function (holder / T-handle)
- Continuous hardened
- Matt chrome
- Special steel

			g	
151.2130	8 pcs	5/64" - 3/32" - 1/8" - 5/32" - 3/16" - 1/4" - 5/16" - 3/8"	310	

Ball ended hexagon key wrench set in a folding holder

- Long execution
- DIN / ISO 2936
- Ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Matt chrome
- Special steel

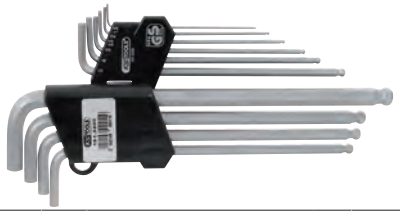

			g	
151.3200	10 pcs	1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm	500	

3 in 1 Ball ended hexagon key wrench set

- Long execution
- DIN / ISO 2936
- With ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

			g	
920.2200	10 pcs	1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm	600	

3 in 1 Ball ended hexagon key wrench set

- Long execution
- DIN / ISO 2936
- Imperial sizes
- With ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

			g	
920.2250	10 pcs	1/16" - 5/64" - 3/32" - 1/8" - 5/32" - 3/16" - 7/32" - 1/4" - 5/16" - 3/8"	600	

3 in 1 Ball ended hexagon key wrench set

- Extra long execution
- DIN / ISO 2936
- Ball head on the long end
- Ideal for difficult to access screws
- Handle with double function (holder / T-handle)
- Continuous hardened
- Matt chrome
- Special steel

			g	
151.2180	8 pcs	2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	440	

Ball ended hexagon key wrench set

- Extra long execution
- DIN/ISO 2936
- With ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Matt chrome
- Chrome vanadium
- In a convenient folding holder

			g	
151.3220	9 pcs	1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	500	

3 in 1 Ball ended hexagon key wrench set

- Extra long execution
- DIN / ISO 2936
- Imperial sizes
- With ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

			g	
920.2400	10 pcs	1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm	600	

Ball ended hexagon key wrench set

- Extra long execution
- DIN / ISO 2936
- Ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Matt chrome
- Special steel

			kg	
151.2150	10 pcs	3 - 4 - 5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 mm	2.38	

3 in 1 Ball ended hexagon key wrench set

- Long execution
- DIN / ISO 2936
- Imperial sizes
- With ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

			g
920.2450	10 pcs	1/16" - 5/64" - 3/32" - 1/8" - 5/32" - 3/16" - 7/32" - 1/4" - 5/16" - 3/8"	600

BALL ENDED HEXAGON KEY WRENCH DISPLAYS

CHROME*plus*® Ball ended hexagon key wrench display

- In accordance to DIN / ISO 2936
- With ball end
- Ideal for difficult to access screws
- Continuous hardened
- Chrome plated and mirror polished
- Special steel
- In a durable folding holder with two component housing

			kg
158.3520D	12 pcs	12 x 158.3520	4.98

3 in 1 Ball ended hexagon key wrench display

- Long execution
- DIN / ISO 2936
- Ball head on the long end
- Ideal for difficult to access screws
- Handle with double function (holder / T-handle)
- Continuous hardened
- Matt chrome
- Special steel

			kg
151.2100D	24 pcs	24 x 151.2100	8.00

Ball ended hexagon key wrench display

- Extra long execution
- In accordance to DIN / ISO 2936
- Ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Matt chrome
- Special steel

			kg
151.3200D	10 pcs	10 x 151.3200	5.60

3 in 1 Ball ended hexagon key wrench display

- Long execution
- DIN / ISO 2936
- Imperial sizes
- Ball head on the long end
- Ideal for difficult to access screws
- Continuous hardened
- Matt chrome
- Special steel

			kg
151.2130D	24 pcs	24 x 151.2130	7.60

3 in 1 Ball ended hexagon key wrench display

- Extra long execution
- DIN / ISO 2936
- Ball head on the long end
- Ideal for difficult to access screws
- Handle with double function (holder / T-handle)
- Continuous hardened
- Matt chrome
- Special steel

			kg
151.2180D	18 pcs	18 x 151.2180	8.00

TX-HEXAGON KEY WRENCH

TX key wrench, short

- Short execution
- Continuous hardened
- Matt chrome
- Special steel



		L1 mm	L2 mm	g
151.2341	T6	42.0	16.0	10
151.2342	T7	48.0	16.0	10
151.2343	T8	48.0	16.0	10
151.2344	T9	48.0	16.0	10
151.2345	T10	51.0	17.0	10
151.2346	T15	54.0	18.0	10
151.2347	T20	57.0	19.0	10
151.2348	T25	60.0	20.0	10
151.2349	T27	64.0	21.0	20
151.2350	T30	70.0	24.0	30
151.2351	T40	76.0	26.0	40
151.2352	T45	82.0	28.0	50
151.2353	T50	95.0	32.0	60
151.2354	T55	108.0	35.0	130
151.2355	T60	120.0	38.0	190

TX key wrench, long

- Long execution
- Continuous hardened
- Matt chrome
- Special steel

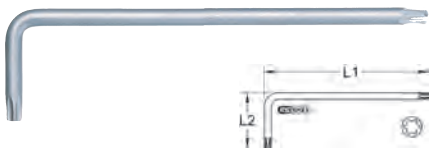

		L1 mm	L2 mm	g
151.2312	T6	66.0	16.0	10
151.2313	T7	71.0	16.0	10
151.2314	T8	76.0	16.0	10
151.2315	T9	80.0	16.0	10
151.2301	T10	86.0	17.0	10
151.2302	T15	90.0	18.0	10
151.2303	T20	95.0	19.0	10
151.2304	T25	100.0	20.0	20
151.2309	T27	105.0	21.0	30
151.2305	T30	114.0	24.0	40
151.2306	T40	124.0	26.0	70
151.2307	T45	133.0	28.0	100
151.2308	T50	152.0	32.0	140
151.2310	T55	171.0	35.0	180
151.2311	T60	190.0	38.0	280

TX key wrench, extra long

- Extra long execution
- Continuous hardened
- Matt chrome
- Special steel

		L1 mm	L2 mm	g
151.3161	T10	90.0	14.0	10
151.3162	T15	100.0	16.0	10
151.3163	T20	112.0	18.0	10
151.3164	T25	126.0	20.0	20
151.3165	T27	140.0	25.0	30
151.3166	T30	160.0	28.0	40
151.3167	T40	180.0	32.0	60
151.3168	T45	200.0	36.0	90
151.3169	T50	224.0	40.0	130

TX TAMPERPROOF HEXAGON KEY WRENCH SETS

CHROME*plus*® TX key wrench set

- Continuous hardened
- Chrome plated and mirror polished
- Special steel
- In a durable folding holder with two component housing

158.3510	8 pcs	T8 - T10 - T15 - T20 - T25 - T27 - T30 - T40	300	

3 in 1 TX key wrench set

- Short execution
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

920.2500	10 pcs	T8 - T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50	500	

3 in 1 TX key wrench set

- Long execution
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

151.2300	8 pcs	T10 - T15 - T20 - T25 - T30 - T40 - T45 - T50	333	

3 in 1 TX key wrench set

- Long execution
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

920.2520	10 pcs	T8 - T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50	500	

3 in 1 TX key wrench set

- Extra long execution
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

151.2380	8 pcs	T10 - T15 - T20 - T25 - T30 - T40 - T45 - T50	420	

3 in 1 TX key wrench set

- Extra long execution
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

920.2540	10 pcs	T8 - T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50	700	

TX-HEXAGON KEY WRENCH DISPLAYS

CHROME*plus*® TX key wrench display

- Continuous hardened
- Chrome plated and mirror polished
- Special steel
- In a durable folding holder with two component housing

158.3510D	12 pcs	12 x 158.3510	3.84	

3 in 1 TX key wrench display

- Long execution
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

151.2300D	24 pcs	24 x 151.2300	7.55	

3 in 1 TX key wrench display

- Extra long execution
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

151.2380D	18 pcs	18 x 151.2380	7.55	

TX BALL ENDED HEXAGON KEY WRENCH

TX ball ended key wrench, long

- Long execution
- Continuous hardened
- Ball head on the long end
- Ideal for difficult to access screws
- Matt chrome
- Special steel

		L1 mm	L2 mm		
151.2401	T10	86.0	17.0	10	
151.2402	T15	90.0	18.0	10	
151.2403	T20	95.0	19.0	10	
151.2404	T25	100.0	20.0	20	
151.2405	T30	114.0	24.0	30	
151.2406	T40	124.0	26.0	50	
151.2407	T45	133.0	29.0	60	
151.2408	T50	152.0	32.0	90	

TX BALL ENDED HEXAGON KEY WRENCH SETS

3 in 1 TX ball ended key wrench set

- Long execution
- Continuous hardened
- Ball head on the long end
- Ideal for difficult to access screws
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

			g
151.2400	8 pcs	T10 - T15 - T20 - T25 - T30 - T40 - T45 - T50	310

TX BALL ENDED HEXAGON KEY DISPLAYS

3 in 1 TX ball ended key wrench display

- Long execution
- Continuous hardened
- Ball head on the long end
- Ideal for difficult to access screws
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

			kg
151.2400D	24 pcs	24 x 151.2400	7.65

TX TAMPERPROOF HEXAGON KEY WRENCH

TX tamperproof key wrench, short

- Short execution
- Bore hole at the short and long end
- Continuous hardened
- Matt chrome
- Special steel



		L1 mm	L2 mm	g
151.2241	TB6	42.0	16.0	10
151.2242	TB7	48.0	16.0	10
151.2243	TB8	48.0	16.0	10
151.2244	TB9	48.0	16.0	10
151.2245	TB10	51.0	17.0	10
151.2246	TB15	54.0	18.0	10
151.2247	TB20	57.0	19.0	10
151.2248	TB25	60.0	20.0	10
151.2249	TB27	64.0	21.0	20
151.2250	TB30	70.0	24.0	30
151.2251	TB40	76.0	26.0	40
151.2252	TB45	82.0	28.0	50
151.2253	TB50	95.0	32.0	60
151.2254	TB55	108.0	35.0	130
151.2255	TB60	120.0	38.0	190

TX tamperproof key wrench, long

- Long execution
- Bore hole at the short and long end
- Continuous hardened
- Matt chrome
- Special steel

		L1 mm	L2 mm	g
151.2212	TB6	66.0	16.0	10
151.2213	TB7	71.0	16.0	10
151.2214	TB8	76.0	16.0	10
151.2215	TB9	80.0	16.0	10
151.2201	TB10	86.0	17.0	10
151.2202	TB15	90.0	18.0	10
151.2203	TB20	95.0	19.0	10
151.2204	TB25	100.0	20.0	20
151.2209	TB27	105.0	21.0	30
151.2205	TB30	114.0	24.0	40
151.2206	TB40	124.0	26.0	70
151.2207	TB45	133.0	28.0	100
151.2208	TB50	152.0	32.0	140
151.2210	TB55	171.0	35.0	180
151.2211	TB60	190.0	38.0	280

TX tamperproof key wrench, extra long

- Extra long execution
- Bore hole at the short and long end
- Continuous hardened
- Matt chrome
- Special steel



		L1 mm	L2 mm	g
151.3181	TB10	90.0	14.0	10
151.3182	TB15	100.0	16.0	10
151.3183	TB20	112.0	18.0	10
151.3184	TB25	126.0	20.0	20
151.3185	TB27	140.0	25.0	30
151.3186	TB30	160.0	28.0	40
151.3187	TB40	180.0	32.0	60
151.3188	TB45	200.0	36.0	90
151.3189	TB50	224.0	40.0	130

TX TAMPERPROOF KEY WRENCH SETS

TX tamperproof key wrench set

- Short execution
- With tamperproof
- Continuous hardened
- Matt chrome
- Special steel

			g
151.4150	7 pcs	TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	100

CHROME*plus*® TX tamperproof key wrench set

- With tamperproof
- Continuous hardened
- Chrome plated and mirror polished
- Special steel
- In a durable folding holder with two component housing

			g
158.3530	8 pcs	TB8 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	300

3 in 1 TX tamperproof key wrench set

- Short execution
- With tamperproof
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

			g
920.2550	10 pcs	TB8 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50	600

3 in 1 TX tamperproof key wrench set

- Long execution
- With tamperproof
- Handle with double function (holder / T-handle)
- Continuous hardened
- Matt chrome
- Special steel

			g
151.2200	8 pcs	TB10 - TB15 - TB20 - TB25 - TB30 - TB40 - TB45 - TB50	250

3 in 1 TX tamperproof key wrench set

- Long execution
- With tamperproof
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

			g
920.2570	10 pcs	TB8 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50	600

3 in 1 TX tamperproof key wrench set

- Extra long execution
- With tamperproof
- Handle with double function (holder / T-handle)
- Continuous hardened
- Matt chrome
- Special steel

			g
151.2280	8 pcs	TB10 - TB15 - TB20 - TB25 - TB30 - TB40 - TB45 - TB50	420

3 in 1 TX tamperproof key wrench set

- Extra long execution
- With tamperproof
- Continuous hardened
- Handle with double function (holder / T-handle)
- Matt chrome
- Special steel

			g
920.2590	10 pcs	TB8 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50	800

TX TAMPERPROOF KEY WRENCH DISPLAYS

CHROME*plus*® TX tamperproof key wrench display

- With tamperproof
- Continuous hardened
- Chrome plated and mirror polished
- Special steel
- In a durable folding holder with two component housing

			kg
158.3530D	12 pcs	12 x 158.3530	3.84

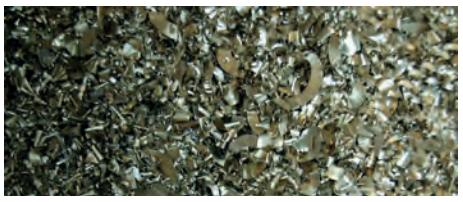

3 in 1 TX tamperproof key wrench display

- Long execution
- With tamperproof
- Handle with double function (holder / T-handle)
- Continuous hardened
- Matt chrome
- Special steel

			kg
151.2200D	24 pcs	24 x 151.2200	8.50

3 in 1 TX tamperproof key wrench display

- Extra long execution
- With tamperproof
- Handle with double function (holder / T-handle)
- Continuous hardened
- Matt chrome
- Special steel

			kg
151.2280D	18 pcs	18 x 151.2280	7.51

FIVE STAR PROFILE TAMPERPROOF KEY WRENCH

Five star profile amperproof key wrench, extra long

- Extra long execution
- Bore hole at the short and long end
- Continuous hardened
- Matt chrome
- Special steel

		L1 mm	L2 mm	g
151.2471	TS10	94.0	18.0	10
151.2472	TS15	104.0	20.0	10
151.2473	TS20	116.0	22.0	10
151.2474	TS25	130.0	25.0	20
151.2475	TS27	133.0	30.0	30
151.2476	TS30	167.0	34.0	40
151.2477	TS40	190.0	38.0	60
151.2478	TS45	190.0	44.0	90
151.2479	TS50	245.0	50.0	130

FIVE STAR PROFILE TAMPERPROOF KEY WRENCH SETS

Five star profile amperproof key wrench set

- Long execution
- Bore hole at the short and long end
- Continuous hardened
- Matt chrome
- Special steel



			g
151.2470	9 pcs	TS10 - TS15 - TS20 - TS25 - TS27 - TS30 - TS40 - TS45 - TS50	330

RIBE KEY WRENCH

RIBE® Key wrench, extra long

- Extra long execution
- Continuous hardened
- Matt chrome
- Special steel

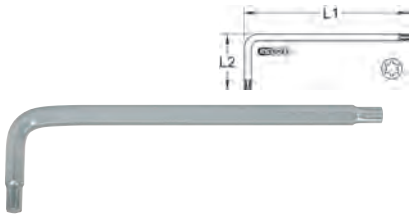

		L1 mm	L2 mm	g
151.2451	M4	144.0	29.0	20
151.2452	M5	165.0	33.0	30
151.2453	M6	186.0	38.0	40
151.2454	M7	197.0	41.0	80
151.2455	M8	208.0	44.0	90
151.2456	M9	219.0	47.0	150
151.2457	M10	234.0	50.0	170
151.2670	M12	262.0	57.0	256
151.2671	M14	294.0	70.0	397
151.2672	M16	337.0	80.0	595
151.2458	M18	379.0	89.0	849

RIBE HEXAGON KEY WRENCH SETS

RIBE® Key wrench set

- Long execution
- Continuous hardened
- Matt chrome
- Special steel

			g
151.2450	7 pcs	M4 - M5 - M6 - M7 - M8 - M9 - M10	310

SPLINE-HEXAGON KEY WRENCH (XZN®)

Spline key wrench, short

- Short execution
- Continuous hardened
- Matt chrome
- Special steel

		L1 mm	L2 mm	g
151.4101	M4	63.0	20.0	10
151.4102	M5	72.0	24.0	10
151.4103	M6	76.0	26.0	20
151.4104	M8	82.0	28.0	40
151.4105	M10	93.0	31.0	80
151.4106	M12	106.0	34.0	80
151.4107	M14	125.0	45.0	80
151.4108	M16	140.0	55.0	80
151.2673	M18	178.0	81.0	333

SPLINE-HEXAGON KEY WRENCH SETS (XZN®)

Spline key wrench set

- Short execution
- Continuous hardened
- Matt chrome
- Special steel

			g
151.4100	5 pcs	M5 - M6 - M8 - M10 - M12	150

T-HANDLE NUT SCREWDRIVER

CHROME*plus*® T-handle socket screwdriver, long

- 6 point
- Two component handle
- With hanging hole
- Chrome plated and mirror polished
- Chrome vanadium

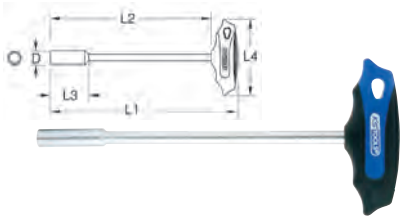

	mm	D mm	L1 mm	L2 mm	L3 mm	L4 mm	g
158.50055	5,5	9.9	264.0	230.0	10.0	95.0	80
158.5006	6	9.9	264.0	230.0	10.0	95.0	100
158.5007	7	10.1	264.0	230.0	10.0	95.0	120
158.5008	8	12.5	270.0	230.0	14.0	115.0	140
158.5009	9	13.6	270.0	230.0	12.0	115.0	150
158.5010	10	14.5	270.0	230.0	14.0	115.0	160
158.5011	11	15.7	270.0	230.0	15.0	115.0	180
158.5012	12	16.7	270.0	230.0	15.0	115.0	180
158.5013	13	17.6	270.0	230.0	16.0	115.0	180
158.5014	14	19.2	270.0	230.0	15.0	115.0	190

CHROME*plus*® T-handle socket screwdriver, extra long

- 6 point
- Two component handle
- With hanging hole
- Chrome plated and mirror polished
- Chrome vanadium

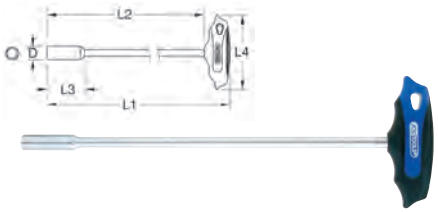

	mm	D mm	L1 mm	L2 mm	L3 mm	L4 mm	g
158.5408	8	12.6	390.0	350.0	13.0	115.0	180
158.5409	9	13.6	390.0	350.0	14.0	115.0	190
158.5410	10	14.7	390.0	350.0	15.0	115.0	220
158.5413	13	17.7	390.0	350.0	15.0	115.0	230
158.5414	14	19.1	390.0	350.0	16.0	115.0	250

T-HANDLE NUT SCREWDRIVER SETS

CHROME*plus*® T-handle socket srewdriver set

- 6 point
- Two component handle
- With hanging hole
- Chrome plated and mirror polished
- Chrome vanadium

			kg
158.5000	6 pcs	6 - 8 - 10 - 12 - 13 - 14 mm	1.40

T-HANDLE HEXAGON SOCKET KEY WRENCH

ERGOTORQUE*plus*® T-handle hexagon key wrench

- With two component handle
- Continuous hardened
- Tip burnished
- Chrome plated and mirror polished
- Special steel

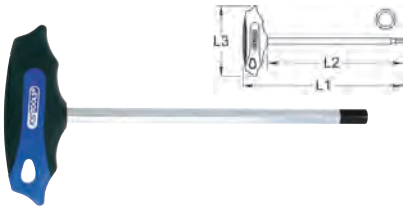

	mm	L1 mm	L2 mm	L3 mm	g
158.8032	2,0	130.0	100.0	80.0	20
158.80325	2,5	130.0	100.0	80.0	30
158.8033	3,0	130.0	100.0	80.0	30
158.8034	4,0	180.0	150.0	80.0	50
158.8035	5,0	185.0	150.0	100.0	100
158.8036	6,0	185.0	150.0	100.0	140
158.8037	7,0	185.0	150.0	100.0	157
158.8038	8,0	230.0	200.0	100.0	320
158.8040	10,0	235.0	200.0	115.0	360

3 Way T-handle hexagonal key wrench

- Hexagonal profile on three ends
- For difficult to access areas
- Matt finish
- Chrome finish with burnished tips
- Chrome vanadium

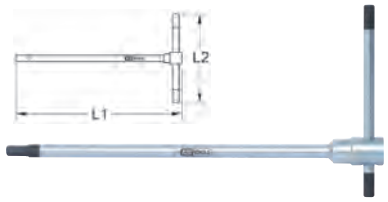

	mm	L1 mm	L2 mm	g
158.5102	2,0	125.0	65.0	23
158.51025	2,5	125.0	65.0	23
158.5103	3,0	125.0	65.0	23
158.5104	4,0	180.0	90.0	59
158.51045	4,5	180.0	90.0	59
158.5105	5,0	180.0	90.0	60
158.5106	6,0	210.0	105.0	126
158.5108	8,0	250.0	125.0	208
158.5110	10,0	300.0	145.0	384

ERGOTORQUE*plus*® T-handle hexagon key wrench

- Ideal for difficult to access screws
- With two component handle
- Continuous hardened
- Matt chrome
- Special steel

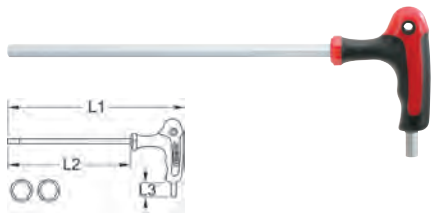

	mm	L1 mm	L2 mm	L3 mm	g
151.2686	2,0	142.0	100.0	12.0	12
151.2687	2,5	142.0	100.0	12.0	15
151.2688	3,0	167.0	125.0	12.0	19
151.2689	4,0	211.0	150.0	14.0	49
151.2690	4,5	211.0	150.0	14.0	60
151.2691	5,0	211.0	150.0	14.0	68
151.2692	6,0	236.0	175.0	14.0	91
151.2693	7,0	261.0	200.0	14.0	142
151.2694	8,0	279.0	200.0	16.0	175
151.2695	10,0	304.0	225.0	16.0	257

T-HANDLE HEXAGON SOCKET KEY WRENCH SETS

ERGOTORQUE*plus*® T-handle key wrench set

- In accordance to DIN / ISO 2936
- Continuous hardened
- Chrome plated and mirror polished
- Tip burnished
- Special steel
- In durable wall holder

			kg
158.8130	8 pcs	2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	1.08

3 Way T-handle hexagonal key wrench set

- Hexagonal profile on hree ends
- For diffi ult to access areas
- Matt finis
- Chrome finish wi h burnished tips
- Chrome vanadium
- In durable plastic storage case

			kg
158.5100	8 pcs	2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	2.00

T-HANDLE BALL ENDED-HEXAGON KEY WRENCHES

ERGOTORQUE*plus*® T-handle ball ended hexagon key wrench

- With ball head on the long end
- Ideal for diffi ult to access screws
- With two component handle
- Continuous hardened
- Tip burnished
- Matt chrome
- Special steel

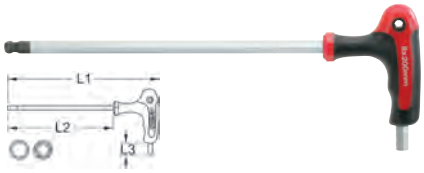

	mm	L1 mm	L2 mm	L3 mm	g
151.8130	2,0	138.0	100.0	12.0	20
151.8131	2,5	140.0	100.0	13.0	30
151.8132	3,0	140.0	100.0	15.0	30
151.8133	4,0	188.0	150.0	15.0	50
151.8134	5,0	205.0	150.0	15.0	100
151.8135	6,0	205.0	150.0	15.0	140
151.8136	7,0	210.0	150.0	15.0	300
151.8137	8,0	250.0	200.0	15.0	320
151.8138	10,0	275.0	200.0	18.0	360
151.8139	12,0	275.0	200.0	20.0	420

T-HANDLE BALL ENDED HEXAGON SOCKET KEY WRENCH SETS

ERGOTORQUE*plus*® T-handle ball ended hexagon key wrench set

- With ball head on the long end
- Ideal for diffi ult to access screws
- With two component handle
- Continuous hardened
- Tip burnished
- Matt chrome
- Special steel

			kg
151.8155	8 pcs	2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm	0.44

ERGOTORQUE*plus*® T-handle ball ended hexagon key wrench set

- With ball head on the long end
- Ideal for diffi ult to access screws
- With two component handle
- Continuous hardened
- Tip burnished
- Matt chrome
- Special steel
- In durable plastic storage case

			kg
151.8150	9 pcs	2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 - 12 mm	1.80

T-HANDLE TX-KEY WRENCH

ERGOTORQUE*plus*® T-handle TX key wrench

- With two component handle
- Continuous hardened
- Tip burnished
- Chrome plated and mirror polished
- Special steel

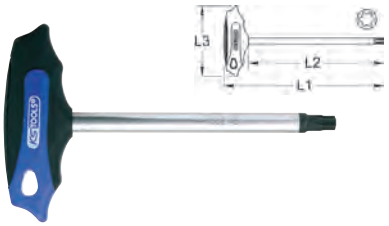

		L1 mm	L2 mm	L3 mm	g
158.8015	T5	130.0	100.0	80.0	18
158.8016	T6	130.0	100.0	80.0	18
158.8017	T7	130.0	100.0	80.0	18
158.8018	T8	130.0	100.0	80.0	33
158.8019	T9	130.0	100.0	80.0	38
158.8020	T10	130.0	100.0	80.0	38
158.8021	T15	130.0	100.0	80.0	30
158.8022	T20	130.0	100.0	80.0	30
158.8023	T25	135.0	100.0	100.0	50
158.8024	T27	135.0	100.0	100.0	100
158.8025	T30	135.0	100.0	100.0	100
158.8026	T40	235.0	200.0	100.0	300
158.8027	T45	285.0	250.0	100.0	320
158.8028	T50	290.0	250.0	115.0	360

3 Way T-handle TX key wrench

- TX profile on hree ends
- For diffi ult to access areas
- Matt finis
- Chrome finish wi h burnished tips
- Chrome vanadium

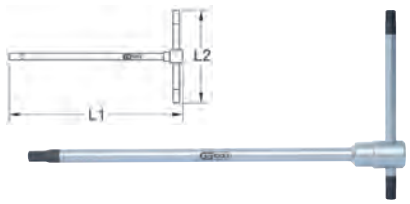

		L1 mm	L2 mm	g
158.5201	T10	125.0	65.0	23
158.5202	T15	125.0	65.0	23
158.5203	T20	125.0	65.0	23
158.5204	T25	180.0	90.0	59
158.5205	T27	180.0	90.0	59
158.5206	T30	180.0	90.0	60
158.5207	T40	180.0	90.0	126
158.5208	T45	180.0	90.0	208
158.5209	T50	250.0	125.0	384

ERGOTORQUE*plus*® T-handle TX key wrench, long

- Extra long execution
- With two component handle
- Continuous hardened
- Tip burnished
- Chrome plated and mirror polished
- Special steel

		L1 mm	L2 mm	L3 mm	g
158.8051	T10	403.0	373.0	80.0	30
158.8052	T15	403.0	373.0	80.0	30
158.8053	T20	403.0	373.0	100.0	40
158.8054	T25	408.0	373.0	100.0	40
158.8055	T27	408.0	373.0	100.0	40
158.8056	T30	408.0	373.0	100.0	45

T-HANDLE TX-HEXAGON KEY WRENCH SETS

ERGOTORQUE*plus*® T -handle TX key wrench set

- Continuous hardened
- Chrome plated and mirror polished
- Tip burnished
- Special steel
- In durable wall holder

			kg	
158.8160	9 pcs	T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50	1.33	

3 Way T-handle TX key wrench set

- TX profile on hree ends
- For diffi ult to access areas
- Matt finis
- Chrome finish wi h burnished tips
- Chrome vanadium
- In durable plastic storage case

			kg	
158.5200	9 pcs	T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50	1.88	

ERGOTORQUE*plus*® T -handle TX key wrench set

- Extra long execution
- With two component handle
- Continuous hardened
- Tip burnished
- Chrome plated and mirror polished
- Special steel

			g	
158.8050	6 pcs	T10 - T15 - T20 - T25 - T27 - T30	375	

T-HANDLE TX-BALL ENDED KEY WRENCH

ERGOTORQUE*plus*® T -handle ball ended TX key wrench

- With ball head on the long end
- Ideal for diffi ult to access screws
- With two component handle
- Continuous hardened
- Matt chrome
- Special steel

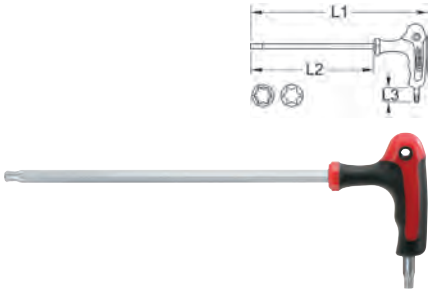

		L1 mm	L2 mm	L3 mm	g	
151.2751	T6	167.0	125.0	12.0	20	
151.2752	T7	167.0	125.0	12.0	20	
151.2753	T8	167.0	125.0	12.0	20	
151.2754	T9	167.0	125.0	12.0	25	
151.2755	T10	167.0	125.0	12.0	30	
151.2756	T15	167.0	125.0	12.0	35	
151.2757	T20	167.0	125.0	12.0	40	
151.2758	T25	211.0	150.0	14.0	50	
151.2759	T27	211.0	150.0	14.0	70	
151.2760	T30	211.0	150.0	14.0	75	
151.2761	T40	254.0	175.0	16.0	120	

T-HANDLE TX TAMPERPROOF KEY WRENCH

ERGOTORQUE*plus*® T -handle TX tamperproof key wrench

- Tamperproof
- With two component handle
- Continuous hardened
- Tip burnished
- Matt chrome
- Special steel

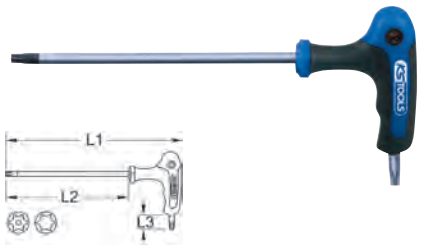

		L1 mm	L2 mm	L3 mm	g	
151.8119	TB9	100.0	100.0	13.0	20	
151.8121	TB10	140.0	100.0	13.0	20	
151.8122	TB15	140.0	100.0	15.0	30	
151.8123	TB20	140.0	100.0	15.0	30	
151.8124	TB25	208.0	150.0	15.0	50	
151.8125	TB27	208.0	150.0	15.0	100	
151.8126	TB30	208.0	150.0	15.0	140	
151.8127	TB40	260.0	200.0	15.0	300	
151.8128	TB45	260.0	200.0	18.0	320	
151.8129	TB50	280.0	200.0	20.0	360	

T-HANDLE TX TAMPERPROOF KEY WRENCH SETS

ERGOTORQUE*plus*® T-handle TX tamperproof key wrench set

- Tamperproof
- With two component handle
- Continuous hardened
- Tip burnished
- Matt chrome
- Special steel

			kg	
151.8165	8 pcs	TB9 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	0.70	

ERGOTORQUE*plus*® T-handle TX tamperproof key wrench set

- Tamperproof
- With two component handle
- Continuous hardened
- Tip burnished
- Matt chrome
- Special steel
- In durable plastic storage case

			kg	
151.8160	9 pcs	TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50	1.80	

6 SCREWDRIVERS

KSTOOLS®

Innovation is our mission!

	PAGE
ERGOTORQUE® WOOD SCREWDRIVER	230
ERGOTORQUE® SCREWDRIVER	231 - 232
ERGOTORQUE® SCREWDRIVER SETS	232 - 233
ERGOTORQUE® SCREWDRIVER DISPLAYS	234
ERGOTORQUE*plus*® SCREWDRIVER	234 - 236
ERGOTORQUE*plus*® SCREWDRIVER SETS	236 - 237
ERGOTORQUE*plus*® SCREWDRIVER DISPLAYS	237
ERGOTORQUE®*max*	237 - 238
ERGOTORQUE®*max* SCREWDRIVER SETS	238
ERGOTORQUE®*max* SCREWDRIVER DISPLAYS	239
VDE	239
VDE SCREWDRIVER SETS	239
VDE SCREWDRIVER DISPLAYS	240
KEY WRENCH	240
1/4" BIT SCREWDRIVERS	240
1/4" RATCHET BIT SCREWDRIVERS	240 - 241
MAGNETISING AND DE-MAGNETISING ATTACHMENT	241
1/2“ HAND IMPACT SCREWDRIVER	241

SCREWDRIVERS

Hammer cap with a direct connection to the blade

Optimum power transmission and perfect operation

Blue handle component made out of impact resistant plastic

Black handle zone made out of structured soft material

Ergotorque® handle with ergonomic design adapts itself perfectly to the hand

6 point wrench drive

Blades made from S2 special steel continuous hardened matt chrome

Rigid hexagon blade for high torsion power

Black blade tip, with high size accuracy

Composition

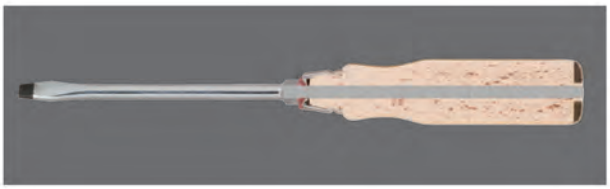

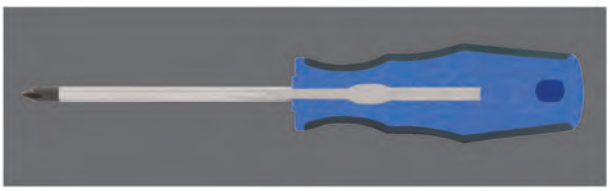

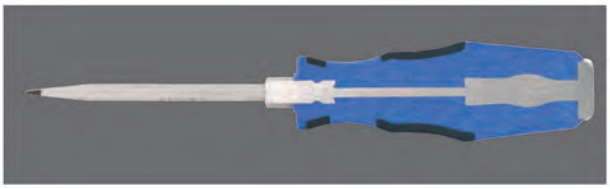

Profil s

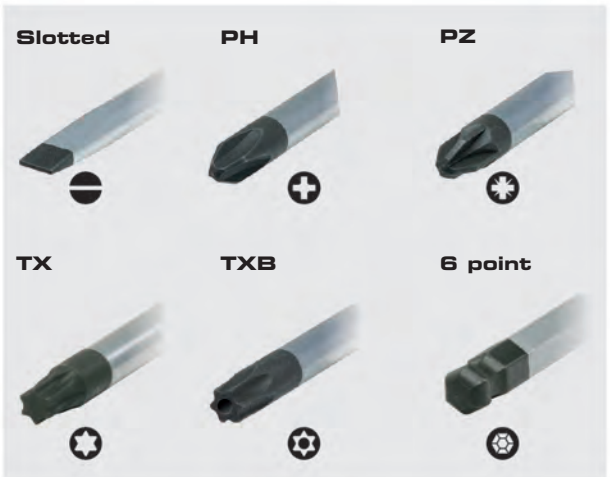

1/4” Additional square drive for use with the T handle ratchet (duplication of the torque)

Screwdriver profil

ERGOTORQUE® Wood

- Ergonomic handle design
- Handles made of hard wood beech
- Forged hexagon spanner drive
- Blade made of special chrome molybdenum vanadium alloy

ERGOTORQUE®

- Robust 1 component plastic handle (black)
- Ergonomic handle design - with micro structured surface
- Rigid hexagonal blade
- Blade made of S2 special steel - continuous hardened and matt chrome finish

ERGOTORQUE® plus

- 2 Component comfort handle with striking cap
- Ergonomic handle design
- Hard blue core with soft black component with micro structured surface
- Rigid hexagonal blade with forged hexagon spanner drive
- Blade made out of S2 special steel - continuous hardened and matt chrome finish

ERGOTORQUE® max

- 2 Component comfort handle
- Ergonomic handle design
- Hard blue core with soft black component with micro structured surface
- Rigid round blade with forged hexagon spanner drive
- Blade made out of S2 special steel - continuous hardened and matt chrome finish

Handle variants

Wood

- Hard wood beech
- Protective leather cap for shatter protection
- Continuous blade

- Hard wood beech
- Ergonomic, convex handle contour
- Metal striking cap
- Firm connection between blade and striking cap

Plastic

- Robust 1 component plastic handle
- Black
- Ergonomic handle design
- Handle zone with micro structure surface
- Chemical and oil resistant

2 Component

- Ergonomic handle design
- Blue handle made out of impact resistant plastic
- Black handle zone made out of structured soft material
- Handle with hanging eyelet

- Ergonomic handle design
- Blue handle made out of impact resistant plastic
- Black handle zone made out of structured soft material
- Handle end with striking cap
- Firm connection between blade and striking cap

ERGOTORQUE® WOOD SCREWDRIVER

ERGOTORQUE® WOOD screwdriver for slotted screws

- DIN 5265 / ISO 2380
- Includes hexagon drive for a spanner or wrench
- Protective leather cap on the handle end
- Optimal power transmission
- Ergonomically formed and sealed beech wood handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

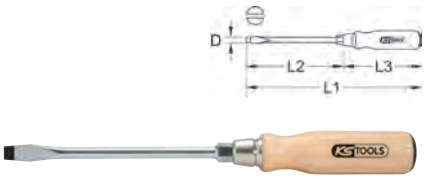

	D mm	L1 mm	L2 mm	L3 mm		g
300.1001	3,5	170.0	75.0	95.0	●	50
300.1002	4,5	185.0	90.0	95.0	●	50
300.1003	5,5	200.0	100.0	100.0	●	70
300.1004	7,0	235.0	125.0	110.0	●	120
300.1005	9,0	280.0	150.0	120.0	●	170
300.1006	10,0	300.0	175.0	125.0	●	220
300.1007	12,0	330.0	200.0	130.0	●	310
300.1008	14,0	390.0	250.0	140.0	●	360

ERGOTORQUE® WOOD screwdriver for phillips screws PH

- DIN 8764
- Includes hexagon drive for a spanner or wrench
- Protective leather cap on the handle end
- Optimal power transmission
- Ergonomically formed and sealed beech wood handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm		g
300.1011	PH 1	175.0	80.0	95.0	●	50
300.1012	PH 2	220.0	100.0	120.0	●	90
300.1013	PH 3	270.0	150.0	120.0	●	170
300.1014	PH 4	340.0	200.0	140.0	●	330

ERGOTORQUE® WOOD screwdriver for phillips screws PZ

- DIN 8764
- Includes hexagon drive for a spanner or wrench
- Protective leather cap on the handle end
- Optimal power transmission
- Ergonomically formed, sealed beech wood handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm		g
300.1021	PZ 1	175.0	80.0	95.0	●	50
300.1022	PZ 2	220.0	100.0	120.0	●	90
300.1023	PZ 3	270.0	150.0	120.0	●	170
300.1024	PZ 4	340.0	200.0	140.0	●	330

ERGOTORQUE® WOOD screwdriver set

- Includes hexagon drive for a spanner or wrench
- Protective leather cap on the handle end
- Optimal power transmission
- Ergonomically formed, sealed beech wood handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

			g
300.1100	6 pcs	ERGOTORQUE® WOOD screw-driver set	420

4 x	3,5 - 4,5 - 5,5 - 7 mm
2 x	PH1 - PH2

ERGOTORQUE® WOOD*max* screwdriver for slotted screws

- DIN 5265
- Includes hexagon drive for a spanner or wrench
- Protective cap on the handle end
- Optimal power transmission
- Ergonomically formed, sealed beech wood handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



	D mm	L1 mm	L2 mm	L3 mm		g
300.1051	3,5	175.0	75.0	100.0	●	50
300.1052	4,5	190.0	90.0	100.0	●	50
300.1053	5,5	205.0	100.0	105.0	●	70
300.1054	7,0	240.0	125.0	115.0	●	120
300.1055	8,0	275.0	150.0	125.0	●	170

ERGOTORQUE® WOOD*max* screwdriver for phillips screws PH

- DIN / ISO 8764
- Includes hexagon drive for a spanner or wrench
- Protective cap on the handle end
- Optimal power transmission
- Ergonomically formed, sealed beech wood handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



	L1 mm	L2 mm	L3 mm		g
300.1061	PH 1	180.0	80.0	100.0	●	50
300.1062	PH 2	225.0	100.0	125.0	●	90
300.1063	PH 3	275.0	150.0	125.0	●	170

ERGOTORQUE® WOOD*max* screwdriver for phillips screws PZ

- DIN / ISO 8764
- Includes hexagon drive for a spanner or wrench
- Protective cap on the handle end
- Optimal power transmission
- Ergonomically formed, sealed beech wood handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



		L1 mm	L2 mm	L3 mm		g
300.1071	PZ 1	180.0	80.0	100.0	●	50
300.1072	PZ 2	225.0	100.0	125.0	●	90
300.1073	PZ 3	275.0	150.0	125.0	●	170

ERGOTORQUE® WOOD*max* screwdriver set

- Includes hexagon drive for a spanner or wrench
- Protective cap on the handle end
- Optimal power transmission
- Ergonomically formed, sealed beech wood handle
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

			g
300.1050	6 pcs	ERGOTORQUE® WOOD*max* screwdriver set	500

4 x	3,5 - 4,5 - 5,5 - 7 mm
2 x	PH1 - PH2

ERGOTORQUE® SCREWDRIVER

ERGOTORQUE® screwdriver for slotted screws, stubby

- DIN 5265
- Extra short blade
- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

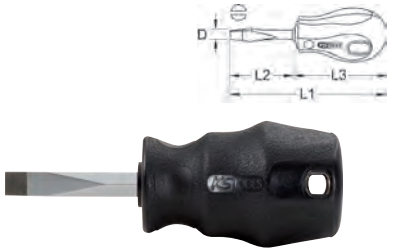

	D mm	L1 mm	L2 mm	L3 mm	g	
911.3755	4,0	75.0	25.0	50.0	35	
911.3756	5,0	75.0	25.0	50.0	36	
911.1141	6,0	90.0	38.0	52.0	40	
911.3757	6,5	75.0	25.0	50.0	39	
911.3758	8,0	75.0	25.0	50.0	44	

ERGOTORQUE® screwdriver for phillips screws PH, stubby

- DIN / ISO 8764
- Extra short blade
- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm	g	
911.3759	PH 1	75.0	25.0	50.0	42	
911.1132	PH 2	90.0	38.0	52.0	40	

ERGOTORQUE® screwdriver for phillips screws PZ, stubby

- DIN / ISO 8764
- Extra short blade
- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

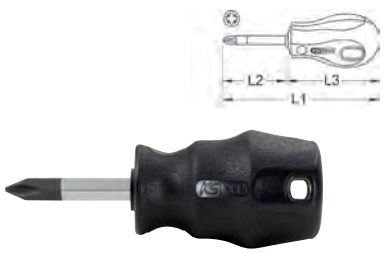

		L1 mm	L2 mm	L3 mm	g	
911.3760	PZ 1	75.0	25.0	50.0	42	
911.1136	PZ 2	90.0	38.0	52.0	40	

ERGOTORQUE® screwdriver for slotted screws

- DIN 5265
- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

	D mm	L1 mm	L2 mm	L3 mm	g	
911.1146	3,2	175.0	75.0	100.0	20	
911.1641	3,5	180.0	80.0	100.0	30	
911.1138	4,5	175.0	100.0	75.0	30	
911.1181	4,0	205.0	125.0	80.0	30	
911.1182	4,0	280.0	200.0	80.0	40	
911.1183	5,0	175.0	75.0	100.0	40	
911.1184	5,0	250.0	150.0	100.0	40	
911.1185	5,0	350.0	250.0	100.0	40	
911.1139	5,5	200.0	100.0	100.0	40	
911.1147	6,5	200.0	100.0	100.0	40	
911.1142	6,5	225.0	125.0	100.0	40	
911.1642	6,5	250.0	150.0	100.0	108	
911.1144	8,0	260.0	150.0	110.0	40	
911.1186	8,0	310.0	200.0	110.0	40	
911.1643	10,0	285.0	175.0	110.0	229	
911.1644	12,0	310.0	200.0	110.0	250	
911.1645	14,0	345.0	225.0	120.0	286	

ERGOTORQUE® screwdriver for phillips screws PH

- DIN / ISO 8764
- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm	g	
911.1646	PH 0	140.0	60.0	80.0	33	
911.1130	PH 1	175.0	75.0	100.0	76	
911.1187	PH 1	350.0	250.0	100.0	140	
911.1131	PH 2	200.0	100.0	100.0	60	
911.1188	PH 2	350.0	250.0	100.0	140	
911.1133	PH 3	255.0	150.0	105.0	60	
911.1647	PH 4	310.0	200.0	110.0	252	

ERGOTORQUE® screwdriver for phillips screws PZ

- DIN / ISO 8764
- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm	g	
911.1648	PZ 0	140.0	60.0	80.0	33	
911.1134	PZ 1	175.0	75.0	100.0	76	
911.1135	PZ 2	200.0	100.0	100.0	60	
911.1137	PZ 3	260.0	150.0	100.0	140	
911.1649	PZ 4	310.0	200.0	110.0	252	

ERGOTORQUE® screwdriver for TX screws

- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm	g	
911.1651	T5	130.0	60.0	70.0	35	
911.1652	T6	130.0	60.0	70.0	36	
911.1653	T7	130.0	60.0	70.0	36	
911.1150	T8	150.0	75.0	75.0	40	
911.1158	T9	150.0	75.0	75.0	40	
911.1151	T10	200.0	100.0	100.0	40	
911.1152	T15	200.0	100.0	100.0	40	
911.1153	T20	200.0	100.0	100.0	40	
911.1154	T25	200.0	100.0	100.0	40	
911.1155	T27	200.0	100.0	100.0	40	
911.1156	T30	200.0	100.0	100.0	40	
911.1157	T40	200.0	100.0	100.0	40	
911.1654	T45	240.0	130.0	110.0	102	

ERGOTORQUE® screwdriver for TX screws, long

- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm	g	
911.1670	T15	330.0	250.0	80.0	60	
911.1671	T20	343.0	250.0	93.0	60	
911.1672	T25	345.0	250.0	95.0	70	
911.1673	T30	360.0	250.0	110.0	70	

ERGOTORQUE® screwdriver for TX screws, tamperproof

- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm	g	
911.1674	TB7	130.0	60.0	70.0	25	
911.1160	TB8	175.0	75.0	100.0	40	
911.1168	TB9	200.0	100.0	100.0	40	
911.1161	TB10	175.0	75.0	100.0	40	
911.1162	TB15	200.0	100.0	100.0	40	
911.1163	TB20	200.0	100.0	100.0	40	
911.1164	TB25	200.0	100.0	100.0	40	
911.1165	TB27	200.0	100.0	100.0	40	
911.1166	TB30	200.0	100.0	100.0	40	
911.1167	TB40	200.0	100.0	100.0	40	

ERGOTORQUE® screwdriver for hexagon screws with ball end

- One component handle
- Optimal power transmission
- With hanging hole
- Incorporates hexagon blade
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

	mm	L1 mm	L2 mm	L3 mm	g	
911.1191	2,0	175.0	100.0	75.0	30	
911.1192	2,5	175.0	100.0	75.0	30	
911.1193	3,0	175.0	100.0	75.0	30	
911.1194	4,0	175.0	100.0	75.0	30	
911.1195	5,0	195.0	100.0	95.0	30	
911.1196	6,0	195.0	100.0	95.0	30	
911.1197	8,0	210.0	100.0	110.0	30	

ERGOTORQUE® bit screwdriver

- Extra short execution
- Magnetic
- One component handle
- Optimal power transmission
- 1/4" hexagonal holder for bits
- Hanging hole

1/4"

	○	L mm	g	
911.1190	1/4"	63.0	30	

ERGOTORQUE® bit screwdriver

- One component handle
- Optimal power transmission
- Magnetic
- For bits to DIN 3126 / C 6,3
- Hanging hole
- Blade made of chrome vanadium

1/4"

	○	L1 mm	L2 mm	L3 mm	g	
911.1198	1/4"	200.0	100.0	100.0	90	
911.1199	1/4"	250.0	150.0	100.0	100	

ERGOTORQUE® quick change bit screwdriver

- Locking and fast change device
- One component handle
- Optimal power transmission
- Magnetic
- For bits to DIN 3126 / C 6,3
- Hanging hole
- Blade made of chrome vanadium

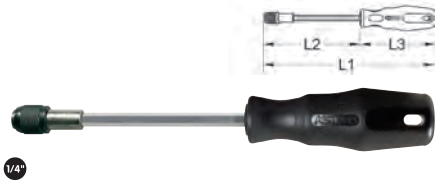

1/4"

	○	L1 mm	L2 mm	L3 mm	g	
911.1145	1/4"	200.0	100.0	100.0	100	

ERGOTORQUE® Soldering tip 4.5mm, diagonal

- One component handle
- Includes clamping ring
- For bits to DIN 3126
- Optimal power transmission
- With hanging hole

1/4"

	○	L mm	g	
911.1170	1/4"	110.0	50	

ERGOTORQUE® bit screwdriver

- Flexible
- Limited torque
- Double spiral shaft
- One component handle
- Plastic protective coating
- 1/4" hexagonal holder for bits
- Hanging hole

1/4"

	○	L1 mm	L2 mm	L3 mm	L4 mm	g	
911.1129	1/4"	200.0	150.0	50.0	8.0	200	

ERGOTORQUE® Square screwdriver

- Flexible blade with double spiral shaft
- Limited torque
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Plastic protective coating
- One component handle
- With hanging hole

1/4"

	■	D mm	L1 mm	L2 mm	L3 mm	g	
911.1120	1/4"	15.0	200.0	150.0	50.0	150	

ERGOTORQUE® socket screwdriver

- 6 point
- Flexible
- Limited torque
- Double spiral shaft
- Plastic protective coating
- With hanging hole
- Chrome vanadium

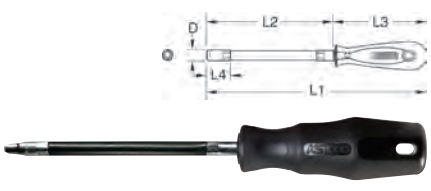

	mm	D mm	L1 mm	L2 mm	L3 mm	L4 mm	g	
911.1126	6	10.8	259.0	150.0	109.0	9.3	155	
911.1127	7	11.7	259.0	150.0	109.0	10.0	155	
911.1128	8	11.9	259.0	150.0	109.0	10.0	155	
911.1125	10	12.5	279.0	170.0	109.0	14.3	170	

ERGOTORQUE® SCREWDRIVER SETS

ERGOTORQUE® screwdriver set

- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

			g
911.2110	6 pcs	ERGOTORQUE® screwdriver set	600
3 x		4,5 - 5,5 - 6,5 mm	
3 x		PH1 - PH2 - PH3	

ERGOTORQUE® screwdriver set

- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

			g
911.2120	6 pcs	ERGOTORQUE® screwdriver set	630
3 x		4,5 - 5,5 - 6,5 mm	
3 x		PZ1 - PZ2 - PZ3	

ERGOTORQUE® screwdriver set

- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

			g
911.2130	7 pcs	ERGOTORQUE® screwdriver set	630
3 x		5,5 - 6,5 - 8 mm	
2 x		PH1 - PH2	
1 x		6 mm	
1 x		PH2	

ERGOTORQUE® screwdriver set

- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

911.2125	7 pcs	ERGOTORQUE® screwdriver set	630
7 x		TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	

ERGOTORQUE® screwdriver set

- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

911.2115	7 pcs	ERGOTORQUE® screwdriver set	630
7 x		T10 - T15 - T20 - T25 - T27 - T30 - T40	

ERGOTORQUE® screwdriver and bit set

- One component handle
- Optimal power transmission
- With hanging hole
- Contains also the most current 1/4" bits
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium
- In durable plastic storage case

911.2101	25 pcs	ERGOTORQUE® screwdriver and bit set	1.25
4 x		4,5 - 5,5 - 6,5 - 8 mm	
2 x		PH1 - PH2	
1 x		1/4“	
1 x		PH3	
3 x		PZ1 - PZ2 - PZ3	
7 x		2 - 2,5 - 3 - 4 - 5 - 5,5 - 6 mm	
7 x		T10 - T15 - T20 - T25 - T27 - T30 - T40	

ERGOTORQUE® double ended blade set

- Double ended blades
- Includes screwdriver handle
- Interchangeable through clamping ring
- Hardened blade
- Matt finish
- Chrome vanadium
- In durable plastic storage case

911.2400	9 pcs	ERGOTORQUE® double ended blade set	750
1 x			
1 x		5 x 6 mm	
1 x		PH1 x PH2	
1 x		PZ1 x PZ2	
2 x		3 x 4 mm - 5 x 6 mm	
3 x		T10 x T15 - T20 x T25 - T30 x T40	

ERGOTORQUE® screwdriver and bit set

- One component handle
- Optimal power transmission
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium
- In durable plastic storage case

911.2150	50 pcs	ERGOTORQUE® screwdriver and bit set	1.50
3 x		5,5 - 6,5 - 8 mm	
3 x		PH1 - PH2 - PH3	
1 x		6 mm	
1 x		PH2	
1 x		1/4“	
3 x		2 - 2,4 - 3 mm	
2 x		PH00 - PH0	
2 x		T15 - T20	
1 x		1/4“	
1 x		1/4“	
1 x		1/4“	
1 x		140 mm	
4 x		3 - 4 - 5 - 6 mm	
3 x		PH1 - PH2 - PH3	
3 x		PZ1 - PZ2 - PZ3	
6 x		2,5 - 3 - 4 - 5 - 6 - 7 mm	
7 x		T10 - T15 - T20 - T25 - T27 - T30 - T40	
7 x		TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	

ERGOTORQUE® SCREWDRIVER DISPLAYS

ERGOTORQUE® screwdriver display

- One component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium
- In display stand

			kg
911.0136	136 pcs	ERGOTORQUE® screwdriver display	21.22
20 x		5 x (3,2 - 4,5 - 5,5 - 6,5 mm)	
15 x		5 x (PH1 - PH2 - PH3)	
15 x		5 x (PZ1 - PZ2 - PZ3)	
45 x		5 x (T8 - T9 - T10 - T15 - T20 - T25 - T27 - T30 - T40)	
5 x		6 mm	
5 x		PH2	
5 x		PZ2	
15 x		5 x (4 - 5 - 8 mm)	
5 x		PH2	
5 x		100 mm	

ERGOTORQUE*plus*® SCREWDRIVER

ERGOTORQUE*plus*® screwdriver for slotted screws, stubby

- DIN 5265
- Extra short blade
- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



	D mm	L1 mm	L2 mm	L3 mm	g
159.1001	6,0	98.0	38.0	60.0	40

ERGOTORQUE*plus*® screwdriver for phillips screws PH, stubby

- DIN / ISO 8764
- Extra short blade
- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



		L1 mm	L2 mm	L3 mm	g
159.1026	PH 2	98.0	38.0	60.0	40

ERGOTORQUE*plus*® screwdriver for phillips screws PZ, stubby

- DIN / ISO 8764
- Extra short blade
- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



		L1 mm	L2 mm	L3 mm	g
159.1046	PZ 2	98.0	38.0	60.0	40

ERGOTORQUE*plus*® screwdriver for slotted screws

- DIN 5265
- Two component handle
- Hexagon drive
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium



	D mm	L1 mm	L2 mm	L3 mm		g
159.1002	3,0	155.0	75.0	80.0		40
159.1003	4,0	155.0	75.0	80.0		40
159.1004	4,0	180.0	100.0	80.0		50
159.1005	5,5	205.0	100.0	105.0		50
159.1006	5,5	230.0	125.0	105.0		50
159.1007	5,5	255.0	150.0	105.0		60
159.1008	6,5	230.0	125.0	105.0	●	60
159.1009	6,5	255.0	150.0	105.0	●	90
159.1010	8,0	265.0	150.0	115.0	●	130
159.1011	8,0	315.0	200.0	115.0	●	150
159.1012	10,0	315.0	200.0	115.0	●	180
159.1013	10,0	365.0	250.0	115.0	●	190

ERGOTORQUE*plus*® screwdriver for slotted screws, extra long

- DIN 5265
- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

	D mm	L1 mm	L2 mm	L3 mm	g
159.1107	5,5	405.0	300.0	105.0	100

6 in 1 ERGOTORQUE*plus*® screwdriver

- DIN / ISO 8764
- Two component handle
- Hexagon drive
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadiumUniversal use for Phillips screws PH1, PH2 and PH3 as well as for PZ1, PZ2 and PZ3.



	L1 mm	L2 mm	L3 mm		g
159.1100	230.0	125.0	105.0	●	30

ERGOTORQUE*plus*® scr ewdriver for phillips screws PH

- DIN / ISO 8764
- Two component handle
- Hexagon drive
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

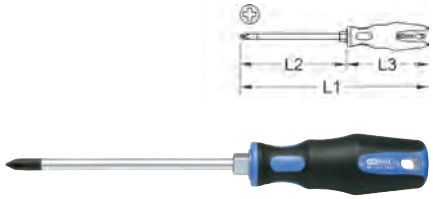

		L1 mm	L2 mm	L3 mm		g	
159.1027	PH 0	155.0	75.0	80.0		30	
159.1020	PH 1	180.0	75.0	105.0		40	
159.1029	PH 1	205.0	100.0	105.0		70	
159.1021	PH 2	205.0	100.0	105.0	●	70	
159.1022	PH 2	230.0	125.0	105.0	●	80	
159.1023	PH 2	255.0	150.0	105.0	●	90	
159.1028	PH 2	305.0	200.0	105.0	●	110	
159.1024	PH 3	265.0	150.0	115.0	●	130	
159.1025	PH 3	315.0	200.0	115.0	●	150	

ERGOTORQUE*plus*® scr ewdriver for phillips screws PH, extra long

- DIN / ISO 8764
- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm	g	
159.1128	PH 2	405.0	300.0	105.0	100	

ERGOTORQUE*plus*® scr ewdriver for phillips screws PZ

- DIN / ISO 8764
- Two component handle
- Hexagon drive
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

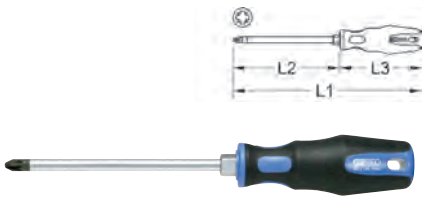

		L1 mm	L2 mm	L3 mm		g	
159.1047	PZ 0	155.0	75.0	80.0		30	
159.1040	PZ 1	180.0	75.0	105.0		30	
159.1049	PZ 1	205.0	100.0	105.0		30	
159.1041	PZ 2	205.0	100.0	105.0	●	30	
159.1042	PZ 2	230.0	125.0	105.0	●	60	
159.1043	PZ 2	255.0	150.0	105.0	●	60	
159.1044	PZ 3	265.0	150.0	115.0	●	130	
159.1048	PZ 2	305.0	200.0	105.0	●	110	
159.1045	PZ 3	315.0	200.0	115.0	●	150	

ERGOTORQUE*plus*® scr ewdriver for TX screws

- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm	g
159.1030	T8	205.0	100.0	105.0	50
159.1031	T9	205.0	100.0	105.0	50
159.1032	T10	205.0	100.0	105.0	50
159.1033	T15	205.0	100.0	105.0	50
159.1034	T20	205.0	100.0	105.0	50
159.1035	T25	205.0	100.0	105.0	60
159.1036	T27	205.0	100.0	105.0	60
159.1037	T30	205.0	100.0	105.0	60
159.1038	T40	205.0	100.0	105.0	80

ERGOTORQUE*plus*® scr ewdriver for TX screws, tamperproof

- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm	g
159.1050	TB8	205.0	100.0	105.0	50
159.1051	TB9	205.0	100.0	105.0	50
159.1052	TB10	205.0	100.0	105.0	50
159.1053	TB15	205.0	100.0	105.0	50
159.1054	TB20	205.0	100.0	105.0	50
159.1055	TB25	205.0	100.0	105.0	60
159.1056	TB27	205.0	100.0	105.0	60
159.1057	TB30	205.0	100.0	105.0	60
159.1058	TB40	205.0	100.0	105.0	80

ERGOTORQUE*plus*® scr ewdriver for hexagon screws with ball end

- Two component handle
- Optimal power transmission
- With hanging hole
- Incorporates hexagon blade
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

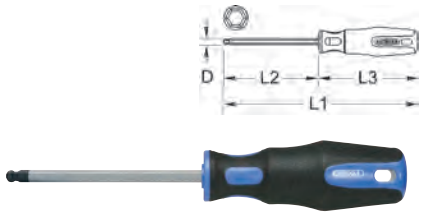

	D mm	L1 mm	L2 mm	L3 mm	g
159.1060	2,5	180.0	100.0	80.0	20
159.1061	3,0	180.0	100.0	80.0	20
159.1062	4,0	180.0	100.0	80.0	20
159.1063	5,0	205.0	100.0	105.0	60
159.1064	6,0	205.0	100.0	105.0	70
159.1065	8,0	205.0	100.0	105.0	130

ERGOTORQUE*plus*® bit scr ewdriver

- Two component handle
- Optimal power transmission
- Magnetic
- For bits to DIN 3126 / C 6,3
- Hanging hole
- Blade made of chrome vanadium

	○	L1 mm	L2 mm	L3 mm	g	
159.1198	1/4"	205.0	100.0	105.0	90	

ERGOTORQUE*plus*® sock et screwdriver

- 6 point
- Two component handle
- With hanging hole
- Matt finis
- Chrome vanadium

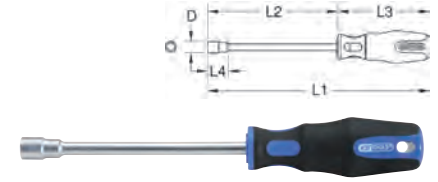

	mm	D mm	L1 mm	L2 mm	L3 mm	L4 mm	g	
159.1201	4	6.6	255.0	150.0	105.0	4.3	60	
159.1202	5	7.6	255.0	150.0	105.0	4.4	70	
159.1203	5,5	8.2	255.0	150.0	105.0	4.8	80	
159.1204	6	8.8	255.0	150.0	105.0	5.5	80	
159.1205	7	10.0	255.0	150.0	105.0	6.8	110	
159.1206	8	11.2	264.0	150.0	114.0	7.0	110	
159.1207	9	13.9	264.0	150.0	114.0	9.3	110	
159.1208	10	15.0	264.0	150.0	114.0	9.9	120	
159.1209	11	16.5	264.0	150.0	114.0	10.3	130	
159.1210	12	17.6	264.0	150.0	114.0	11.2	180	
159.1211	13	17.6	264.0	150.0	114.0	11.6	180	
159.1212	14	18.9	264.0	150.0	114.0	13.0	180	

ERGOTORQUE*plus*® squar e screwdriver, extra long

- Flexible blade with double spiral shaft
- Limited torque
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Plastic protective coating
- Two component handle
- With hanging hole

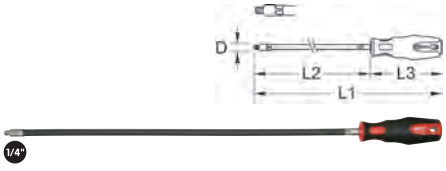

	■	D mm	L1 mm	L2 mm	L3 mm	g	
911.1171	1/4"	12.0	614.0	500.0	114.0	280	

ERGOTORQUE*plus*® bit scr ewdriver, extra long

- Flexible blade with double spiral shaft
- Limited torque
- For bits to DIN 3126 / C 6,3
- Plastic protective coating
- Two component handle
- Hanging hole

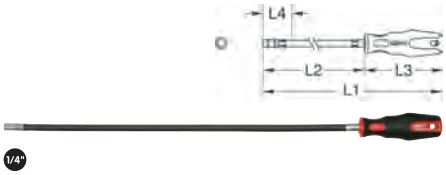

	○	L1 mm	L2 mm	L3 mm	L4 mm	g	
911.1172	1/4"	614.0	500.0	114.0	43.0	280	

ERGOTORQUE*plus*® socket screwdriver, extra long

- 6 point
- Flexible
- Limited torque
- Double spiral shaft
- Plastic protective coating
- Two component handle
- With hanging hole
- Chrome vanadium



	mm	D mm	L1 mm	L2 mm	L3 mm	L4 mm	g
911.1175	5	11.9	614.0	500.0	114.0	8.9	270
911.1176	6	10.9	614.0	500.0	114.0	11.3	280
911.1177	7	11.7	614.0	500.0	114.0	11.3	280
911.1178	8	11.7	614.0	500.0	114.0	11.3	280

ERGOTORQUE*plus*® SCREWDRIVER SETS

ERGOTORQUE*plus*® bit set

- Two component handle
- Optimal power transmission
- Power screwdriver handle with fast change device
- With hanging hole
- Hardened blade
- Nickel plated
- Blade made of chrome vanadium
- In practical folding case

			g
159.2010	17 pcs	ERGOTORQUE*plus*® bit set	750
1 x		1/4“	
1 x		5,5 mm	
3 x		PH1 - PH2 - PH3	
3 x		PZ1 - PZ2 - PZ3	
4 x		3 - 4 - 5 - 6 mm	
5 x		TB10 - TB15 - TB20 - TB25 - TB30	

ERGOTORQUE*plus*® screwdriver set

- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

			g
159.0005	5 pcs	ERGOTORQUE*plus*® screwdriver set	270
3 x		4 - 5,5 - 6,5 mm	
2 x		PH1 - PH2	

ERGOTORQUE*plus*® screwdriver set

- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

			g
159.0010	6 pcs	ERGOTORQUE*plus*® screwdriver set	708
4 x		3 - 4 - 5,5 - 6,5 mm	
2 x		PH1 - PH2	

ERGOTORQUE*plus*® screwdriver set

- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

			g
159.0020	6 pcs	ERGOTORQUE*plus*® screwdriver set	580
4 x		3 - 4 - 5,5 - 6,5 mm	
2 x		PZ1 - PZ2	

ERGOTORQUE*plus*® screwdriver set

- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

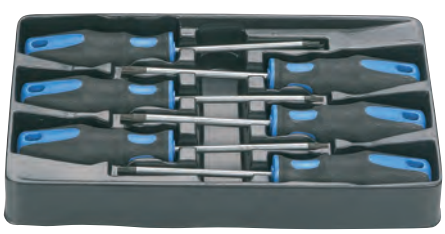

			g
159.0030	6 pcs	ERGOTORQUE*plus*® screwdriver set	580
6 x		T10 - T15 - T20 - T25 - T30 - T40	

ERGOTORQUE*plus*® screwdriver set

- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

			g
159.0040	6 pcs	ERGOTORQUE*plus*® screwdriver set	580
6 x		TB10 - TB15 - TB20 - TB25 - TB30 - TB40	

ERGOTORQUE*plus*® screwdriver and bit set

- Two component handle
- Optimal power transmission
- Includes the most current 1/4" bits, bit holder and screwdriver bits
- With hanging hole
- Hardened blade
- Chrome finish wi h burnished tips
- Chrome vanadium
- In durable plastic storage case

			kg
159.0100	39 pcs	ERGOTORQUE*plus*® screwdriver and bit set	2.91
6 x		3 - 4 - 5,5 - 6,5 - 8 - 10 mm	
4 x		PH0 - PH1 - PH2 - PH3	
4 x		PZ0 - PZ1 - PZ2 - PZ3	
1 x		6 mm	
1 x		PH2	
1 x		100 mm	
1 x		1/4“	
7 x		2 - 2,5 - 3 - 4 - 5 - 6 - 8 mm	
7 x		T10 - T15 - T20 - T25 - T27 - T30 T40	
7 x		TB10 - TB15 - TB20 - TB25 - TB27 TB30 - TB40	

ERGOTORQUE*plus*® sock et screwdriver set

- 6 point
- Two component handle
- With hanging hole
- Matt finis
- Chrome vanadium

159.1200	8 pcs	ERGOTORQUE*plus*® soc ket screwdriver set	800

8 x		5 - 6 - 7 - 8 - 10 - 11 - 12 - 13 mm

ERGOTORQUE® scr ewdriver set

- Flexible blade with double spiral shaft
- Limited torque
- Plastic protective coating
- Two component handle
- With hanging hole
- Contains also the most current 1/4" bits and sockets
- In display box

911.1180	16 pcs	ERGOTORQUE® scr ewdriver set	1.30

1 x		1/4"
1 x		1/4"
1 x		7 mm
3 x		5 - 6 - 8 mm
2 x		5.5 - 6.5 mm
2 x		PH1 - PH2
6 x		T10 - T15 - T20 - T25 - T27 - T30

ERGOTORQUE*plus*® S CREWDRIVER DISPLAYS

ERGOTORQUE*plus*® scr ewdriver display

- Two component handle
- Optimal power transmission
- With hanging hole
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium
- In display stand

159.0136	136 pcs	ERGOTORQUE*plus*® scr ewdriver display	26.00

30 x		5 x (3 - 4 - 5,5 - 6,5 - 8 - 10 mm)
15 x		5 x (PH1 - PH2 - PH3)
15 x		5 x (PZ1 - PZ2 - PZ3)
45 x		5 x (T8 - T9 - T10 - T15 - T20 - T25 - T27 - T30 - T40)
5 x		6 mm
5 x		PH2
5 x		PZ2
5 x		5,5 mm
5 x		PH2
5 x		100 mm

ERGOTORQUE® *max*

ERGOTORQUE® *max* T-handle ratchet

- DIN 3122 / ISO 3315
- Reversible
- 1/4" square drive adaptor to DIN 3120 / ISO 1174
- With ball lock
- Exact gearing with 45 teeth
- Two component handle
- With hanging hole
- Handy and compact
- Matt finis
- Chrome vanadium

		B mm	L1 mm	L2 mm	
151.1109	1/4"	115.0	110.0	55.0	40

ERGOTORQUE® *max* hammer cap screwdriver for slotted screws, stubby

- DIN 5265
- Extra short blade
- Two component handle
- Protective cap on the handle end
- Internal square drive adaptor to DIN 3120 / ISO 1174 in the hammer cap
- Ideal for usage with T-handle screwdriver drive and standard ratchet
- Optimal power transmission
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium



	D mm	L1 mm	L2 mm	L3 mm	
151.1131	6,0	98.0	38.0	60.0	40

ERGOTORQUE® *max* hammer cap screwdriver for phillips screws PH, stubby

- DIN / ISO 8764
- Extra short blade
- Two component handle
- Protective cap on the handle end
- Internal square drive adaptor to DIN 3120 / ISO 1174 in the hammer cap
- Ideal for usage with T-handle screwdriver drive and standard ratchet
- Optimal power transmission
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium



		L1 mm	L2 mm	L3 mm	
151.1107	PH 2	98.0	38.0	60.0	40

ERGOTORQUE® *max* hammer cap screwdriver for phillips screws PZ, stubby

- DIN / ISO 8764
- Extra short blade
- Two component handle
- Protective cap on the handle end
- Internal square drive adaptor to DIN 3120 / ISO 1174 in the hammer cap
- Ideal for usage with T-handle screwdriver drive and standard ratchet
- Optimal power transmission
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium



		L1 mm	L2 mm	L3 mm	
151.1147	PZ 2	98.0	38.0	60.0	40

ERGOTORQUE®*max* hammer cap screwdriver for slotted screws

- DIN 5265
- Two component handle
- Hexagon drive
- Protective cap on the handle end
- Internal square drive adaptor to DIN 3120 / ISO 1174 in the hammer cap
- Ideal for usage with T-handle screwdriver drive and standard ratchet
- Optimal power transmission
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

	D mm	L1 mm	L2 mm	L3 mm		g
151.1123	3,5	185.0	80.0	105.0		70
151.1125	4,5	195.0	90.0	105.0		70
151.1128	5,5	205.0	100.0	105.0	●	150
151.1132	7,0	230.0	125.0	105.0	●	240
151.1133	8,0	230.0	125.0	105.0	●	240
151.1134	10,0	230.0	125.0	105.0	●	300

ERGOTORQUE®*max* hammer cap screwdriver for phillips screws PH

- DIN / ISO 8764
- Two component handle
- Hexagon drive
- Protective cap on the handle end
- Internal square drive adaptor to DIN 3120 / ISO 1174 in the hammer cap
- Ideal for usage with T-handle screwdriver drive and standard ratchet
- Optimal power transmission
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm		g
151.1101	PH 0	165.0	60.0	105.0		120
151.1102	PH 1	185.0	80.0	105.0	●	150
151.1104	PH 2	205.0	100.0	105.0	●	220
151.1105	PH 3	255.0	150.0	105.0	●	250
151.1106	PH 4	305.0	200.0	105.0	●	280

ERGOTORQUE®*max* hammer cap screwdriver for phillips screws PZ

- DIN / ISO 8764
- Two component handle
- Hexagon drive
- Protective cap on the handle end
- Internal square drive adaptor to DIN 3120 / ISO 1174 in the hammer cap
- Ideal for usage with T-handle screwdriver drive and standard ratchet
- Optimal power transmission
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm		g
151.1141	PZ 0	165.0	60.0	105.0	●	120
151.1142	PZ 1	185.0	80.0	105.0	●	150
151.1144	PZ 2	205.0	100.0	105.0	●	230
151.1145	PZ 3	255.0	150.0	105.0	●	250
151.1146	PZ 4	305.0	200.0	105.0	●	280

ERGOTORQUE®*max* SCREWDRIVER SETS

ERGOTORQUE®*max* hammer cap screwdriver set

- Two component handle
- Hexagon drive
- Protective cap on the handle end
- Internal square drive adaptor to DIN 3120 / ISO 1174 in the hammer cap
- Ideal for usage with T-handle screwdriver drive and standard ratchet
- Optimal power transmission
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

			kg
151.1160	6 pcs	ERGOTORQUE®*max* hammer cap screwdriver set	1.33

3 x	5,5 - 7 - 8 mm
3 x	PH1 - PH2 - PH3

ERGOTORQUE®*max* hammer cap screwdriver set

- Two component handle
- Hexagon drive
- Protective cap on the handle end
- Internal square drive adaptor to DIN 3120 / ISO 1174 in the hammer cap
- Ideal for usage with T-handle screwdriver drive and standard ratchet
- Optimal power transmission
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

			kg
151.1165	6 pcs	ERGOTORQUE®*max* hammer cap screwdriver set	1.13

3 x	5,5 - 7 - 8 mm
3 x	PZ1 - PZ2 - PZ3

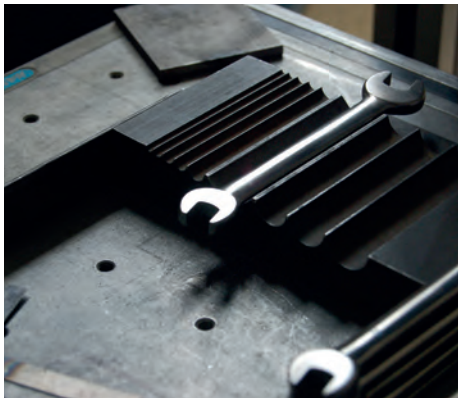

ERGOTORQUE®*max* hammer cap screwdriver set

- Two component handle
- Hexagon drive
- Includes T-handle ratchet
- Protective cap on the handle end
- Internal square drive adaptor to DIN 3120 / ISO 1174 in the hammer cap
- Ideal for usage with T-handle screwdriver drive and standard ratchet
- Optimal power transmission
- Hardened blade
- Chrome finish with burnished tips
- Blade made of chrome vanadium

			kg
151.1100	7 pcs	ERGOTORQUE®*max* hammer cap screwdriver set	0.98

4 x	3,5 - 4,5 - 5,5 - 7 mm
2 x	PH1 - PH2
1 x	1/4“

ERGOTORQUE®*max* hammer cap screwdriver set

- Two component handle
- Hexagon drive
- Includes T-handle ratchet
- Protective cap on the handle end
- Optimal power transmission
- Hardened blade
- Blade made of chrome vanadium
- In durable plastic storage case

			kg
151.1150	13 pcs	ERGOTORQUE®*max* hammer cap screwdriver set	3.50

5 x	3,5 - 5,5- 7 - 8 - 10 mm
5 x	PH0 - PH1 - PH2 - PH3 - PH4
1 x	6 mm
1 x	PH2
1 x	1/4“

ERGOTORQUE®*max* SCREWDRIVER DISPLAYS

ERGOTORQUE®*max* hammer cap screwdriver - display stand

- Two component handle
- Hexagon drive
- Includes T-handle ratchet
- Protective cap on the handle end
- Optimal power transmission
- Hardened blade
- In display stand

151.1170	100 pcs	ERGOTORQUE®*max* hammer cap screwdriver - display stand	32.00

30 x		5 x (3,5 - 4,5 - 5,5 - 7 - 8 - 10 mm)
25 x		5 x (PH0 - PH1 - PH2 - PH3 - PH4)
25 x		5 x (PZ0 - PZ1 - PZ2 - PZ3 - PZ4)
5 x		6 mm
5 x		PH2
5 x		PZ2
5 x		1/4“

VDE

ERGOTORQUE® VDE screwdriver for slotted screws

- Slotted
- In accordance to DIN 5264 / DIN ISO 2380
- Insulated to IEC 60900
- Two component handle
- Burnished tip
- S2 special steel

	D mm	L1 mm	L2 mm	L3 mm		
117.0502	2,5	155.0	75.0	80.0		32
117.0504	3,0	180.0	100.0	80.0		35
117.0506	3,5	180.0	100.0	80.0		38
117.0508	4,0	180.0	100.0	80.0		41
117.0512	5,5	230.0	125.0	105.0		92
117.0514	6,5	255.0	150.0	105.0		111
117.0516	8,0	290.0	175.0	115.0		164
117.0518	10,0	315.0	200.0	115.0		230

ERGOTORQUE® VDE screwdriver for phillips screws PH

- PH
- In accordance to DIN 7438 / DIN ISO 8764
- Insulated to IEC 60900
- Two component handle
- Burnished tip
- S2 special steel

		L1 mm	L2 mm	L3 mm		
117.0522	PH 0	140.0	60.0	80.0		32
117.0524	PH 1	185.0	80.0	105.0		38
117.0526	PH 2	205.0	100.0	105.0		95
117.0528	PH 3	265.0	150.0	115.0		152

ERGOTORQUE® VDE screwdriver for Phillips screws PZ

- PZ
- In accordance to DIN 7438 / DIN ISO 8764
- insulated to IEC 60900
- With two component handle
- Burnished
- S2 special steel

		L1 mm	L2 mm	L3 mm		
117.0532	PZ 0	140.0	60.0	80.0		32
117.0534	PZ 1	185.0	80.0	105.0		38
117.0536	PZ 2	205.0	100.0	105.0		95
117.0538	PZ 3	265.0	150.0	115.0		152

Insulated screwdriver for internal TX screws

- TX
- Insulated to IEC 60900
- Burnished tip
- Special steel

		L1 mm	L2 mm	L3 mm		
117.0551	T10	170.0	80.0	90.0		27
117.0552	T15	170.0	80.0	90.0		28
117.0553	T20	190.0	100.0	90.0		36
117.0554	T25	190.0	100.0	90.0		61
117.0555	T27	205.0	115.0	90.0		74
117.0556	T30	205.0	115.0	90.0		93

Insulated Socket Screwdriver

- 6 point
- In accordance to DIN 7445
- Insulated to IEC 60900
- Chrome vanadium

	mm	D mm	L1 mm	L2 mm	L3 mm	L4 mm		
117.1177	3	10.0	215.0	125.0	90.0	37.0		65
117.1178	3,5	10.0	215.0	125.0	90.0	37.0		70
117.1179	4	10.0	215.0	125.0	90.0	37.0		70
117.1181	4,5	10.0	215.0	125.0	90.0	37.0		70
117.1235	5	11.5	215.0	125.0	90.0	37.0		75
117.1182	5,5	15.5	215.0	125.0	90.0	37.0		70
117.1236	6	12.5	215.0	125.0	90.0	37.0		75
117.1237	7	14.5	225.0	125.0	100.0	37.0		115
117.1238	8	15.5	225.0	125.0	100.0	37.0		115
117.1239	9	16.5	225.0	125.0	100.0	37.0		155
117.1240	10	17.0	225.0	125.0	100.0	37.0		120
117.1241	11	19.5	235.0	125.0	110.0	37.0		160
117.1242	12	20.5	235.0	125.0	110.0	37.0		170
117.1243	13	21.5	235.0	125.0	110.0	37.0		170
117.1244	14	23.5	235.0	125.0	110.0	37.0		170
117.1247	17	26.5	235.0	125.0	110.0	37.0		190

VDE SCREWDRIVER SETS

ERGOTORQUE® VDE screwdriver set

- In accordance to DIN 5264 / 7437 / 7438 / 8764
- Insulated to IEC 60900
- Two component handle
- Burnished tip
- S2 special steel

117.0540	5 pcs	ERGOTORQUE® VDE screwdriver set	200

1 x		PH1
3 x		2,5 - 4,0 - 5,5 mm
1 x		3,0 mm

ERGOTORQUE® VDE screwdriver set

- In accordance to DIN 5264 / 7437 / 7438 / 8764
- Insulated to IEC 60900
- Two component handle
- Burnished tip
- S2 special steel



117.0550	8 pcs	ERGOTORQUE® VDE screwdriver set	430

3 x		PH0 - PH1 - PH2
4 x		2,5 - 4,0 - 5,5 - 6,5 mm
1 x		3,0 mm

Insulated socket screwdriver set

- 6 point
- In accordance to DIN 7445
- Insulated handle to IEC 60900
- Chrome vanadium

117.1255	5 pcs	Insulated socket screwdriver set	630

5 x		5,5 - 7 - 8 - 10 - 13 mm

VDE SCREWDRIVER DISPLAYS

ERGOTORQUE® VDE screwdriver display

- Insulated to IEC 60900
- Two component handle
- Includes voltage tester
- Burnished tip
- Blades made from S2 special steel
- In display stand

			kg
117.0560	120 pcs	ERGOTORQUE® VDE screwdriver display	23.00
50 x		5 x 2,5 - 5 x 3,0 - 5 x 3,5 - 5 x 4,0 10 x 5,5 - 10 x 6,5 - 5 x 8,0 - 5 x 10,0 mm	
20 x		3,0 mm	
25 x		5 x PH0 - 5 x PH1 - 10 x PH2 - 5 x PH3	
25 x		5 x PZ0 - 5 x PZ1 - 10 x PZ2 - 5 x PZ3	

KEY WRENCH

Offset screwdriver, slotted

- Short execution
- DIN / ISO 8764
- Continuous hardened
- Matt chrome
- Special steel

	D mm	L1 mm	L2 mm	g
151.2674	3,5	90.0	12.4	10
151.2675	4,0	100.0	15.3	12
151.2676	5,5	125.0	20.4	25
151.2677	8,0	150.0	24.8	50
151.2678	10,0	175.0	32.8	135
151.2679	12,0	200.0	42.4	228

Offset screwdriver, PH

- Short execution
- DIN / ISO 8764
- Continuous hardened
- Matt chrome
- Special steel

		L1 mm	L2 mm	g
151.2680	PH 1 - PH 2	100.0	25.4	40
151.2681	PH 2 - PH 3	150.0	33.1	77
151.2682	PH 3 - PH 4	200.0	38.6	77

Offset screwdriver, PZ

- Short execution
- DIN / ISO 8764
- Continuous hardened
- Matt chrome
- Special steel

		L1 mm	L2 mm	g
151.2683	PZ 1 - PZ 2	125.0	24.4	40
151.2684	PZ 3 - PZ 4	200.0	37.9	156

1/4" BIT SCREWDRIVERS

ERGOTORQUE® bit screwdriver

- Extra short execution
- Magnetic
- One component handle
- Optimal power transmission
- 1/4" hexagonal holder for bits
- Hanging hole

1/4"

	○	L mm	g
911.1190	1/4"	63.0	30

ERGOTORQUE® bit screwdriver

- One component handle
- Optimal power transmission
- Magnetic
- For bits to DIN 3126 / C 6,3
- Hanging hole
- Blade made of chrome vanadium

1/4"

	○	L1 mm	L2 mm	L3 mm	g
911.1198	1/4"	200.0	100.0	100.0	90
911.1199	1/4"	250.0	150.0	100.0	100

ERGOTORQUE® quick change bit screwdriver

- Locking and fast change device
- One component handle
- Optimal power transmission
- Magnetic
- For bits to DIN 3126 / C 6,3
- Hanging hole
- Blade made of chrome vanadium

1/4"

	○	L1 mm	L2 mm	L3 mm	g
911.1145	1/4"	200.0	100.0	100.0	100

ERGOTORQUE® bit screwdriver

- Flexible
- Limited torque
- Double spiral shaft
- One component handle
- Plastic protective coating
- 1/4" hexagonal holder for bits
- Hanging hole

1/4"

	○	L1 mm	L2 mm	L3 mm	L4 mm	g
911.1129	1/4"	200.0	150.0	50.0	8.0	200

ERGOTORQUE*plus*® bit screwdriver

- Two component handle
- Optimal power transmission
- Magnetic
- For bits to DIN 3126 / C 6,3
- Hanging hole
- Blade made of chrome vanadium

1/4"

	○	L1 mm	L2 mm	L3 mm	g
159.1198	1/4"	205.0	100.0	105.0	90

ERGOTORQUE*plus*® bit screwdriver, extra long

- Flexible blade with double spiral shaft
- Limited torque
- For bits to DIN 3126 / C 6,3
- Plastic protective coating
- Two component handle
- Hanging hole

1/4"

	○	L1 mm	L2 mm	L3 mm	L4 mm	g
911.1172	1/4"	614.0	500.0	114.0	43.0	280

1/4" RATCHET BIT SCREWDRIVERS

Ratchet bit screwdriver

- Robust gearing with 24 teeth
- Ratchet function
- 180° multi ajustable blade
- For bits to DIN 3126 / C 6,3
- Magnetic
- Integrated bit magazine with 13 bits
- Ergonomically designed handle

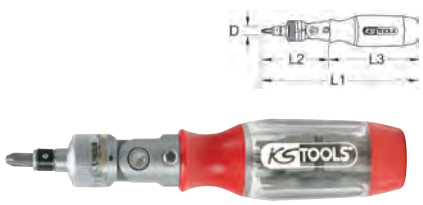

1/4"

	○	D mm	L1 mm	L2 mm	L3 mm	g
911.2470	1/4"	10.0	190.0	82.0	108.0	380

T-handle ratchet bit screwdriver

- Robust gearing with 24 teeth
- Ratchet function
- Locking and fast change device
- 45° two way revolving head
- For bits to DIN 3126 / C 6,3
- Fast change bit stop function
- Magnetic
- Integrated bit magazine with 5 bits
- Two component handle



1/4"

	○	D mm	L1 mm	L2 mm	L3 mm	g
911.2475	1/4"	15.0	140.0	26.0	114.0	380

Mini ratchet screwdriver

- Exact gearing with 72 teeth
- Ratchet function
- For bits to DIN 3126 / C 6,3
- Magnetic
- Two component handle
- Blade mirror polished chrome



1/4"

	○	L1 mm	L2 mm	L3 mm	g
159.2061	1/4"	95.0	27.0	68.0	140

Revolver ratchet bit screwdriver

- Exact gearing with 72 teeth
- Ratchet function
- Handle with double function (standard and pistol handle)
- For bits to DIN 3126 / C 3,6
- Magnetic
- 40 Nm maximum torque
- Integrated bit magazine
- Two component handle
- Blade mirror polished chrome



1/4"

	○	L1 mm	L2 mm	L3 mm	g
159.2051	1/4"	260.0	130.0	130.0	450

GEAR*plus*® ratchet screwdriver set

- Exact gearing with 72 teeth
- Ratchet function
- For bits to DIN 3126 / C 6,3
- Magnetic
- 40 Nm maximum torque
- Integrated bit magazine
- Two component handle
- Chrome plated and mirror polished
- In durable plastic storage case

1/4"

			g
159.2050	58 pcs	GEAR*plus*® ratchet screwdriver set	1200
13 x		4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm	
10 x		5/32" - 3/16" - 7/32" - 1/4" - 9/32" - 5/16" - 11/32" - 3/8" - 7/16" - 1/2"	
1 x		1/4"	
1 x		1/4" x 1/4"	
1 x		300 mm	
1 x		250 mm	
2 x		150 - 250 mm	
3 x		4 - 5,5 - 7 mm	
3 x		PH1 - PH2 - PH3	
3 x		PZ1 - PZ2 - PZ3	
7 x		T10 - T15 - T20 - T25 - T27 - T30 - T40	
7 x		TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40	
6 x		3 - 4 - 5 - 6 - 7 - 8 mm	

MAGNETISING AND DE-MAGNETISING ATTACHMENT

Magnetizer and demagnetizer

- Easy to use
- To magnetise by pulling the blade through
- To demagnetise by pulling the blade over the recess
- For screwdrivers, tweezers and similar tools made of steel
- Plastic housing



	B mm	H mm	L mm	g
550.1126	15.0	20.0	47.0	70

You can find p ecision screwdrivers in the Precision Mechanics section

1/2" HAND IMPACT SCREWDRIVER

Hand-impact screwdriver

- Reversible
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- 1/4 Revolution of the impact screwdriver through hammer blow (Parable mechanism)
- Optimal feed rate
- No slippage of the blade bit possible
- Ideal for loosening jammed screw connections
- Ideally suited for the automotive area
- Special steel



1/2"

	■	D mm	L mm	g
515.1004	1/2"	35.0	135.0	950

Hand impact screwdriver set

- Reversible
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- 1/4 Revolution of the impact screwdriver through hammer blow (Parable mechanism)
- Optimal feed rate
- No slippage of the blade bit possible
- Ideal for loosening jammed screw connections
- Ideally suited for the automotive area
- Includes the most current impact bits, impact bit adaptor
- Special steel
- In durable plastic storage case

1/2"

			kg
515.1003	11 pcs	Hand impact screwdriver set	1.00

consists of:

		g
515.1004	1/2" Hand impact screwdriver 1/2"	950
911.4351	1/2" x 5/16" Bit adaptor steel ball type	25
911.1283-1	5/16" Impact bit PH1	10
911.1268-1	5/16" Impact bit PH2	10
911.1284-1	5/16" Impact bit PH3	10
911.1276	5/16" Slotted impact bit 5 mm	10
911.1271	5/16" Slotted impact bit 6 mm	10
911.1286	5/16" Slotted impact bit 8 mm	10
911.1287	5/16" Slotted impact bit 10 mm	10
911.5143	5/16" Slotted bit, 12 mm	10
911.1275	5/16" Slotted impact bit 14 mm	20

7 PLIERS

KS TOOLS®

Innovation is our mission!

	PAGE
COMBINATION PLIERS	246
FLAT PLIERS	246
NEEDLE NOSE PLIERS	246 - 247
TELEPHONE PLIERS	247 - 248
CUTTING PLIERS AND SIDE CUTTERS	248 - 249
WIRE STRIPPER	249
UNIVERSAL PLIER SETS	249 - 250
WATER PUMP PLIERS	251
WATER PUMP PLIER SETS	251 - 252
PIPE WRENCHES	252 - 254
PIPE WRENCH SETS	254
FITTERS PLIERS	254
CIRCLIP PLIERS FOR INTERNAL CIRCLIPS	254 - 255
CIRCLIP PLIERS FOR EXTERNAL CIRCLIPS	255
CIRCLIP PLIER SETS FOR CIRCLIPS	255
LOCKING PLIERS	256 - 261
RIVETING PLIERS	261 - 263
CRIMPING PLIERS	263 - 264
WIRE PROCESSING PLIERS	265
BOLT CUTTERS	265
SADDLER PLIERS	266
REVOLVING PUNCH PLIERS	266
PUNCHED HOLE AND JOGGLER PLIERS	266
PLUMBER PLIERS	266 - 267
AUTOMOTIVE CLIP REMOVAL PLIERS	267
CARTRIDGE TIP PLIERS	267
WHEELS & TYRES PLIERS	267 - 268
CHASSIS & BRAKE PLIERS	268 - 269
BRAKE PLIERS	269
OIL & FUEL SERVICE PLIERS	269 - 270
HOSE CLAMP PLIERS	270
HOSE CLAMP PLIERS	270 - 272
HOSE CLAMP PLIER SETS	272 - 273
HOSE STRP CUTTER PLIERS	273
SOLDERING WIRE HOLDING FORCEPS	273
INCANDESCENT BULB PLIERS	273
VALVE AND PISTON PLIERS	273
IGNITION COILS AND GLOW PLUG PLIERS	273 - 274
EXHAUST PLIERS	274
CIRCUIT STOPPER PLIERS	274

PLIERS

Manufacturing and fabrication steps

Raw material blank

Forging of the plier blank

Deburring

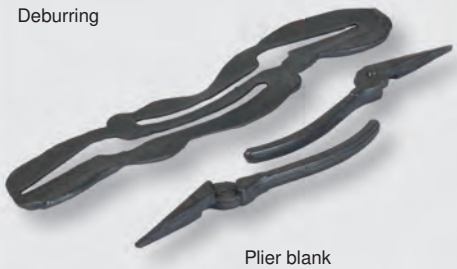

Plier blank

Preparing of the joint rivet reception and the pliers head profil

Hardening and tempering

Riveting and arranging of the pliers arms and surface refinement of he pliers head

Attaching of the handle sheath

Plier joints

Lay-on joint

The two halves of the pliers are placed on top of each other and riveted - without being milled out. e.g.: End cutting pliers

Lap joint

One of the pliers arms revolves in the milled edge and the other arm around the joint bolt. e.g.: Combination pliers

Box joint

Joint which is pushed through in the arm of the pliers by an opening in the other arm. e.g: Water pump plier

Surfaces

Polished head

Titan finis

Handle designs

Dipped handle

2 component handle

Plier profil

CLASSIC

- Dip coated handle
- Hot forged and tempered
- Ground heads
- Precise machined, oil hardened and tempered
- Cutting edges inductively hardened
- High cutting performance
- Special quenched and tempered steel

Handle colour: red

ERGOTORQUE®

- 2 Component handle with ergonomic hand protection
- Hot forged and tempered
- Ground heads
- Precise machines, oil hardened and tempered
- Cutting edges inductively hardened
- Perfect torque transmission
- High cutting performance
- Special quenched and tempered steel

Handle colour: black / red

ULTIMATE PLUS

- 2 Component handle with ergonomic hand protection
- Hot forged and tempered
- Head chrome plated titan finishe
- Precise machined, oil hardened and tempered
- Cutting edges inductively hardened
- Perfect torque transmission
- Excellent cutting performance
- Special quenched and tempered steel

Handle colour: black / red

GRIPXtreme

- Forged gripping jaws
- Prevents slipping even at high forces
- Well thought through jaw teeth
- Size adjustment using the adjustment wheel
- With loosening lever
- No fla ing under the strongest loads
- Nickel-plated

ESD pliers

Can be found in the Precision Mechanics section

Insulated pliers

Can be found in the VDE and general electrician tool kits section

COMBINATION PLIERS

Combination pliers

- In accordance to DIN ISO 5748
- Long cutting edge
- Suitable for wire
- Inductively hardened precision cutting edges
- With PVC dipped handle
- Matt chrome
- Special tool steel

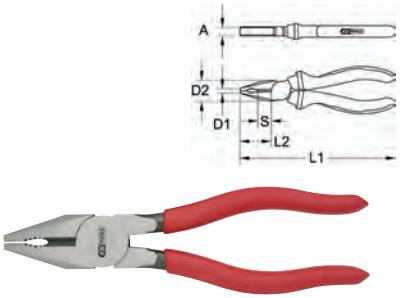

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g
115.1320	11.0	7.0	25.0	165.0	34.0	15,0	150
115.1321	12.0	8.0	28.0	180.0	36.0	16,0	290
115.1322	12.0	9.0	33.0	200.0	41.0	20,0	380

ERGOTORQUE® combina tion pliers

- In accordance to DIN ISO 5748
- Long cutting edge
- Suitable for wire
- Inductively hardened precision cutting edges
- With two component handle
- Matt chrome
- Special tool steel

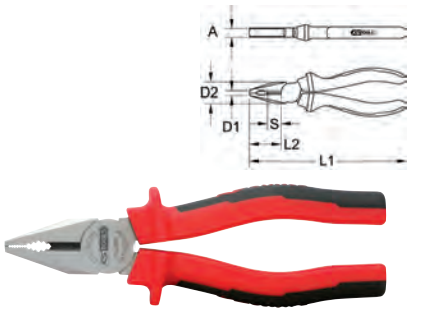

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g
115.1020	11.0	7.0	24.0	160.0	35.0	15,0	300
115.1021	12.0	7.0	28.0	180.0	36.0	15,0	300
115.1022	12.0	7.0	32.0	200.0	41.0	20,0	390

ULTIMATE*plus* combination pliers

- In accordance to DIN / ISO 5748
- Long cutting edge
- Suitable for wire
- Inductively hardened precision cutting edges
- With two component handle
- Titanium coated surface
- Special tool steel

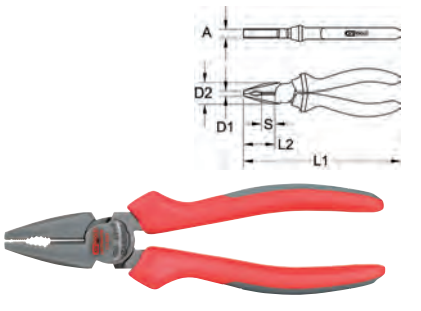

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g
119.2020	11.0	7.0	24.0	160.0	35.0	15,0	300
119.2021	12.0	7.0	28.0	180.0	36.0	15,0	300
119.2022	12.0	7.0	32.0	200.0	41.0	20,0	400

FLAT PLIERS

Flat pliers

- In accordance to DIN / ISO 5232
- With locking jaw opening
- With adjusting screw and spring
- With two component handle
- For wires from 0,5 - 4,0 mm²
- Titanium coated surface
- Special tool steel

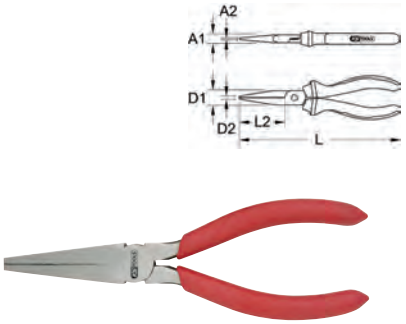

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
115.1316	11.0	7.0	19.0	7.0	165.0	51.0	150
115.1317	13.0	7.0	20.0	7.0	200.0	63.0	230

Double jointed fl t pliers, extra long

- Serrated execution
- With double joint
- Extremely narrow design
- For diffi ult to access areas
- With PVC dipped handle
- Matt chrome
- Special tool steel

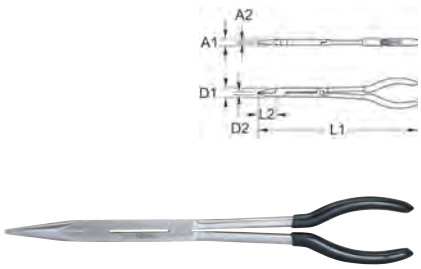

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7062	11.0	3.0	18.0	5.0	335.0	65.0	450

Telephone pliers, extra long

- Long nosed jaws
- Serrated execution
- With PVC dipped handle
- Extra long execution
- Matt chrome
- Special tool steel

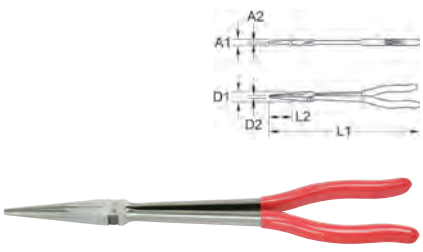

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7051	11.0	4.0	18.0	7.0	270.0	70.0	330

ERGOTORQUE® fl t pliers

- In accordance to DIN ISO 5745
- Serrated execution
- With two component handle
- Matt chrome
- Special tool steel

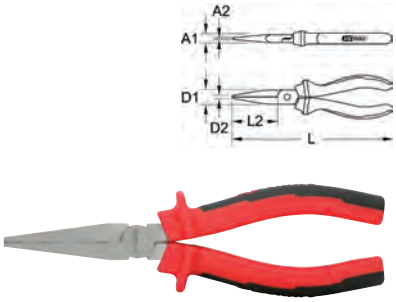

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
115.1016	9.0	6.0	18.0	5.0	160.0	51.0	250
115.1017	13.0	8.0	20.0	7.0	200.0	65.0	260

ULTIMATE*plus* fl t pliers

- In accordance to DIN / ISO 5745
- Serrated execution
- With two component handle
- Titanium coated surface
- Special tool steel

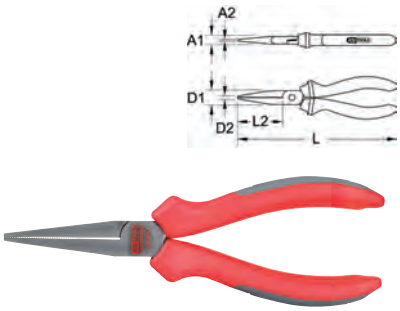

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
119.2016	9.0	6.0	18.0	5.0	160.0	51.0	250

NEEDLE NOSE PLIERS

Long nosed pliers, curved

- In accordance to DIN / ISO 5745
- With PVC dipped handle
- 45° curved jaws
- For soft and medium wire
- Inductively hardened precision cutting edges
- Matt chrome
- Special tool steel

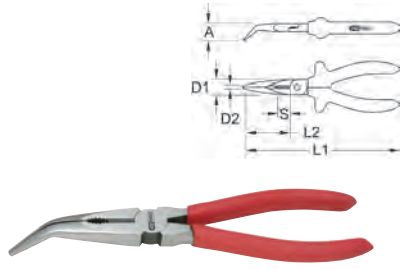

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g
115.1318	14.0	19.0	5.0	165.0	50.0	11,0	150
115.1319	24.0	22.0	5.0	200.0	68.0	14,0	230

Telephone pliers 45° curved, extra long

- Long nosed jaws
- Serrated execution
- 45° curved jaws
- With PVC dipped handle
- Extra long execution
- Matt chrome
- Special tool steel

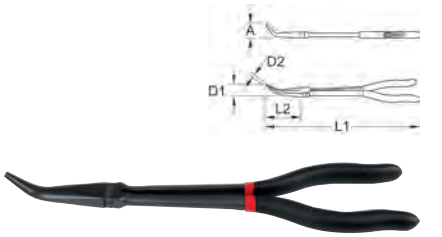

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7052	26.0	18.0	7.0	270.0	70.0	330

Double jointed long nosed pliers 45° curved, extra long

- Serrated execution
- With double joint
- Extremely narrow design
- 45° curved jaws
- With PVC dipped handle
- For diffi ult to access areas
- Matt chrome
- Special tool steel

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7063	22.0	17.0	5.0	330.0	60.0	450

Telephone pliers 90° curved, extra long

- Long nosed jaws
- Serrated execution
- 90° curved jaws
- With PVC dipped handle
- Extra long execution
- Matt chrome
- Special tool steel



	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7053	46.0	18.0	7.0	270.0	42.0	330

ERGOTORQUE® lon g nosed pliers, curved

- In accordance to DIN / ISO 5745
- With two component handle
- 45° curved jaws
- For soft and medium wire
- Inductively hardened precision cutting edges
- Matt chrome
- Special tool steel



	A mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g
115.1018	18.0	18.0	3.0	165.0	50.0	11,0	250
115.1019	27.0	22.0	5.0	210.0	67.0	16,0	260

ULTIMATE*plus* long nosed pliers, curved

- In accordance to DIN / ISO 5745
- With two component handle
- 45° curved jaws
- For soft and medium wire
- Inductively hardened precision cutting edges
- Titanium coated surface
- Special tool steel



	A mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g
119.2018	18.0	18.0	3.0	165.0	50.0	11,0	250
119.2019	27.0	22.0	5.0	210.0	67.0	16,0	270

TELEPHONE PLIERS

Telephone pliers

- In accordance to DIN ISO 5745
- Long nosed jaws
- Serrated execution
- With PVC dipped handle
- With intergrated cutting edge
- Matt chrome
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g
115.1323	9.0	3.0	18.0	5.0	165.0	51.0	11,0	150
115.1324	11.0	3.0	22.0	5.0	200.0	75.0	15,0	230

Double jointed telephone pliers, extra long

- Serrated execution
- With double joint
- Extremely narrow design
- With PVC dipped handle
- For diffi ult to access areas
- Matt chrome
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7061	10.0	10.0	18.0	3.0	300.0	32.0	450

Telephone pliers, extra long

- Long nosed jaws
- Serrated execution
- With PVC dipped handle
- Extra long execution
- Matt chrome
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7051	11.0	4.0	18.0	7.0	270.0	70.0	330

ERGOTORQUE® t elephone pliers

- In accordance to DIN ISO 5745
- Long nosed jaws
- Serrated execution
- With two component handle
- With intergrated cutting edge
- Matt chrome
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g
115.1023	9.0	3.0	18.0	4.0	160.0	49.0	12,0	153
115.1024	11.0	3.0	22.0	4.0	200.0	75.0	16,0	230

ULTIMATE*plus* telephone pliers

- In accordance to DIN / ISO 5745
- Long nosed jaws
- Serrated execution
- With two component handle
- With intergrated cutting edge
- Titanium coated surface
- Special tool steel

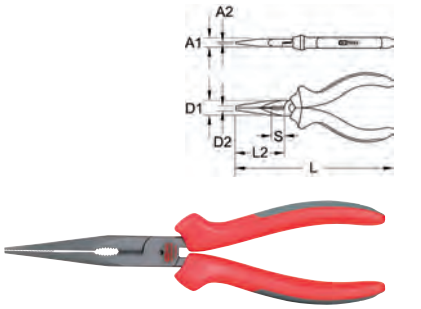

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g
119.2023	9.0	3.0	18.0	4.0	160.0	49.0	12,0	150
119.2024	11.0	3.0	22.0	4.0	200.0	75.0	16,0	230

Diagonal side cutter

- In accordance to DIN ISO 5749
- Long cutting edge
- Suitable for various types of wire
- Induction-hardened precision cutting
- With PVC dipped handle
- Matt chrome
- Special tool steel

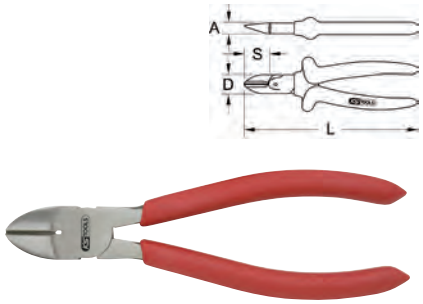

	A mm	D mm	L mm	S mm	g
115.1311	20.0	19.0	130.0	5,0	110
115.1312	20.0	22.0	165.0	5,0	160

High leverage side cutter

- In accordance to DIN ISO 5749
- 30° angled head
- Long cutting edge
- Suitable for various types of wire
- Induction-hardened precision cutting
- With PVC dipped handle
- Matt chrome
- Special tool steel

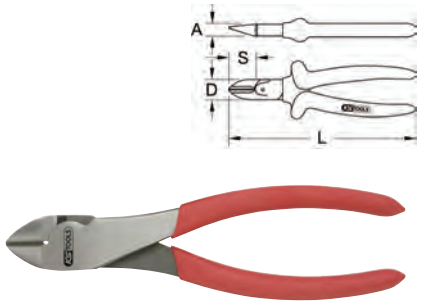

	A mm	D mm	L mm	S mm	g
115.1313	13.0	28.0	180.0	18,0	230

CUTTING PLIERS AND SIDE CUTTERS

Cutting pliers

- In accordance to DIN ISO 5748
- Suitable for various types of wire
- Induction-hardened precision cutting
- With PVC dipped handle
- Matt chrome
- Special tool steel

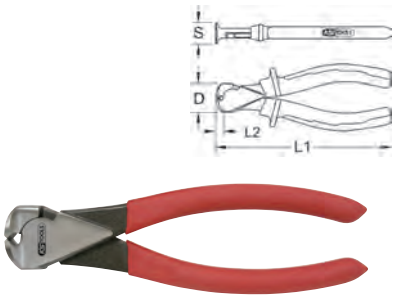

	D mm	L1 mm	L2 mm	S mm	g
115.1315	31.0	165.0	18.0	39,0	180

ERGOTORQUE® diagonal side cutter

- In accordance to DIN ISO 5749
- Long cutting edge
- Suitable for various types of wire
- Induction-hardened precision cutting
- With two component handle
- Matt chrome
- Special tool steel

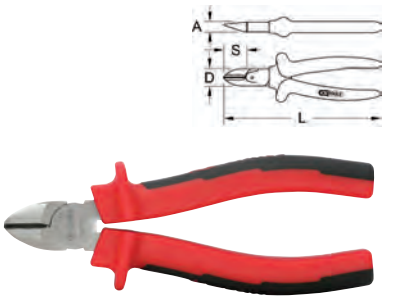

	A mm	D mm	L mm	S mm	g
115.1011	9.0	18.0	125.0	18,0	140
115.1012	11.0	22.0	160.0	20,0	260

ERGOTORQUE® high leverage side cutter

- In accordance to DIN ISO 5749
- 30° angled head
- Long cutting edge
- Suitable for various types of wire
- Induction-hardened precision cutting
- With two component handle
- Matt chrome
- Special tool steel

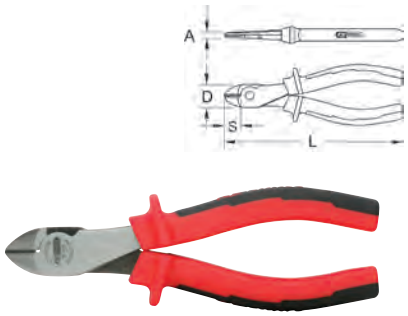

	A mm	D mm	L mm	S mm	g
115.1013	12.0	29.0	180.0	21,0	260

ERGOTORQUE® cutting pliers

- In accordance to DIN ISO 5748
- Suitable for various types of wire
- Induction-hardened precision cutting
- With two component handle
- Matt chrome
- Special tool steel

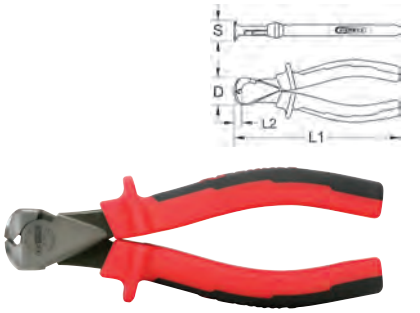

	D mm	L1 mm	L2 mm	S mm	g
115.1015	31.0	160.0	7.0	24,0	270

ULTIMATE*plus* diagonal side cutter

- In accordance to DIN / ISO 5749
- Long cutting edge
- Suitable for various types of wire
- Induction-hardened precision cutting
- With two component handle
- Titanium coated surface
- Special tool steel

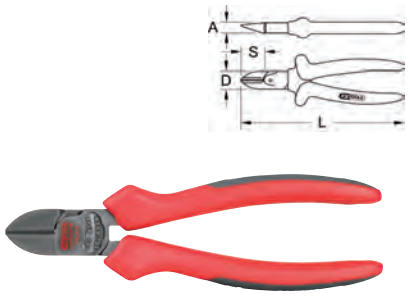

	A mm	D mm	L mm	S mm	g
119.2011	10.0	20.0	145.0	20,0	140
119.2012	11.0	22.0	170.0	24,0	260

ULTIMATE*plus* high leverage side cutter

- In accordance to DIN / ISO 5749
- 30° angled head
- Long cutting edge
- Suitable for various types of wire
- Induction-hardened precision cutting
- With two component handle
- Titanium coated surface
- Special tool steel

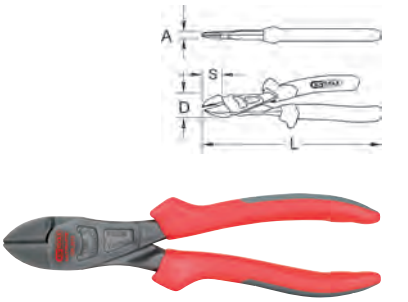

	A mm	D mm	L mm	S mm	g
119.2013	12.0	29.0	180.0	21,0	260

ULTIMATE*plus* high leverage side cutter

- Long cutting edge
- Induction-hardened precision cutting
- With two component handle
- Suitable for various types of wire
- Extremely robust execution
- Titanium coated surface
- Special tool steel

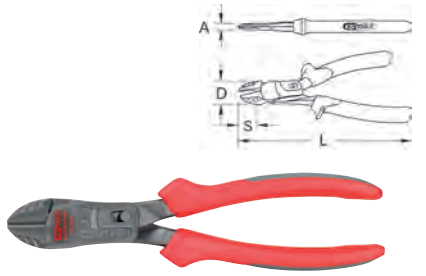

	A mm	D mm	L mm	S mm	g	
119.2025	17.0	30.0	210.0	23,0	300	

Mini bolt cutter, self-releasing

- Cutting performance up to 60-63 HRC
- Cutter head made of high quality special steel
- Inductively hardened precision cutting edges
- Phosphate
- Chrome molybdenum

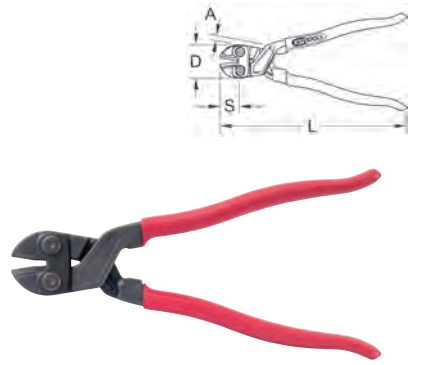

	L mm	S mm	D mm	A mm	g	
118.0015	205.0	14,0	34.0	17.0	270	

WIRE STRIPPER

Automatic wire stripper

- Plastic handle
- For damage free Stripping
- Durable clamping jaw for the adherence of the wire
- Self closing due to the spring mechanics

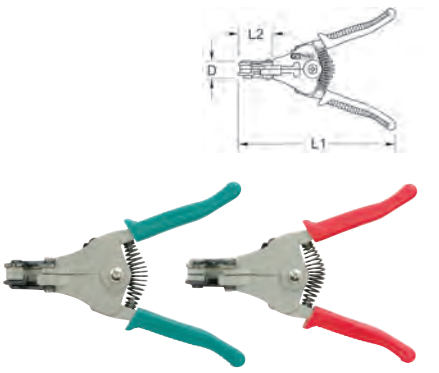

	Ø mm	AWG	D mm	L1 mm	L2 mm	g	
115.1028	0,5-2,0	2,0-0,5	20.0	170.0	35.0	280	
115.1029	1,0-3,2	3,2-1,0	20.0	170.0	35.0	280	

Self regulating wire stripper

- Easily interchangeable knife modules
- Cutting function
- Light weight
- Exact adjustment possible for safe stripping
- For damage free stripping
- Length stop for 0,02 - 10,0 mm
- Smooth running mechanics

	mm²	AWG	D mm	L1 mm	L2 mm	Replacement blades	g	
115.1244	0,1-4	28-12	48.0	190.0	73.0	115.1247	130	
115.1245	0,02-10	34-8	48.0	190.0	73.0	115.1246	130	
115.1249	4-16	12-6	48.0	190.0	73.0	115.1248	130	

Wire stripper

- In accordance to DIN / ISO 5232
- Locking jaw opening
- Adjusting screw and spring
- PVC dipped handle
- For wires from 0,5 - 4.0 mm²
- Matt chrome
- Special tool steel

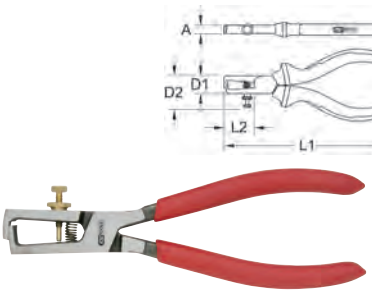

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g	
115.1314	9.0	20.5	33.0	176.0	39.0	170	

ERGOTORQUE® w ire stripper

- In accordance to DIN / ISO 5232
- Locking jaw opening
- Adjusting screw and spring
- Two component handle
- For wires from 0,5 - 4.0 mm²
- Matt Chrome
- Special tool steel

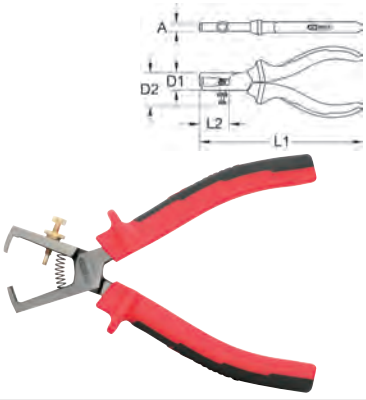

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g	
115.1014	9.0	20.5	33.0	179.0	39.0	300	

ULTIMATE*plus* wire strippers

- In accordance to DIN / ISO 5232
- With locking jaw opening
- With adjusting screw and spring
- With two component handle
- For wires from 0,5 - 4,0 mm²
- Titanium coated surface
- Special tool steel

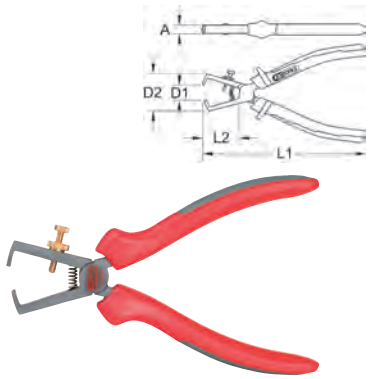

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g	
119.2014	9.0	20.5	33.0	180.0	40.0	220	

UNIVERSAL PLIER SETS

Pliers set, extra long

- Serrated execution
- With PVC dipped handle
- Extra long execution
- Matt chrome
- Special tool steel

			kg	
500.7050	3 pcs	Pliers set, extra long	1.20	
1 x		270 mm		
1 x		270 mm		
1 x		270 mm		

Double jointed pliers set, extra long

- Serrated execution
- With double joint
- Extremely narrow design
- With PVC dipped handle
- For diffi ult to access areas
- Matt chrome
- Special tool steel

			kg	
500.7060	3 pcs	Double jointed pliers set, extra long	1.40	
1 x		300 mm		
1 x		340 mm		
1 x		335 mm		

Pliers set

- Long cutting edge
- Suitable for various types of wire
- Induction-hardened precision cutting
- With PVC dipped handle
- Matt chrome
- Special tool steel

			kg
115.1310	3 pcs	Pliers set	0.90
1 x		165 mm	
1 x		180 mm	
1 x		205 mm	

Pliers set

- Long cutting edge
- Suitable for various types of wire
- Induction-hardened precision cutting
- With PVC dipped handle
- Matt chrome
- Special tool steel

			kg
115.1304	4 pcs	Pliers set	1.70
1 x		165 mm	
1 x		180 mm	
1 x		200 mm	
1 x		256 mm	

ERGOTORQUE® pliers set

- Suitable for various types of wire
- Induction-hardened precision cutting
- With two component handle
- Matt chrome
- Special tool steel

			kg
115.1010	3 pcs	ERGOTORQUE® pliers set	0.90
1 x		160 mm	
1 x		180 mm	
1 x		200 mm	

ERGOTORQUE® pliers set

- Suitable for various types of wire
- Induction-hardened precision cutting
- With two component handle
- Matt chrome
- Special tool steel

			kg
115.1004	4 pcs	ERGOTORQUE® pliers set	1.44
1 x		160 mm	
1 x		180 mm	
1 x		200 mm	
1 x		240 mm	

ULTIMATE*plus* pliers set

- In accordance to DIN ISO 5748
- Suitable for various types of wire
- Induction-hardened precision cutting
- With two component handle
- Titanium coated surface
- Special tool steel

			kg
119.2010	3 pcs	ULTIMATE*plus* pliers set	1.00
1 x		160 mm	
1 x		180 mm	
1 x		200 mm	

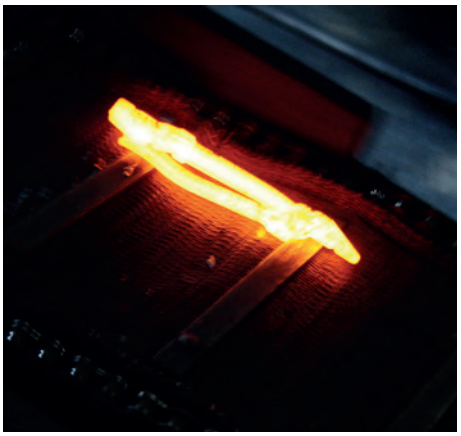

ULTIMATE*plus* pliers set

- In accordance to DIN ISO 5748
- Suitable for various types of wire
- Induction-hardened precision cutting
- With two component handle
- Titanium coated surface
- Special tool steel

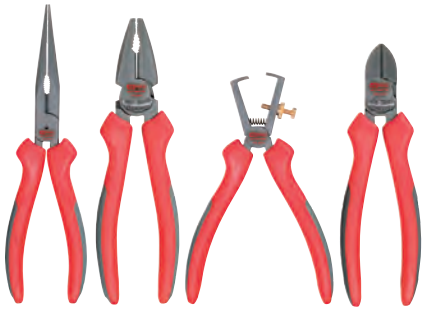

			kg
119.2004	4 pcs	ULTIMATE*plus* pliers set	1.00
1 x		160 mm	
1 x		180 mm	
1 x		180 mm	
1 x		165 mm	

WATER PUMP PLIERS

Water pump pliers

- In accordance to DIN 8976
- Toothed gripping surfaces
- Optimum power transfer
- Industrial and ground heads
- Red powder coating
- Chrome vanadium



	A mm	B mm	L1 mm	L2 mm	g	
115.1000	35.0	30.0	175.0	30.0	160	
115.2000	45.0	35.0	240.0	36.0	310	
115.3000	55.0	40.0	300.0	42.0	620	

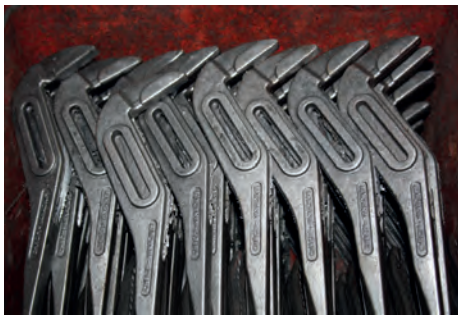

Water pump pliers

- In accordance to DIN 8976
- With PVC dipped handle
- Toothed gripping surfaces
- Optimum power transfer
- Industrial and ground heads
- Chrome vanadium



	A mm	B mm	L1 mm	L2 mm	g	
115.2001	36.0	46.0	240.0	34.0	350	

Water pump pliers, black

- In accordance to DIN 8976
- With PVC dipped handle
- Toothed gripping surfaces
- Optimum power transfer
- With grooved handle adjustment
- Chrome vanadium



	A mm	B mm	L1 mm	L2 mm	g	
115.7000	45.0	55.0	250.0	40.0	340	

Professional water pump pliers

- Toothed gripping surfaces
- Optimum power transfer
- With grooved handle adjustment
- Progressive teeth
- With PVC dipped handle
- Chrome vanadium



	Industrial	A mm	B mm	L1 mm	L2 mm	g	
115.1350	7	46.0	45.0	265.0	50.0	380	
115.1351	7	66.0	60.0	330.0	60.0	920	
115.1352	11	77.0	74.0	420.0	74.0	1150	

ULTIMATE*plus* waterpump pliers

- In accordance to DIN 8976
- With two component handle
- 10 stage adjustment
- Optimum power transfer
- Toothed gripping surfaces
- Industrial and ground heads
- Titanium coated surface
- Chrome vanadium



	A mm	B mm	L1 mm	L2 mm	g	
119.2027	50.0	55.0	260.0	38.0	355	

Water pump pliers

- With accurate industrial adjustment
- With safety clamping protection
- Optimum power transfer
- Asymmetric grip profile wi h offset teeth
- Ground heads
- With PVC dipped handle
- Chrome vanadium



	A mm	B mm	L1 mm	L2 mm	g	
115.2011	35.0	38.0	175.0	20.0	160	
115.2010	45.0	47.0	240.0	25.0	360	
115.2012	55.0	53.0	300.0	30.0	560	

Water pump pliers

- With accurate industrial adjustment
- With safety clamping protection
- Optimum power transfer
- Double sided gripping jaws
- Ground heads
- With PVC dipped handle
- Chrome vanadium



	A mm	B mm	L1 mm	L2 mm	g	
115.8502	36.0	44.0	175.0	26.5	185	
115.8000	51.0	54.0	250.0	33.5	340	
115.8500	61.5	65.0	300.0	41.5	510	

Water pump pliers Quattro Gripp

- Maximum jaw opening approx. 40% above DIN ISO
- Push-button with 4 tooth technique
- With accurate industrial adjustment
- With safety clamping protection
- Optimum power transfer
- Substaintial precision through joint
- Ground heads
- Handle dip insulated
- Chrome vanadium



	A mm	B mm	L1 mm	L2 mm	g	
115.8520	50.0	50.0	260.0	40.0	370	
115.8525	70.0	60.0	320.0	50.0	630	
115.8530	100.0	90.0	400.0	65.0	1250	

WATER PUMP PLIER SETS

Water pump pliers set

- In accordance to DIN 8976
- Toothed gripping surfaces
- Optimum power transfer
- 7 stage adjustment
- Industrial and ground heads
- Red powder coating
- Chrome vanadium

			kg	
115.0000	3 pcs	175 - 240 - 300 mm	1.20	

Water pump pliers set

- With accurate industrial adjustment
- With safety clamping protection
- Optimum power transfer
- Double sided gripping jaws
- Ground heads
- With PVC dipped handle
- Chrome vanadium

			g
115.8501	2 pcs	250 - 300 mm	960

PIPE WRENCHES

Special pipe wrench

- 2-stage adjustment
- PVC dipped handle
- Ideal for round turned pipe fi tings
- Polished surface
- Chrome vanadium

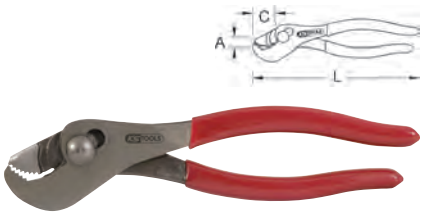

	A mm	L mm	C mm	g
115.1361	0-16	178.0	23.0	180

Special pipe wrench

- 4 stage industrial adjustment
- PVC dipped handle
- Optimum power transfer
- Grooved handle adjustment
- Polished surface
- Ideally suited for twisting both thrust and track rods
- Usably on axle joints and exhaust pipes
- Chrome vanadium

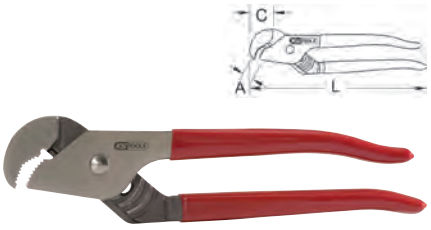

	A mm	L mm	g
115.1362	0-30	242.0	470

Special pipe wrench

- 6 stage industrial adjustment
- PVC dipped handle
- Optimum power transfer
- Grooved handle adjustment
- Polished surface
- Ideally suited for twisting both thrust and track rods
- Usably on axle joints and exhaust pipes
- Chrome vanadium

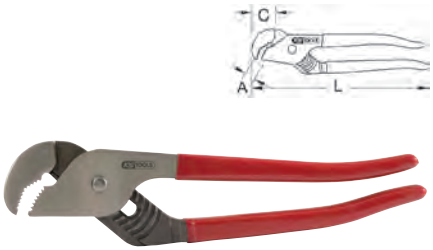

	A mm	L mm	C mm	kg
115.1363	0-51	345.0	41.0	1.10

One handed pipe pliers

- Type "Stillson"
- Heavy execution
- Ground heads
- Infini ely variable
- Drop forged

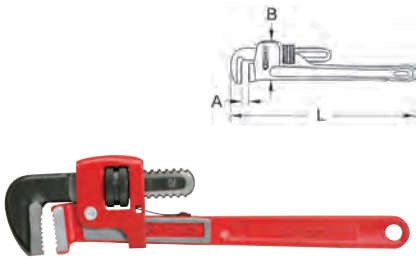

	A	B mm	L mm	kg
114.0008	3/4“	50.0	200.0	0.25
114.0010	1“	64.0	250.0	0.60
114.0012	1.1/4“	68.0	300.0	0.70
114.0014	1.1/2“	82.0	350.0	1.10
114.0018	2“	93.0	450.0	1.75
114.0024	2.1/2“	111.0	600.0	3.50
114.0036	3.1/2“	134.0	900.0	6.25

One handed pipe pliers

- Type "Stillson"
- Aluminium cast body
- Ground heads
- Infini ely variable
- Aluminium drop forged

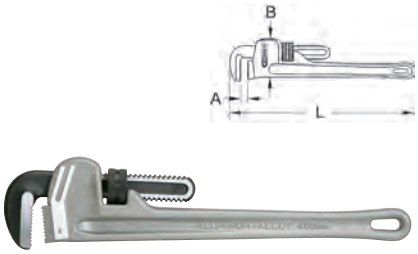

	A	B mm	L mm	kg
111.3100	1.1/2“	75.0	350.0	0.88
111.3200	2“	90.0	450.0	1.46
111.3300	2.1/2“	100.0	600.0	2.44

One handed steel pipe pliers

- Type "Stillson"
- Ground heads
- Infini ely variable
- Die forged head
- Handle of steel

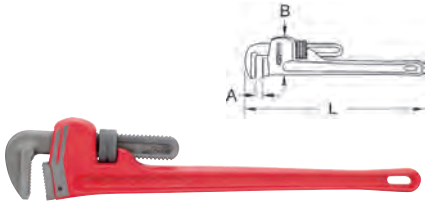

	A	B mm	L mm	kg
111.3500	3/4“	50.0	200.0	0.37
111.3505	1“	60.0	250.0	0.65
111.3510	1.1/4“	65.0	300.0	0.87
111.3515	1.1/2“	70.0	350.0	1.27
111.3520	2“	85.0	450.0	1.85
111.3525	2.1/2“	95.0	600.0	3.00
111.3530	3.1/2“	125.0	900.0	5.10
111.3535	5“	150.0	1200.0	9.10

Pipe wrench with adjustable head

- Type "Stillson"
- Aluminium cast body
- Upper jaw HRC 54-57
- Lower jaw HRC 52-55
- Stepless adjustment via milled nut
- 160° revolving handle
- Aluminium handle

	A	B mm	L mm	g
111.3550	1.1/2	97.0	250.0	650

Offset pipe pliers, 45° angled

- In accordance to DIN 5234
- Swedish form
- Jaw 45° offset
- Infini ely variable
- Gear, contrary to the direction of rotation
- Red powder coating
- Chrome vanadium

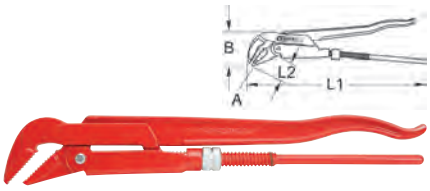

	A	B mm	L1 mm	L2 mm	kg
112.1000	1"	65.0	320.0	65.0	0.75
112.1500	1.1/2"	70.0	430.0	75.0	1.38
112.2000	2"	75.0	580.0	85.0	2.75

S Jaw angled pipe pliers, offset

- In accordance to DIN 5234
- Jaw 45° offset
- Ground heads
- Infini ely variable
- Gear, contrary to the direction of rotation
- Red powder coating
- Drop forged
- Chrome vanadium

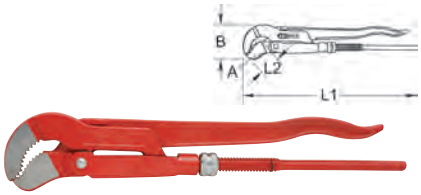

	A	B mm	L1 mm	L2 mm	kg
113.0500	1/2"	48.0	245.0	45.0	0.48
113.1000	1"	95.0	320.0	60.0	0.82
113.1500	1.1/2"	73.0	420.0	73.0	1.40
113.2000	2"	87.0	550.0	87.0	2.57
113.3000	3"	112.0	630.0	112.0	4.30

Offset pipe pliers, 90° angled

- In accordance to DIN 5234
- Swedish form
- Jaw 90° offset
- Infini ely variable
- Gear, contrary to the direction of rotation
- Red powder coating
- Chrome vanadium

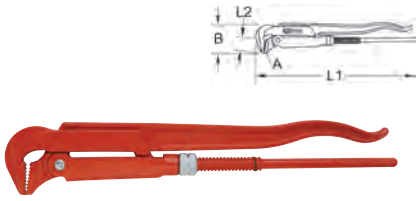

	A	B mm	L1 mm	L2 mm	kg
111.1000	1"	35.0	320.0	15.0	0.79
111.1500	1.1/2"	31.0	430.0	41.0	1.40
111.2000	2"	51.0	580.0	58.0	2.69
111.3000	3"	60.0	670.0	62.0	3.45

Siphon pliers

- With 4 adjustable steps
- Insulated foot for chrome fi tings
- For screw fi tings up to max. Ø 65 mm
- With PVC dipped handle
- For loosening pipe fi tings
- Interchangeable jaw protector
- For hard to reach places
- Chrome plated and mirror polished
- Chrome vanadium

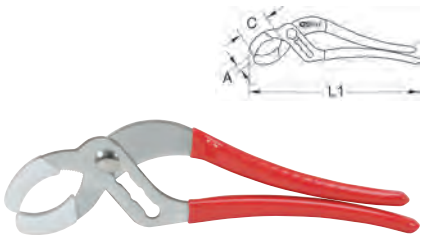

	A mm	C mm	L mm	Replacement jaws	kg
116.1200	20,0 - 65,0	45.0	225.0	116.1201	320

Thread roughing pliers

- For roughening of the thread after thread cutting
- Uniform roughening over the entire circumference
- Special tool steel

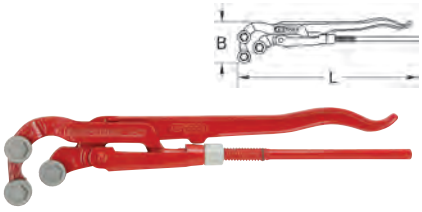

	Ø mm	Ø	B mm	L mm	kg
995.6500	12,7 - 50,8	1/2" - 2"	100.0	335.0	1.77

Strap pipe pliers

- For hard to reach places
- Especially suited for plastic pipes
- Glass fib e reinforced handle
- Belt made of reinforced, non slip rubber

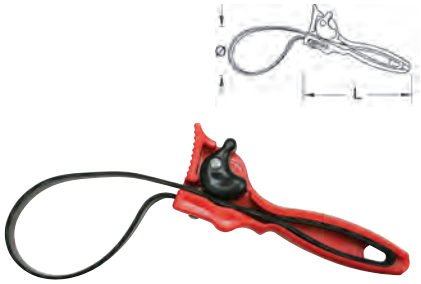

	Ø mm	L mm	g
114.0150	110,0	190.0	180

Strap pipe pliers

- With metal grip
- For hard to reach places
- Especially suited for plastic pipes
- Belt made of reinforced, non-slip rubber
- Chrome vanadium

	Ø mm	L mm	kg
114.0160	160,0	250.0	1.00

Strap wrench

- With metal handle
- For hard to reach places
- Especially suited for plastic pipes
- Belt made of reinforced, non-slip webbing
- Chrome plated
- Chrome vanadium

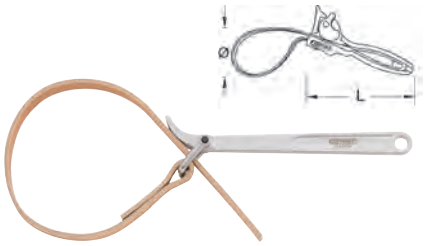

	mm	Ø mm	Ø	L mm	Replacement band	g
114.0170	20.0	140,0	9/64"	220.0	114.0170-1	323
114.0171	25.0	200,0	13/64"	280.0	114.0171-1	590

Chain pipe wrench

- Function is similar to a ratchet
- For hard to reach places
- Hardened teeth
- Drop-forged
- Chrome vanadium

	Ø mm	L mm	kg
114.0040	110,0	390.0	1.36

PIPE WRENCH SETS

Angled pipe pliers set

- With PVC dipped handle
- Toothed gripping surfaces
- Optimum power transfer
- With grooved handle adjustment
- Progressive teeth
- Chrome vanadium

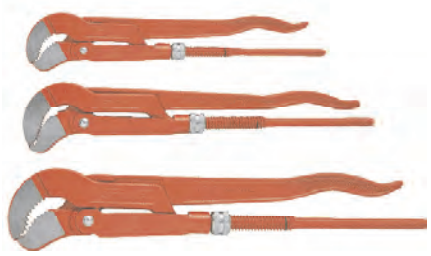

			kg
113.2100	3 pcs	1" - 1.1/2" - 2"	4.79

FITTERS PLIERS

Fitters pliers

- With accurate industrial adjustment
- With safety clamping protection
- With setting scale
- Smooth, polished head area
- Optimum power transfer
- Ground heads
- With PVC dipped handle
- Chrome vanadium



	A mm	B mm	L1 mm	L2 mm	g
115.8510	53.0	50.0	250.0	60.0	350

Fitters pliers, angled

- 90° Jaw position
- Interchangeable jaw protector
- For pipe up to max. Ø 35 mm
- For mild assembly
- Infini ely variable
- Red powder coating
- Chrome vanadium

	A	A mm	B mm	L1 mm	L2 mm	Replacement jaws	g
116.1000	1"	25.4	81.0	315.0	54.0	116.1001	790

Fitters wrench

- Interchangeable jaw protector
- For screw fi tings up to max. Ø 60 mm
- Smooth, parallel adjustment jaws
- For mild assembly
- Infini ely variable
- Matt chrome
- Chrome vanadium



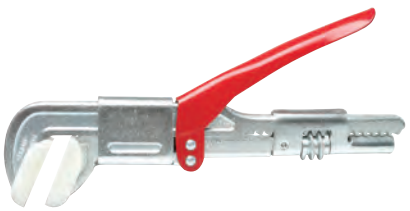

	A mm	B mm	L mm	Replacement jaws	g
116.1002	60.0	47.0	265.0	116.1003	550

CIRCLIP PLIERS FOR INTERNAL CIRCLIPS

Circlip pliers for internal circlips

- In accordance to DIN 5254
- Durable, rolled precision tips
- Self opening
- With PVC dipped handle
- Chrome vanadium



	mm	A1 mm	S mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.1034	12,0 - 25,0	8.0	1.0	17.0	2.0	130.0	29.0	120
500.1035	19,0 - 60,0	10.0	1.7	18.0	2.0	160.0	40.0	150
500.1036	40,0 - 100,0	11.0	2.2	22.0	2.0	230.0	44.0	200

Circlip pliers for internal circlips, angled

- In accordance to DIN 5256
- Durable, rolled precision tips
- 90° angled tips
- Self opening
- With PVC dipped handle
- Chrome vanadium



	mm	A mm	S mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.1031	12,0 - 25,0	11.0	1.0	15.0	2.0	130.0	21.0	120
500.1032	19,0 - 60,0	19.0	1.7	17.0	2.0	160.0	23.0	150
500.1033	40,0 - 100,0	25.0	2.2	23.0	2.0	230.0	30.0	200

Circlip pliers for internal circlips

- In accordance to DIN 5254
- Slip inhibiting machined precision tips
- Durable, straight version
- With rubber grip
- Power version
- Die forged
- Chrome vanadium



	mm	A1 mm	S mm	D1 mm	D2 mm	L1 mm	L2 mm	g
119.2053	12,0 - 25,0	7.5	1.2	15.0	2.7	135,0	30.0	80
119.2058	19,0 - 60,0	9.5	1.6	18.0	5.0	180,0	40.0	150
119.2063	40,0 - 100,0	10.0	2.5	20.0	6.0	230,0	50.0	250

Circlip pliers for internal circlips, angled

- In accordance to DIN 5256
- Slip inhibiting machined precision tips
- 90° angled tips
- With rubber grip
- Power version
- Die forged
- Chrome vanadium



	mm	A mm	S mm	D1 mm	D2 mm	L1 mm	L2 mm	g
119.2054	12,0 - 25,0	16.5	1.0	14.5	2.5	125,0	20.0	80
119.2059	19,0 - 60,0	21.0	1.5	18.0	3.0	165,0	25.0	150
119.2064	40,0 - 100,0	25.0	2.0	20.0	5.0	210,0	35.0	250

Circlip pliers for internal circlips with 0°+ 90° tips

- For internal circlips
- Interchangeable tips
- For circlips according to DIN 472 / DIN 984
- Black powder coating
- Chrome vanadium

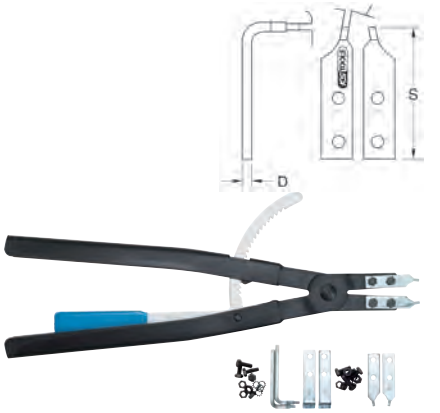

	D mm	L mm	mm	g
500.1340	3,5	540.0	122,0 - 300,0	2025

CIRCLIP PLIERS FOR EXTERNAL CIRCLIPS

Circlip pliers for external circlips

- In accordance to DIN 5254
- Durable, straight precision tips
- Self opening
- With PVC dipped handle
- Chrome vanadium

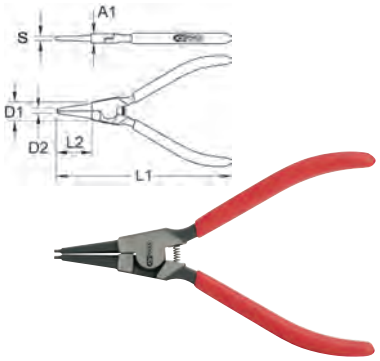

	mm	A1 mm	S mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.1028	10,0 - 25,0	8.0	1.0	18.0	1.0	130.0	28.0	120
500.1029	19,0 - 60,0	10.0	2.0	30.0	6.0	160.0	38.0	150
500.1030	40,0 - 100,0	11.0	3.0	33.0	6.0	230.0	44.0	200

Circlip pliers for external circlips, angled

- In accordance to DIN 5254
- Durable precision tips
- 90° angled tips
- Self opening
- With PVC dipped handle
- Chrome vanadium

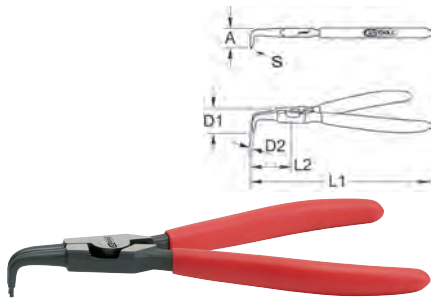

	mm	A mm	S mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.1025	10,0 - 25,0	13.0	1.0	12.0	2.0	130.0	18.0	120
500.1026	19,0 - 60,0	19.0	1.7	17.0	2.0	160.0	23.0	150
500.1027	40,0 - 100,0	24.0	2.2	21.0	2.0	230.0	27.0	200

Wheel bearing circlip pliers, angled

- In accordance to DIN 5256
- Slip inhibiting machined precision tips
- 45° angled version
- Self closing
- With rubber grip
- Power version
- Die forged
- Chrome vanadium

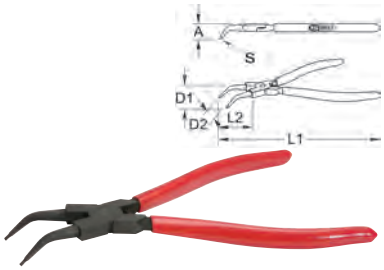

	mm	A mm	S mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.1038	19,0 - 60,0	22.0	2.5	23.0	2.3	240.0	32.0	250
500.1039	19,0 - 60,0	22.0	3.0	23.0	3.0	300.0	46.0	490

Long arm circlip pliers for external circlips, angled

- Durable, extra long precision points
- 90° angled tips
- Self opening
- PVC dipped handle
- Ideal for brake calliper and transmission work
- Chrome vanadium

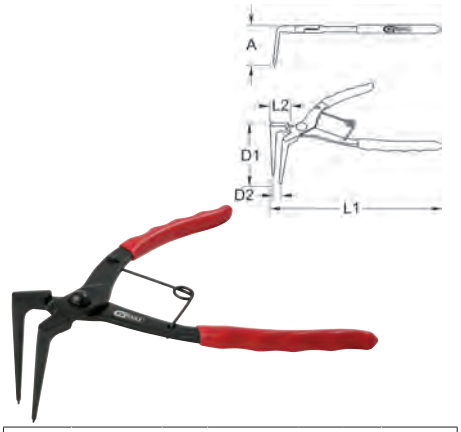

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.1037	63.0	18.0	4.0	185.0	18.0	190

Circlip pliers for external circlips

- In accordance to DIN 5254
- Slip inhibiting machined precision tips
- Durable, straight design
- Self closing
- With rubber grip
- Power version
- Die forged
- Chrome vanadium

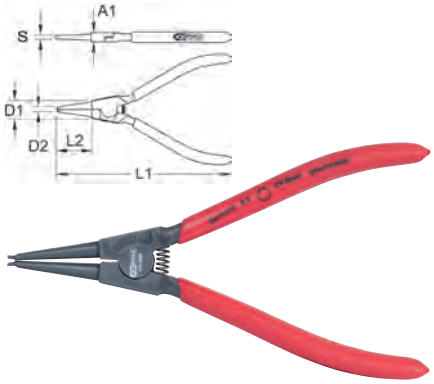

	mm	A1 mm	S mm	D1 mm	D2 mm	L1 mm	L2 mm	g
119.2051	10,0 - 25,0	8.0	1.0	13.5	3.5	135,0	30.0	80
119.2056	19,0 - 60,0	9.0	1.5	15.0	4.5	175,0	40.0	150
119.2061	40,0 - 100,0	10.0	2.5	20.0	6.0	230,0	50.0	250

Circlip pliers for external circlips, angled

- In accordance to DIN 5256
- Slip inhibiting machined precision tips
- 90° angled version
- Self closing
- With rubber grip
- Power version
- Die forged
- Chrome vanadium

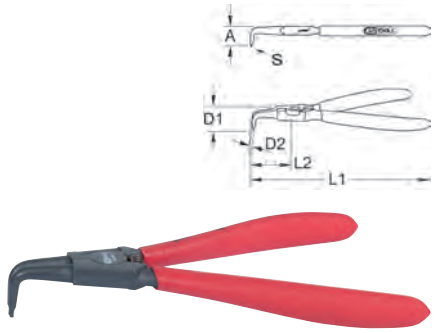

	mm	A mm	S mm	D1 mm	D2 mm	L1 mm	L2 mm	g
119.2052	10,0 - 25,0	20.0	1.0	15.0	3.0	125,0	20.0	80
119.2057	19,0 - 60,0	25.0	1.5	20.0	4.5	165,0	32.0	150
119.2062	40,0 - 100,0	30.0	2.0	25.0	6.0	210,0	40.0	250

Circlip pliers for external circlips with 0°+ 90° tips

- For external security rings
- Interchangeable tips
- For circlips according to DIN 472 / DIN 984
- Black powder coating
- Chrome vanadium

	D mm	L mm	mm	g
500.1345	3,5	540.0	122,0 - 300,0	2005

CIRCLIP PLIER SETS FOR CIRCLIPS

Circlip pliers set with ratchet function

- For inside and outside circlips
- With rubber grip
- Interchangeable tips
- 6 types of pliers by reversing the tips
- Includes disassembly and assembly heads
- Chrome vanadium

Internal circlips: 78,0 mm - 159,0 mm
External circlips: 89,0 mm - 159,0 mm

			kg
500.1300	14 pcs	Circlip pliers set with ratchet function	1.80

Universal circlip pliers set

- For inside and outside circlips
- Simply plier reconfi aration
- With rubber grip
- Interchangeable tips
- 16 types of pliers by reversing the tips
- Includes disassembly and assembly heads
- Chrome vanadium

			kg
500.1320	10 pcs	Universal circlip pliers set	1.80
4 x		1,0 - 1,2 - 1,8 - 2,3 mm	
4 x		1,0 - 1,2 - 1,8 - 2,3 mm	
1 x		120 mm	
1 x		120 mm	

Circlip pliers set with ratchet function

- For inside and outside circlips
- With rubber grip
- Interchangeable tips
- 8 types of pliers by reversing the tips
- Includes disassembly and assembly heads
- Chrome vanadium

Internal circlips: 60,0 mm - 100,0 mm
External circlips: 40,0 mm - 85,0 mm

			kg
500.1350	20 pcs	Circlip pliers set with ratchet function	1.80

Circlip pliers set

- For inside and outside circlips
- With rubber grip
- 90° angled tips
- Durable, straight precision tips
- All outside circlips with opening spring
- Power version
- Chrome vanadium

			g
119.2050	4 pcs	Circlip pliers set	455

consists of:

		g
119.2051	Circlip pliers for external circlips, 10-25 mm	80
119.2052	Circlip pliers for external circlips, angled, 12-25 mm	80
119.2053	Circlip pliers for internal circlips, 12-25 mm	80
119.2054	Circlip pliers for internal circlips, angled, 12-25 mm	80

Circlip pliers set

- For inside and outside circlips
- With rubber grip
- 90° angled tips
- Durable, straight precision tips
- All outside circlips with opening spring
- Power version
- Chrome vanadium

			g
119.2055	4 pcs	Circlip pliers set	735

consists of:

		g
119.2056	Circlip pliers for external circlips, 19-60 mm	150
119.2057	Circlip pliers for external circlips, angled, 19-60 mm	150
119.2058	Circlip pliers for internal circlips, 19-60 mm	150
119.2059	Circlip pliers for internal circlips, angled, 19-60 mm	150

Circlip pliers set

- For inside and outside circlips
- With rubber grip
- 90° angled tips
- Durable, straight precision tips
- All outside circlips with opening spring
- Power version
- Chrome vanadium

			g
119.2060	4 pcs	Circlip pliers set	1000

consists of:

		g
119.2061	Circlip pliers for external circlips, 40-100 mm	250
119.2062	Circlip pliers for external circlips, angled, 40-100 mm	250
119.2063	Circlip pliers for internal circlips, 40-100 mm	250
119.2064	Circlip pliers for internal circlips, angled, 40-100 mm	250

LOCKING PLIERS

Locking pliers holder

- Alternative for a vice
- For light work
- For screwing onto workbenches, worktables etc.

	L mm	B mm	T mm	
115.2072	91.0	84.0	24.3	300

Locking pliers

- Forged gripping jaws
- Serrated execution
- Size adjustment using the adjustment wheel
- With loosening lever
- With easy locking action
- For round and fl t material
- To hold when welding
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome vanadium



	A mm	L mm	S mm	
115.1031	0-50	140.0	19,3	180
115.1032	0-55	175.0	24,0	340
115.1033	0-60	220.0	27,5	520

Power locking pliers

- Forged gripping jaws
- Prevents slipping even at high forces
- Well thought through jaw teeth
- Size adjustment using the adjustment wheel
- With loosening lever
- With easy locking action
- For round and fl t material
- To hold when welding
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome vanadium

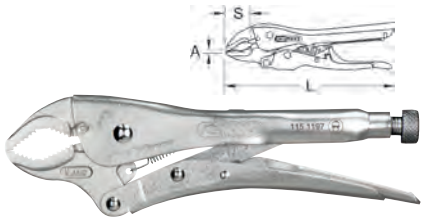

	A mm	L mm	S mm	
115.1196	0-40	175.0	30,0	400
115.1197	0-50	220.0	37,0	600

Locking pliers with quick-release lever

- Forged gripping jaws
- Serrated execution
- Size adjustment using the adjustment wheel
- With easy locking action
- For round and fl t material
- To hold when welding
- With quick-release lever
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum
- With dual component handle

	A mm	L mm	S mm	
115.2031	0-30	125.0	21,0	300
115.2032	0-40	175.0	27,0	390
115.2033	0-55	225.0	30,0	600

Wide jaw locking pliers

- Forged gripping jaws
- Serrated execution
- Size adjustment using the adjustment wheel
- With loosening lever
- With easy locking action
- For round and fl t material
- To hold when welding
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum

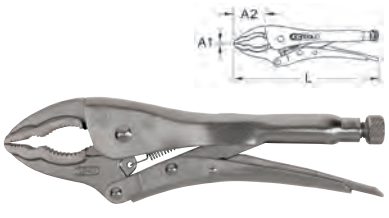

	A mm	L mm	S mm	
115.1506	0-64	235.0	50,0	600

Wide jaw locking pliers with quick-release lever

- Forged gripping jaws
- Serrated execution
- Size adjustment using the adjustment wheel
- With easy locking action
- For round and fl t material
- To hold when welding
- With quick-release lever
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum
- With dual component handle

	A mm	L mm	S mm	
115.2006	0-65	230.0	51,0	620

Locking pliers, straight jaws

- Forged gripping jaws
- Serrated execution
- Size adjustment using the adjustment wheel
- With loosening lever
- With easy locking action
- For round and fl t material
- To hold when welding
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum

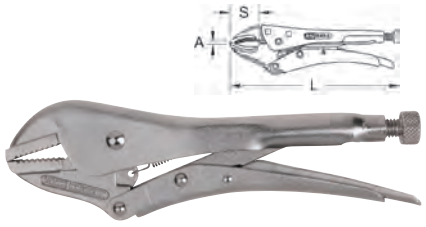

	A mm	L mm	S mm	
115.1501	0-28,5	175.0	27,0	370
115.1502	0-45,5	225.0	30,0	600

Locking pliers with quick-release lever, straight jaws

- Forged gripping jaws
- Serrated execution
- Size adjustment using the adjustment wheel
- With easy locking action
- For round and fl t material
- To hold when welding
- With quick-release lever
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum
- With dual component handle

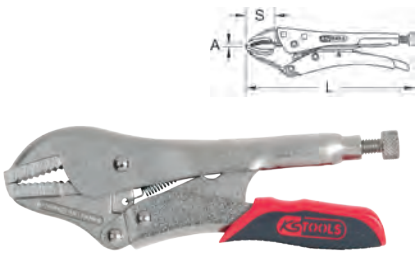

	A mm	L mm	S mm	
115.3011	0-40	175.0	25,0	400
115.3012	0-50	250.0	30,0	600

Locking pliers, V jaws

- Forged gripping jaws
- Serrated execution
- Size adjustment using the adjustment wheel
- With loosening lever
- With easy locking action
- For round and fl t material
- To hold when welding
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum

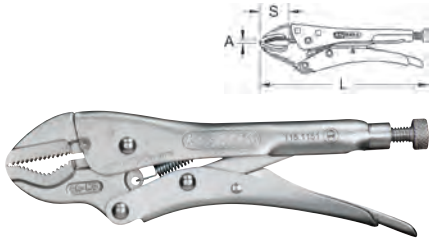

	A mm	L mm	S mm	g
115.1151	0-25	185.0	24,0	400
115.1152	0-32	225.0	27,5	600

Clamping pliers for pipes

- Forged gripping jaws
- Size adjustment using the adjustment wheel
- With loosening lever
- With easy locking action
- With hexagonal nut for safe fastening
- For clamping pipes
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum



	A mm	L mm	S mm	g
115.1504	0-30,5	175.0	29,5	360

Clamping pliers for pipes

- Forged gripping jaws
- Serrated execution
- Size adjustment using the adjustment wheel
- With loosening lever
- With easy locking action
- For clamping pipes
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum



	A mm	L mm	S mm	g
115.1505	0-86	255.0	118,0	500

Round jaw locking pliers with wire cutter

- For safe gripping of nuts and screw heads
- 3 level points prevents slipping and rounding
- With loosening lever
- With easy locking action
- Size adjustment using the adjustment wheel
- Good adaptation to existing surfaces
- With wire cutting function
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum

	mm	L mm	g
115.1175	11-19	175.0	370
115.1176	16-27	240.0	700

Chain grip pliers

- For fastening and clamping of different profil s
- With loosening lever
- With easy locking action
- Size adjustment using the adjustment wheel
- Ideal for confined spa es
- Good adaptation to existing surfaces
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum

	Ø mm	L mm	Replacement chain	kg
115.1171	150,0	220.0	115.1172	0.76

Long nose locking pliers

- Forged gripping jaws
- Serrated execution
- Size adjustment using the adjustment wheel
- With loosening lever
- With easy locking action
- For round and fl t material
- To hold when welding
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum



	A mm	L mm	S mm	g
115.1177	0-25	125.0	35	110
115.1034	0-35	150.0	45,0	180
115.1035	0-45	210.0	65,0	340

Long-nose locking pliers with quick-release lever

- Forged gripping jaws
- Serrated execution
- Size adjustment using the adjustment wheel
- With easy locking action
- For round and fl t material
- To hold when welding
- With quick-release lever
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum
- With dual component handle

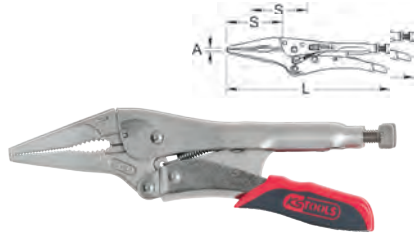

	A mm	L mm	S mm	g
115.2034	0-45	170.0	45,0	300
115.2035	0-60	205.0	53,0	500

Wide and fl t jaw locking pliers

- Forged gripping jaws
- With loosening lever
- With easy locking action
- Size adjustment using the adjustment wheel
- For clamping of fl t or bended metal sheets
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum

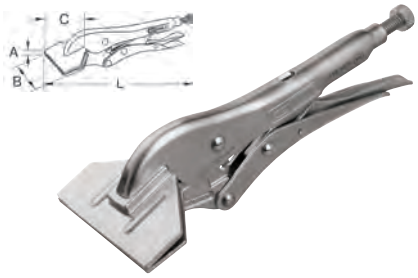

	A mm	B mm	C mm	L mm	g
115.1076	0-53	90.0	40.0	205.0	480
115.1077	0-57	100.0	45.0	245.0	650

Wide jaw fl t die locking pliers with quick-release lever

- Forged gripping jaws
- With easy locking action
- Size adjustment using the adjustment wheel
- For clamping of fl t or bended metal sheets
- With quick-release lever
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum
- With dual component handle



	A mm	C mm	L mm	B mm	g
115.2076	0-40	45.0	205.0	80.0	600
115.2077	0-55	45.0	250.0	80.0	800

Welding gripping pliers

- With malleable cast iron jaws
- Suitable for setting the welding points between the cut outs
- With loosening lever
- Size adjustment using the adjustment wheel
- To hold and adjust sheets and profil s
- With easy locking action
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum

	A mm	C mm	L mm	g
115.1078	0-45	70.0	220.0	600
115.1079	0-55	70.0	260.0	780

Welding gripping pliers with quick-release lever

- With malleable cast iron jaws
- Suitable for setting the welding points between the cut outs
- Size adjustment using the adjustment wheel
- To hold and adjust sheets and profil s
- With easy locking action
- With quick-release lever
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome vanadium
- With dual component handle

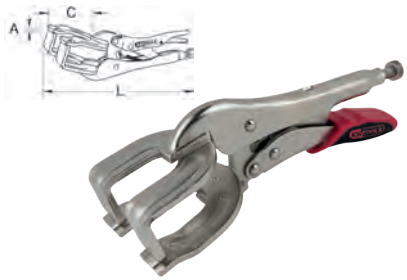

	A mm	C mm	L mm	g
115.2078	0-45	70.0	220.0	710
115.2079	0-65	70.0	260.0	875

Welding gripping pliers

- Forged semi-circular gripping jaws
- With loosening lever
- With easy locking action
- Size adjustment using the adjustment wheel
- For profiled bul y components
- Good adaptation to existing surfaces
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum

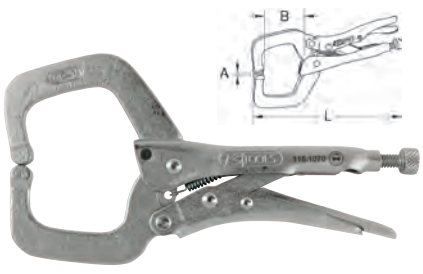

	A mm	B mm	L mm	g
115.1070	0-35	40.0	170.0	240

Welding gripping pliers, extra long

- Round forged gripping jaws
- Quick-release lever
- Easy locking action
- Size adjustment using the adjustment wheel
- For profiled bul y components
- Large clamping depth for front and rear panels
- Good adaptation to existing surfaces
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum

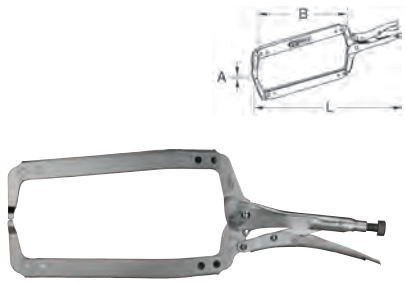

	A mm	B mm	L mm	kg
115.1072	0-270	250.0	450.0	1.18

Welding gripping pliers

- Very good clamping capacity
- Round forged gripping jaws
- Quick-release lever
- Easy locking action
- Size adjustment using the adjustment wheel
- For profiled bul y components
- Good adaptation to existing surfaces
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum

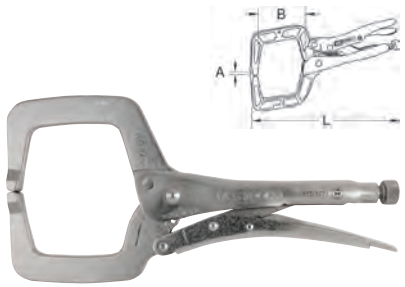

	A mm	B mm	L mm	g
115.1071	0-100	90.0	270.0	780

Welding gripping pliers, extra long

- Round forged gripping jaws
- With loosening lever
- With easy locking action
- Size adjustment using the adjustment wheel
- For profiled bul y components
- Large clamping depth for front and rear panels
- Good adaptation to existing surfaces
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum

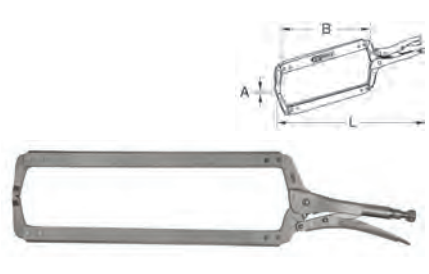

	A mm	B mm	L mm	kg
115.0573	0-295	415.0	610.0	1.50

Welding clamp gripping pliers with quick-release lever

- Very good clamping capacity
- Round forged gripping jaws
- With quick-release lever
- With easy locking action
- Size adjustment using the adjustment wheel
- For profiled bul y components
- Good adaptation to existing surfaces
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome vanadium
- With dual component handle

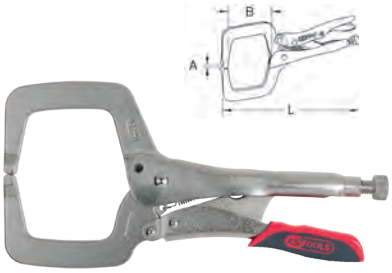

	A mm	B mm	L mm	g
115.2008	0-45	45.0	165.0	300
115.2009	0-90	85.0	280.0	900

Welding gripping pliers with movable clamping jaws

- Flat gripping jaws
- Movable clamping jaws
- Quick-release lever
- Easy locking action
- Size adjustment using the adjustment wheel
- For profiled bul y components
- Good adaptation to existing surfaces
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum

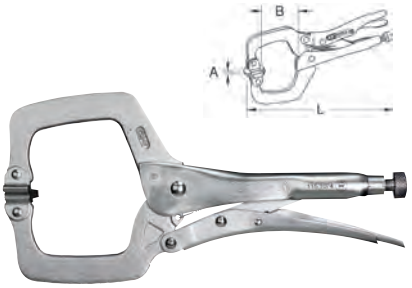

	A mm	B mm	L mm	kg
115.1178	0-25	25.0	125.0	0.15
115.1073	0-35	40.0	170.0	0.24
115.1074	0-100	70.0	285.0	0.78
115.1075	0-270	240.0	420.0	1.25
115.0570	0-420	395.0	610.0	1.54

Welding gripping pliers with movable clamping jaws

- Flat gripping jaws
- Movable clamping jaws
- With quick-release lever
- With easy locking action
- Size adjustment using the adjustment wheel
- For profiled bul y components
- Good adaptation to existing surfaces
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum
- With dual component handle

	A mm	B mm	L mm	kg	
115.2013	0-105	115.0	170.0	0.40	
115.2014	0-420	395.0	275.0	1.00	

Welding gripping pliers

- For applications that need a straight jaw
- Jaws from special steel
- Easy locking action
- Quick-release lever
- Size adjustment using the adjustment wheel
- Ideal for spot welding
- Nickel plated handle
- Chrome molybdenum



	A mm	C mm	L mm	g	
115.1080	0-20	56.0	205.0	548	

Welding gripping pliers

- For applications that required double curved jaws
- Jaws from special steel
- Easy locking action
- Quick-release lever
- Size adjustment using the adjustment wheel
- Ideal for fi ting and mounting of body parts
- Nickel plated handle
- Chrome molybdenum



	A mm	C mm	L mm	g	
115.1081	0-20	39.0	230.0	568	

Welding gripping pliers

- For applications that required double curved jaws
- Jaws from special steel
- Easy locking action
- Quick-release lever
- Size adjustment using the adjustment wheel
- For welding of the hole between the panels
- Also suitable for U-profil
- Nickel plated handle
- Chrome molybdenum



	A mm	C mm	L mm	g	
115.1082	0-15	26.0	215.0	562	

Welding gripping pliers

- For applications that need a angled jaw
- Jaws from special steel
- Easy locking action
- Quick-release lever
- Size adjustment using the adjustment wheel
- Ideal for welding in the fold
- Also suitable for U-profil
- Nickel plated handle
- Chrome molybdenum



	A mm	C mm	L mm	g	
115.1083	0-20	30.0	210.0	509	

Welding gripping pliers

- For applications that need a straight jaw
- Slim design
- Jaws from special steel
- Easy locking action
- Quick-release lever
- Size adjustment using the adjustment wheel
- For right-angled terminals in the fold
- For diffi ult to access areas
- Nickel plated handle
- Chrome molybdenum



	A mm	C mm	L mm	g	
115.1084	0-16	30.0	195.0	488	

Welding gripping pliers set

- For applications that need a straight jaw
- Extra slim design
- Jaws from special steel
- With easy locking action
- With quick release lever
- Size adjustment using the adjustment wheel
- For right angled terminals in the fold
- For diffi ult to access areas
- For welding of the hole between the panels
- Also suitable for U profil
- Ideal for spot welding
- Nickel plated handle
- Chrome molybdenum

			kg	
115.1085	5 pcs	Welding gripping pliers set	2.62	

consists of:

		g	
115.1080	Welding self grip pliers, 205mm	548	
115.1081	Welding self grip pliers, 230mm	568	
115.1082	Welding self grip pliers, 215mm	562	
115.1083	Welding self grip pliers, 210mm	509	
115.1084	Welding self grip pliers, 210mm	488	

Automotive welding gripping pliers

- Forged gripping jaws
- Serrated execution
- Quick-release lever
- Easy locking action
- For fla ged material
- To hold when welding
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated
- Chrome molybdenum



	A mm	C mm	L mm	g	
115.1068	0-40	60.0	200.0	400	

Welding gripping pliers

- Flat gripping jaws
- Movable clamping jaws
- Serrated execution
- No sticking to the electrode
- Quick-release lever
- Easy locking action
- Good adaptation to existing surfaces
- Copper alloy clamping jaws
- No fla ing under the strongest loads
- Loosening under continuous pressure of a spring
- Nickel plated handle
- Chrome molybdenum

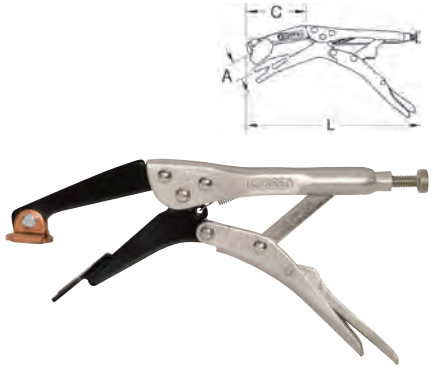

	A mm	C mm	L mm	g
115.1180	0-70	85.0	240.0	500

Locking pliers, serrated

- Forged gripping jaws
- Serrated execution
- Quick release lever
- Size adjustment using the adjustment wheel
- For round and fl t material
- To hold when welding
- Nickel plated
- Chrome vanadium

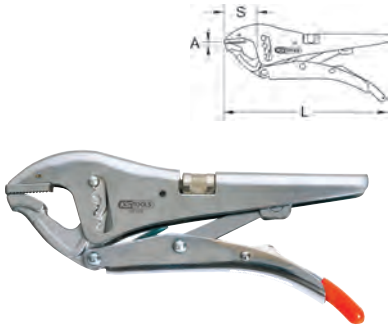

	A mm	L mm	S mm	g
115.1036	0-55	220.0	40,0	670

Locking pliers, serrated

- Forged gripping jaws
- Serrated execution
- Quick release lever
- Size adjustment using the adjustment wheel
- For round and fl t material
- To hold when welding
- Nickel plated
- Chrome vanadium

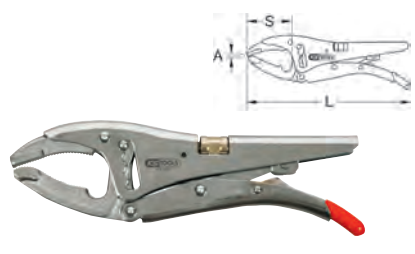

	A mm	L mm	S mm	g
115.1037	0-85	250.0	60,0	800

Locking pliers, serrated

- Forged gripping jaws
- Movable clamping jaws
- Serrated execution
- Quick-release lever
- Size adjustment using the adjustment wheel
- For round and fl t material
- To hold when welding
- Nickel plated
- Chrome vanadium

	A mm	L mm	S mm	g
115.1038	0-85	250.0	60,0	800

Automatic locking pliers

- Forged gripping jaws
- Automatic adjustment by cam mechanism
- Serrated execution
- Quick-release lever
- For round and fl t material
- Heavy but controlled clamping
- To hold when welding
- Knurled handle
- Nickel plated
- Chrome vanadium

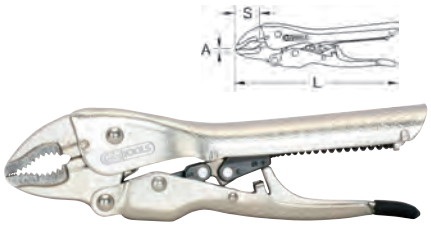

	A mm	L mm	S mm	g
115.1150	0-32	170.0	22,0	250
115.1155	0-47	250.0	29,0	620

Automatic long nosed locking pliers

- Forged gripping jaws
- Automatic adjustment by cam mechanism
- Serrated execution
- Quick-release lever
- Heavy but controlled clamping
- For round and fl t material
- To hold when welding
- Knurled handle
- Nickel plated
- Chrome molybdenum

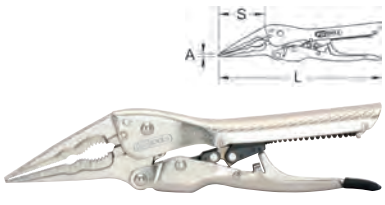

	A mm	L mm	S mm	g
115.1160	0-51	200.0	55,0	260

Automatic gripping pliers

- Flat gripping jaws
- Movable clamping jaws
- Automatic adjustment by cam mechanism
- Quick-release lever
- Heavy but controlled clamping
- For round and fl t material
- For profiled bul y components
- Good adaptation to existing surfaces
- Knurled handle
- Nickel plated
- Chrome molybdenum

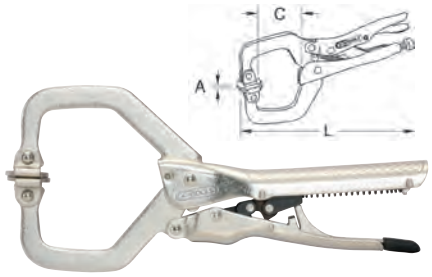

	A mm	C mm	L mm	g
115.1165	0-68	55.0	215.0	330
115.1170	0-90	90.0	310.0	860

Special clamping gripping pliers

- For the cutting of plastic pipes
- Enormous time and costs saving
- Suitable for narrow hard to access areas
- Versatile use
- With loosening lever
- With easy locking action
- Size adjustment using the adjustment wheel
- Black lacquer
- Chrome molybdenum

	Size mm	Ø mm	L mm	g
450.0350	1	8 / 9 / 10 / 11 / 12	260.0	775
450.0351	2	7 / 9 / 10 / 12 / 14	265.0	775
450.0352	3	15 / 16 / 18	255.0	636

RIVETING PLIERS

Plastic rivet pliers set included rivets

- Suitable for plastic rivets
- Narrow head pliers
- Can be used in hard to access areas
- 90° angled rivet head
- With rubber grip
- Includes 40 plastic rivets
- Die-cast metal body

Plastic rivets: 5.0x15.8 - 5.0x17.2 - 6.3x25.2 - 6.6x17.2 mm

			g
150.9650	41 pcs	Plastic rivet pliers set included rivets	760

consists of:

		g
150.9651	Plastic rivet pliers	580
150.9652	Replacement rivets Pack of 10, 17,2 x 6,6 mm	20
150.9653	Replacement rivets Pack of 10, 25,2 x 6,3 mm	22
150.9654	Replacement rivets Pack of 10, 17,2 x 5 mm	15
150.9655	Replacement rivets Pack of 10, 15,8 x 5 mm	16

Anchor rivet pliers

- Suitable for anchor rivets
- With PVC dipped handle
- Die-cast metal body

Anchor rivets: 4 - 5 - 6 - 8 mm (5/32" - 3/16" - 15/64" - 5/16")

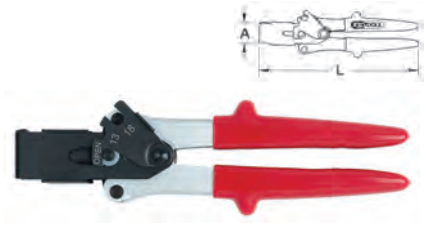

	A mm	L mm	g
150.9580	30.0	230.0	438

Standard hand riveting tool

- Suitable for blind rivets
- Including four interchangeable mouthpieces
- Magazine and key in the riveter body
- Narrow head pliers
- With safety lock on the handle end
- With rubber grip
- Die-cast metal body

Blind rivets: 2,4 - 3,2 - 4,0 - 4,8 mm

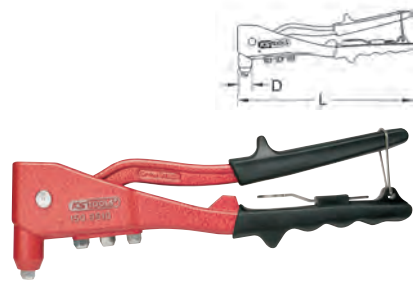

	D mm	L mm	g
150.9510	21.0	270.0	920

Standard hand riveting tool set

- Suitable for blind rivets
- Four interchangeable mouthpieces
- Magazine and key in the riveter body
- Includes 200 blind rivets
- With rubber grip
- Die-cast metal body

Blind rivets: 2,4 - 3,2 - 4,0 - 4,8 mm

			kg
150.9520	205 pcs	Standard hand riveting tool set	1.25

Hand rivet tool

- Suitable for blind rivets
- 360° rotating head
- For diffi ult to access areas
- Narrow head pliers
- With safety lock on the handle end
- Including four interchangeable mouthpieces
- Die-cast metal body

Blind rivets: 2,4 - 3,2 - 4,0 - 4,8 mm

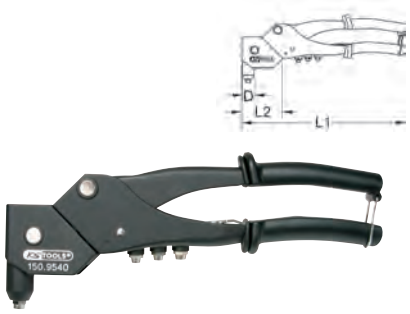

	D mm	L1 mm	L2 mm	g
150.9540	21.0	290.0	70.0	751

Universal hand riveting tool set

- Suitable for blind rivets and blind rivet nuts
- 360° rotating head
- For diffi ult to access areas
- Four interchangeable mouthpieces and nut rivet pulling inserts
- Die-cast metal body

Blind rivets: 2,4 - 3,2 - 4,0 - 4,8 mm
Rivet nuts: M3 - M4 - M5 - M6

			kg
150.9610	10 pcs	Universal hand riveting tool set	1.96

Long arm hand riveting tool

- Suitable for blind rivets
- Including four interchangeable mouthpieces
- Extra long lever arms
- High power transmission
- Magazine and key in the riveter body
- With rubber grip
- Die-cast metal bodyBlind rivets: 2,4 - 3,2 - 4,0 - 4,8 mm

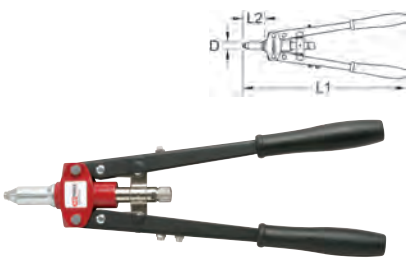

	D mm	L1 mm	L2 mm	kg
150.9530	21.0	410.0	59.0	1.50

Universal riveting tool

- Suitable for blind rivets and blind rivet nuts
- Retractable legs for increased power consumption
- Mouthpiece magazine intergrated in the handle
- With two component handle
- Die cast metal body

Blind rivets: 2,4 - 3,2 - 4,0 - 4,8 - 6,4 mm

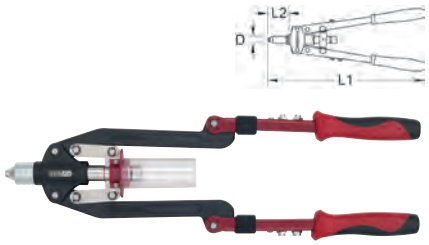

	D mm	L1 mm	L2 mm	kg
150.9633	30.0	510.0	45.0	1.60

Universal riveting tool set

- Suitable for blind rivets and blind rivet nuts
- Retractable legs for increased power consumption
- Mouthpiece magazine intergrated in the handle
- With two component handle
- Die-cast metal body

Blind rivets: 2,4 - 3,2 - 4,0 - 4,8 - 6,4 mm
Rivet nuts: M4 - M5 - M6 - M8 - M10

			kg
150.9630	11 pcs	Universal riveting tool set	2.67

accessories:

		g
150.9570	Rivet holders for rivetting tool small and large, 2,4 mm	10
150.9571	Mouthpieces for riveting, 3.2 mm	10
150.9572	Mouthpieces for riveting, 4.0 mm	10
150.9573	Mouthpieces for riveting, 4.8 mm	10
150.9574	Mouthpieces for riveting, 5 mm	10
150.9575	Mouthpieces for riveting, 6.4 mm	10
150.9578	Replacement jaw grips suitable for rivet head, suitable for 150.9610	10
150.9579	Replacement gripping jaws for rivet head, for 150.9630	10
150.9620	Cavity wall fixi g rivet head, for 150.9610	160
150.9613	Rivet nut pulling spindle for small rivet tool, M3, suitable for 150.9610	30
150.9614	Rivet nut pulling spindle for riveting tools, M4	30
150.9615	Rivet nut pulling spindle for riveting tools, M5	30
150.9616	Rivet nut pulling spindle for riveting tools, M6	30
150.9634	Rivet nut pulling spindle for riveting tools, M4	40
150.9635	Rivet nut pulling spindle for riveting tools, M5	40
150.9636	Rivet nut pulling spindle for riveting tools, M6	40
150.9638	Rivet nut pulling spindle for riveting tools, M8	70
150.9640	Rivet nut pulling spindle for riveting tools, M10	70
150.9611	Spare rivet heads, suitable for 150.9610	60
150.9631	Replacement rivet heads for rivet tools, for 150.9630	100
150.9632	Replacement rivet heads for rivet tools, for 150.9630	40

CRIMPING PLIERS

Wire end ferrule pliers

- For cable cutting and wire stripping
- For crimping cable lugs and connectors
- With PVC dipped handle
- Plier body made of fl t steel

	D mm	L mm	g	
115.1236	0,25 - 2,5	155.0	165	
115.1237	0,5 - 16,0	220.0	240	

Crimp pliers for not insulated, opened cable connector

- Ideally suited for converting not insulated contacts
- For stripping of wires from 0.5 - 6.0 mm²
- Cut wires up to 6.0 mm²
- For crimping blade terminals 2.8 / 4.8 / 6.3 mm and other contacts with open crimp sleeve
- Handle dip insulated
- Plier body from special steel
- Material strength 3 mm

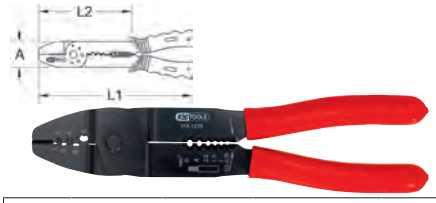

	A mm	L1 mm	L2 mm	g	
115.1235	38.0	220.0	120.0	196	

Multifunction pliers for insulated and non insulated cable terminals

- For professional cable cutting and stripping of wires from 0,75 - 6,0 mm²
- For crimping cable lugs and connectors of 1,5 - 6,0 mm²
- Cutting function
- Two component handle
- Pliers body made of fl t steel

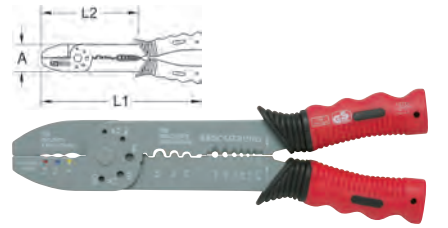

	A mm	L1 mm	L2 mm	g	
115.1231	40.0	220.0	130.0	230	

Multifunction crimping pliers set

- For insulated and un-insulated cable terminals
- Includes 270 pcs consumables
- For professional cable cutting and stripping wires from 0,75 - 6,0 mm²
- For crimping cable terminals and connectors from 1,5 - 6,0 mm²
- Cutting function
- Two component handle
- Pliers body made of fl t steel
- In durable plastic storage case

			g	
115.1230	271 pcs	Multifunction crimping pliers set	560	

Crimping pliers for non insulated terminals

- Extremely robust and reliable
- Safety lock
- Inserts lock and to they click to prevent possible misuse
- Optimal crimping through precision profil
- Ratchet function
- Adjustment of the crimping pressure
- Easy to change the crimp heads through quick locking device
- Two component handle
- Burnished
- Pliers body made of fl t steel

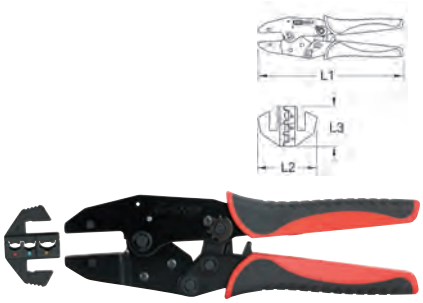

	mm²	AWG	L1 mm	L2 mm	L3 mm		g	
115.1425	0,5-1,0/1,5-2,5/4,0-6,0	22-18/16-14/12-10	220.0	50.0	34.0	115.1415	491	

Crimping pliers for insulated terminals

- Extremely robust and reliable
- Safety lock
- Inserts lock and to they click to prevent possible misuse
- Optimal crimping through precision profil
- Ratchet function
- Adjustment of the crimping pressure
- Easy to change the crimp heads through quick locking device
- Two component handle
- Burnished
- Pliers body made of fl t steel

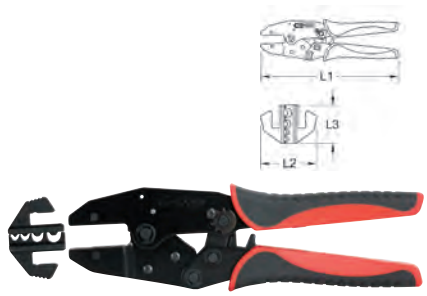

	mm²	AWG	L1 mm	L2 mm	L3 mm		g	
115.1430	1,5/2,5/6,0/10,0	20-18/16-14/12-10/8	220.0	50.0	34.0	115.1416	487	

Crimping pliers for pin terminals

- Extremely robust and reliable
- Safety lock
- Inserts lock and to they click to prevent possible misuse
- Optimal crimping through Precision profil
- Ratchet function
- Adjustment of the crimping pressure
- Easy to change the crimp heads through quick locking device
- Two component handle
- Burnished
- Pliers body made of fl t steel

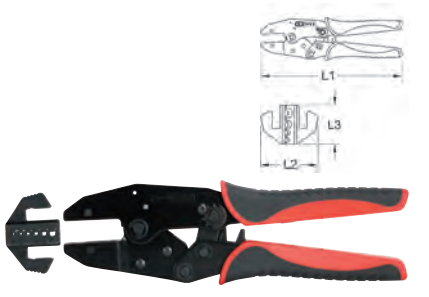

	mm²	AWG	L1 mm	L2 mm	L3 mm		g	
115.1440	0,5/0,75/1,0/1,5/2,5/4,0	22/20/18/16-14/12-10	220.0	50.0	34.0	115.1418	499	
115.1450	6,0/10,0/16,0	10/8/6	220.0	50.0	34.0	115.1420	499	

Crimping pliers for spade terminals

- Extremely robust and reliable
- Safety lock
- Inserts lock and to they click to prevent possible misuse
- Optimal crimping through precision profil
- Ratchet function
- Adjustment of the crimping pressure
- Easy to change the crimp heads through quick locking device
- Two component handle
- Burnished
- Pliers body made of fl t steel

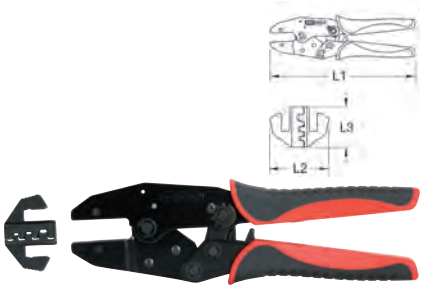

	mm²	AWG	L1 mm	L2 mm	L3 mm		g	
115.1435	0,5-1,0/1,5-2,5/4,0-6,0	20-18/16-14/12-10	220.0	50.0	34.0	115.1417	499	
115.1455	2,5/0,5/8,0/10,0	14-22/8-6	220.0	50.0	34.0	115.1421	505	

Crimping pliers for coaxial terminals

- Extremely robust and reliable
- Safety lock
- Inserts lock and to they click to prevent possible misuse
- Optimal crimping through precision profil
- Ratchet function
- Adjustment of the crimping pressure
- Easy to change the crimp heads through quick locking device
- Two component handle
- Burnished
- Pliers body made of fl t steel

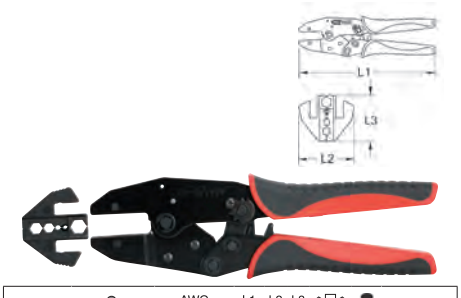

	mm²	AWG	L1 mm	L2 mm	L3 mm		g	
115.1445	1,72/2,50/5,40/6,48/8,23	RG58/RG59/RG62	220.0	50.0	34.0	115.1419	491	

Crimping pliers for Western terminals

- Extremely robust and reliable
- Safety lock
- Inserts lock and to they click to prevent possible misuse
- Optimal crimping through precision profil
- Ratchet function
- Adjustment of the crimping pressure
- Easy to change the crimp heads through quick locking device
- Two component handle
- Burnished
- Pliers body made of fl t steel

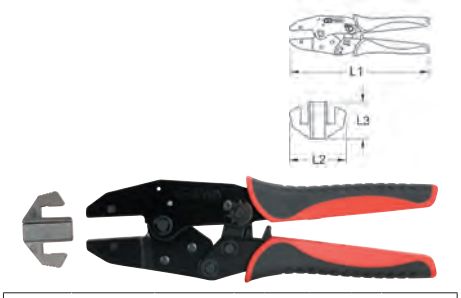

	mm²	AWG	L1 mm	L2 mm	L3 mm		g	
115.1460	RJ22	22-24	220.0	50.0	34.0	115.1422	500	
115.1465	RJ11/RJ12	22-24	220.0	50.0	34.0	115.1423	505	
115.1470	RJ45	22-24	220.0	50.0	34.0	115.1424	505	

Electricians crimping pliers set

- Ideal configu ation for electricians
- Extremely robust and reliable
- Safety lock
- Inserts lock and to they click to prevent possible misuse
- Optimal crimping through precision profil
- Ratchet function
- Adjustment of the crimping pressure
- Easy to change the crimp heads through quick locking device
- In durable plastic storage case
- Two component handle
- Burnished
- Pliers body made of fl t steel

115.1480	3 pcs	Electricians crimping pliers set	910

1 x		220 mm
1 x		Ø 0,5 - 4,0 mm, H
1 x		Ø 1,5 - 10,0 mm, B

Net working crimping pliers set

- Ideal configu ation for network cabling
- Extremely robust and reliable
- Safety lock
- Inserts lock and to they click to prevent possible misuse
- Optimal crimping through precision profil
- Ratchet function
- Adjustment of the crimping pressure
- Easy to change the crimp heads through quick locking device
- In durable plastic storage case
- Two component handle
- Burnished
- Pliers body made of fl t steel

115.1490	5 pcs	Net working crimping pliers set	1.05

1 x		220 mm
1 x		AWG: 22 - 14 - 6 - 8, H
1 x		AWG: 22 - 24, G1
1 x		AWG: 22 - 24, G2
1 x		AWG: 22 - 24, G3

Crimping pliers for Solarlok

- Extremely robust and reliable
- Safety lock
- Inserts lock and to they click to prevent possible misuse
- Optimal crimping through precision profil
- Ratchet function
- Adjustment of the crimping pressure
- Easy to change the crimp heads through quick locking device
- Two component handle
- Burnished
- Pliers body made of fl t steel

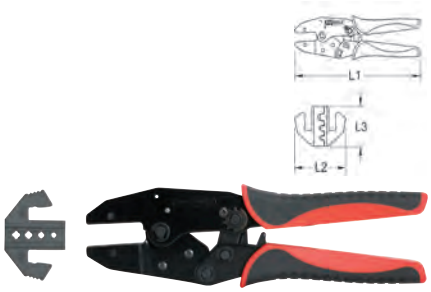

	mm²	AWG	L1 mm	L2 mm	L3 mm		g
115.1520	6,0 / 4,0 / 2,5 / 1,5	10 - 15	220.0	50.0	34.0	115.1412	540

Crimping plier for solar coupler MC 3

- Extremely robust and reliable
- Safety lock
- Inserts lock and to they click to prevent possible misuse
- Optimal crimping through precision profil
- Ratchet function
- Adjustment of the crimping pressure
- Easy to change the crimp heads through quick locking device
- Two component handle
- Burnished
- Pliers body made of fl t steel

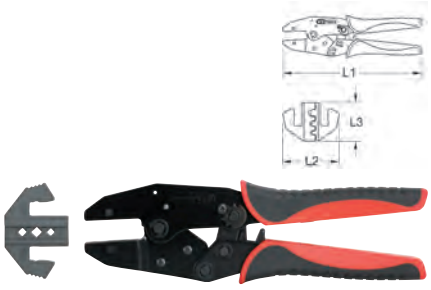

	mm²	AWG	L1 mm	L2 mm	L3 mm		g
115.1521	4,0 / 6,0 / 2,5	12 / 10 / 14	220.0	50.0	34.0	115.1413	545

Crimping pliers for solar coupler MC 4

- Extremely robust and reliable
- Safety lock
- Inserts lock and to they click to prevent possible misuse
- Optimal crimping through precision profil
- Ratchet function
- Adjustment of the crimping pressure
- Easy to change the crimp heads through quick locking device
- Two component handle
- Burnished
- Pliers body made of fl t steel

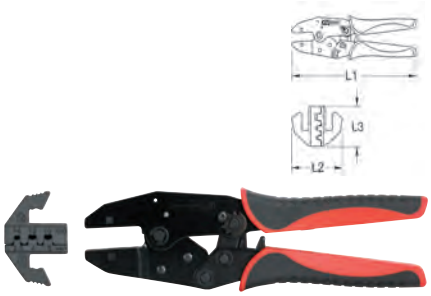

	mm²	AWG	L1 mm	L2 mm	L3 mm		g
115.1522	2,5 / 4,0 / 6,0	14 / 12 / 10	220.0	50.0	34.0	115.1414	550

Universal crimping tool set with automatic wire stripper

- Extremely robust and reliable crimping plier
- Safety lock
- Inserts lock and to they click to prevent possible misuse
- Optimal crimping through precision profil
- Ratchet function
- Adjustment of the crimping pressure
- Easy to change the crimp heads through quick locking device
- In durable plastic storage case
- Two component handle
- Burnished
- Pliers body made of fl t steel
- Includes self-closing and damage free automatic wire stripper

115.1400	8 pcs	Universal crimping tool set with automatic wire stripper	2.37

1 x		220 mm
1 x		Ø 0,5 - 4,0 mm, H
1 x		Ø 1,5 - 10,0 mm, B
1 x		Ø 0,5 - 6,0 mm, C
1 x		Ø 0,5 - 4,0 mm, D
1 x		RG 58 - RG 71, E
1 x		1,0 - 3,2 mm
1 x		

WIRE PROCESSING PLIERS

Wire twisting pliers

- Anticlockwise
- Serrated execution
- 30° angled jaws
- With additional cutting
- Enables precise, in seconds wire twisting
- Suitable for wire up to 1,0 mm
- Narrow nose for optimal mobility
- Burnished
- Special tool steel



	B mm	L1 mm	L2 mm	S mm	g
116.1301	10.0	215.0	40.0	10,0	230
116.1302	12.0	265.0	60.0	13,0	360

Rabitz pliers

- In accordance to DIN / ISO 9242
- With PVC dipped handle
- Ground heads
- For cutting and twisting tie wire
- Oil-hardened
- Black surface
- Special tool steel



	A1 mm	A2 mm	D mm	L1 mm	L2 mm	g
116.1404	18.0	19.0	26.0	190.0	17.0	350
116.1401	20.0	19.0	29.0	220.0	17.0	400
116.1400	25.0	20.0	36.0	250.0	17.0	400
116.1403	26.0	20.0	37.0	280.0	17.0	500

Heavy pincers

- In accordance to DIN / ISO 9243
- With PVC dipped handle
- Ground heads
- For heavy applications
- Oil-hardened
- Black surface
- Special tool steel



	A1 mm	A2 mm	D mm	L1 mm	L2 mm	g
116.1300	24.0	23.0	52.0	200.0	23.0	410

Self opening rabitz pliers

- In accordance to DIN / ISO 9242
- With PVC dipped handle
- Ground heads
- Self-opening handle with internal spring
- For cutting and twisting tie wire
- Oil-hardened
- Black surface
- Special tool steel



	A1 mm	A2 mm	D mm	L1 mm	L2 mm	g
116.1411	23.0	20.0	30.0	220.0	17.0	400
116.1410	27.0	22.0	36.0	250.0	19.0	400
116.1412	25.0	21.0	35.0	280.0	18.0	400

BOLT CUTTERS

Mini bolt cutter, self-releasing

- With pipe handle
- With steel tube legs and eccentric adjustment
- With interchangeable cutter head
- Cutter head made of high quality special steel
- Inductively hardened precision cutting edges
- Phosphate
- Chrome molybdenum



	L mm	S mm	D mm	A mm	g
118.0015	205.0	14,0	34.0	17.0	270

Bolt cutters

- With pipe handle
- With steel tube legs and eccentric adjustment
- With interchangeable cutter head
- Cutter head made of high quality special steel
- Inductively hardened precision cutting edges
- Phosphate finis
- Special tool steel



	A mm	D mm	L1 mm	L2 mm	Replacement cutter head	kg
118.0118	20.0	65.0	450.0	115.0	118.0119	1.50
118.0124	22.0	85.0	600.0	136.0	118.0125	2.50
118.0130	27.0	95.0	750.0	155.0	118.0131	4.88
118.0136	35.0	110.0	900.0	170.0	118.0137	6.70
118.0142	40.0	120.0	1050.0	195.0	118.0143	6.70

Bolt cutters

- With forged arms
- With steel tube legs and eccentric adjustment
- With interchangeable cutter head
- Cutter head made of high quality special steel
- Inductively hardened precision cutting edges
- Phosphate finis
- Special tool steel



	A mm	D mm	L1 mm	L2 mm	Replacement cutter head	kg
118.0218	20.0	65.0	460.0	120.0	118.0119	2.60
118.0224	25.0	82.0	610.0	135.0	118.0125	2.90
118.0230	30.0	95.0	760.0	155.0	118.0131	3.20
118.0236	35.0	110.0	900.0	170.0	118.0137	5.40

Bolt cutter display

- With steel tube legs and eccentric adjustment
- With interchangeable cutter head
- Cutter head made of high quality special steel
- Inductively hardened precision cutting edges
- Phosphate finis
- Special tool steel
- In display stand

			kg
118.0032	37 pcs	Bolt cutter display	96.16
16 x		2 x 450 - 4 x 600 - 4 x 750 - 4 x 900 - 2 x 1050 mm	
16 x		2 x 450 - 4 x 600 - 4 x 750 - 4 x 900 - 2 x 1050 mm	

Reinforcement steel mesh cutter

- Cutting performance up to 40 HRC
- With adjustable cutters
- Low separating force effort
- Limit stop with extra-large buffer area
- Unproblematic gripping of fl t lying construction steels

	S mm	L mm	kg
118.0246	45,0	820.0	2.79

SADDLER PLIERS

Seat clamp pliers set

- Straps for attaching bolster clamps to vehicle seats
- For all common bolster clamps
- Includes 100 clamps
- With PVC dipped handle
- Chrome vanadium

			g
118.0160	101 pcs	Seat clamp pliers set	310

consists of:

		g
118.0161	Clamps, 100 pcs	85
118.0162	Seat clamp pliers	180

REVOLVING PUNCH PLIERS

Revolving punch pliers

- With an ergonomic, molded handle
- With inspection panel
- Automatic locking device
- Interchangeable hole punches
- Nickel plated
- Chrome vanadium



	L1 mm	L2 mm	g
118.0041	220.0	10.0	325

Revolving punch and eyelet pliers

- Ideal for working with eyelets
- With an ergonomic, molded handle
- With inspection panel
- Automatic locking device
- Interchangeable hole punches
- Nickel plated
- Chrome vanadium



	L1 mm	L2 mm	g
118.0042	220.0	10.0	325

Revolving punch pliers, normal hand

- Up to 70% power savings
- With an ergonomic, molded handle
- With inspection panel
- Automatic locking device
- Interchangeable hole punches
- Nickel plated
- Chrome vanadium



	L1 mm	L2 mm	g
118.0043	250.0	10.0	430

PUNCHED HOLE AND JOGGLER PLIERS

Mini joggler pliers

- Self opening
- For the fla ging of sheet metal and body parts
- Up to 1 mm thickness
- Particularly suitable for thin sheet metal edges, curves and arches
- Requires light expenditure of energy
- Hardened fla ging jaws
- Special tool steel



	L mm	T mm	g
118.0056	220.0	13.0	900

Joggler pliers

- Self opening
- For the fla ging of sheet metal and body parts
- Up to 1 mm thickness
- Requires light expenditure of energy
- Hardened fla ging jaws
- Special tool steel



	L mm	T mm	kg
118.0058	280.0	13.0	1.00

Joggler pliers

- Self opening
- For punching straight and bent sheet metal
- Up to 1.25 mm thickness
- Radius to 40,0 mm
- Hole diameter 5 mm
- Requires light expenditure of energy
- Special tool steel



	L mm	hole diameter	kg
118.0057	300.0	max. 5 mm	1.00

Punched hole and joggler pliers

- Self opening
- Fast conversion by simply turning the head
- For the fla ging and punching sheet metal and body parts
- Punching up to 1,25 mm thickness
- Hole diameter 5 mm
- Requires light expenditure of energy
- Special tool steel



	L mm	T mm	hole diameter	kg
118.0055	285.0	13.0	max. 5 mm	1.23

PLUMBER PLIERS

Seaming pliers

- For folding of sheet metal
- Straight design
- Insulated handle
- Cast iron



	L mm	B mm	g
222.1601	280.0	52.0	660

Seaming pliers

- For folding of sheet metal
- 45° angled jaws
- Insulated handle
- Cast iron

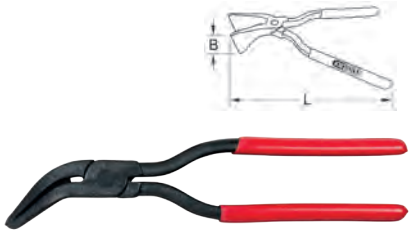

	L mm	B mm	g	
222.1602	260.0	52.0	670	

Seaming pliers

- For folding of sheet metal
- 90° angled jaws
- Insulated handle
- Cast iron

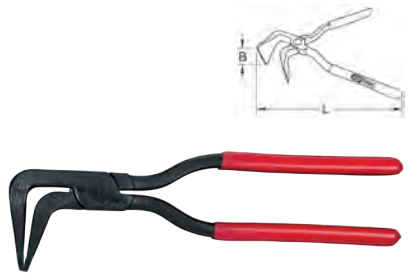

	L mm	B mm	g	
222.1603	260.0	52.0	760	

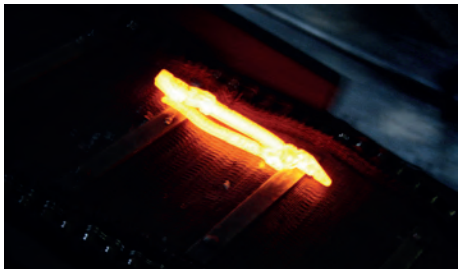

AUTOMOTIVE CLIP REMOVAL PLIERS

Door panel rivet tool

- For the gentle release of clips of all kinds on the entire vehicle
- Through the gentle release of the clips can be reused
- Self-closing
- With spring clip
- Head burnished
- Chromed vanadium

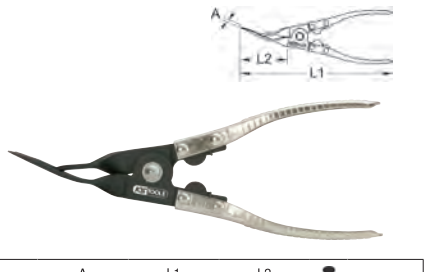

	A mm	L1 mm	L2 mm	g	
115.1051	32,0	240.0	80.0	240	

Trim clip pliers

- 35° angled tips
- With various profil s
- For the removal of re-usable plastic rivets and clips
- Self opening
- Chrome vanadium

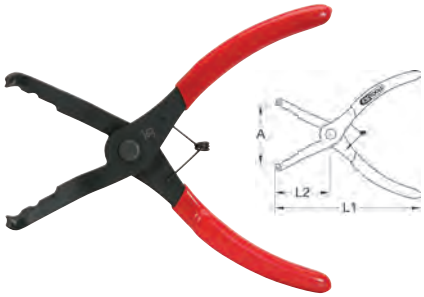

	A mm	L1 mm	L2 mm	g	
115.1087	0-82	190.0	60.0	180	

Trim clip pliers

- 80° angled tips
- With various profil s
- For the removal of re-usable plastic rivets and clips
- Self opening
- Chrome vanadium

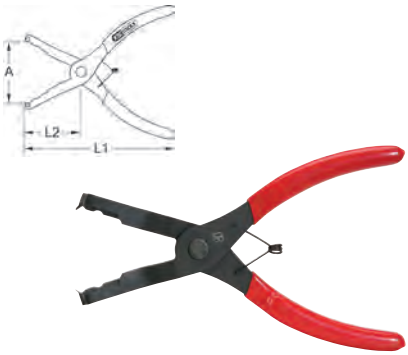

	A mm	L1 mm	L2 mm	g	
115.1088	0-72	200.0	66.0	190	

Rivet removal pliers, offset

- For the removal of two piece plastic rivets
- Self opening
- Plastic

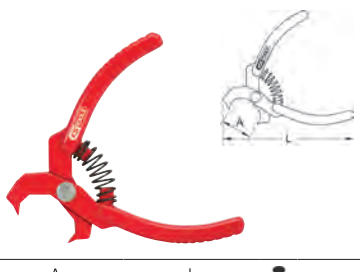

	A mm	L mm	g	
115.1097	0-28	100.0	20	

Rivet removal tool

- For the removal of two piece plastic rivets
- Self opening
- Plastic

	A mm	L mm	g	
115.1098	0-20	100.0	20	

CARTRIDGE TIP PLIERS

Cartridge tip pliers

- PVC dipped handle
- Very versitile
- Safety locking device
- Clean V-cut in the cartridge tip
- Cut from solid steel
- Chrome vanadium

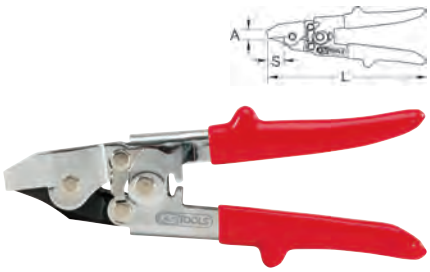

	A mm	L mm	S mm	g	
140.2220	33.0	210.0	20,0	420	

WHEELS & TYRES PLIERS

Wheel nut cap pliers

- For the disassembly and assembly of nut caps
- Two component handle
- Easy removal due to the special mouth pliers
- Chrome vanadium

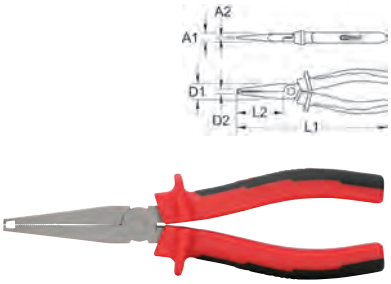

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g	
150.2023	0,0-11,5	6.5	20.0	7.0	200.0	64.0	260	

HGV wheel nut cap pliers

- PVC dipped handle
- For removing of wheel nut caps
- No slipping through specially coated jaws
- Ideally suited for commercial vehicles
- Special tool steel

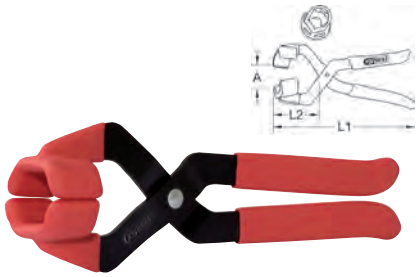

	A mm	L1 mm	L2 mm	g	
150.1995	28-60	250.0	72.0	300	

Wheel balance weight pliers

- Dipped covered handles
- For cutting off the balance weights
- With additional function for opening and closing the spring clips
- Chrome vanadium

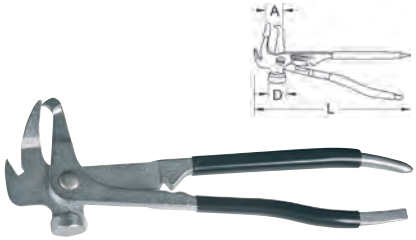

	A mm	D mm	L mm	g	
150.2025	26,0	22.0	250.0	450	

Wheel balance weight pliers, self opening

- Dipped covered handles
- For cutting off the balance weights
- Pliers and Hammer plastic covered
- Suitable for alloy wheels
- With additional function for opening and closing the spring clips
- Chrome vanadium

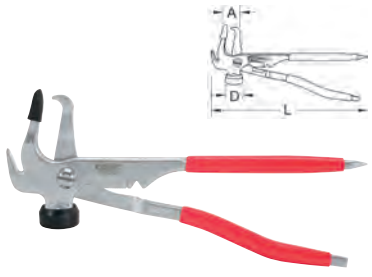

	A mm	D mm	L mm	g	
150.2024	32,0	28.0	250.0	380	

CHASSIS & BRAKE PLIERS

Drive shaft removal pliers

- 30° angled
- With PVC dipped handle
- Self-closing
- Plier head with cut out and ring stop body
- For the disassembly and assembly of nut caps without lug retainer
- Chrome vanadium

Application range: For the dismantling of the external (bellow joints in the exchange of the axle boots and / or the drive shaft sleeves). e.g.: for Audi, Opel, Volkswagen (Golf, T4), Fiat, Mitsubishi.

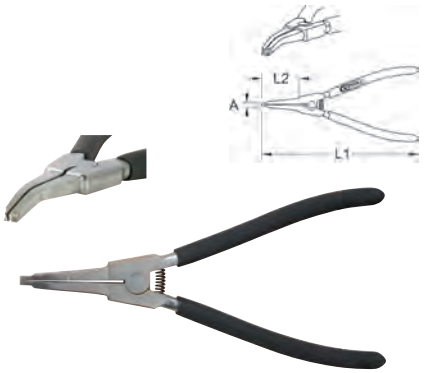

	A mm	L1 mm	L2 mm	g	
115.0991	0-33	210.0	50.0	215	

Drive shaft removal pliers

- Slightly angled
- With PVC dipped handle
- Self-closing
- Checkered plier head
- For the disassembly and assembly of drive shaft circlips without lug retainer
- Slip proof
- Chrome vanadium

Application range: For the removal of external circlips e.g. on synchronisation joints

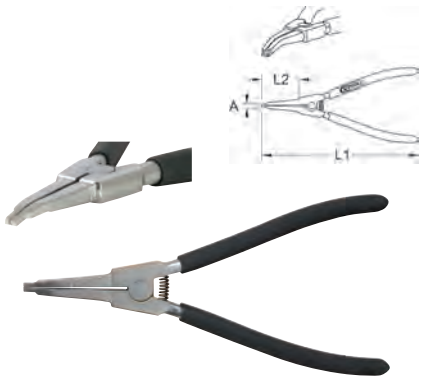

	A mm	L1 mm	L2 mm	g	
115.0992	0-37	210.0	50.0	256	

Drive shaft removal pliers

- Straight form
- With PVC dipped handle
- Self-closing
- Checkered plier head
- For the disassembly and assembly of drive shaft circlips without lug retainer
- Slip proof
- Chrome vanadium

Application range: For the removal of external circlips e.g. on drive shafts, transmissions, etc

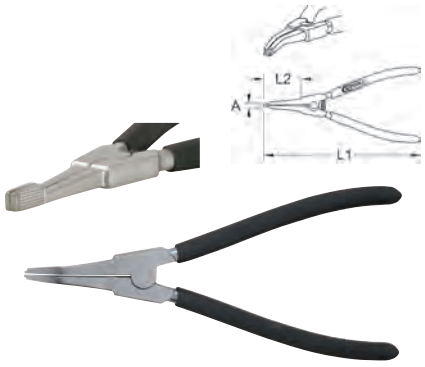

	A mm	L1 mm	L2 mm	g	
115.0993	0-37	210.0	48.0	220	

Lockring pliers, serrated

- With PVC dipped handle
- Serrated and angular tip
- With self closing mechanism
- For the dismantling and assembly lockring
- For external security rings
- No sliping due to the serrated tips
- Chrome molybdenum

Ideally suited for the dismantling and assembly of lockring on drive shafts on for example Volkswagen, MB and Opel.

	A mm	L mm	g	
115.1048	0-20	210.0	220	

Lockring pliers, fully formed tips

- With PVC dipped handle
- Fully formed tips
- With self closing mechanism
- For the dismantling and assembly lockring
- For external security rings
- No sliping due to the serrated tips
- Chrome molybdenum

Ideally suited for the dismantling and assembly of lockring on drive shafts on for example Volkswagen, MB, Opel, BMW and Ford.

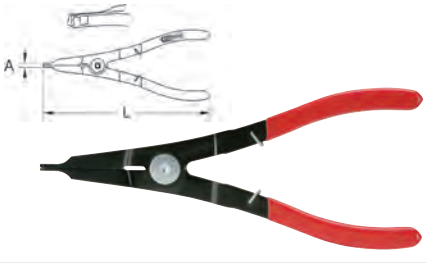

	A mm	L mm	g	
115.1049	0-20	240.0	600	

Wheel bearing circlip pliers, angled

- In accordance to DIN 5256
- Slip inhibiting machined precision tips
- 45° angled version
- Self closing
- With rubber grip
- Power version
- Die forged
- Chrome vanadium



	mm	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.1038	19,0 - 60,0	22.0	23.0	2.3	240.0	32.0	250
500.1039	19,0 - 60,0	22.0	23.0	3.0	300.0	46.0	490

BRAKE PLIERS

Brake pipe bending pliers, 2 in 1

- For 4,75 and 6,00 mm brake pipes
- With plastic handle
- Ideally suitable for bending pipes directly
- For copper, aluminum, brass,mild steel and plastic coated brake pipes
- Burnished
- Special tool steel



	A mm	L mm	C mm	g
120.2000	0-27,5	240.0	37.0	400

Car brake spring pliers

- For attaching and dismantaling the brake shoes retaining spring
- For glued and riveted brake shoes
- Special surround
- Chrome vanadium

	A mm	L mm	g
150.2211	130.0	325.0	335

Grease cap pliers

- Hard rubber handle
- For the damage free drawing off of grease caps
- 2x6 moveable adjustable steps
- Wedge shaped jaw profil
- Head burnished
- Special tool steel

	A mm	C mm	L mm	kg
450.0210	0-100	85.0	500.0	1.20

Brake spring pliers

- For the disassembly and assembly of hand brake cables
- Allows a safe working environment
- Chrome vanadium

Application range: Volkswagen, Audi, BMW, Citröen, Nissan, Peugeot, Renault, Rover, Seat etc.

	L mm	g
150.2118	225.0	175

Car brake spring pliers

- For attaching and dismantaling the brake shoes retaining spring
- For glued and riveted brake shoes
- Special surround
- Chrome vanadium

	A mm	L mm	g
150.2116	130	220.0	340

HGV brake spring pliers

- For attaching and dismantaling the brake shoes retaining spring
- For glued and riveted brake shoes
- Special surround
- Interchangeable tip
- Knurled handle
- Chrome vanadium

	A mm	L mm	Replacement tip	kg
450.0320	205.0	500.0	450.0321	1.25

OIL & FUEL SERVICE PLIERS

Special hose pliers

- With PVC dipped handle
- Extra fl t jaws to the end
- For dismantling and assembly
- For removing of hose connections from hose tails
- Special tool steel

Ideally suited in e.g. fuel vacuum hoses, low pressure systems and water hoses.



	A mm	L mm	C mm	g
115.1044	0-30	195.0	70.0	190

Fuel pipe pliers

- Two component handle
- Cranked execution
- Integrated cutting edge
- For loosening and tightening on fuel lines that are diffi ult to reach
- No damage of the overfl w pipe
- Matt chrome
- Chrome vanadium

Ideally usably in security ring at fuel directions and change valve on BMW motorcycles with 2 valve technology Suitable e.g. for Volkswagen/Audi, Mercedes Benz, Ford, Opel, Peugeot, Volvo, Daihatsu, Mazda and Toyota.



	A mm	L1 mm	L2 mm	S mm	g
115.1067	0-75	200.0	75.0	15,0	220

Fuel connection pliers

- PVC dipped handle
- For unbolting of fuel pipe siezed connections
- Suitable for service and maintenance works
- Special tool steel



	A mm	L1 mm	L2 mm	g
115.1094	0-30	160.0	50.0	220

Fuel pipe pliers, offset

- PVC dipped handle
- 90° angled head
- For the correct unbolting of the siezed connections with rest tongues
- Suitable for service and maintenance works on the fuel tank
- For diffi ult to access areas
- Painted black
- Aluminium

	A mm	L1 mm	L2 mm	g	
115.1099	0-24	220.0	39.0	280	

Fuel pipe connection pliers

- For opening and closing the coupling on fuel pipe connections
- Is required for fuel fil er changes and/or engine repairs
- With two component handle
- Chrome vanadium

Application range: Volkswagen Audi, Fiat, GM, Opel, Mercedes (e.g. M class petrol engine) etc.

	L mm	g	
115.0900	230.0	310	

Fuel connection pliers

- PVC dipped handle
- For opening the coupling on fuel pipe connections
- Blue and green: for compression couplings connected fuel pipe
- Red: with 2 noses 6,5 mm x 6,0 mm for GM and Opel fuel pipe
- Special tool steel

	A mm	L2 mm	L1 mm	g	
115.1091	20,0	35.0	120.0	80	
115.1092	22,0	35.0	120.0	80	
115.1093	22,0	35.0	120.0	80	

Oil fil er pliers

- With PVC dipped handle
- 5-stage industrial adjustment
- Universal usage
- Special tool steel
- Safety stop on the external diameter

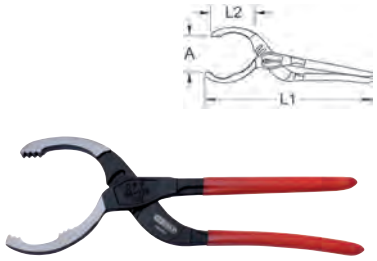

	A mm	L1 mm	L2 mm	g	
150.9317	50-125	290.0	110.0	500	

HOSE CLAMP PLIERS

Hose clamp pliers, ear type

- Knurled handle
- To the dismantling and assembly of "ear type" hose clamp
- For connections on axle boots, coolers and fuel hoses
- Universal usage
- Chrome molybdenum

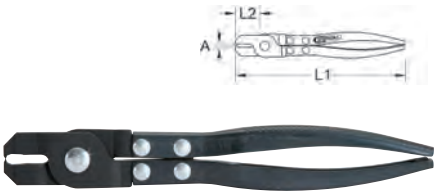

	A mm	L1 mm	L2 mm	g	
115.1039	0-60	230.0	25.0	320	

Hose clamp pliers, ear type

- With PVC dipped handle
- For the fi ting of ear clamps
- No sticking up of the ears during the press process
- Uniform compressing of the ear piece
- No damage to the sleeve
- Nickel-plated finis
- Chrome molybdenum

Application range: Axle boots, coolant and fuel hoses for Volkswagen, Audi, Opel, BMW, Mercedes, Honda, Nissan and Mazda

	A mm	L mm	g	
115.1050	0-22	260.0	380	

Hose clamp pliers

- With PVC dipped handle
- With 3/8" drive for use with a torque wrench
- For the fi ting and clamping of ear clamps
- 1/2" 4-point recess in the handle for use with torque wrench
- Chrome molybdenum

Application range: Volkswagen, Opel, Seat, GM, Ford, Nissan, Mercedes, Mazda, Honda, Chrysler, BMW and Audi

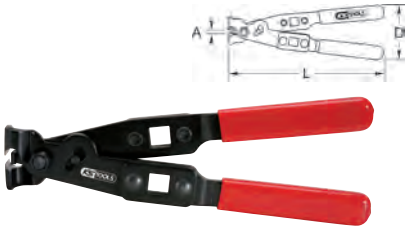

	A mm	L mm	g	
115.1053	0-17	240.0	540	

Hose clamp pliers for torque wrench

- Black plastic handle
- 3/8" drive for use with a torque wrench
- Enables clamping and/or copressing of the hose clamps
- Suitable for the stainless steel hose clamps on drive shafts
- Robust cast steel construction

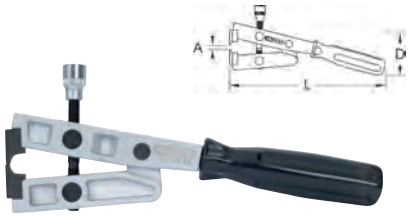

	A mm	L mm	g	
115.1056	0-45	270.0	880	

HOSE CLAMP PLIERS

Click hose clamp pliers

- Suitable for the correct assembly and disassembly of Click, Click-R and Cobra clamps
- Also suitable for self-tensioning hose clamps with fl t 3 pinch ends
- With PVC dipped handle
- Self-opening
- Chrome molybdenum

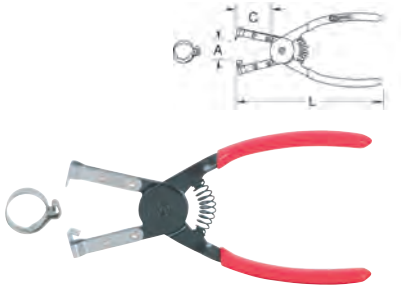

	A mm	C mm	L mm	g	
115.1040	0-25	40.0	160.0	120	

Hose clamp pliers with bowden cable

- PVC dipped handle
- For spring pipe clamps
- 650 mm bowden cable
- Includes locking mechanism
- Internal spring
- For diffi ult to reach clamps
- Chrome molybdenum

	Ø mm	L1 mm	L2 mm		g
115.1041	0 - 60	200.0	650.0	115.1041-1	470

Spring band clamp pliers with gooseneck

- For actuation of self tensioning spring band clamps
- For cooling and heating systems
- Semi rigid, plastic coated gooseneck
- Convenient one handed operation in deep regions
- Fixing of the clamp by micro teeth
- Ideal for confined spa es
- Working head with raised grippers and wide opening
- Working head with slide guide and retraction spring
- With two component handle
- Chrome molybdenum

Application area: NORMA FBS, MUB FBS-STD, FBS-RSV, etc.



	Ø mm	L1 mm	L2 mm		g
115.1190	18-54	220.0	660.0	115.1190-1	620

Hose clamp pliers type MU3

- For secure and correct dismantling and assembly of clamps
- Suitable for fl t fi ting and eccentric clamps
- With 600 mm bowden cable
- Adjustable length bowden cable
- Includes locking mechanism and ratchet function
- For diffi ult to reach clamps
- For new type and hard to access steel band clamps
- Special tool steelSuitable for VAG 2,0 TDI / MC:BKD, Volkswagen Passat from 2005,Touran, Golf V, Skoda Octavia, Audi A3.

	Ø mm	L1 mm	L2 mm		g
115.1064	0 - 50	240.0	600.0	115.1066	540

Hose clamp pliers with double bowden cable

- PVC dipped handle
- For spring pipe clamps
- 600 mm bowden cable
- Adjustable length bowden cable
- Includes locking mechanism
- For diffi ult to reach clamps
- Special tool steel

	Ø mm	L1 mm	L2 mm		g
115.1065	0 - 70	270.0	600.0	115.1065-1	540

Hose clamp pliers, angled

- 45° angled head
- With variable jaws
- For diffi ult to reach clamps
- Includes locking mechanism
- With PVC dipped handle
- Chrome molybdenum

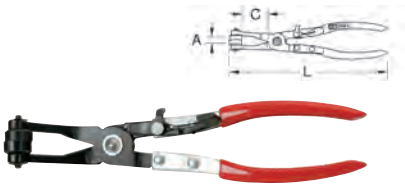

	A mm	C mm	L mm	g
115.1042	0-65	55.0	220.0	210

Universal hose clamp pliers

- Universal crown profil
- For diffi ult to reach clamps
- With PVC dipped handle
- Includes locking mechanism
- Versitile usage
- Chrome molybdenum

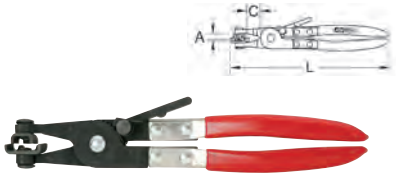

	A mm	C mm	L mm	g
115.1043	0-48,5	40.0	220.0	240

Click hose clamp pliers, forged

- Suitable for the correct assembly and disassembly of Click, Click-R and Cobra clamps
- Also suitable for self-tensioning hose clamps with fl t 3 pinch ends
- Re-usable V2A-clamps
- With PVC dipped handle
- With self-opening mechanism
- Chrome molybdenum

	A mm	C mm	L mm	g
115.1045	0-38	25.0	180.0	215

Hose clamp pliers

- PVC dipped handle
- For spring pipe clamps
- Includes locking mechanism and ratchet function
- Chrome molybdenum

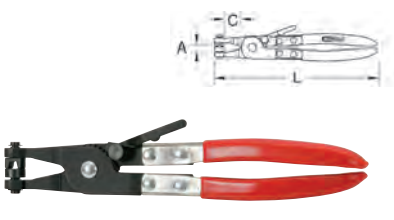

	A mm	C mm	L mm	g
115.1046	0-45	37.0	220.0	230

Hose clamp pliers

- PVC dipped handle
- For spring pipe clamps
- Includes locking mechanism and ratchet function
- Chrome molybdenum



	A mm	C mm	L mm	g	
115.1047	0-45	37.0	220.0	230	

Hose clamp pliers

- Work side
- For compressing locking hose clips
- With PVC dipped handle
- Chrome vanadium

	L mm	g	
115.1185	240.0	335	

Hose clamp pliers with prism reception

- For self-tensioning hose clamps with fl t 3 pinch ends
- In particular for fuel lines, cooling and washing water hoses
- With prism attachment for spring clamps with fl t adjoining ends
- Opening and closing the clamps without damage to the hose also in hard to reach places
- Self-opening
- Special steel

Application range: Audi, Mercedes, Toyota, Volkswagen etc.

	Clamping range mm	L mm	g	
115.1187	8-18	195.0	189	

Hose clamp pliers with swivel prism reception

- Suitable for the correct assembly and disassembly of Click, Click-R and Cobra clamps
- Also suitable for self-tensioning hose clamps with fl t 3 pinch ends
- In particular for fuel lines, cooling and washing water hoses
- With swivel prism attachment
- Self-opening
- Surface nickel-plated
- Special steel

Application range: Volkswagen, Audi, Mercedes, Toyota etc.

	Clamping range mm	L mm	g	
115.1188	8-18	210.0	200	

Hose clamp pliers type MU1

- For secure and correct dismantling and assembly of clamps
- Suitable for fl t fi ting and eccentric clamps
- Includes locking mechanism and ratchet function
- For diffi ult to reach clamps
- For new type and hard to access steel band clamps
- Special tool steelSuitable for VAG

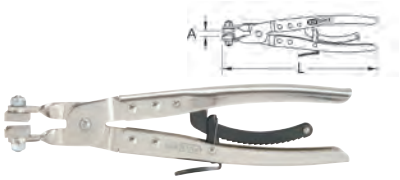

	A mm	L mm	g	
115.1062	0-30	235.0	390	

Hose clamp pliers type MU2

- For secure and correct dismantling and assembly of clamps
- Suitable for fl t fi ting and eccentric clamps
- Includes locking mechanism and ratchet function
- For diffi ult to reach clamps
- For new type and hard to access steel band clamps
- Special tool steelSuitable for VAG 2,0 TDI / MC: BKD, Volkswagen Passat from 2005, Touran, Golf V, Skoda Oktavia, Audi A3 etc.

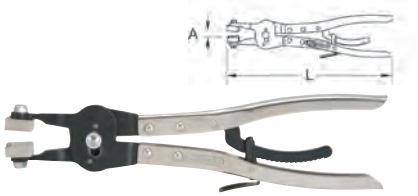

	A mm	L mm	g	
115.1063	0-40	295.0	470	

Hose clamp pliers

- With moveable jaws
- 45° angled head
- Suitable for the correct assembly and disassembly of Click, Click-R and Cobra clamps
- Also suitable for self-tensioning hose clamps with fl t 3 pinch ends
- Suitable for narrow spaces
- Chrome molybdenum

	A mm	C mm	L mm	g	
115.1057	0-30	45.0	200.0	180	

Hose clamp gripping pliers

- Forged gripping jaws
- Serrated execution
- Size adjustment using the adjustment wheel
- Quick release lever
- Easy locking action
- For round and fl t material
- Nickel plated
- Chrome vanadium

	Clamping range mm	L mm	g	
115.1126	18-36	175.0	231	
115.1127	18-54	230.0	420	

HOSE CLAMP PLIER SETS

Hose clamp gripping pliers set

- Forged gripping jaws
- Serrated execution
- Size adjustment using the adjustment wheel
- Quick release lever
- Easy locking action
- For round and fl t material
- Nickel plated
- Chrome vanadium

			g	
115.1125	2 pcs	175 - 230 mm	653	

Automotive hose clamp pliers set

- Handle dip insulated
- Ideal for clamps low down in the engine
- Includes locking mechanism
- For self tensioning spring pipe clamps with 3 point mounting
- Self opening
- For opening and closing re/useable clic hose clamps, type Clic + Clic-R
- For diffi ult to reach clamps
- Special tool steel

Application area: For connecting and removing fuel, immersed ventilation, coolant, washer water and vacuum hoses, etc.

Application range: Volkswagen, Audi, Mercedes Benz, Toyota etc.

			kg	
115.1104	4 pcs	Automotive hose clamp pliers set	1.12	

consists of:

		g	
115.1045	Hose clamp pliers (click type), 180mm	215	
115.1042	Hose clamp pliers (recessed/slot), 220mm	210	
115.1187	Hose clamp pliers with prism, 8-18mm	189	
115.1065	Hose clamp pliers (dbl bowden cable), 600mm	540	

Automotive hose clamp pliers set

- PVC dipped handle
- For opening and closing of cobra hose clamps
- Swivel pressed jaws
- Includes locking mechanism and ratchet function
- Self opening mechanism
- For the dismantling and assembly of hose clamps
- Includes bowden cable
- Chrome molybdenum

			kg
115.1055	7 pcs	Automotive hose clamp pliers set	4.00

consists of:

		g
115.1041	Hose clamp pliers (bowden cable), 650mm	470
115.1042	Hose clamp pliers (recessed/slot), 220mm	210
115.1043	Hose clamp pliers (crown profile , 220mm	240
115.1044	Hose pliers, 195mm	190
115.1045	Hose clamp pliers (click type), 180mm	215
115.1046	Hose clamp pliers (recessed/slot),220mm	230
115.1047	Hose clamp pliers (dbl cross slot),220mm	230

HOSE STRP CUTTER PLIERS

Hose strap cutter, angled

- To be sliced from earless hose clamps
- For connections on axle boots, coolers and fuel hoses
- Dipped covered handle
- Chrome vanadium

	L mm	g
115.1186	220.0	345

SOLDERING WIRE HOLDING FORCEPS

Soldering wire pliers

- With PVC dipped handle
- For the safe fixi g of braded wire
- With self opening internal spring
- Includes locking mechanism
- Chrome molybdenum

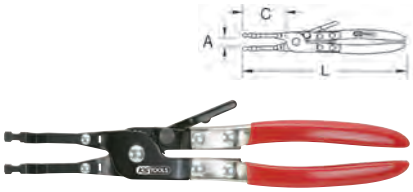

	A mm	C mm	L mm	g
115.1052	78,0	65.0	245.0	260

INCANDESCENT BULB PLIERS

Incandescent bulbs pliers

- With protecting foam material
- For the removal and replacement of incandescent bulbs
- With internal spring
- Plier jaws with foam protection material
- Suited for glass socket lamps of 4,0 mm until 6,0 mm
- Special plastic

	A mm	C mm	L mm	g
115.1054	0-32	45.0	160.0	70

VALVE AND PISTON PLIERS

Valve shaft removal pliers

- Slim execution
- Plastic coated jaws
- Knurled handle
- With self opening mechanism
- Quick and easy removal of valves from the valve shaft
- For the extension of the valve spring lever
- Ideally suitable for engines with 4 valve technology
- Nickel plated execution
- Special tool steel

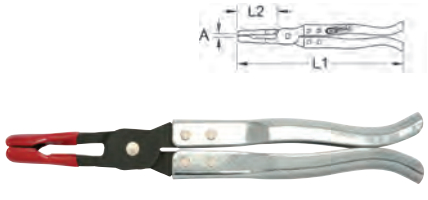

	A mm	L1 mm	L2 mm	g
115.1061	0-125	275,0	100.0	380

Piston ring pliers

- PVC dipped handle
- For the safe disassembly and assembly of piston rings
- Nickel plated surface
- Special tool steel



	Ø mm	A mm	L mm	g
150.1175	50-100	0-100	210.0	305
150.1176	80-120	0-120	220.0	340
150.1177	110-160	0-160	280.0	445

Piston ring pliers

- For the removal and replacement of piston rings
- Suitable for most passenger cars and vans
- Plastic coated handle
- Self closing pliers
- Special steel

	L mm	g
150.1179	221.0	210

IGNITION COILS AND GLOW PLUG PLIERS

Spark plug pliers

- Long, angular gripper sleeves
- Gripping sleeves with milled inner profil
- Long plier arms
- Wide safety margin to the hot assembly
- For extracting low lying spark plugs
- With two component handle
- Chrome vanadium



	A mm	L1 mm	L2 mm	L3 mm	g
500.7510	0-80	290.0	145.0	50.0	280

Glow plug pliers

- With two component handle
- Specially milled pliers profile or positive holding
- Suitable for very firm y seated glow plugs
- For the expert installation and removal of glow plugs
- For diffi ult to access areas
- Special tool steel

Ideally suitable for glow plugs in the newer diesel engine generation e.g. Mercedes, BMW, Volkswagen and Audi.

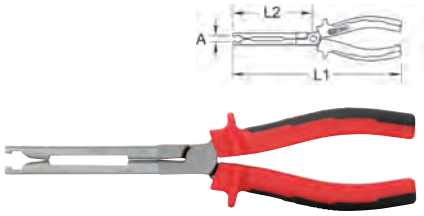

	A mm	L1 mm	L2 mm	g
500.7330	0-125	265.0	95.0	400

Glow plug dismantling pliers

- With rubber dipped handle
- Serrated jaws
- Length wise mounted handle arranged at the plier jaw
- With self opening mechanism
- In order to pull out the glow plugs from the glow plug canal in the cylinder head
- Range also possible to extract incompleted glow plugs
- Optimum power transmission with rotary and train movements
- Special tool steel



	A mm	L1 mm	L2 mm	g
500.7335	0-35	260.0	40.0	280

Glow plug pliers, angled

- With two component handle
- Angled head
- Specially milled plier profile or positive holding
- Suitable for very firm y seated glow plugs
- For the expert installation and removal of glow plugs
- For diffi ult to access areas
- Special tool steel

Ideally suitable for glow plugs in the newer diesel engine generation e.g. Mercedes, BMW, Volkswagen and Audi.



	A mm	L1 mm	L2 mm	g
500.7310	0-105	235.0	120.0	400

EXHAUST PLIERS

Exhaust clamp pliers PSA

- With PVC dipped handle
- Includes locking mechanism
- With self opening mechanism
- For the dismantling and assembly of exhaust clamps
- Plier points-guide sleeve prevents slippage
- No tension loss when holding
- Chrome molybdenum

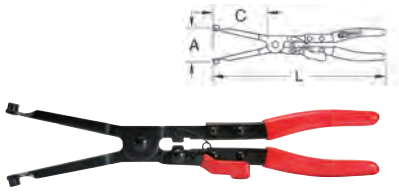

	A mm	C mm	L mm	g
150.1535	0-55	95.0	310.0	430

Exhaust rubber unhooking tool

- For removal of rubber exhaust holders
- A 25° angle
- For all common vehicle types
- Plastic coated handle
- Chrome vanadium

	L mm	g
150.1245	280.0	345

CIRCUIT STOPPER PLIERS

ALLinONE Hose clamp pliers set

- Simple sealing of pipe lines, 4.75 mm (3/16“) to 14.0 mm (9/16“)
- Rotary magazine with 4 slots for the corresponding pipe size
- Ideal for maintenance work with gasoline, oil, water and antifreeze
- Protects against ingress of moisture and dirt
- Ideal for use in passenger cars, vans and large vans, commercial vehicles, tractors, agricultural machinery, construction machinery and industrial applications
- Special plastic

		Ø mm	A mm	L mm	g
122.1295	2 pcs	4,75-14	38.0	120.0	149

consists of:

		g
122.1296	ALLinONE Fluidstopper Ø 4,75 - 14 mm	60
122.1297	Replaceable plastic plugs for 122.1296 pipe stopper pliers	50

Hose clamp pliers set

- For simple clamping of fl xible for hoses from 15.9 mm (5/8") up to 60.0 mm (2.3/8")
- For stopping the fl w
- The hose is a broad area squeezed against the stable support surface, damaging the hose is avoided
- Variable adjustment with locking function
- Ideal for maintenance work with gasoline, oil, water and antifreeze
- Protects against leakage of fuel, oil, water and antifreeze
- Ideal for use in passenger cars, vans and large vans, commercial vehicles, tractors, agricultural machinery, construction machinery and industrial applications
- Heat resistant up to 160 ° C
- Plastic

			g
115.5050	3 pcs	Hose clamp pliers set	370

consists of:

		g
115.5052	Clamping pliers 150 mm for hoses up to Ø 15 mm	80
115.5053	Clamping pliers 180 mm for hoses up to Ø 30 mm	130
115.5054	Clamping pliers 250 mm for hoses up to Ø 60 mm	160

Hose clamp pliers set 90° angled

- For simple clamping of fl xible for hoses from 15.9 mm (5/8") up to 60.0 mm (2.3/8")
- Angled design for use in confined spa es
- For stopping the fl w
- The hose is a broad area squeezed against the stable support surface, damaging the hose is avoided
- Variable adjustment with locking function
- Ideal for maintenance work with gasoline, oil, water and antifreeze
- Protects against leakage of fuel, oil, water and antifreeze
- Ideal for use in passenger cars, vans and large vans, commercial vehicles, tractors, agricultural machinery, construction machinery and industrial applications
- Heat resistant up to 160 ° C
- Plastic

			g
115.5055	3 pcs	Hose clamp pliers set 90° angled	370

consists of:

		g
115.5057	Hose clamp gripper 90°, Ø 15mm	55
115.5058	Hose clamp gripper 90°, Ø 23mm	95
115.5059	Hose clamp gripper 90°, Ø 35mm	130

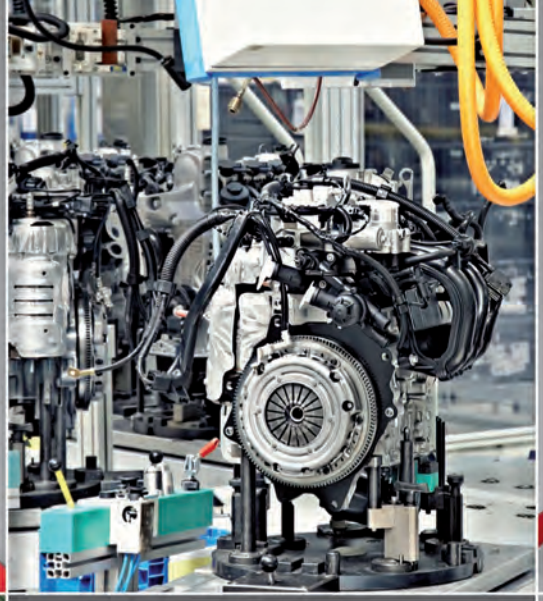

KS TOOLS®

Innovation is our mission!

PLIERS

CLASSIC

ERGOTORQUE®

ULTIMATE PLUS

GRIPXtreme

PRECISION TOOLS

KS TOOLS®

Innovation is our mission!

	PAGE
MAGNETIC LIFTER	280
INSPECTION MIRRORS	280 - 281
VDE PRECISION SCREWDRIVER	281 - 282
VDE PRECISION SCREWDRIVER SETS	282
PRECISION SCREWDRIVER	282 - 283
PRECISION SCREWDRIVER SETS	283 - 284
PRECISION SCREWDRIVER DISPLAY STANDS	284
MAGNETIZERS AND DEMAGNETIZERS	284
PRECISION PLIERS	284 - 285
PRECISION PLIER SETS	285 - 286
ESD PRECISION PLIERS	286 - 289
ESD PRECISION PLIER SETS	290
SOLDERING TECHNOLOGY	290

PRECISION

For the protection of electrostatically endangered construction elements and in order to avoid disturbances in circuits.
These handle have as the required and relevant standards and rules (e.g., IEC TR 61340-5, DIN EN 61340-5, SP Method 2472) for slow and controlled discharging of electrical loads.

CAUTION:
ESD tools should not be used on live working i.e. the power source must be disconnected. Damages are not to be expelled by an electrical impact!

ESD standard IEC61340-5-1

Capacity :	Defini ion according to DIN EN 61340-5-1
Slightly rechargeable:	Minimisation of the load generation
Against screen properties electrostatic unloading: (protection)	Barrier or exposure which limits the current passage and the energy of an electrostatic unloading is dampend that the maximum energy of a human body model discharge from 1000 V does not exceed 50nJ.
Electrostatic conductivity:	1 x 102 Ω ≤ Ro < 1 x 105 Ω
Electrostatic sliding:	1 x 105 Ω ≤ Ro < 1 x 1011 Ω
Insulation:	Ro ≥ 1 x 1011 Ω

Applications:

ESD - electrical working (electrostatic discharge)

Pliers

- 2 Component handle with ergonomic design
- Hot forged and tempered
- Head with anti glare surface
- Precise machines, oil hardened and tempered
- Cutting edges inductively hardened
- Accurately worked joint for even opening with very little friction
- Self opening due to a double spring
- Perfect torque transmission
- High cutting performance
- Ideal for delicate applications inelectronics, precision mechanics as well as model construction area

Optimum power transmission and perfect operation due to the ergonomic handle design

ESD protection - suitable for ESD workplace

Pliers profil

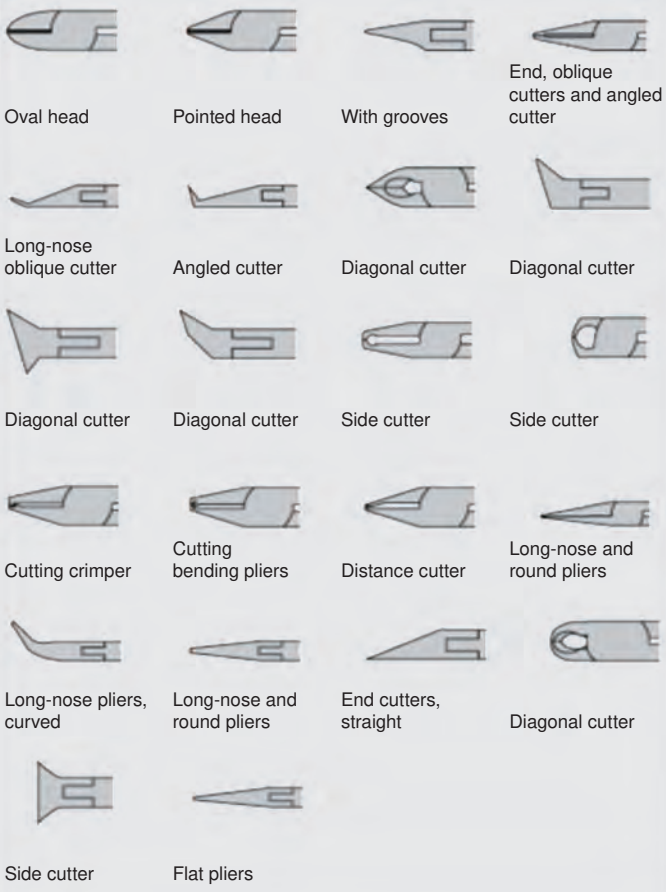

Wire classes

Material examples	Copper, plastic	Wire cable fib e, steel wire	Spring steel wire
Wire type	Flexible	Hard	Piano wire
Tensile strength			
N/mm²	220	1800	2300
kp/mm²	22	180	230

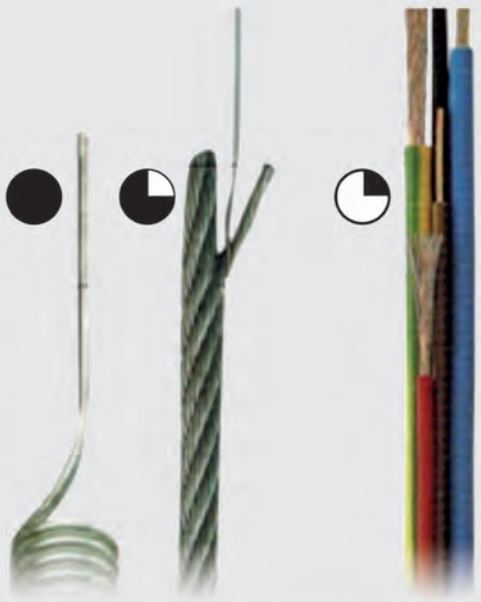

MAGNETIC LIFTER

2 in 1 Telescopic magnetic holder

- Load capacity to 0.5 kg
- Extendable telescopic function
- Cleaning needle
- Clip for the breast pocket
- Ideal for adjusting wiper nozzles
- Aluminium

	Head Ø mm	L mm	g	
550.1001	8.0	150,0 - 675,0	25	

Telescopic magnetic lifter

- Magnet power raised 35% due to energy safety cap
- Stainless steel

	Head Ø mm	L mm	g	
550.1004	13.0	178,0-675,0	70	

Teleskop-Magnethalter

- Tragkraft bis 1,5 kg
- mit ausziehbarer Teleskopfunktion
- Energieschutzkappe erhöht Magnetkraft um 35% und verhindert seitlichen Kontakt
- Edelstahl

	Kopf Ø mm	L mm	g	
550.1002	18,0	178,0-675,0	80	

Telescopic magnetic lifter

- Load capacity to 2 kg
- With an extendable telescopic function
- Clip for the breast pocket
- Special steel

	Head Ø mm	L mm	g	
550.1000	13.0	130,0-630,0	30	

Teleskop-Magnethalter

- Tragkraft bis 5 kg
- mit Schwenkkopf
- mit ausziehbarer Teleskopfunktion
- Energieschutzkappe erhöht Magnetkraft um 35% und verhindert seitlichen Kontakt
- Edelstahl

	Kopf Ø mm	L mm	g	
550.1003	18,0	200,0-700,0	90	

Flexible magnetic holder

- 200 g capacity
- Flexible shaft
- 4 mm with a very thin magnetic seat
- One component handle

	L mm	g	
550.1032	400.0	20	

Flexible magnet lifter

- Load capacity to 1 kg
- Flexible shaft
- Two component handle
- Special steel

	Head Ø mm	L mm	g	
550.1025	15.0	510.0	185	

Flexible magnet lifter

- Load capacity to 2 kg
- Detachable inner cover
- Magnet power raised 35% due to energy safety cap
- Special steel

	Head Ø mm	L mm	g	
550.1010	10.0	585.0	130	

Flexible magnet lifter

- Load capacity to 2 kg
- Flexible shaft
- Two component handle
- Special steel

	Head Ø mm	L mm	g	
550.1026	17.0	510.0	200	

Telescopic magnetic lifter

- Load capacity to 2.5 kg
- With fl xible magnetic head
- With an extendable telescopic function
- Includes cleaning needle for washer jet nozzles
- Clip for the breast pocket
- Aluminium

	Head Ø mm	L mm	g	
550.1023	11.0	150,0 - 590,0	60	

Flexible magnet lifter

- Load capacity to 3 kg
- Flexible shaft
- Two component handle
- Special steel

	Head Ø mm	L mm	g	
550.1027	19.0	510.0	200	

Flexible pick up tool

- Flexible
- Circular diameter max. 20.0 mm
- Stainless steel

	Ø mm	L mm	g	
550.1301	20	600.0	150	

Magnet lifting and claw type gripper set

- Ideally suited for picking up screws and small parts
- Load capacity to 200 g
- Flexible shaft
- 4 mm with a very thin magnetic seat
- Pick-up tool with max. diameter of 20.0 mm
- Magnet holder with one component handle
- Stainless steel pick-up tool

			g	
550.1050	2 pcs	Magnet lifting and claw type gripper set	182	

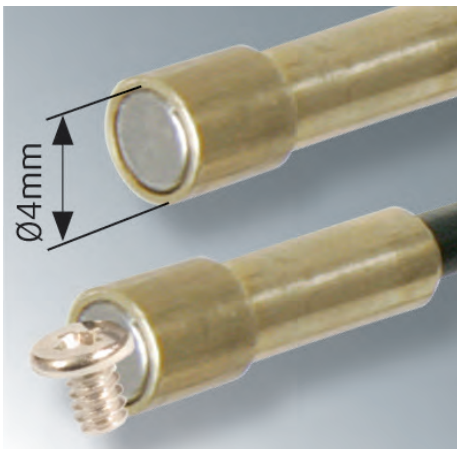

INSPECTION MIRRORS

Insulated inspection mirror

- Insulated handle to IEC 60900
- Insulated
- Chrome vanadium

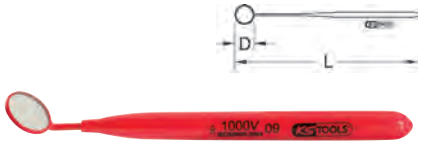

	D mm	L mm		g	
117.1630	22.0	175.0	1000V	20	

Mechanics mirror

- For visual monitoring and troubleshooting
- Ideal for diffi ult to access areas
- Special steel

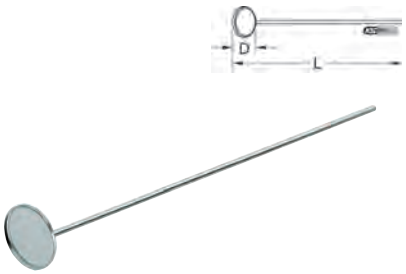

	D mm	L mm	g	
118.0086	12.0	130.0	4	
118.0087	21.0	130.0	9	
118.0088	27.0	130.0	16	

Telescopic mechanics mirror

- Extendable telescopic function
- For visual monitoring and troubleshooting
- Double ball joint
- Head swiveling in all directions
- Clip for the breast pocket
- Ideal for diffi ult to access areas
- Special steel

	D mm	L mm	g	
550.1030	32.0	178 - 530	40	

Telescopic inspection mirror

- Extendable telescopic function
- For visual monitoring and troubleshooting
- With single ball joint
- Head swivels in all directions
- Impact resistant mirror
- Stainless steel

	B mm	H mm	L mm	g	
550.1007	45.0	63.0	178,0-675,0	100	

Telescopic inspection mirror

- Extendable telescopic function
- For visual monitoring and troubleshooting
- Single ball joint
- Mirror out of stainless steel with plate-glass
- Stainless steel

	B mm	H mm	L mm	g	
550.1019	57.0	63.0	178,0-630,0	100	

Telescopic inspection mirror

- Extendable telescopic function
- For visual monitoring and troubleshootingWith single ball joint
- Stainless steel Mirror

	B mm	H mm	L mm	g	
550.1021	57.0	95.0	178,0-630,0	100	

Telescopic set TK 1000

- Extendable telescopic function
- Telescopic-Magnet up to 1.5 kg
- Magnet power raised 35% due to energy safety cap
- Telescopic-Inspection mirror, 45.0 x 63.0 mm
- Length 178,0-860,0 mm
- Special steel
- In durable plastic storage case

			g	
550.1102	2 pcs	Telescopic set TK 1000	280	

consists of:

		g	
550.1007	Telescopic-Inspection mirror, L=178-675mm, 45x63mm	100	
550.1002	Telescopic-Magnet holder up to 5,0 kg, 178 - 675 mm	80	

Flexible inspection lamp with magnet and mirror

- Halogen lamp
- Flexible long shaft, 400 mm
- With optional attachable fl xible mirror (35 x 20 mm)
- With optional clip-on light-flooded m gnet
- Includes extension 500 mm
- Approx: 60 hours lamp duration
- Includes 3 x AA batteries
- Impact proof housing

	L mm	D mm	Mirror size mm	Spare bulb	g	
550.1138	600.0	7.0	22 x 37	550.1188	215	

Magnetic welding mirrors

- Mirror chrome
- Flexible arm
- Special steel



	B mm	L1 mm	L2 mm	g	
903.6000	70.0	500.0	80.0	470	

Telescopic magnifying glass

- Extendable telescopic function
- Single ball joint
- 360° revolving
- Impact proof acrylic glass
- Special steel

	B mm	H mm	L mm	g	
550.1009	44.0	63.5	178,0-660,0	50	

VDE PRECISION SCREWDRIVER

Insulated precision screwdriver for slotted screws

- Slotted
- Insulated to IEC 60900
- Twist end cap
- Colour coding
- Hardened blade
- Burnished tip
- Blades made from special steel



	D mm	L1 mm	L2 mm	L3 mm		g	
500.6138	1,5	140.0	40.0	100.0		10	
500.6139	1,8	160.0	60.0	100.0		10	
500.6140	2,0	160.0	60.0	100.0		15	
500.6141	2,5	175.0	75.0	100.0		15	
500.6142	3,0	175.0	75.0	100.0		15	

Insulated precision screwdriver for phillips screws PH

- PH
- Insulated to IEC 60900
- Twist end cap
- Colour coding
- Hardened blade
- Burnished tip
- Blades made from special steel

		L1 mm	L2 mm	L3 mm		g	
500.6136	PH 00	175.0	75.0	100.0		15	
500.6137	PH 0	175.0	75.0	100.0		15	

VDE PRECISION SCREWDRIVER SETS

Insulated precision screwdriver set

- Insulated to IEC 60900
- Twist end cap
- Colour coding
- Hardened blade
- Burnished tip
- Blade made of chrome vanadium
- In durable ABS storage case

			g	
500.6165	7 pcs	Insulated precision screwdriver set	310	
2 x		PH 0 - PH 00		
5 x		1,5 - 1,8 - 2,0 - 2,5 - 3,0 mm		

PRECISION SCREWDRIVER

Precision screwdriver for slotted screws

- Twist end cap
- Ergonomically designed electronic handle
- Two component handle
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

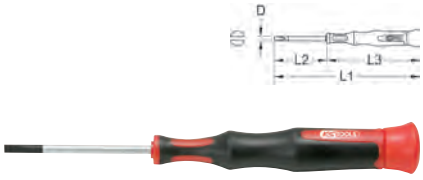

	D mm	D	L1 mm	L2 mm	L3 mm	g	
500.7701	0,8	-	145.0	50.0	95.0	10	
500.7141	1,0	-	145.0	50.0	95.0	10	
500.7702	1,2	-	145.0	50.0	95.0	10	
500.7108	1,4	-	145.0	50.0	95.0	10	
500.7109	2,0	-	145.0	50.0	95.0	15	
500.7110	2,4	-	145.0	50.0	95.0	20	
500.7111	3,0	-	145.0	50.0	95.0	20	
500.7713	3,5	-	145.0	50.0	95.0	20	
500.7142	4,0	-	145.0	50.0	95.0	20	
500.7144	-	1/16"	145.0	50.0	95.0	10	
500.7145	-	3/32"	145.0	50.0	95.0	10	
500.7146	-	9/64"	145.0	50.0	95.0	20	

Precision screwdriver for phillips screws PH

- Twist end cap
- Ergonomically designed electronic handle
- Two component handle
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

		Ø mm	L1 mm	L2 mm	L3 mm	g	
500.7126	PH 000	1,6	145.0	50.0	95.0	10	
500.7106	PH 00	2,0	145.0	50.0	95.0	15	
500.7107	PH 0	2,4	145.0	50.0	95.0	20	
500.7128	PH 1	3,0	145.0	50.0	95.0	20	
500.7125	PH 1	3,5	145.0	50.0	95.0	20	
500.7129	PH 1	4,0	145.0	50.0	95.0	20	

Precision screwdriver for phillips screws PZ

- Twist end cap
- Ergonomically designed electronic handle
- Two component handle
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

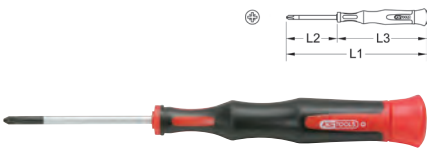

		Ø mm	L1 mm	L2 mm	L3 mm	g	
500.7156	PZ 0	3,0	145.0	50.0	95.0	15	
500.7157	PZ 1	4,0	145.0	50.0	95.0	15	

Precision screwdriver for TX screws

- Twist end cap
- Ergonomically designed electronic handle
- Two component handle
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm	g	
500.7726	T1	145.0	50.0	95.0	15	
500.7727	T2	145.0	50.0	95.0	15	
500.7728	T3	145.0	50.0	95.0	15	
500.7729	T4	145.0	50.0	95.0	15	
500.7140	T5	145.0	50.0	95.0	10	
500.7112	T6	145.0	50.0	95.0	10	
500.7113	T7	145.0	50.0	95.0	15	
500.7114	T8	145.0	50.0	95.0	20	
500.7115	T9	145.0	50.0	95.0	20	
500.7116	T10	145.0	50.0	95.0	20	
500.7117	T15	145.0	50.0	95.0	25	
500.7124	T20	145.0	50.0	95.0	25	

Precision screwdriver for TX tamperproof screws

- Twist end cap
- Ergonomically designed electronic handle
- Two component handle
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

		L1 mm	L2 mm	L3 mm	g	
500.7151	TB7	145.0	50.0	95.0	20	
500.7152	TB8	145.0	50.0	95.0	20	
500.7153	TB9	145.0	50.0	95.0	20	
500.7154	TB10	145.0	50.0	95.0	20	
500.7155	TB15	145.0	50.0	95.0	25	
500.7730	TB20	145.0	50.0	95.0	18	

Precision screwdriver for hexagon screws

- Twist end cap
- Ergonomically designed electronic handle
- Two component handle
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium

	D mm	D	L1 mm	L2 mm	L3 mm	g	
500.7721	0,7	-	145.0	50.0	95.0	10	
500.7722	0,9	-	145.0	50.0	95.0	10	
500.7723	1,3	-	145.0	50.0	95.0	10	
500.7119	1,5	-	145.0	50.0	95.0	10	
500.7120	2,0	-	145.0	50.0	95.0	10	
500.7121	2,5	-	145.0	50.0	95.0	15	
500.7122	3,0	-	145.0	50.0	95.0	20	
500.7123	3,5	-	145.0	50.0	95.0	20	
500.7718	-	0,05"	145.0	50.0	95.0	15	
500.7147	-	1/16"	145.0	50.0	95.0	10	
500.7724	-	5/64"	145.0	50.0	95.0	10	
500.7148	-	3/32"	145.0	50.0	95.0	15	
500.7725	-	7/64"	145.0	50.0	95.0	15	
500.7149	-	1/8"	145.0	50.0	95.0	20	

Precision screwdriver for external hexagon screws

- Twist end cap
- Ergonomically designed electronic handle
- Two component handle
- Hardened blade
- Blades made from special steel



	D mm	D	L1 mm	L2 mm	L3 mm	g
500.7731	1,5	-	165.0	75.0	90.0	10
500.7130	2,0	-	165.0	75.0	90.0	10
500.7131	2,5	-	165.0	75.0	90.0	10
500.7132	3,0	-	165.0	75.0	90.0	15
500.7133	3,2	-	165.0	75.0	90.0	30
500.7134	3,5	-	165.0	75.0	90.0	30
500.7135	4,0	-	165.0	75.0	90.0	30
500.7733	4,5	-	165.0	75.0	90.0	22
500.7734	5,0	-	165.0	75.0	90.0	22
500.7735	5,5	-	165.0	75.0	90.0	25
500.7136	-	3/32"	165.0	75.0	90.0	20
500.7137	-	7/64"	165.0	75.0	90.0	20
500.7738	-	1/8"	165.0	75.0	90.0	22
500.7138	-	9/64"	165.0	75.0	90.0	30
500.7139	-	11/64"	165.0	75.0	90.0	30

PRECISION SCREWDRIVER SETS

Precision screwdriver set

- Reversible interchangeable bits
- Twist end cap
- Clip for the breast pocket
- Plastic handle
- Bits made of special steel

			g
911.2175	4 pcs	Precision screwdriver set	150
1 x		PH000 - PH00 - PH0 - PH1	
1 x		PZ000 - PZ00 - PZ0 - PZ1	
1 x		1,5 - 2,0 - 2,5 - 3,0 mm	
1 x		T6 - T7 - T8 - T9	

Precision screwdriver set TX

- Twist end cap
- Ergonomically designed electronic handle
- Two component handle
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium
- In durable ABS storage case

			g
500.7160	7 pcs	Precision screwdriver set TX	100
7 x		T6 - T7 - T8 - T9 - T10 - T15 - T20	

Precision screwdriver set PH and slotted

- Twist end cap
- Ergonomically designed electronic handle
- Two component handle
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium
- In durable ABS storage case

			g
500.7165	7 pcs	Precision screwdriver set PH and slotted	100
3 x		PH00 - PH0 - PH1	
4 x		1,4 - 2,0 - 2,4 - 3,0 mm	

Precision screwdriver set PH, slotted and TX

- Twist end cap
- Ergonomically designed electronic handle
- Two component handle
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium
- In durable plastic storage case

			g
500.7170	14 pcs	Precision screwdriver set PH, slotted and TX	200
3 x		PH00 - PH0 - PH1	
4 x		1,4 - 2,0 - 2,4 - 3,0 mm	
7 x		T6 - T7 - T8 - T9 - T10 - T15 - T20	

Precision screwdriver set

- Twist end cap
- Ergonomically designed electronic handle
- Two component handle
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium
- In durable plastic storage case

			kg
500.7150	37 pcs	Precision screwdriver set	1.80
6 x		PH000 - PH00 - PH0 x 3,0 - PH0 x 2,0 - PH1 x 3,5 - PH1 x 4,0	
7 x		1,0 - 2,0 - 3,0 - 4,0 mm - 1/16" - 3/32" - 9/64"	
2 x		T5 - T6	
7 x		1,5 - 2,0 - 2,5 - 3,0 - 1/16" - 3/32" - 1/8"	
10 x		2,0 - 2,5 - 3,0 - 3,2 - 3,5 - 4,0 - 3/32" - 7/64" - 9/64" - 1.1/64"	
5 x		TB7 - TB8 - TB9 - TB10 - TB15	

Precision tool set

- Electrical working
- Includes precision screwdrivers and tweezers
- Suitable for wire
- Serrated execution
- Induction hardened precision cutting
- Self opening double spring
- Twist end cap
- Ergonomically designed electronic handle
- Hardened blade
- Chrome finish wi h burnished surface
- Dual component handle
- Black chrome
- Blades made from special steel
- In durable plastic storage case

			g
500.7180	10 pcs	Precision tool set	400
1 x		125 mm	
1 x		100 mm	
1 x		145 mm	
3 x		PH00 - PH0 - PH1	
4 x		1,4 - 2,0 - 2,4 - 3,0 mm	

Precision tool set

- Electrical working
- Includes precision screwdrivers and tweezers
- Suitable for wire
- Serrated execution
- Induction hardened precision cutting
- Self opening double spring
- Twist end cap
- Ergonomically designed electronic handle
- Blades hardened
- Chrome finish wi h burnished surface
- Dual component handle
- Black chrome
- Blades made from special steel

			kg
500.7190	21 pcs	Precision tool set	1.40
2 x		125 - 130 mm	
1 x		100 mm	
1 x		100 mm	
1 x		125 mm	
1 x		150 mm	
1 x		145 mm	
3 x		PH00 - PH0 - PH1	
4 x		1,4 - 2,0 - 2,4 - 3,0 mm	
7 x		T6 - T7 - T8 - T9 - T10 - T15 - T20	

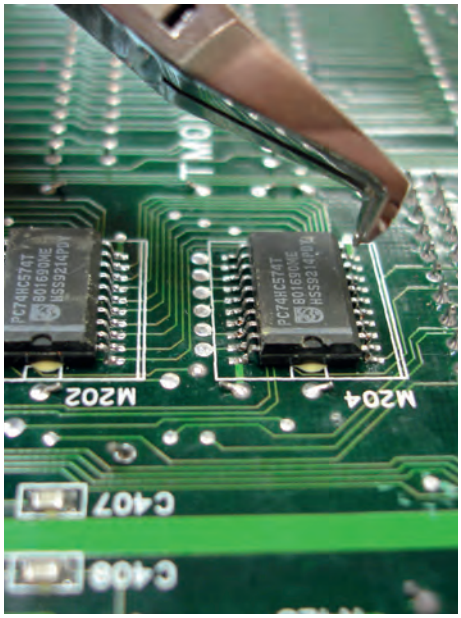

PRECISION SCREWDRIVER DISPLAY STANDS

Precision screwdriver display stand

- Twist end cap
- Ergonomically designed electronic handle
- Two component handle
- Hardened blade
- Chrome finish wi h burnished tips
- Blade made of chrome vanadium
- Display of robust sheet steel construction

			kg
500.0190	190 pcs	Precision screwdriver display stand	1.80
30 x		5 x (PH000 - PH00 - PH0 x 2 mm - PH1 x 3 mm - PH1 x 3,5 mm - PH1 x 4 mm)	
35 x		5 x (1,0 - 2,0 - 3,0 - 4,0 mm - 1/16“ - 3/32“ - 9/64“)	
10 x		5 x (T5 - T6)	
25 x		5 x (TB7 - TB8 - TB9 - TB10 - TB15)	
40 x		5 x (1,5 - 2,0 - 2,5 - 3,0 - 3,5 mm - 1/16“ - 3/32“ - 5 x 1/8“)	
50 x		5 x (2,0 - 2,5 - 3,0 - 3,2 - 3,5 - 4,0 mm - 3/32“ - 7/64“ - 9/64“ - 11/64“)	

MAGNETIZERS AND DEMAGNETIZERS

Magnetizer and demagnetizer

- Easy to use
- To magnetise by pulling the blade through
- To demagnetise by pulling the blade over the recess
- For screwdrivers, tweezers and similar tools made of steel
- Plastic housing



	B mm	H mm	L mm	g
550.1126	15.0	20.0	47.0	70

PRECISION PLIERS

Mounting clamp pliers

- 3 way adjustable locking
- Toothed gripping surfaces
- Anti glare - no annoying refle tion
- Matt finis
- Stainless special steel



	L mm	S mm	g
500.7006	140.0	35,0	30
500.7007	160.0	40,0	40

Precision long nosed pliers, curved

- Electrical working
- Suitable for wire
- 45° curved jaws
- Induction hardened precision cutting
- Self opening double spring
- Dual component handle
- Black chrome
- Special tool steel



	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7022	12.0	18.0	7.0	130.0	33.0	80

Precision telephone pliers

- Electrical working
- Suitable for wire
- Extra long jaws
- Induction hardened precision cutting
- Self opening double spring
- Dual component handle
- Black chrome
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g
500.7032	7.0	2.0	12.0	3.0	160.0	55.0	8,0	90

Precision telephone pliers

- Electrical working
- Suitable for wire
- Serrated execution
- Induction hardened precision cutting
- Self opening double spring
- Dual component handle
- Black chrome
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g
500.7021	7.0	2.0	12.0	3.0	130.0	29.0	8,0	80

Precision diagonal side cutter

- Electrical working
- Suitable for wire
- Induction hardened precision cutting
- Self opening double spring
- Dual component handle
- Black chrome
- Special tool steel



	A mm	D mm	L mm	S mm	g
500.7024	7.0	13.0	120.0	15,0	80

Precision cutting pliers

- Electrical working
- Suitable for wire
- Induction hardened precision cutting
- Self opening double spring
- Dual component handle
- Black chrome
- Special tool steel



	D mm	L1 mm	L2 mm	S mm	g
500.7025	18.0	110.0	7.5	14,0	80

Precision combination pliers

- Electrical working
- Suitable for wire
- Induction hardened precision cutting
- Self opening double spring
- Dual component handle
- Black chrome
- Special tool steel



	A mm	D1 mm	D2 mm	L1 mm	L2 mm	S mm	g
500.7030	7.0	10.0	15.0	120.0	22.0	8,0	90

Precision fl t pliers

- Electrical working
- Suitable for wire
- Induction hardened precision cutting
- Self opening double spring
- Dual component handle
- Black chrome
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7028	7.0	2.0	13.0	3.0	125.0	27.0	80

PRECISION PLIER SETS

Precision pliers set

- Electro static discharge - electrostatically protect
- Suitable for wire
- Serrated execution
- Induction hardened precision cutting
- Self opening double spring
- Dual component handle
- Black chrome
- Special tool steel

			g
500.7020	5 pcs	Precision pliers set	420
1 x		130 mm	
1 x		120 mm	
1 x		110 mm	
1 x		120 mm	
1 x		160 mm	

Precision tool set

- Electrical working
- Includes precision screwdrivers and tweezers
- Suitable for wire
- Serrated execution
- Induction hardened precision cutting
- Self opening double spring
- Twist end cap
- Ergonomically designed electronic handle
- Hardened blade
- Chrome finish wi h burnished surface
- Dual component handle
- Black chrome
- Blades made from special steel
- In durable plastic storage case

			g
500.7180	10 pcs	Precision tool set	400
1 x		125 mm	
1 x		100 mm	
1 x		145 mm	
3 x		PH00 - PH0 - PH1	
4 x		1,4 - 2,0 - 2,4 - 3,0 mm	

Precision tool set

- Electrical working
- Includes precision screwdrivers and tweezers
- Suitable for wire
- Serrated execution
- Induction hardened precision cutting
- Self opening double spring
- Twist end cap
- Ergonomically designed electronic handle
- Blades hardened
- Chrome finish wi h burnished surface
- Dual component handle
- Black chrome
- Blades made from special steel

			kg
500.7190	21 pcs	Precision tool set	1.40

2 x		125 - 130 mm
1 x		100 mm
1 x		100 mm
1 x		125 mm
1 x		150 mm
1 x		145 mm
3 x		PH00 - PH0 - PH1
4 x		1,4 - 2,0 - 2,4 - 3,0 mm
7 x		T6 - T7 - T8 - T9 - T10 - T15 - T20

ESD PRECISION PLIERS

Tweezers can be found in the VDE and general electrician tool kits section.

ESD long-nose pliers – straight – without cut

- Electrical working
- Suitable for wire
- Short, straight jaws
- Without cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7064	6.5	1.0	10.0	2.0	130.0	23.0	62

ESD long-nose pliers – straight – with cut

- Electrical working
- Suitable for wire
- Short, straight jaws
- With cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7065	6.5	1.0	10.0	2.0	130.0	23.0	62

ESD long-nose pliers – curved – without cut

- Electrical working
- Suitable for wire
- Short, curved jaws
- Without cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7066	10.0	10.0	2.0	130.0	20.0	62

ESD long-nose pliers – curved – with cut

- Electrical working
- Suitable for wire
- Short, curved jaws
- With cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel



	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7067	10.0	10.0	2.0	130.0	20.0	62

ESD long-nose pliers – straight – without cut

- Electrical working
- Suitable for wire
- Long, straight jaws
- Without cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7068	6.5	1.0	10.0	2.0	140.0	32.0	68
500.7077	7.5	1.2	12.5	2.4	155.0	40.0	93

ESD long-nose pliers – straight – with cut

- Electrical working
- Suitable for wire
- Long, straight jaws
- With cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel



	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7069	6.5	1.0	10.0	2.0	140.0	32.0	68
500.7072	7.5	1.2	12.5	2.4	155.0	40.0	93

ESD long-nose pliers – curved – without cut

- Electrical working
- Suitable for wire
- Long, curved jaws
- Without cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7070	14.0	10.0	2.0	140.0	26.0	62
500.7073	20.0	12.5	2.4	155.0	33.0	93

ESD fl t pliers

- Electrical working
- Suitable for wire
- Short jaws
- Without cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7075	6.5	3.5	10.0	1.5	130.0	22.0	61

ESD fl t pliers

- Electrical working
- Suitable for wire
- Long jaws
- Without cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7079	7.5	4.5	12.0	1.5	150.0	40.0	82

ESD long-nose pliers – curved – with cut

- Electrical working
- Suitable for wire
- Long, curved jaws
- With cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7071	14.0	10.0	2.0	140.0	26.0	68

ESD round pliers

- Electrical working
- Suitable for wire
- Short jaws
- Without cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7076	6.0	1.0	10.0	2.0	130.0	20.0	62

ESD mini side cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Flexible steel: 0.8 mm/AWG 20
- Copper wire: 1.5 mm/AWG 15
- Small, oval head
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g
500.7080	6.0	9.0	120.0	9,0	55

ESD needle-nose pliers – straight – without cut

- Electrical working
- Suitable for wire
- Very fin , long jaws
- Without cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7074	7.5	1.2	11.0	2.0	150.0	37.0	93

ESD long-nose pliers – straight – without cut

- Electrical working
- Suitable for wire
- Short, straight jaws
- Ultra-fine p ecision tips for extremely fine ork
- Without cut
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel

	A1 mm	A2 mm	D1 mm	D2 mm	L1 mm	L2 mm	g
500.7078	6.5	0.1	10.0	0.2	130.0	22.0	62

ESD mini side cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Flexible steel: 0.8 mm/AWG 20
- Copper wire: 1.5 mm/AWG 15
- Small, pointed head
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g
500.7081	6.0	9.0	120.0	9,0	55

ESD mini side cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Flexible steel: 0.8 mm/AWG 20
- Copper wire: 1.5 mm/AWG 15
- Short, pointed head with grooving
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g
500.7082	6.0	9.0	120.0	9,0	55

ESD side cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.4 mm/AWG 26
- Flexible steel: 1.0 mm/AWG 18
- Copper wire: 1.5 mm/AWG 15
- Oval head with wire holder
- With control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g
500.7085	7.5	11.0	125.0	13,0	75

ESD side cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.7 mm/AWG 21
- Flexible steel: 1.0 mm/AWG 18
- Copper wire: 1.5 mm/AWG 15
- Oval, sturdy head
- With control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g
500.7088	9.0	14.5	135.0	20,0	105

ESD side cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.4 mm/AWG 26
- Flexible steel: 1.0 mm/AWG 18
- Copper wire: 1.5 mm/AWG 15
- Oval head
- With control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g
500.7083	7.5	11.0	125.0	13,0	70

ESD side cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.3 mm/AWG 28
- Flexible steel: 1.0 mm/AWG 18
- Copper wire: 1.5 mm/AWG 15
- Pointed head
- With control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g
500.7086	7.5	11.0	125.0	13,0	62

ESD side cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Flexible steel: 1.5 mm/AWG 15
- Copper wire: 2.0 mm/AWG 12
- Pointed, sturdy head
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g
500.7089	9.0	14.5	135.0	18,0	105

ESD side cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Flexible steel: 1.0 mm/AWG 18
- Copper wire: 1.5 mm/AWG 15
- Oval head
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g
500.7084	7.5	11.0	125.0	13,0	70

ESD side cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Flexible steel: 1.0 mm/AWG 18
- Copper wire: 1.5 mm/AWG 15
- Pointed head
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g
500.7087	7.5	11.0	125.0	13,0	62

ESD carbide side cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 84-86 HRA
- Piano wire: 0.6 mm/AWG 22
- Hard wire: 1.0 mm/AWG 18
- Flexible wire: 2.0 mm/AWG 12
- Oval head
- With control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g
500.7090	7.5	11.0	125.0	10,0	62

ESD carbide side cutters

- Electrical working
- Suitable for wire
- Hard metal cutting edge in plier head for the highest cutting performance
- Induction-hardened precision cutting, 84-86 HRA
- Oval head
- With special control only for glass fib e (e.g. Keviar)
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g	
500.7091	7.5	11.0	125.0	10,0	62	

ESD carbide side cutters

- Electrical working
- Suitable for wire
- Hard metal cutting edge in plier head for the highest cutting performance
- Induction-hardened precision cutting, 84-86 HRA
- Piano wire: 0.4 mm/AWG 26
- Hard wire: 0.8 mm/AWG 20
- Flexible wire: 1.8 mm/AWG 13
- Pointed head with grooves for working in hard to access places
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g	
500.7092	7.5	11.0	125.0	10,0	62	

ESD end cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Medium wire: 0.6 mm/AWG 22
- Flexible wire: 0.8 mm/AWG 20
- Slim jaws
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g	
500.7093	6.5	11.0	130.0	5,0	70	

ESD mini angled cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.4 mm/AWG 26
- Medium wire: 1.0 mm/AWG 18
- Flexible wire: 1.2 mm/AWG 16
- Straight head for working in small spaces
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g	
500.7094	6.5	10.0	120.0	12,0	64	

ESD mini carbide oblique cutter

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 84-86 HRA
- Piano wire: 0.6 mm/AWG 22
- Hard wire: 1.0 mm/AWG 18
- Flexible wire: 2.0 mm/AWG 12
- Straight head for working in small spaces
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g	
500.7095	6.5	10.0	120.0	12,0	62	

ESD mini angled cutters

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.5 mm/AWG 24
- Medium wire: 1.2 mm/AWG 16
- Flexible wire: 1.6 mm/AWG 14
- Wide head with long cutters
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D mm	L mm	S mm	g	
500.7096	7.5	11.0	125.0	18,0	64	

ESD mini side cutter

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Medium wire: 0.6 mm/AWG 22
- Flexible wire: 0.8 mm/AWG 22
- Slim jaws with small cutting edges
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	D mm	L1 mm	L2 mm	S mm	g	
500.7097	10.0	120.0	17.0	2,5	63	

ESD side cutter

- Electrical working
- Suitable for wire
- Induction-hardened precision cutting, 61-63 HRC
- Hard wire: 0.5 mm/AWG 24
- Medium wire: 1.2 mm/AWG 16
- Flexible wire: 1.6 mm/AWG 14
- Wide head with long cutters
- With subtle control
- Self-opening double spring
- With dual component handle
- Special tool steel

	D mm	L1 mm	L2 mm	S mm	g	
500.7098	11.0	125.0	6.0	15,0	74	

ESD wire strippers

- Electrical working
- With internal brass adjusting screw
- Suitable for PVC, Teflon tc.
- Induction-hardened precision cutting
- Medium wire: 0,8 mm/AWG 20
- Self-opening double spring
- With dual component handle
- Special tool steel

	A mm	D1 mm	D2 mm	L1 mm	L2 mm	g	
500.7099	12.0	32.0	18.0	140.0	50.0	90	

ESD PRECISION PLIER SETS

ESD pliers service map

- Electro static discharge - electrostatically protect
- Suitable for wire
- Induction-hardened precision cutting
- Self-opening double spring
- With dual component handle
- Special tool steel

500.7019	6 pcs	ESD pliers service map	620

1 x		140 mm
1 x		140 mm
1 x		130mm
1 x		120 mm
1 x		125 mm
1 x		120 mm

SOLDERING TECHNOLOGY

Mini pocket soldering torch

- Gas operated micro soldering device up to 1,300 °C / 2,450 °F
- Piezo ignition
- Optimal for light soldering
- Safety lock

	L mm	
960.1110	80.0	130

Mini pocket soldering torch

- Gas operated micro soldering device up to 1,300 °C / 2,450 °F
- With piezo ignition
- For melting, hard soldering, small soldering jobs
- Filled with standard lighter gas/ISO butane gas
- Compact construction
- With child-proofi g and switch-off function

	L1 mm	L2 mm	H mm	
960.1215	75.0	50.0	110.0	112

Small soldering torch

- Gas operated micro soldering device up to 1,300 ° / 2,450 °F
- With piezo ignition
- Optimal for fine solde ing
- Table stand

	L mm	
960.1200	140.0	350

Small soldering torch with flame efle tor

- Gas operated micro soldering device up to 1,300 ° / 2,450 °F
- With piezo ignition
- Optimal for fine solde ing
- Shrink / flame efle tor
- Table stand

	L mm	
960.1210	140.0	350

Micro terminal set

- Gas operated micro soldering device up to 1,300 / 2,450 °F
- Optimal for fine orking
- Gas supply totally adjustable
- Filled with standard lighter gas / ISO butan gas
- Includes different attachments soldering wire and soldering sponge
- In durable plastic storage box

960.1150	13 pcs	Micro terminal set	200

consists of:

960.1151	Gas soldering iron	110
960.1152	Bunsen burner nozzle head	20
960.1153	Soldering head including. 6 different on screw solder tips	30
960.1154	Flat attachment for flame p otection for Bunsen burner nozzle head	10
960.1155	Attachment for Bunsen burner nozzle head	10
960.1156	Soldering sponge	6
960.1157	Soldering wire spool	24

Micro soldering terminal set

- Gas operated micro soldering device up to 1,300 °C / 2,450 °F
- With piezo ignition
- Optimal for fine orking
- Gas supply totally adjustable
- Filled with standard lighter gas / ISO butan gas
- Includes different attachments soldering wire and soldering sponge
- In durable plastic storage box

960.1160	10 pcs	Micro soldering terminal set	370

consists of:

960.1161	Soldering iron with piezo ignition	80
960.1162	Soldering head for screw solder tips	9
960.1163	Soldering tip 3.5 mm, chisel	3
960.1164	Soldering tip 4.5mm, diagonal	3
960.1165	Soldering tip knife	3
960.1166	Shrink hose attachment	3
960.1167	Soldering sponge	12
960.1168	Soldering wire spool	25
960.1169	Protective cap	14
960.1170	Housing for additional adaptors for 960.1160	7

KS TOOLS

Innovation is our mission!

PRECISION TOOLS

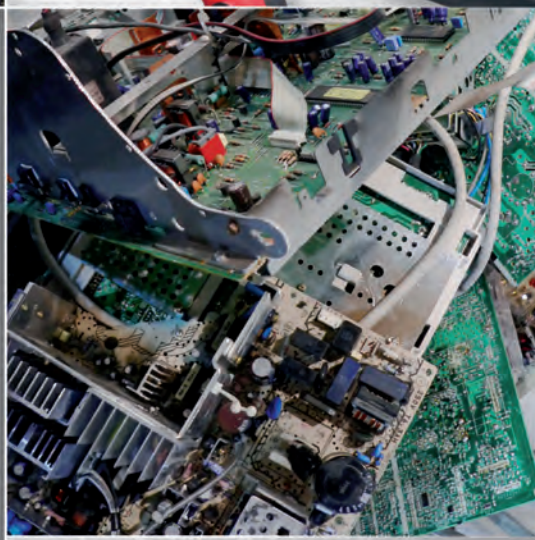

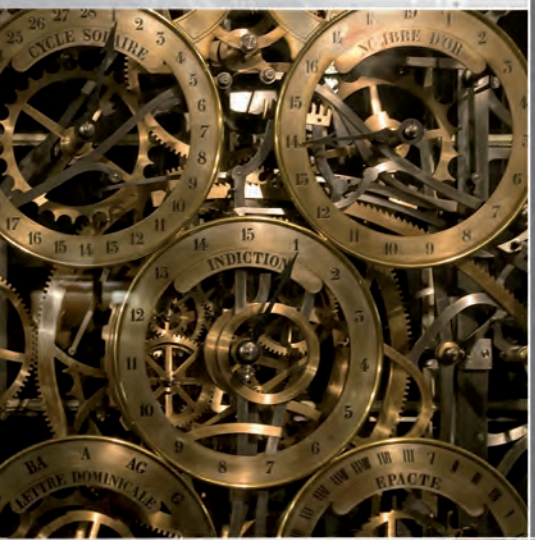

MEASURING AND TESTING TOOLS

KSTOOLS®

Innovation is our mission!

	PAGE
ANALOGUE VERNIER CALLIPERS	296
DIGITAL VERNIER CALLIPERS	296
BRAKE DISK VERNIER CALLIPERS	296 - 297
BRAKE DRUM CALLIPERS	297
DEPTH VERNIER CALLIPERS	297
MEASURING TOOL SET	297 - 298
MICROMETER & MOUNT	298
DIAL GAUGES & TABLE STAND	298 - 299
THREAD- & FEELER GAUGES	299 - 300
SQUARES	300 - 302
PROTRACTOR	302
FOLDING RULES	302 - 303
REEL TAPE MEASURES	303
SPIRIT LEVELS	304 - 305
RULERS	305
MARKING GAUGE & SCRIBER	305 - 306
DIVIDERS	306 - 307
MEASURING AND TESTING TOOLS	307

MEASURING AND TEST TOOLS

Construction of the calipers with scale reading (head and vernier divisions)

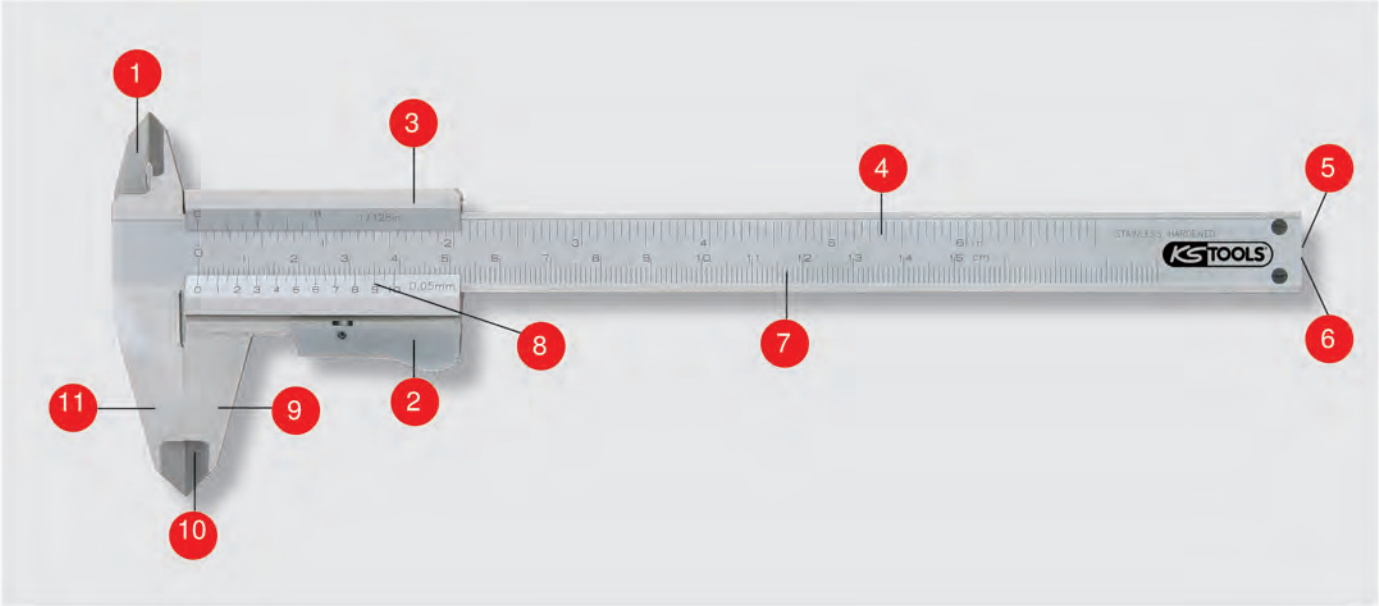

Denominations according to DIN 862

1. Cross measuring surfaces in the form of edges
2. Torque locking device
3. Slider
4. Guide rail
5. Deep measuring rod
6. Measuring surfaces for measuring of low dimensions
7. Line scale with main division
8. Verneir with verneir divisions
9. Adjustable measuring arm
10. Measuring surfaces for measuring of external dimensions
11. Fixed measuring arm

Construction of a micrometre

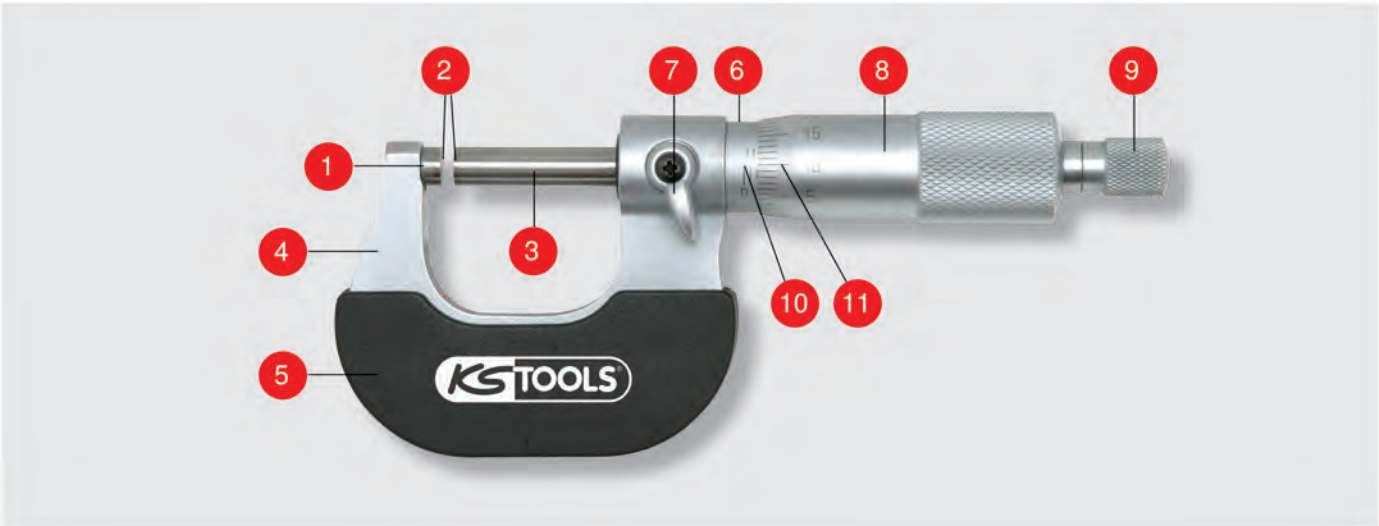

Denominations according to DIN 863

1. Measuring plug
2. Hard metal measuring surfaces
3. Bearings
4. Frame
5. Insulating plate
6. Scale sleeve
7. Clamping lever
8. Scale drum
9. Coupling
10. Reference line
11. Scales

Construction of the dial indicator gauge

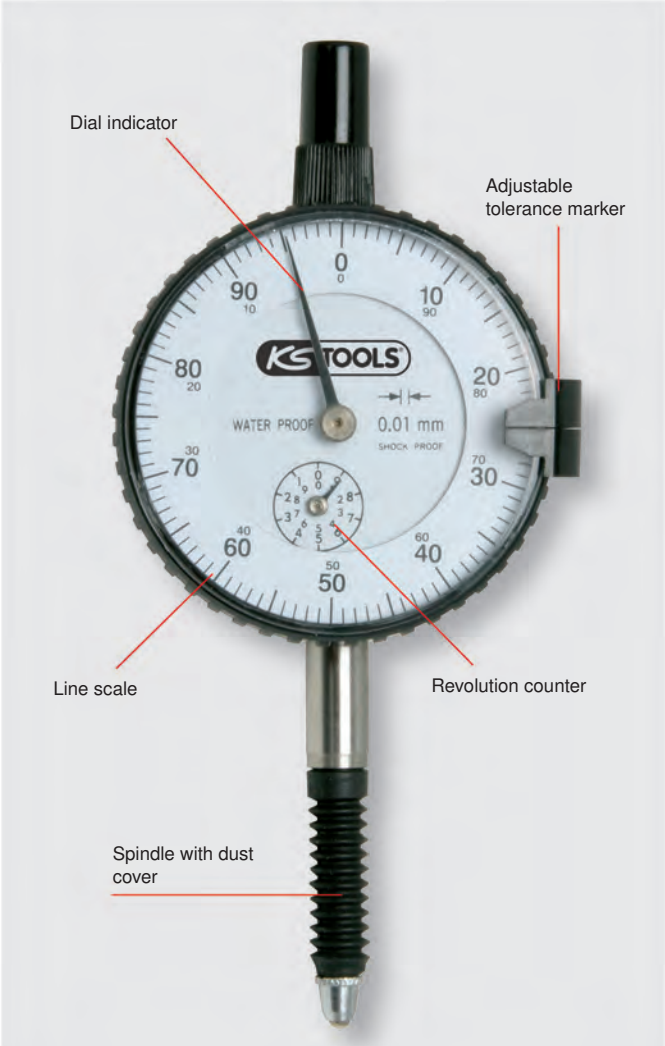

Dial gauge to DIN 878

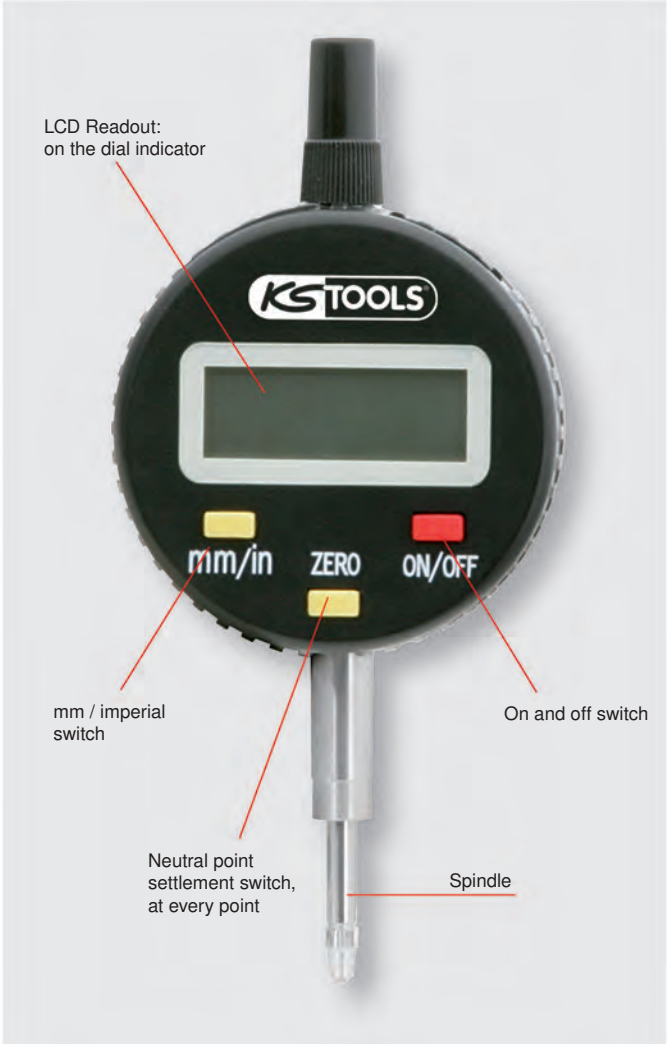

Dial gauge to DIN 878

Tolerance classes and identification standards for folding rul s and tapes

The tolerance in accordance with
EC-standard classes at 20° Celsius and
with a tensile force of 20 Newton (N) for synthetic material
and 50 Newton (N) for steel tapes

Corresponds to the European standard of metric measuring tools
in accordance with specified olerance classes / deviation in mm:

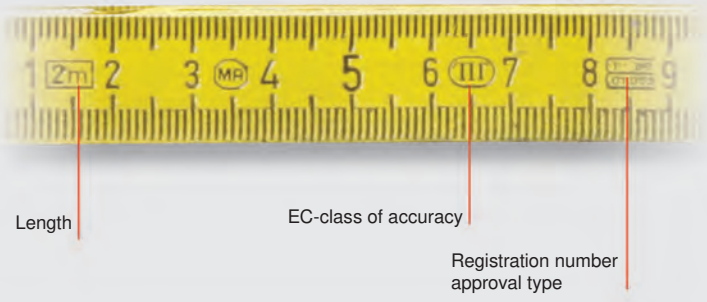

class	1m	2m	3m	5m	10m	15m	20m	30m	50m
I	0,2	0,3	0,4	0,6	1,1	1,6	2,1	3,1	5,1
II	0,5	0,7	0,9	1,3	2,3	3,3	4,3	6,3	10,3
III	1,0	1,4	1,8	2,6	4,6	6,6	8,6	12,6	20,6

ANALOGUE VERNIER CALLIPERS

Pocket vernier calliper 0 - 150 mm

- In accordance with DIN 862
- Instant declaration
- For external, internal, step and depth measurements
- Scale division in black
- Measuring bar in mm and imperial divisions
- Thread table
- Entirely hardened, fin ly engineered
- Stainless steel
- In leather case

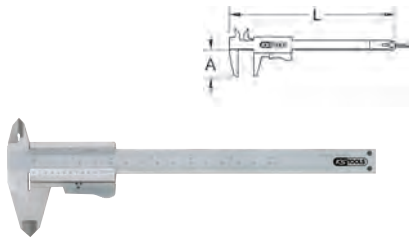

	Measuring range mm	A mm	L mm	Display accuracy mm	Depth gauge	g
300.0510	0 - 150	40.0	235.0	+/- 0,05	flat	145

Workshop vernier calliper 0 - 300 mm

- In accordance with DIN 862
- Locking screw
- For external, internal, step and depth measurements
- Scale division in black
- Measuring bar in mm divisions
- Entirely hardened, fin ly engineered
- Stainless steel
- In durable plastic case

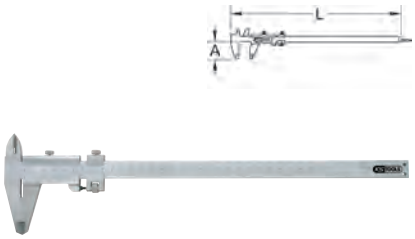

	Measuring range mm	A mm	L mm	Display accuracy mm	Depth gauge	g
300.0515	0 - 300	55.0	415.0	+/- 0,05	flat	250

Dial vernier calliper 0 - 150 mm

- In accordance with DIN 862
- Fixed adjusting screw and revolving scale reading
- For external, internal, step and depth measurements
- Scale division in black
- Measuring bar in mm divisions
- Thread table
- Entirely hardened, fin ly engineered
- Stainless steel
- In durable plastic case

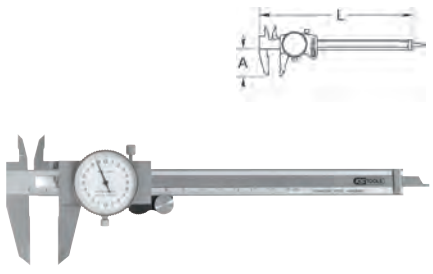

	Measuring range mm	A mm	L mm	Display accuracy mm	Depth gauge	Pointer revolution mm	g
300.0547	0 - 150	40.0	236.0	+/- 0,02	flat	1.0	215

Workshop vernier calliper without points

- In accordance with DIN 862
- Locking screw
- For external and internal measurements
- Scale division in black
- Measuring bar in mm and imperial divisions
- Entirely hardened, fin ly engineered
- Stainless steel
- In durable plastic case

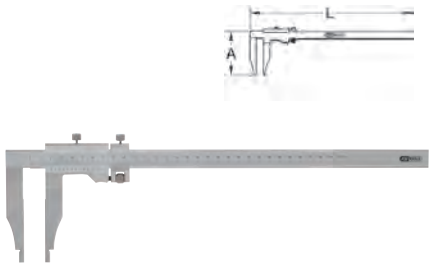

	Measuring range mm	A mm	L mm	Display accuracy mm	g
300.0541	0 - 200	60.0	315.0	+/- 0,05	360
300.0542	0 - 250	90.0	365.0	+/- 0,05	390
300.0543	0 - 300	90.0	415.0	+/- 0,05	415
300.0544	0 - 400	125.0	550.0	+/- 0,05	950
300.0545	0 - 500	150.0	650.0	+/- 0,05	1495
300.0546	0 - 500	200.0	650.0	+/- 0,05	1980

DIGITAL VERNIER CALLIPERS

Digital vernier calliper 0 - 150 mm

- In accordance with DIN 862
- With fi ed adjusting screw and fine olling adjustment
- For external, internal, step and depth measurements
- Scale division in black
- Measuring bar in mm and imperial divisions
- mm/imperial switching
- With thread table
- Reset (to zero) in every position possible
- Large LCD display - figu e height 10.0 mm
- With automatic switching off
- Entirely hardened, fin ly engineered
- Stainless steel
- In durable plastic case

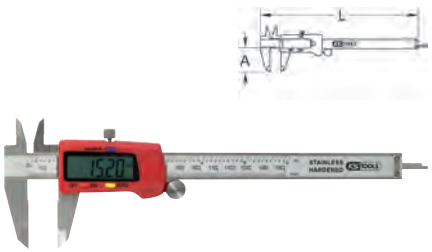

	Measuring range mm	A mm	L mm	Display accuracy mm	Depth gauge	g
300.0532	0 - 150	40.0	235.0	+/- 0,03	flat	300

IP 67 digital vernier calliper 0 - 150 mm

- Accuracy according to works standard
- Protection class IP 67
- Locking screw
- For external, internal, step and depth measurements
- Scale division in blue
- Measuring bar in mm divisions
- mm/imperial switching
- Thread table
- Reset (to zero) in every position possible
- Large LCD display figu e height 6,0 mm
- Automatic switching off
- Entirely hardened, fin ly engineered
- Stainless steel
- In durable plastic case

	Measuring range mm	A mm	L mm	Display accuracy mm	Depth gauge	g
300.0531	0 - 150	40.0	240.0	+/- 0,03	flat	150

Workshop vernier calliper without points

- In accordance with DIN 862
- Locking screw
- For external and internal measurements
- mm/imperial switching
- Reset (to zero) in every position possible
- Knife points
- Fine adjustment
- Large LCD display figu e height 6,0 mm
- Automatic switching off
- Entirely hardened, fin ly engineered
- Stainless steel
- In durable plastic case

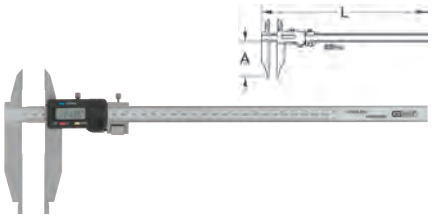

	Measuring range mm	A mm	L mm	Display accuracy mm	kg
300.0559	0 - 300	90.0	440.0	+/- 0,03	1.14
300.0562	0 - 500	150.0	670.0	+/- 0,03	2.86
300.0563	0 - 1000	150.0	1220.0	+/- 0,03	4.90

BRAKE DISK VERNIER CALLIPERS

Brake disk vernier calliper

- In accordance with DIN 862
- Locking screw
- Scale division in black
- Measuring bar in mm divisions
- Entirely hardened, fin ly engineered
- Stainless steel
- In durable wooden case

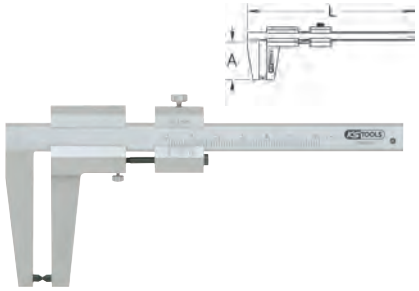

	Measuring range mm	A mm	L mm	Display accuracy mm	g
300.0535	0 - 60	55.0	162.0	+/- 0,01	130
300.0536	0 - 90	120.0	255.0	+/- 0,01	135

Digital brake disk vernier calliper 0 - 60 mm

- In accordance with DIN 862
- Locking screw
- For internal measurements
- Scale division in black
- Measuring bar in mm and imperial divisions
- mm/imperial switching
- Hold button for fixi g measured
- Reset (to zero) in every position possible
- Large LCD display figu e height 10.0 mm
- Automatic switching off
- Entirely hardened, fin ly engineered
- Stainless steel
- In durable plastic case

	Measuring range mm	A mm	L mm	Display accuracy mm	g
300.0540	0 - 60	55.0	160.0	+/- 0,03	130

Digital calliper for brake discs HGV 0 - 100 mm

- In accordance with DIN 862
- mm/imperial switching
- Hold button for fixi g measured value
- Reset (to zero) in every position possible
- LCD display - figu e height 6,0 mm
- With automatic switching off
- Stainless steel, hardened
- In durable plastic case

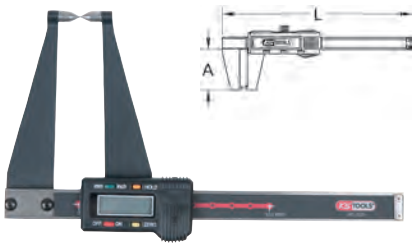

	Measuring range mm	A mm	L mm	Display accuracy mm	g
300.0539	0 - 100	95.0	207.0	+/- 0,03	155

BRAKE DRUM CALLIPERS

Brake drum calliper

- In accordance with DIN 862
- Locking screw
- For external and internal measurements
- Scale division in black
- Fine adjustment
- Measuring bar in mm divisions
- Thread table
- Internal measure has direct reading
- Entirely hardened, fin ly engineered
- Stainless steel
- In durable wooden case

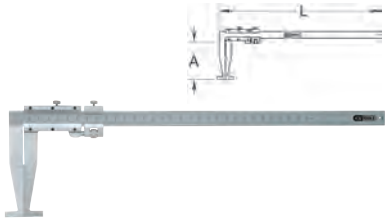

	Inner measuring range mm	Outer measuring range mm	A mm	L mm	Display accuracy mm	g
300.0525	0 - 300	40 - 340	95.0	410.0	+/- 0,02	500
300.0530	0 - 500	60 - 560	150.0	660.0	+/- 0,05	1380

DEPTH VERNIER CALLIPERS

Depth gauge

- In accordance with DIN 862
- Locking screw
- Vernier scale two sided accurate laser scales
- Scale division in black
- Measuring bar in mm divisions
- Entirely hardened, fin ly engineered
- Stainless steel
- In durable plastic case

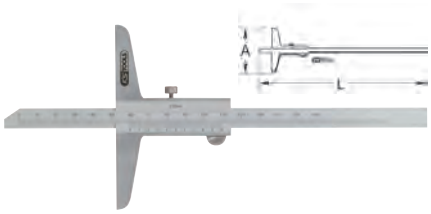

	Measuring range mm	A mm	L mm	Display accuracy mm	g
300.0571	0 - 150	100.0	225.0	+/- 0,02	160
300.0572	0 - 200	100.0	275.0	+/- 0,02	174
300.0573	0 - 250	125.0	340.0	+/- 0,02	180
300.0574	0 - 300	125.0	382.0	+/- 0,02	285
300.0575	0 - 300	150.0	382.0	+/- 0,02	300
300.0576	0 - 400	150.0	480.0	+/- 0,02	370
300.0577	0 - 500	150.0	580.0	+/- 0,02	406

Depth vernier calliper with feeler pin

- In accordance with DIN 862
- Locking screw
- Vernier scale two sided accurate laser scales
- Scale division in black
- Measuring bar in mm divisions
- Entirely hardened, fin ly engineered
- Hardened feeler pin
- Stainless steel
- In durable plastic case

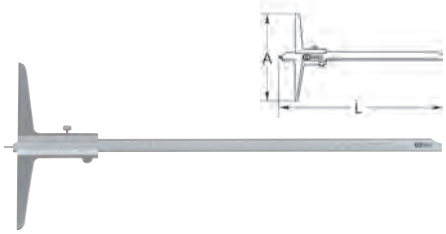

	Measuring range mm	A mm	L mm	Display accuracy mm	Ø Feeler pin mm	g
300.0551	0 - 80	50.0	160.0	+/- 0,02	1,0	70
300.0552	0 - 150	100.0	231.0	+/- 0,02	1,5	150
300.0553	0 - 200	100.0	281.0	+/- 0,02	1,5	170
300.0554	0 - 300	150.0	390.0	+/- 0,02	2,0	300
300.0561	0 - 500	150.0	590.0	+/- 0,02	2,0	406

Digital depth vernier calliper 0 - 500 mm

- In accordance with DIN 862
- Locking screw
- For depth measurements
- Scale division in black
- mm/imperial switching
- Reset (to zero) in every position possible
- Large LCD display figu e height 10,0 mm
- Automatic switching off
- Entirely hardened, fin ly engineered
- Stainless steel
- In durable plastic case

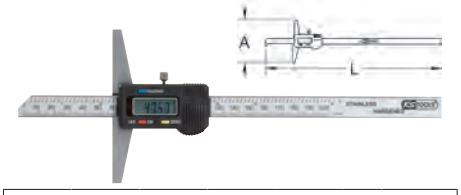

	Measuring range mm	A mm	L mm	Display accuracy mm	kg
300.0549	0 - 500	200.0	580.0	+/- 0,03	1.15

Digital depth gauge 0 - 25 mm

- In accordance with DIN 862
- Locking screw
- For depth measurements
- mm/imperial switching
- Reset (to zero) in every position possible
- Large LCD display figu e height 8.0 mm
- Little energy consumption through automatic switching off
- Entirely hardened, fin ly engineered
- Stainless steel
- In durable plastic case

	Measuring range mm	A mm	L mm	Display accuracy mm	g
300.0550	0 - 25	40.0	125.0	+/- 0,03	100

MEASURING TOOL SET

Measuring tool set

- Practical assortment for daily workshop usage
- Includes accurate machined protective foam insert
- In durable plastic storage case

			kg
150.2240	7 pcs	Measuring tool set	1.66

1 x		0 - 150 mm
1 x		0 - 25 mm
1 x		200 mm
1 x		100 mm
1 x		150 mm
1 x		0 - 125 mm
1 x		0,5 - 1,75 mm

Brake disc measuring tool set

- For measuring the radial and axial runout of wheel hubs and brake discs
- Exact positioning of the dial gauge on the test object with magnetic dial gauge holder
- Quick and easy attachment of stand with prismatic support and activated magnets
- Precise setting of the measuring scale with adjustable tolerance marks
- With rotating, knurled outer ring
- Suitable for measuring the brake disc thickness, and for detection of irregularities and distortion
- With measured value fixi g lever and measuring force control with ratchet function
- In durable plastic storage case

			kg
150.2230	3 pcs	Brake disc measuring tool set	4.00

consists of:

		kg
300.0625	Magnetic-measurement stand	1.80
300.0560	Dial gauge 0 - 10 mm, mechanical	0.26
300.0556	Outside micrometre 25- -50mm.	0.32

MICROMETER & MOUNT

Micrometer

- In accordance with DIN 863
- With measurement locking screw
- Measuring force rule through ratchet sensation
- Spindle made out of hardened steel
- Measuring surfaces with hard metal tips
- With hand warmth insulation
- Stainless steel
- In durable plastic case

	Measuring range mm	A mm	L mm	Display accuracy mm	Ø Spindle mm	Ø Drum mm	Ø Spindle pitch mm	g
300.0555	0-25	30.0	130.0	+/- 0,01	6,5	17,0	0,5	300
300.0556	25-50	35.0	165.0	+/- 0,01	6,5	17,0	0,5	315
300.0557	50-75	46.0	190.0	+/- 0,01	6,5	17,0	0,5	370
300.0558	75-100	58.0	220.0	+/- 0,01	6,5	17,0	0,5	485

Digital outside micrometre

- DIN 863
- With measured value locating screw
- Measuring force rule through ratchet sensation
- Measuring surfaces with hard metal tips
- With hand warmth insulation
- Stainless steel
- 2 mm feed enables quick measurement
- IP54
- Large LCD display
- With automatic switching off
- In durable plastic case

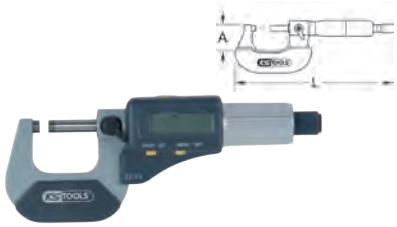

	Measuring range mm	A mm	L mm	Display accuracy mm	Ø Spindle mm	Ø Drum mm	Ø Spindle pitch mm	g
300.0580	0-25	24.0	160.0	+/- 0,01	6,5	17,0	0,5	310
300.0581	25-50	32.0	180.0	+/- 0,01	6,5	17,0	0,5	320
300.0582	50-75	45.0	205.0	+/- 0,01	6,5	17,0	0,5	370
300.0583	75-100	57.0	220.0	+/- 0,01	6,5	17,0	0,5	390

Holder for external micrometers

- For external micrometers up to 300 mm
- Clamp opening 16mm
- Clamping jaws made out of plastic
- Inclinable locking facility
- Heavy standing foot
- Cast iron

		kg
300.0680	Holder for external micrometers	1.80

Set of outside micrometres

- in accordance with DIN 863
- With measured value locating screw
- Measuring force rule through ratchet sensation
- Spindle made out of hardened steel
- Measuring surfaces with hard metal tips
- With hand warmth insulation
- Stainless steel
- In durable plastic storage case

			kg
300.0538	4 pcs	Set of outside micrometres	1.57

consists of:

		g
300.0555	Micrometer 0-25 mm, matt chrome plated	300
300.0556	Outside micrometre 25- -50mm.	315
300.0557	Outside micrometre 50- -75mm.	370
300.0558	Outside micrometre 75- -100mm.	485

DIAL GAUGES & TABLE STAND

Precision dial indicator gauge 0 - 10 mm

- In accordance with DIN 878
- With fi ed adjusting screw and revolving scale reading
- Shockproof
- Splash proofed
- Measuring tip protected against contamination by a bellowed sleeve
- Clamping shaft Ø 8 mm H6
- With 2 measuring scales
- Spindle and clamping shaft made from stainless steel
- In durable plastic case

	Measuring range mm	D mm	Display accuracy mm	Pointer revolution mm	g
300.0560	0 - 10	60.0	+/- 0,01	1.0	260

Digital precision dial indicator gauge 0 - 10 mm

- mm/imperial switching
- Reset (to zero) in every position
- Large LCD display figu e height 6,0 mm
- Clamping shaft Ø 8 mm H6
- Automatic switching off
- Spindle and clamping shaft made from stainless steel
- In durable wooden case

	Measuring range mm	D mm	Display accuracy mm	g
300.0565	0 - 10	60.0	+/- 0,02	280

Precision-dial indicator gauge with zero setting 0 - 0.08 mm

- DIN 2270
- high performance and anti-magnetic due to its high-quality brass base body
- Tolerance marks
- Gem storage for enhanced sensitivity
- Carbide needle
- 230° turning range of the stylus
- In total there are 3 dovetails for mounting brackets
- Stylus length 16.5 mm
- In durable plastic storage case



	Measuring range mm	D mm	L1 mm	L2 mm	Display accuracy mm	g
300.0564	0 - 0,08	30.0	75.0	16.5	+/- 0,01	220

Magnetic measurement stand with 2 joints

- For clamping of the dial indicator
- Revolving base
- Transverse arm with joint and fine a justment
- With on and off switchable magnetic base
- High adhesive force on burnished steel and cast areas
- Also adhesive on convolutions
- Foot with prismatic base and stop area mounted edges
- With dial guage reception Ø 8 mm

	Radius mm	Magnet foot L x W x H mm	Total depth mm	Adhesive force n	Stand Ø mm	kg	
300.0625	180.0	60x50x55	280.0	600,0	16,0	1.80	

Magnetic measurement stand with 3 joints

- For clamping of the dial indicator
- Revolving base
- Transverse arm with joint and fine a justment
- With on and off switchable magnetic base
- High adhesive force on burnished steel and cast areas
- Also adhesive on convolutions
- Foot with prismatic base and stop area mounted edges
- With dial guage reception Ø 8 mm

	Radius mm	Magnet foot L x W x H mm	Total depth mm	Adhesive force n	Stand Ø mm	kg	
300.0623	280.0	50x55x60	380.0	600,0	12,0	1.70	

Precision-dial indicator gauge 0 - 30 mm

- in accordance with ISO 9001
- with standard dial
- for measuring thickness of wires, sheet metal, film , threads etc.
- suitable for direct and comparative measurements
- with rotating scale
- Button made out of stainless steel
- Bracket made from cast iron
- In durable plastic case

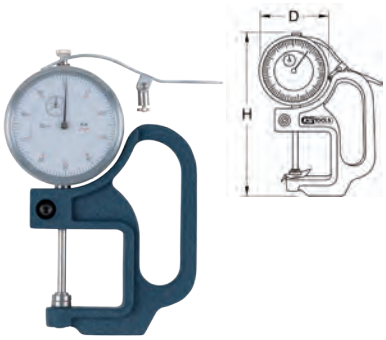

	Measuring range mm	D mm	H mm	Display accuracy mm	Pointer revolution mm	g	
300.0624	0 - 30 mm	60.0	140	+/- 0,01	1.0	300	

THREAD- & FEELER GAUGES

Welding seam gauge

- For measuring the welded seams at right angled welded corners
- Blades fan shaped on a ring
- Leaves individually marked with size
- Blades made out of hardened spring steel

	Tooth pitch		g	
300.0619	12	3,0-3,5-4,0-4,5-5,0-5,5-6,0-6,5-7,0-8,0-10,0-12,0	50	

Thread gauge

- For controlling and increasing the interior thread and outside thread
- Imperial sizes
- Cylindrical tapered
- Leaves fan shaped arrangement
- Leaves individually marked with size
- Out of hardened spring steel

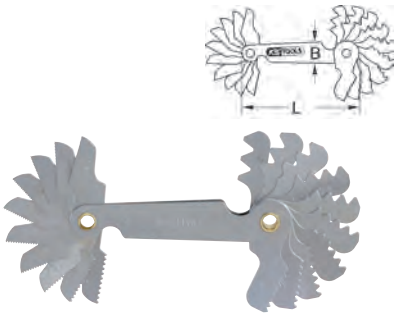

	Tooth pitch	Measuring range	B mm	L mm	g	
301.0090	22	4-4,5-5-6-7-8-9-10-11-12-13-14-16-18 20-22-24-32-40-48-56-64mm	12.2	66.5	40	
301.0095	20	0,40-0,45-0,50-0,60-0,70-0,75-0,80-1,00-1,25-1,50-1,75-2,00-2,50-3,00-3,50-4,00-4,50-5,00-5,50-6,00mm	12.2	66.5	40	

Trapezoid steel thread gauge

- In accordance with DIN 103
- For measuring of trapezoid thread 2 - 12 mm pitch and tooth angle
- 30° notch
- Cleanly milled
- Blade mades out of hardened spring steel

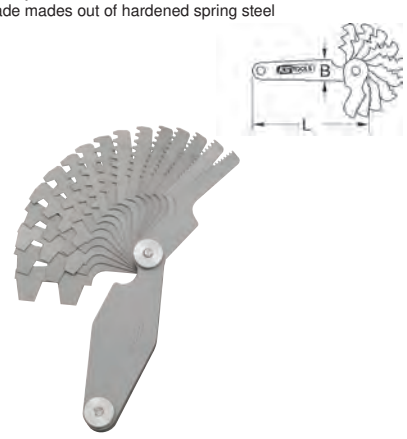

	Thread	Measuring range mm	L mm	B mm	g	
300.0622	30°	2-3-4-5-6-7-8-9-10-12-16-20	120.0	40.0	150	

TORX® gauge

- For testing of TX and E profil s
- Measuring caps fan shaped on a ring
- Individually marked with size
- Measuring caps made from plastic

			g	
300.0610	20 pcs	E1xT5 - E2xT6 - E4xT7 - E5xT8 - E6xT9 - E7xT10 - E8xT15 - E10xT20 - E11xT25 - E12xT27- E14xT30 - E16xT35 - E18xT40 - E20xT45 - E22xT47 - E24xT50 - E26xT55 - E28xT60 - E30xT70	50	

Feeler gauge

- For the testing of intervals, contact distances, etc.
- Feeler gauge conical tapered
- Fixing nut
- Leaves individually marked with size
- Blades made out of hardened spring steel

	Tooth pitch	Measuring range mm	L mm	g	
300.0600	20	0,05-0,10-0,15-0,20-0,25-0,30-0,35-0,40-0,45-0,50-0,55-0,60-0,65-0,70-0,75-0,80-0,85-0,90-0,95-1,00	100.0	88	

Antimagnetic brass feeler gauge

- For the testing of intervals, contact distances, etc.
- Feeler gauge conical tapered
- Fixing nut
- Leaves individually marked with size
- Blades made of brass

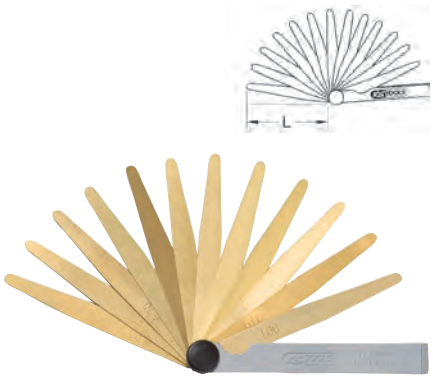

	Tooth pitch	Measuring range mm	L mm	g	
300.0611	8	0,05-0,1-0,15-0,2-0,25-0,3-0,4-0,5	100.0	55	
300.0612	13	0,05-0,1-0,15-0,2-0,25-0,3-0,4-0,5-0,6-0,7-0,8-0,9-1,0	100.0	70	
300.0613	20	0,05-0,1-0,15-0,2-0,25-0,3-0,35-0,4-0,45-0,5-0,55-0,6-0,65-0,7-0,75-0,8-0,85-0,9-0,95-1,0	100.0	85	

Piston tolerance gauge

- For the testing of intervals, contact distances, etc.
- Feeler gauge cylindrical
- Blades fan shaped on a ring
- Leaves individually marked with size
- Blades made out of hardened spring steel



	Tooth pitch	Measuring range mm	L mm	g	
300.0614	8	0,05-0,1-0,15-0,2-0,25-0,3-0,4-0,5	150.0	30	
300.0617	8	0,05-0,1-0,15-0,2-0,25-0,3-0,4-0,5	200.0	50	
300.0615	13	0,05-0,1-0,15-0,2-0,25-0,3-0,4-0,5-0,6-0,7-0,8-0,9-1,0	150.0	80	
300.0618	13	0,05-0,1-0,15-0,2-0,25-0,3-0,4-0,5-0,6-0,7-0,8-0,9-1,0	200.0	150	
300.0616	20	0,05-0,1-0,15-0,2-0,25-0,3-0,35-0,4-0,45-0,5-0,55-0,6-0,65-0,7-0,75-0,8-0,85-0,9-0,95-1,0	150.0	150	

SQUARES

Square

- Ideal for general working
- Machined on all sides
- Steel

	L1 mm	L2 mm	H mm	S mm	g	
300.0231	100.0	70.0	20.0	5.0	115	
300.0232	150.0	100.0	20.0	5.0	175	
300.0233	200.0	130.0	20.0	5.0	250	
300.0234	250.0	160.0	25.0	5.0	375	
300.0235	300.0	180.0	25.0	5.0	525	
300.0236	400.0	230.0	30.0	5.0	615	
300.0237	500.0	280.0	30.0	5.0	870	
300.0238	600.0	330.0	30.0	5.0	1400	
300.0239	750.0	375.0	30.0	5.0	1550	
300.0241	1000.0	500.0	30.0	5.0	2910	

Square

- In accordance with DIN 875/1
- For the most accurate working and inspection in precision mechanical engineering
- Perpendicularity-, Parallelism- and smoothness tolerances fin ly ground and aligned
- Stock and cross section fin ly ground and alinged
- Special steel

	L1 mm	L2 mm	H mm	S mm	g	
300.0199	75.0	50.0	15.0	5.0	80	
300.0200	100.0	70.0	20.0	5.0	100	
300.0201	150.0	100.0	25.0	5.0	250	
300.0202	200.0	130.0	30.0	6.0	500	
300.0203	250.0	165.0	35.0	7.0	700	
300.0204	300.0	200.0	40.0	8.0	1150	
300.0205	400.0	265.0	40.0	8.0	1180	
300.0206	500.0	330.0	40.0	8.0	2800	

Square

- In accordance with DIN 875/0
- Ideal for the most accurate working and inspection in precision mechanical engineering
- Perpendicularity-, Parallelism- and smoothness tolerances fin ly ground and aligned
- Stock and cross section fin ly ground and alinged
- Stainless steel



	L1 mm	L2 mm	H mm	S mm	g	
300.0291	50.0	40.0	12.0	5.0	40	
300.0292	75.0	50.0	15.0	5.0	70	
300.0293	100.0	70.0	20.0	5.0	115	
300.0294	150.0	100.0	25.0	5.0	210	
300.0295	200.0	130.0	30.0	6.0	350	
300.0296	250.0	165.0	35.0	7.0	850	
300.0297	300.0	200.0	40.0	8.0	1300	

Square

- In accordance with DIN 875/2
- Ideal for accurate working in precision mechanical engineering and shop floor us
- Perpendicularity-, Parallelism- and smoothness tolerances ground
- Stock area and cross area ground
- Special steel



	L1 mm	L2 mm	H mm	S mm	g	
300.0254	75.0	50.0	15.0	5.0	80	
300.0255	100.0	70.0	20.0	5.0	100	
300.0256	150.0	100.0	25.0	5.0	240	
300.0257	200.0	130.0	30.0	6.0	450	
300.0258	250.0	165.0	35.0	7.0	550	
300.0259	300.0	175.0	40.0	8.0	800	
300.0260	400.0	200.0	45.0	10.0	1100	
300.0261	500.0	250.0	50.0	10.0	1600	

Square with stock

- Ideal for general working
- Stock
- Machined on all sides
- Steel

	L1 mm	L2 mm	H mm	I mm	J mm	K mm	g	
300.0270	100.0	70.0	20.0	5.0	5.0	20.0	170	
300.0271	150.0	100.0	20.0	5.0	5.0	20.0	260	
300.0272	200.0	130.0	20.0	5.0	5.0	20.0	340	
300.0273	250.0	160.0	25.0	5.0	5.0	25.0	530	
300.0274	300.0	180.0	25.0	5.0	5.0	25.0	620	
300.0275	400.0	230.0	30.0	6.0	6.0	30.0	1160	
300.0276	500.0	280.0	30.0	6.0	6.0	30.0	1440	
300.0277	600.0	330.0	30.0	6.0	6.0	30.0	1720	
300.0278	750.0	375.0	30.0	6.0	6.0	30.0	2060	
300.0279	1000.0	500.0	30.0	6.0	6.0	30.0	2760	

Square with stock

- In accordance with DIN 875/2
- Ideal for accurate working in precision mechanical engineering and shop floor us
- Stock
- Perpendicularity-, Parallelism- and smoothness tolerances ground
- Stock area and cross area ground
- Special steel

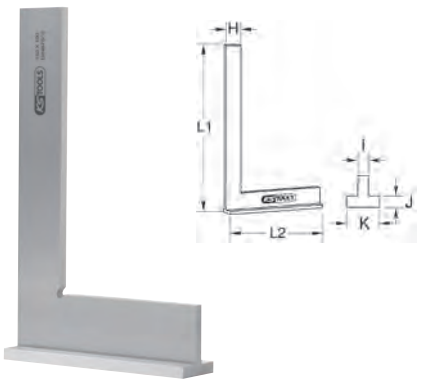

	L1 mm	L2 mm	H mm	I mm	J mm	K mm	g	
300.0281	75.0	50.0	15.0	5.0	5.0	15.0	100	
300.0282	100.0	70.0	20.0	5.0	5.0	20.0	155	
300.0283	150.0	100.0	25.0	5.0	5.0	25.0	330	
300.0284	200.0	130.0	30.0	6.0	6.0	30.0	650	
300.0285	250.0	165.0	35.0	7.0	7.0	35.0	750	
300.0286	300.0	175.0	35.0	7.0	7.0	35.0	1200	
300.0287	400.0	200.0	40.0	8.0	8.0	40.0	1480	
300.0288	500.0	250.0	40.0	8.0	8.0	40.0	2300	

Square with stock

- In accordance with DIN 875/1
- For the most accurate working and inspection in precision mechanical engineering
- Perpendicularity-, Parallelism- and smoothness tolerances fin ly ground and aligned
- Stock and cross section fin ly ground and alinged
- Stock
- Special steel

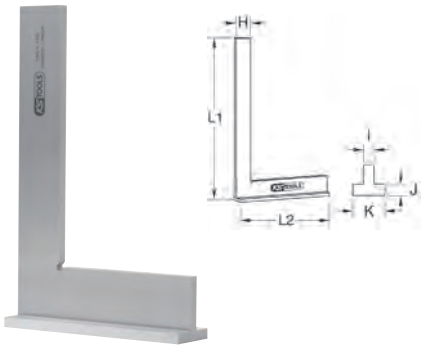

	L1 mm	L2 mm	H mm	I mm	J mm	K mm	g	
300.0209	75.0	50.0	15.0	5.0	5.0	15.0	100	
300.0210	100.0	70.0	20.0	5.0	5.0	20.0	150	
300.0211	150.0	100.0	25.0	5.0	5.0	25.0	400	
300.0212	200.0	130.0	30.0	6.0	6.0	30.0	700	
300.0213	250.0	165.0	35.0	7.0	7.0	35.0	1100	
300.0214	300.0	200.0	40.0	8.0	8.0	40.0	1600	
300.0215	400.0	265.0	40.0	8.0	8.0	40.0	2700	
300.0216	500.0	330.0	40.0	8.0	8.0	40.0	4360	

Square with stock

- In accordance with DIN 875/0
- Ideal for the most accurate working and inspection in precision mechanical engineering
- Perpendicularity-, Parallelism- and smoothness tolerances fin ly ground and aligned
- Stock and cross section fin ly ground and alinged
- Stock
- Stainless steel

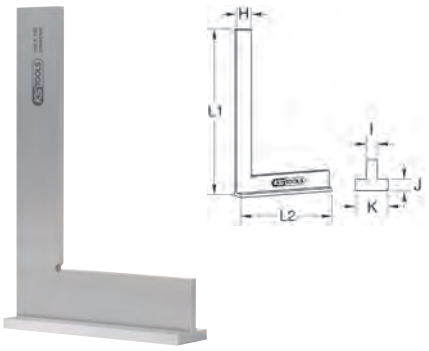

	L1 mm	L2 mm	H mm	I mm	J mm	K mm	g	
300.0311	50.0	40.0	14.0	5.5	4.5	18.0	60	
300.0312	75.0	50.0	18.5	5.5	4.5	17.5	100	
300.0313	100.0	70.0	20.0	5.5	5.0	23.4	185	
300.0314	150.0	100.0	24.0	5.5	6.0	23.4	330	
300.0315	200.0	130.0	28.5	6.0	6.0	27.5	560	
300.0316	250.0	165.0	36.0	8.0	7.0	32.0	1050	
300.0317	300.0	200.0	39.0	8.0	8.0	38.0	1490	

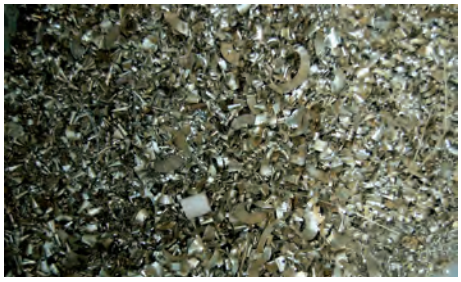

Precision hard square

- In accordance with DIN 875/00
- For inspection and test working in light cold processing
- Perpendicularity -, Parallelism- and smoothness tolerances fin ly ground and aligned
- Stock and cross section fin ly ground and alinged
- Hardened
- Stainless steel

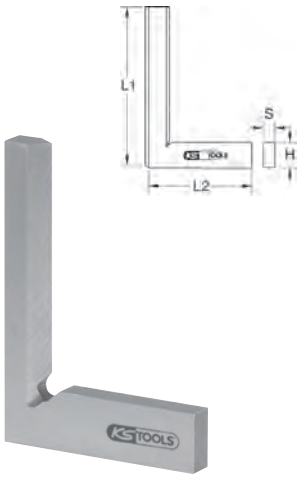

	L1 mm	L2 mm	H mm	S mm	g	
300.0318	25.0	20.0	5.0	3.5	40	
300.0319	40.0	28.0	5.0	3.5	80	

Carpenters square

- Hanging hole
- Without head stock
- Red powder coating
- Quenched and tempered
- Special steel

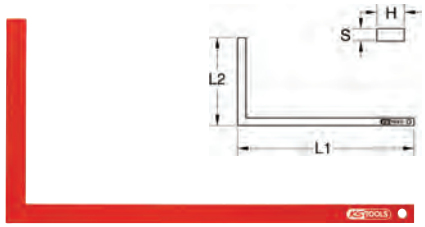

	L1 mm	L2 mm	H mm	S mm	g	
300.0250	500.0	260.0	35.0	5.0	840	
300.0251	600.0	280.0	35.0	5.0	1070	
300.0252	800.0	320.0	35.0	5.0	1370	
300.0253	1000.0	380.0	35.0	5.0	1700	

Cabinetmakers square with aluminium stock

- Stock made from aluminium
- Upper edge divisions 1 mm
- Lower edge divisions 1 mm
- Large decimal scale
- Units engraved
- Scale division in black
- Blade made from cast iron

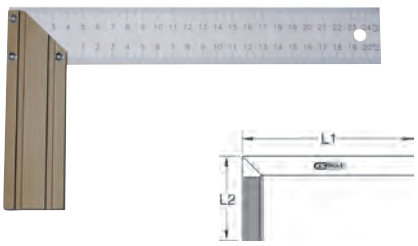

	L1 mm	L2 mm	g	
300.0220	250.0	140.0	70	

Mitre angle

- In accordance with DIN 875/2
- Ideal for the most accurate working and inspection in precision mechanical engineering
- Stock and cross section fin ly ground and aligned
- With stock
- Special high performance steel



	L1 mm	L2 mm	L3 mm	S mm	B mm	g	
300.0217	107.0	92.0	47.0	5.0	25.0	400	
300.0218	128.0	110.0	59.0	5.0	25.0	450	
300.0219	155.0	130.0	70.0	5.0	25.0	500	

Sharpening angle 45°

- In accordance with DIN 875/2
- For the most accurate working and inspection in precision mechanical engineering
- Stock and cross section fin ly ground and aligned
- With stock
- Special steel



	L1 mm	L2 mm	S mm	H mm	g	
300.0224	200.0	130.0	5.0	25	280	

Adjustable square with steel blade

- Blade made from steel
- Ideal for simple metal working
- Wing nut for locking
- Channel for the adjustment of the angle
- Chrome plated
- Spring steel

	L mm	g	
300.0327	200.0	180	
300.0328	250.0	200	
300.0329	300.0	220	
300.0330	400.0	240	
300.0331	500.0	260	

Adjustable square

- Ideal for simple metal working
- Head stock out of wood and/or cast iron
- Wing nut for locking
- Channel for the adjustment of the angle
- Chrome plated
- Spring steel

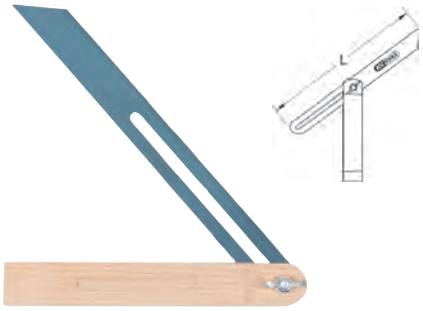

	L mm	Blade	g	
300.0230	250.0	cast iron	200	
300.0240	250.0	wood	100	

PROTRACTOR

Protractor with open arch

- Ideal for measuring of angles 0 - 180°
- Half round open arch
- With locking screw
- Degree graduation 1°
- With large decimal scale
- Units engraved
- Scale division in black
- Anti glare matt finis
- Stainless steel

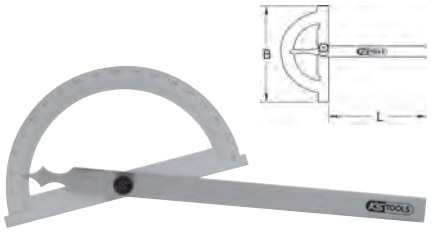

	B mm	L mm	g	
300.0640	100.0	120.0	150	
300.0641	140.0	150.0	200	
300.0642	170.0	200.0	300	
300.0643	220.0	300.0	500	
300.0644	320.0	500.0	1400	
300.0645	320.0	600.0	1450	
300.0646	320.0	800.0	1500	
300.0647	420.0	600.0	2600	
300.0648	420.0	800.0	2900	
300.0649	420.0	1000.0	3400	

Protractor

- Ideal for measuring of angles 0 - 180°
- Half round arch
- Locking screw
- Divisions printed in two directions
- Two direction scale in mm division in upper and lower edge
- Units engraved
- Scale division in black
- Anti glare matt finis
- Stainless steel

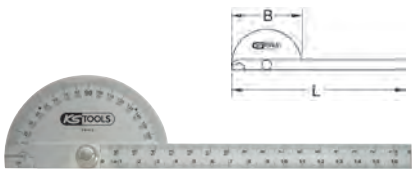

	B mm	L mm	g	
300.0700	90.0	220.0	70	
300.0701	200.0	400.0	150	

Universal protractor

- Ideal for the measuring of angles on workpieces, devices and machines
- Also can be used as a ruler, cross and mitre square
- Locking screw
- Reading with magnifiyi g glass for viewing fi ld over the entire vernier scale
- Fine adjustment through geared wheel and toothed rim
- Indicating dial reading 4 x 90°
- Vernier scale reading 1/12° - 5 angular minutes
- Units engraved
- Anti glare matt finish m tt chrome
- Includes 3 measuring bars 150 mm, 200 mm und 300 mm
- Stainless steel
- In durable plastic case



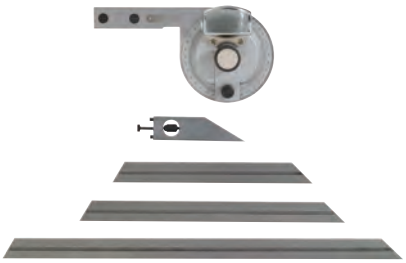

	D mm	L mm	g	
300.0207	70.0	300.0	600	

FOLDING RULES

Wooden folding rule, yellow

- Out of ten yellow dividers
- Outside visible joints with spring fi tings
- Through riveted joints
- Two sided mm divisions on the upper and lower edge
- Large decimal scale
- Scale division in black
- Overall length 2 meters
- Measuring accuracy according to EC accuracy class III
- Beech wood

	L m	Width mm	Number of links	g	
300.0060	2.00	16.0	10	100	

Wooden folding rule, white

- Out of ten white dividers
- Outside visible joints with brass spring fi tings
- Through riveted joints
- Two sided mm divisions on the upper and lower edge
- Large decimal scale red marking
- Scale division in black
- Overall length 2 meters
- Measuring accuracy according to EC accuracy class III
- Beech wood

	L m	Width mm	Number of links	g	
300.0062	2.00	16.0	10	110	

Wooden folding rule, white/yelllow

- Out of ten white/yelllow dividers
- Outside visible joints with brass spring fi tings
- Through riveted joints
- Two sided mm divisions on the upper and lower edge
- Large decimal scale red marking
- Scale division in black
- Overall length 2 meters
- Measuring accuracy according to EC accuracy class III
- Beech wood

	L m	Width mm	Number of links	g	
300.0063	2.00	16.0	10	100	

Plastic folding rule, yellow

- Out of ten yellow dividers
- Durable special joint connection
- Two sided mm divisions on the upper and lower edge
- Large decimal scale
- Scale division in black
- Overall length 2 meters
- Measuring accuracy according to EC accuracy class III
- Glass fib e reinforced and bends resistant ABS-plastic

	L m	Width mm	Number of links	g	
300.0061	2.00	16.0	10	100	

REEL TAPE MEASURES

Tape measure with locking device and belt clip

- Yellow varnished steel strip
- mm divisions on the upper and lower edge
- Scale division in black
- Decimal in red marking
- Automatic tape returns and tape locking
- Plastic tape guide
- Wrist strap
- Measuring accuracy according to EC accuracy class II
- Weathering spring band steel
- Dual component plastic housing

	L m	Tape width mm	g	
300.0113	3.00	16.0	100	
300.0114	5.00	19.0	220	
300.0115	5.00	25.0	190	
300.0116	8.00	25.0	210	

Tape measure with locking device and belt clip

- Yellow lacquered, abrasion proof polyamide coated steel tape
- mm divisions on the upper and lower edge
- Scale division in black
- Decimal in red marking
- Automatic tape returns and tape locking
- Metallic tape guide
- Wrist strap
- Measuring accuracy according to EC accuracy class II
- Flexible, kink proof weathering spring band steel
- ABS two component housing

	L m	Tape width mm	g	
300.0131	3.00	16.0	100	
300.0132	5.00	19.0	150	
300.0133	5.00	25.0	150	
300.0134	8.00	25.0	370	
300.0135	10.00	30.0	690	

Tape measure with locking device, belt clip and magnetic stop

- Yellow lacquered, abrasion proof polyamide coated steel tape
- mm divisions on the upper and lower edge
- Scale division in black
- Decimal in red marking
- Automatic tape returns and tape locking
- Magnetic stop
- Measuring accuracy according to EC accuracy class II
- Flexible, kink proof weathering spring band steel
- ABS two component housing

	L m	Tape width mm	g	
300.0143	5.0	25.0	150	

Enclosed tape measure with plastic tape

- Yellow glass fib e reinforced plastic tape
- Stretch, abrasion resistant and washable
- Measuring begins at 100 mm after measurement stop
- cm division on the lower edge
- Large decimal scale-red marking
- Scale division in black
- Good handling through the crank arm and locking position
- Measuring accuracy according to EC accuracy class III
- Impact resistant, ABS plastic housing

	L m	Tape width mm	g	
300.0040	10.0	10.0	350	
300.0041	20.0	10.0	400	
300.0042	30.0	10.0	550	
300.0043	50.0	10.0	690	

Frame tape measure with yellow steel tape

- Yellow laquered, abrasion proof polyamide coated steel tape
- Measuring begins at 100 mm after measurement stop
- mm division on the lower edge
- Large decimal scale red marking
- Scale division in black
- Two ball bearings guarantee easy winding in and out
- Good handling through the crank arm and locking position
- Measuring accuracy according to EC accuracy class III
- Impact resistant, ABS plastic housing

	L m	Tape width mm	g	
300.0055	30.0	13.0	800	
300.0056	50.0	13.0	1000	

Frame tape measure with yellow steel tape

- Yellow laquered, abrasion proof polyamide coated steel tape
- mm division on the lower edge
- Large decimal scale
- Scale division in black
- Two ball bearings guarantee easy winding in and out
- Good handling through the crank arm and locking position
- Measuring accuracy according to EC accuracy class II
- Glass fib e reinforced and bend resistant plastic
- Impact resistant steel framework with plastic handle

	L m	Tape width mm	g	
300.0049	20.0	13.0	800	
300.0050	30.0	13.0	900	
300.0051	50.0	13.0	1000	

Reel tape measure with plastic tape

- White glass fib e reinforced plastic tape
- Stretch, abrasion resistant and washable
- Large decimal scale
- Scale division in black
- Two ball bearings guarantee easy winding in and out
- Good handling through the crank arm and locking position
- Measuring accuracy according to EC accuracy class III
- Impact resistant steel framework with plastic handle

	L m	Tape width mm	g	
300.0052	20.0	13.0	800	
300.0053	30.0	13.0	900	
300.0054	50.0	13.0	1000	

SPIRIT LEVELS

Aluminium profile pirit level with fine a justment

- Smooth aluminium rectangular profil
- Light profile eight
- Accurate to 0,5 mm per meter
- 4 robust Acrylglas-vials (0° + 45° + 90°)
- Fine adjustment
- 1,8 mm wall thickness
- Hanging hole
- Aluminium

	L mm	B mm	H mm	g	
204.5610	600.0	22.0	50.0	250	
204.5810	800.0	22.0	50.0	350	
204.5910	1000.0	22.0	50.0	450	

Aluminium profile pirit level with pipe levelling

- Aluminium rectangular profil
- Profile raduated for pipe leveling
- Light profile eight
- 2 through handles for easier handling
- Accurate to 0,5 mm per meter
- 3 robust Acrylglas vials (0° + 90°)
- Push softening end caps
- Measuring area milled
- 1,8 mm wall thickness
- Hanging hole
- Aluminium

	L mm	B mm	H mm	g	
204.7050	500.0	27.0	64.0	450	
204.7060	600.0	27.0	64.0	550	
204.7080	800.0	27.0	64.0	730	
204.7100	1000.0	27.0	64.0	910	
204.7150	1500.0	27.0	64.0	1370	

Aluminium profile pirit level

- Smooth aluminium rectangular profil
- Light profile eight
- Accurate to 0,5 mm per meter
- 3 robust Acrylglas vials (0° + 45° + 90°)
- 1,8 mm wall thickness
- Hanging hole
- Aluminium

	L mm	B mm	H mm	g	
204.5400	400.0	22.0	50.0	320	
204.5500	500.0	22.0	50.0	390	
204.5600	600.0	22.0	50.0	300	
204.5800	800.0	22.0	50.0	350	
204.5900	1000.0	22.0	50.0	730	

Heavy aluminium die cast spirit level

- Skeleton profil
- Accurate to 0,5 mm per meter
- 3 robust Acrylglas vials (0° + 45° + 90°)
- Very high torsional stiffness
- All sides of the level can be used as the reading edge
- Measuring area and front sides milled
- Hanging hole
- Aluminium

	L mm	B mm	H mm	g	
204.4410	400.0	23.0	44.0	200	
204.4610	600.0	23.0	44.0	400	
204.4810	800.0	23.0	44.0	600	

Aluminium profile pirit level, magnetic

- DIN 877
- Smooth aluminium rectangular profil
- Light profile eight
- Accurate to 0,5 mm per meter
- 2 robust Acrylglas vials (0° + 90°)
- Hanging hole
- Magnetic
- Aluminium

	L mm	B mm	H mm	g	
204.5470	400.0	21.0	50.0	280	
204.5471	600.0	21.0	50.0	280	

Spirit level, magnetic

- DIN 877
- Skeleton profil
- With 2 through handles for easier handling
- Accurate to 0.5 mm per metre
- 3 robust Acrylglas-block vials (0° + 90° + angle vial)
- With hanging hole
- Magnetic
- made of stabilised cast iron
- Shock-absorbing end caps

	L mm	B mm	H mm	g	
204.5480	600.0	25.0	54.0	280	
204.5481	800.0	25.0	54.0	300	

Heavy aluminium die cast spirit level in torpedo form

- Skeleton profil
- Accurate to 0,5 mm per meter
- 2 robust Acrylic vials (0° + 90°)
- Very high torsional stiffness
- Torpedo form
- Measuring area milled
- Hanging hole
- Made from aluminium die cast



	L mm	B mm	H mm	g	
204.4400	400.0	23.0	47.0	260	
204.4500	500.0	23.0	47.0	300	
204.4600	600.0	23.0	47.0	400	
204.4800	800.0	23.0	47.0	650	
204.4900	1000.0	23.0	47.0	800	

Heavy aluminium die cast spirit level in torpedo form, magnetic

- Skeleton profil
- Accurate to 0,5 mm per meter
- 2 robust Acrylglas vials (0° + 90°)
- Very high torsional stiffness
- Torpedo form
- Magnetic
- Measuring area milled
- Hanging hole
- Made from aluminium die cast

	L mm	B mm	H mm	g	
204.6400	400.0	23.0	47.0	470	
204.6500	500.0	23.0	47.0	600	
204.6600	600.0	23.0	47.0	600	
204.6800	800.0	23.0	47.0	1000	

Spirit level with a frame

- DIN 877
- made of stabilised cast iron
- Lateral surfaces are fi ted with anti-slip insulating plates
- Accurate to 0.04 mm per metre
- 1 robust Acrylglas-block vial (0°)
- Vial is protected behind transparent Plexiglas
- in a durable metal case

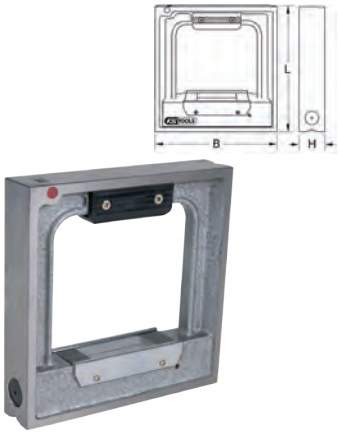

	L mm	B mm	H mm	kg
204.5487	200.0	200.0	42.5	2.00

RULERS

Semi fl xible steel ruler

- Upper edge 1 mm
- Lower edge 1 mm
- Large decimal scale
- Units engraved
- Scale division in black
- Anti glare matt finish efle tion free
- Rounded edges
- Measuring accuracy according to EC accuracy class II
- Rust proof
- Hard tempered spring steel

	L mm	H mm	g
300.0110	300.0	30.0	70
300.0111	500.0	30.0	105
300.0112	1000.0	30.0	245
300.0117	1500.0	30.0	370
300.0118	2000.0	30.0	490

Flexible steel ruler

- Upper edge1/2 mm
- Lower edge 1 mm
- Large decimal scale
- Units engraved
- Scale division in black
- Anti glare matt finish efle tion free
- Rounded edges
- Measuring accuracy according to EC accuracy class II
- Rust proof
- Hard tempered spring steel

	L mm	H mm	g
300.0101	150.0	13.0	9
300.0102	200.0	13.0	11
300.0103	250.0	13.0	14
300.0104	300.0	13.0	16
300.0105	500.0	13.0	37
300.0106	1000.0	13.0	72

Precision ruler

- mm division on the upper edge
- Chamfer
- Without protective layer
- Hanging hole
- Finely polished and zinc plated
- Steel

	L mm	H mm	S mm	g
300.0121	300.0	50.0	5.0	186
300.0122	500.0	50.0	5.0	292
300.0123	600.0	50.0	5.0	350
300.0124	800.0	50.0	5.0	460
300.0125	1000.0	50.0	5.0	600

Precision straightedge

- For the inspection and the exact working on cylinder heads
- In accordance with DIN 874/1
- Double T profile ail with rear 5 hand slots
- On edge and fl t sides examination process
- Hanging hole
- Steel

	L mm	H mm	S mm	kg
152.1090	600.0	30.0	16.0	2.10

Precision straightedge

- In accordance with DIN 874/00
- Hand warmth protection
- Test area precise and fin ly engineered
- Flatness tolerance for highest accuracy
- For controlled and test working in the light gap procedure
- Hardened
- Stainless steel

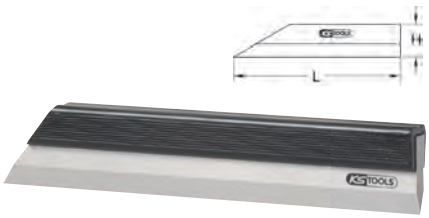

	L mm	H mm	g
300.0630	50.0	25.0	40
300.0631	75.0	25.0	60
300.0632	100.0	25.0	80
300.0633	125.0	25.0	100
300.0634	150.0	25.0	120
300.0635	200.0	25.0	160
300.0636	300.0	25.0	240
300.0637	400.0	25.0	320
300.0638	500.0	25.0	400
300.0639	600.0	25.0	480

MARKING GAUGE & SCRIBER

Scriber

- For marking of work pieces
- Straight and 70° bent tip
- Knurled handle
- Hardened point
- Burnished
- Special steel

	L mm	D mm	g
300.0300	190.0	4.0	10

Hard metal scriber

- For marking of work pieces
- Straight form
- Hard metal tip
- Pocket clip
- Hardened point
- Chrome plated
- Special steel

	L mm	D mm	g
300.0301	145.0	5.0	60

Hard metal scriber in ball-point pen form

- For marking of work pieces
- Straight form
- Hardened and interchangeable hard metal tips
- Pocket clip
- Protection through foldaway needle tip
- Adjustable and lead bow mine
- Metal housing

	L mm	D mm	Replacement tip	g
300.0302	150.0	8.0	300.0303	40

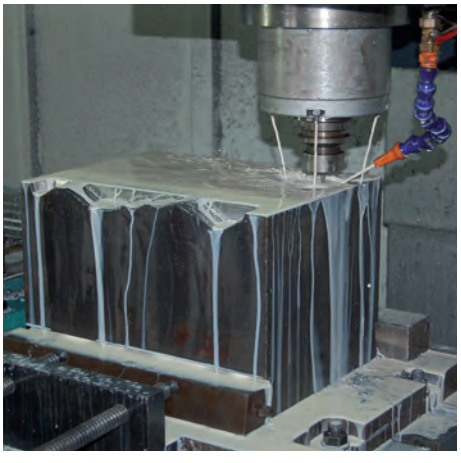

Mechanics marking gauge

- Revolving base
- Fine adjustment by means of a fi ed adjusting screw
- For simple marking of workpieces
- Hardened scribing iron
- Bar made out of stainless steel
- Prism shaped socket made out of cast iron

	H mm	B mm	T mm	g
300.0627	300.0	100.0	80.0	700
300.0628	400.0	400.0	80.0	750
300.0629	500.0	500.0	80.0	780

Precision vernier height gauge

- DIN 862
- Measuring range 0-300 mm
- Fine adjustment by means of a fi ed adjusting screw
- For simple marking of work pieces
- With hardened scribing iron
- Bar made out of stainless steel
- Base made out of cast iron
- Accurate to 0.02mm
- Adjustable magnifying glass
- Measuring table supplied
- in an elegant wooden box

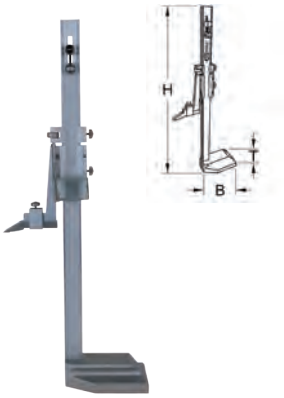

	H mm	B mm	T mm	kg
300.0652	555.0	130.0	90.0	2.90

DIVIDERS

Pointed dividers with regulating arc

- Square edged irgs and riveted hinge
- Locking screw
- Hardened points
- Ground and fin ly polished
- Special steel



	R mm	L mm	g
300.0416	300.0	150.0	135
300.0417	400.0	200.0	190
300.0418	500.0	250.0	275
300.0419	600.0	300.0	320

Pointed dividers without regulating arc

- Square edged irgs and riveted hinge
- Hardened points
- Ground and fin ly polished
- Special steel

	R mm	L mm	g
300.0412	300.0	150.0	125
300.0413	400.0	200.0	180
300.0414	500.0	250.0	245
300.0415	600.0	300.0	295

Precision spring gap dividers inside callipers

- Extra square edged legs
- Through stay spindle and fast clamping nut
- Hardened points
- Ground and fin ly polished
- Special steel

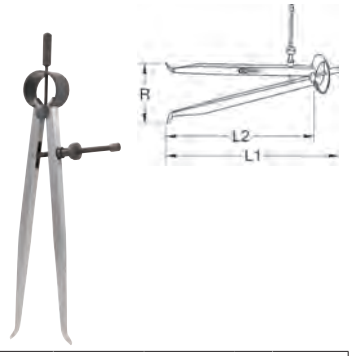

	R mm	L1 mm	L2 mm	g
300.0421	144.0	200.0	150.0	120
300.0422	200.0	250.0	200.0	160
300.0423	245.0	300.0	250.0	205
300.0424	300.0	355.0	300.0	240

Precision spring pointed dividers

- Extra square edged legs
- Through stay spindle and fast clamping nut
- Hardened points
- Ground and fin ly polished
- Special steel

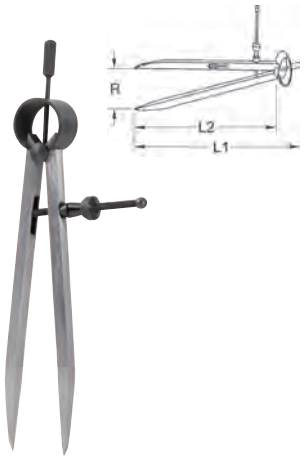

	R mm	L1 mm	L2 mm	g
300.0402	138.0	200.0	150.0	120
300.0404	190.0	255.0	200.0	160
300.0405	235.0	300.0	250.0	200
300.0406	280.0	360.0	300.0	235

Precision spring pointed dividers with pencil holder

- Extra square edged legs
- Through stay spindle and fast clamping nut
- Hardened points
- Ground and fin ly polished
- Special steel

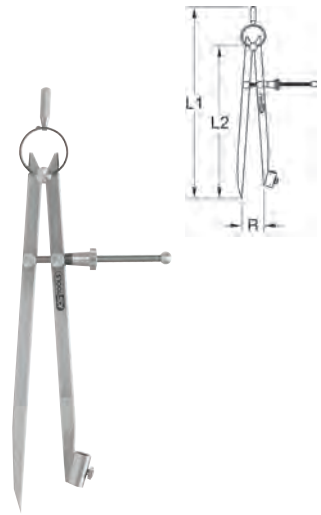

	R mm	L1 mm	L2 mm	g
300.0411	210.0	260.0	205.0	150

Precision spring pointed dividers with interchangeable tips

- Extra square edged legs
- Through stay spindle and fast clamping nut
- Interchangeable tips
- Hardened points
- Ground and fin ly polished
- Special steel



	R mm	L1 mm	L2 mm	Replacement tip	g	
300.0429	130.0	190.0	150.0	300.0434	120	
300.0431	190.0	260.0	200.0	300.0434	155	
300.0432	240.0	300.0	250.0	300.0434	205	
300.0433	285.0	355.0	300.0	300.0434	245	

Precision spring gryphon dividers outside callipers

- Extra square edged legs
- Through stay spindle and fast clamping nut
- Hardened points
- Ground and fin ly polished
- Special steel



	R mm	L1 mm	L2 mm	g	
300.0425	180.0	200.0	150.0	135	
300.0426	190.0	260.0	200.0	185	
300.0427	235.0	310.0	250.0	225	
300.0428	280.0	345.0	300.0	260	

Universal marking gauge with stop roller

- Ideal for simple marking of work pieces
- Vernier calliper 1/128"
- Interchangeable tip
- Locking screw
- Measuring bar with mm divisions
- Hardened
- Stainless steel

	Measuring range mm	L mm	Display accuracy mm	Replacement tip	g	
300.0626	200,0	265.0	1/20 mm; 1/128"	300.0651	200	

Precision beam compass

- In accordance with DIN 866/B
- Interchangeable tips
- Fine adjustment
- Measuring bar with mm divisions
- Position slider with reference marker
- Hardened
- Stainless steel

	Measuring range mm	L mm	Display accuracy mm	Replacement tip	kg	
300.0407	0 - 500	660.0	1/10	300.0410	1.18	
300.0408	0 - 1000	1170.0	1/10	300.0410	2.24	

MEASURING AND TESTING TOOLS

Infared thermometer

- Laser pistol for non contact temperature measurement
- Ideally suited for the automotive sector, industrial, and construction usage Chemical and foodsuffs industry
- Laser measuring beam with a red measuring point
- Illuminating Display
- LCD Digital display
- Automatic swiching off
- Includes 9V block battery
- Stable plastic housing

Application range: In turning motors, diffi ult to access places, fluid , under current line directions, in heating appliances, gas and, air-conditioning, coolent systems, brake discs aggressive chemicals and groceries

Technical data:

Switchable:	°C / °F
Working range:	-50° - 500 °C
Emission factor:	adjust to 0.95
Power output max:	1mW
Power requirement:	9V block battery

		g	
150.3040	Infared thermometer	250	

Photoelectric rev counter, LED display/laser

- Portable laser measuring instrument, digital
- For touchless measuring of the rotating speed / number of revolutions
- LED display 18mm
- Automatic back up: last test result / maximum and minimum value
- Laser aim point to focus exactly on the measuring point
- Solid state RPM measurement by refle tors supplied

Application range: Trucks, land and construction machines, municipally and forestery technology, conveyor belts, machinery, revolution motor shafts etc.

Technical data:

Working range:	2,5 - 99.999 U/min
Measuring distance:	50-500 mm
Resolution:	0.1 RPM up to 999.9 , 1 RPM from 1000
Display accuracy:	0,05% +/- 1
Power requirement:	3x 1,5V AAA (not in the delivery)
Dimensions:	185x73x37mm
Working temperature:	0° / +40°C

		g	
455.0130	Photoelectric rev counter, LED display/laser	415	

accessories:

		g	
455.0131	Refle tive tape stripes 3 pcs L 200 x W 12 mm	1	

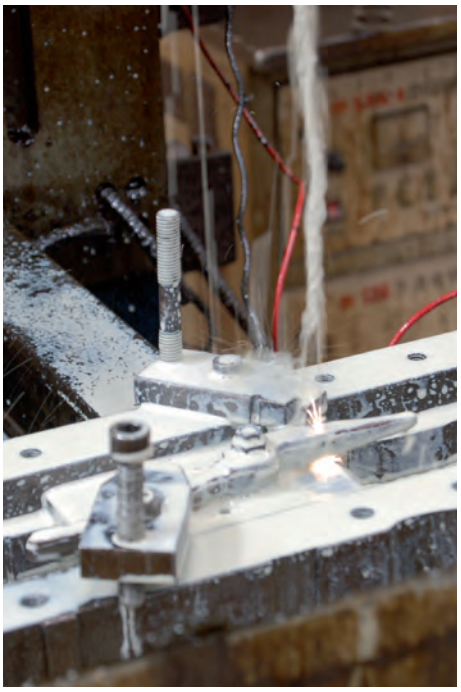

10

PULLERS

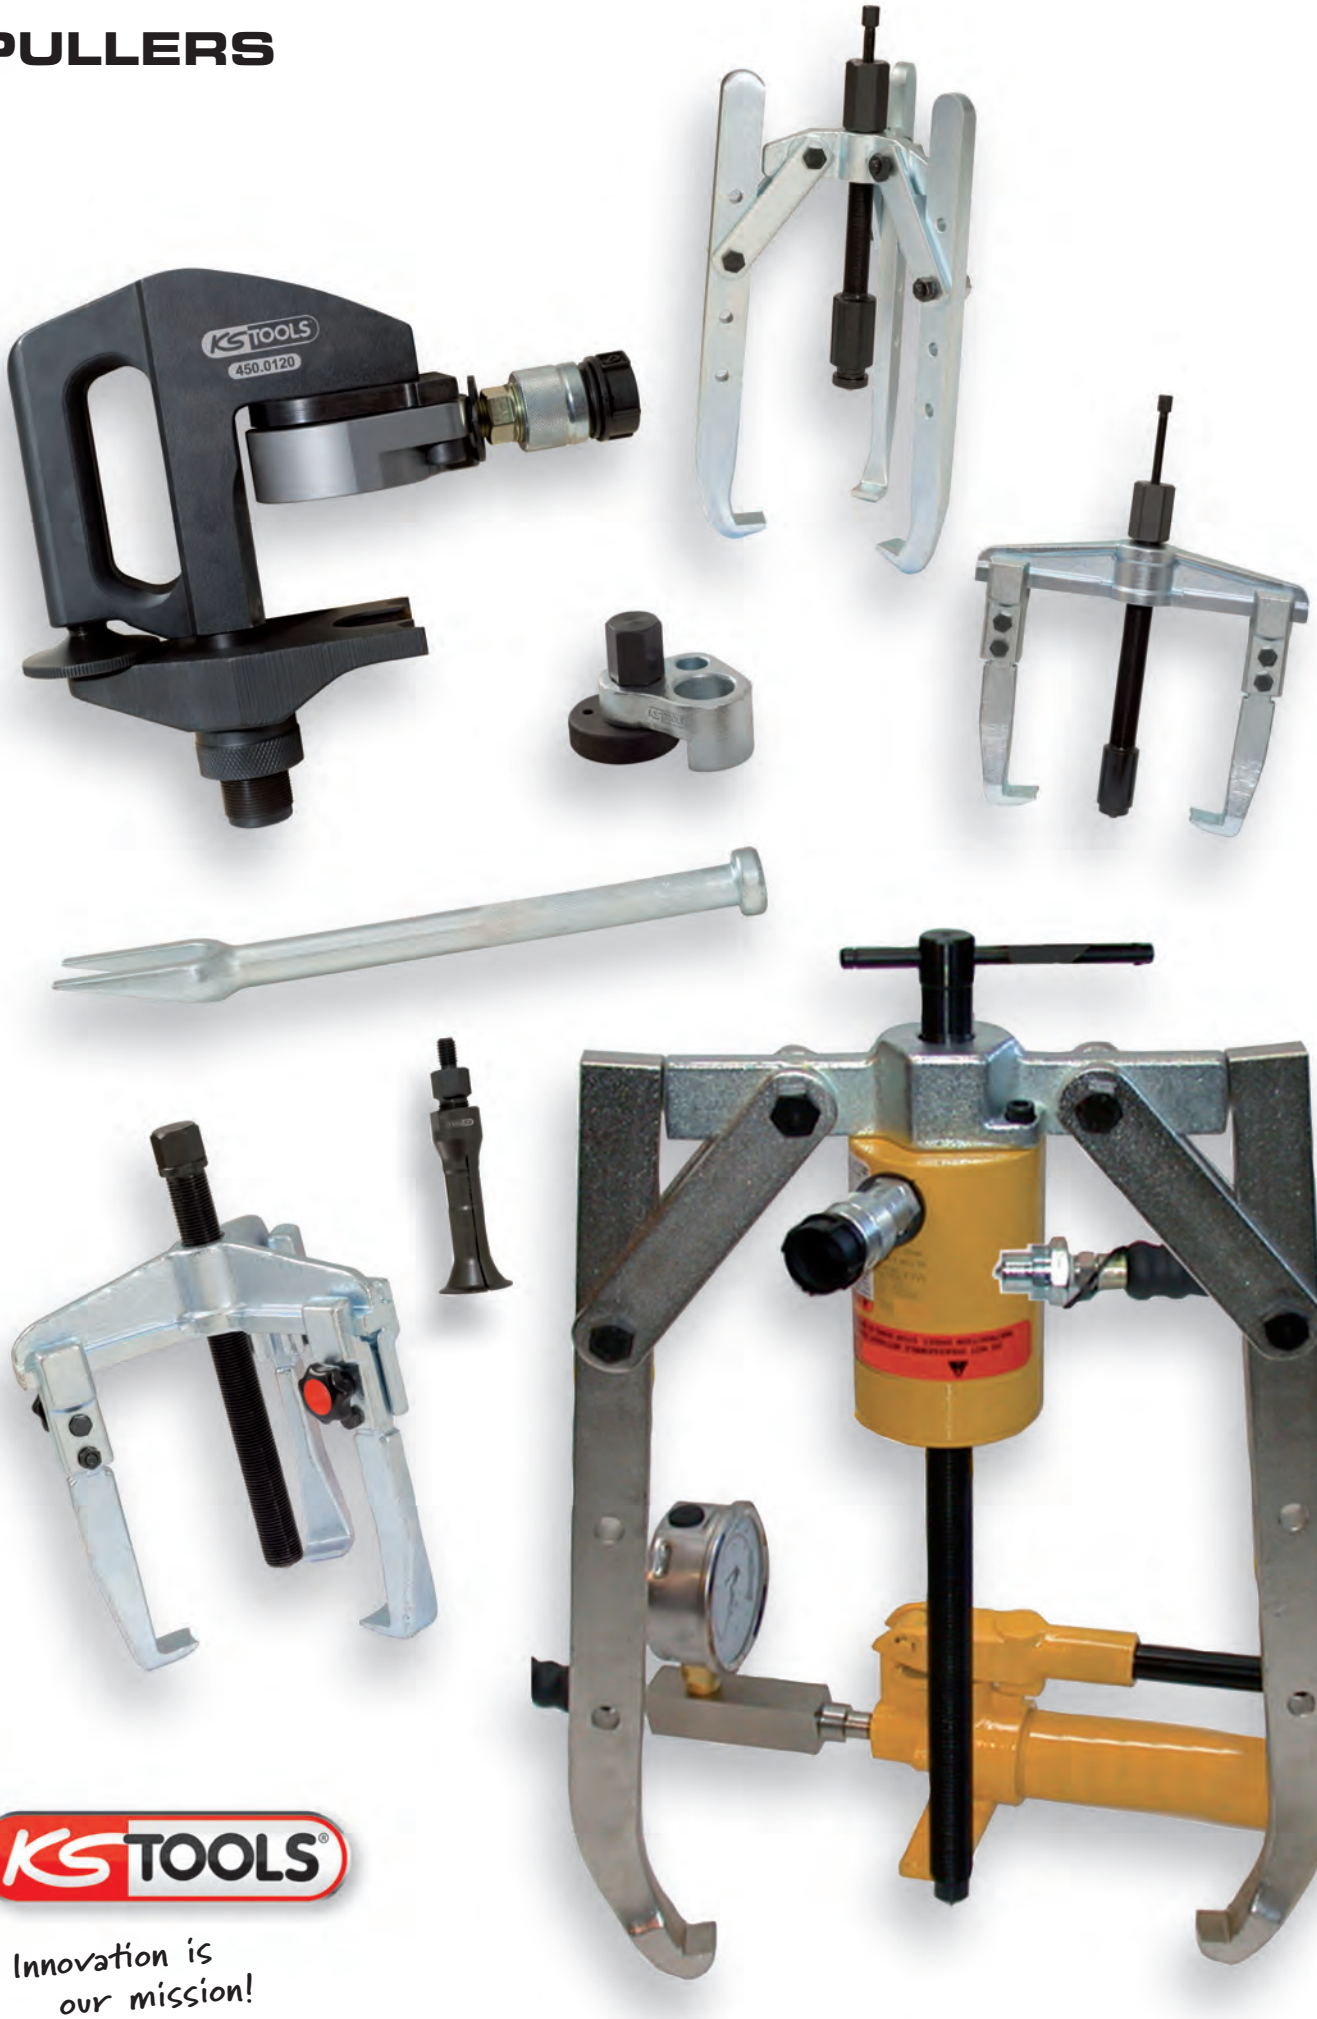

KSTOOLS®

Innovation is our mission!

	PAGE
INTERNAL EXTRACTORS	324
INTERNAL EXTRACTORS SETS	324 - 325
INTERNAL EXTRACTORS & PULLER SETS	325
BALL BEARING EXTRACTORS	326
BEARING AND BUSH DRIVER	326 - 327
UNIVERSAL 2 ARM PULLER	327 - 330
UNIVERSAL 2 ARM PULLER SET	330 - 331
UNIVERSAL 3 ARM PULLER	332 - 334
UNIVERSAL 3 ARM PULLER SET	334
SEPARATOR PULLER TOOL	335
SEPARATOR PULLER TOOL SET	335 - 336
ACCESSORIES	336
REPLACEMENT HOOK	336 - 338
REPLACEMENT SPINDLE	338
HYDRAULIC PULLERS AND PUMP	338 - 341
SAFETY COVERING FOIL	341
UNIVERSAL BELT PULLER	342
STEERING WHEEL PULLER	342
WINDSCREEN WIPER ARM PULLER	343
BALL JOINT PULLERS	343 - 347
WHEEL HUB EXTRACTOR & DRIVE SHAFT EJECTOR	347 - 348
UNIVERSAL AUTOMOTIVE PULLERS	348 - 349
WHEEL BEARING PULLER	349 - 353
INJECTOR & GLOW PLUG EXTRACTORS	353
STUD BOLT PULLER	353 - 354
NUT SPLITTER	354 - 355
COIL SPRING COMPRESSOR	355 - 356

SAFETY AND USAGE INSTRUCTIONS

Removing components may require very high forces. The use of a puller involves risks that should not be underestimated.
Therefore great care must be observed and attention given to safety during each pulling process.

- Prior to commissioning, read through the operating instructions thoroughly and obtain advice from the manufacturer's application consultancy service if anything is unclear.
- Before use, learn about the correct employment of the tool to be used, taking into account the safety measures required.
- Apply pullers securely and monitor the forces that occur during the pulling procedure. If there are signs of overloading for example stiffness - break off pulling procedure immediately and use a larger puller or if necessary another puller model.
- Check the application of force on spindle drives with a torque wrench and on pump-driven, hydraulic puller tools using a pressure gauge. Never exceed the torque and load information on manufacturers' nameplates, in operating instructions or tables.
- Do not use electrical or pneumatic force or impact wrenches to operate pulling tools.
- The use of an extension to increase the transferred torque on the active tool can lead to overload and thus to breakage.
- **Caution:** The load and torque details are to be determined in the laboratory with new pullers and pulling equipment under normal conditions of use. Wear and tear caused by use and unfavourable usage circumstances can negatively influen e the values.
- **Important:** The performance capacity of a combination piece of equipment, such as a puller with a hydraulics system, always depends on the weakest element.
- During the pulling procedure, always cover the danger zone, puller/part to be pulled, with an accident protection tarpaulin, in order to avoid injuries.
- Warming up the component is one method of positively influenci g the pulling procedure.
  Caution: In the process, the puller should never be warmed, as otherwise its strength characteristics can be negatively influen ed.
- Check state of the puller tool prior to any use and immediately replace damaged, manipulated or worn parts.
- Keep spindle threads or traverses clean and well-oiled.
- Regular maintenance lengthens the lifespan of the equipment, protects against accidents and ensures that the puller tool is ready for use.
- Make no alterations whatsoever to the puller tools. Any alteration may lead to dangerous consequences for the operator and automatically results in the expiry of the guarantee claim.
- In accordance with the UVV (Accident Prevention Regulations) or country-specific l gislation, always wear prescribed personal protective equipment such as safety shoes, helmet, protective goggles, gloves, etc.

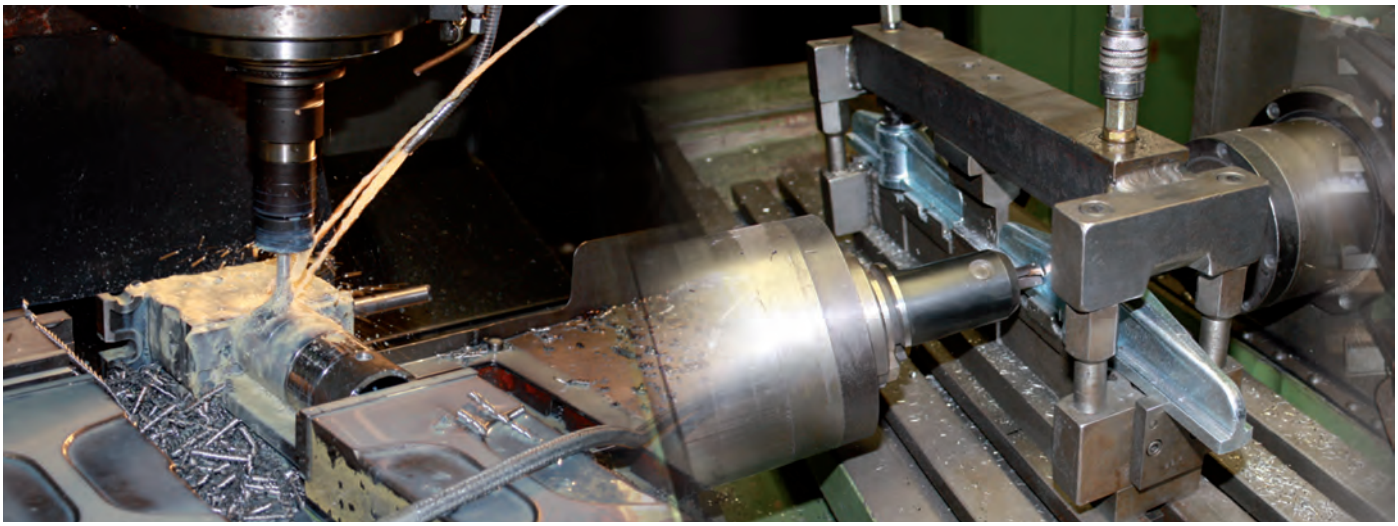

PREVENTIVE ACCIDENT PROTECTION MEASURES

Accident protection tarpaulin covers

During pulling work there are typically very powerful forces which can jerk components loose or even cause parts to break off or splinter from the pulling object. Parts flyi g around out of control represent a potential danger to the life and limb of the operator. Our accident protection tarpaulins were developed to effectively eliminate this danger.
The tarpaulins consist of particularly highly-elastic, tear-resistant and oil-resistant special material and will be tautened prior to the pulling procedure around component and puller.
To ensure that it is still possible to properly monitor and control the pulling procedure, the tarpaulins are transparent.

General safety instructions

During the pulling procedure as few people as possible should be in the puller's working area.

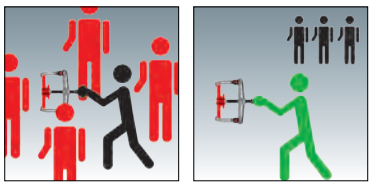

During the pulling procedure, always position yourself at the side and not in the puller's pulling axis. If the component comes loose abruptly, it can lead to the puller shooting away.

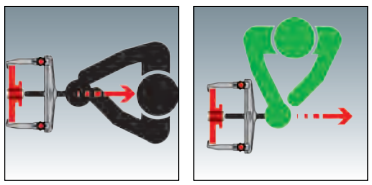

If necessary secure the puller against falling or uncontrolled motion away, after successful loosening of the component, with chain or belt, etc.

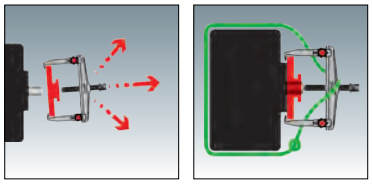

In accordance with the UVV (accident-prevention regulations) or country-specific l gislation always wear prescribed, personal protective equipment, e.g. safety shoes, helmet, protective goggles, gloves, etc.

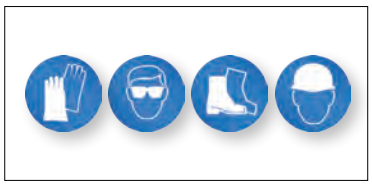

SMALL PULLING PRIMER

Selection of the puller according to the work task

Inquire about:

type of component	bearing / belt pulley / gear wheel / bushes, etc.
diameter of the component	selection of the work area
pulling depth	selection of the arm length
gripping options on the component	external puller / internal puller / special puller
spatial conditions	standard puller or slim design / 2-arm or 3-arm
support options on the component	on the central axle (spindle) / outside of the housing (bridge yoke) / no support option (slide hammer)

In general, the model determined in this way will exhibit the required characteristics. Regardless of this, however, the largest possible model should always be used as safety must always be paramount here.

Insofar as spatial conditions permit, a three-armed variant should always be preferred to a two-armed variant. Three-armed pullers have a better load distribution of the pulling force than two-armed pullers. This ensures easy, secure and even pulling.

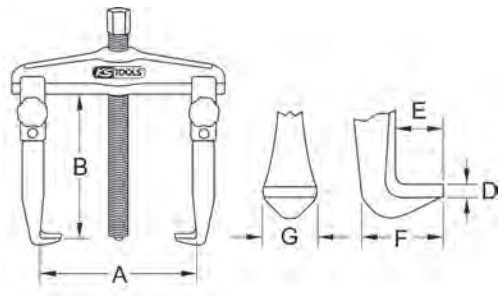

Diameter and pulling depth from the table directly at the item

Torque and max. load

	A mm	B mm	C mm	max t	mm	SW mm	D mm	E mm	F mm	G mm	kg
620.1701	20-90	100	70-130	4,5	M14x1,5 x 130	17	3	13	25	20	1,00
620.1702	25-130	100	80-180	4,5	M14x1,5 x 130	17	3	13	25	20	1,20
620.1703	50-160	150	108-220	6,5	G1/2"x14g x 210	22	4	16	35	25	3,00
620.1704	60-200	150	120-270	6,5	G1/2"x14g x 210	22	4	16	35	25	3,30
620.1705	80-250	200	160-330	11	G3/4"x14g x 280	27	5	25	54	35	7,40
620.1706	80-350	200	160-420	11	G3/4"x14g x 280	27	5	25	54	35	8,50

	max. Drehmoment	max. Belastung t
	30	2
	40	2,5
	70	4
605.0114	90	5

External puller



Internal puller



Puller and extractor

Separation equipment



Special puller



CORRECT PLACEMENT OF A PULLER

When pulling from belt pulleys, gear wheels, fla ges, etc. the puller arm should always be placed as close as possible in the direction of the centre (at the shaft) (between the spokes / at a collar, etc.). With large components in particular the direct application of force in the base area is signifi antly more effective than on the external diameter and the dimensions of the traverse / arm can be smaller.





Components lying flush equire tapered gripping elements, such as a knife (e.g. slitting knife/internal extractor/separating puller). To ensure the the gripping elements have an optimal and secure fi , after a brief, powerful pull of the working spindle the puller should be loosened again, in order for the clamping element to then be able to clamp again. This allows the gripping elements to get an even better rear grip.





Place the puller arm carefully and ensure that the puller sits precisely in the pulling axis.





Insofar as spatial conditions permit, a three-armed variant should always be preferred over a two-armed variant. Three-armed pullers have a better load distribution of the pulling force than two-armed pullers. This ensures easy, secure and even pulling.





Before the pulling procedure remove everything that would prevent the unobstructed outwards movement of the part to be pulled. (wedges, screws, fla ges, nuts, dowel pins, etc.)





USE OF THE CORRECT DRIVE TOOLS

Torque wrench

To achieve optimal work results, it is necessary to monitor the application of force to mechanical spindle drives with a suitable torque wrench. On the next page is a table with technical data such as information on the maximum input torque at the drive spindle and the maximum load-bearing capacity of the puller. Note that this input torque is to be measured in such a way that the maximum draw-off strength can be achieved.
Therefore avoid extending the drive tools as this may lead to overload and thus to breakage.
The torque tools listed below are of matched perfectly in type and design to the usage requirements of all KS Tools pullers and correspond to the DIN EN 6789 standards.

ERGOTORQUE®*precision*
torque wrench with rotary button reversible ratchet head

- Release accuracy: ±3 % tolerance from set scale value
- Repeat-accurate and precise for at least 5,000 load reversals
- for controlled clockwise and counterclockwise operation
- with ribbed knob at the reversal square for manual pulling
- The direction of operation is changed by reversing the drive square
- Double scale in N•m and lbf•ft division for precise setting
- including fin ly divisible N•m micrometer scale for fine and p ecise setting
- large viewing window with magnifying function optimises readability
- clearly audible and palpable torque release through close-gap release
- with robust 30-tooth ratchet mechanism
- Torque-setting quickly and safely by turning the handle
- secure locking option on the handle
- ergonomic and hand-friendly 2-component grip with soft zone
- square drive in accordance with DIN 3120 - ISO 1174 with ball-locking device
- individual series number for clear product identifi ation
- including certfi ate in accordance with DIN EN ISO 6789:2003 - traceable to national standard

1/4" 3/8" 1/2"

item	■	N•m	lbf•ft	Division N•m	L mm	D mm	H mm	kg	
516.1412	1/4"	1 - 25	0,8 - 18	0,10	289,0	35,0	18,0	0,46	
516.1422	3/8"	5 - 50	4 - 37	0,25	350,0	45,0	23,0	0,61	
516.1432	1/2"	10 - 100	8 - 75	0,50	412,0	45,0	23,0	0,91	
516.1442	1/2"	20 - 200	15 - 150	1,00	500,0	45,0	23,0	1,30	
516.1472	1/2"	60 - 320	45 - 236	1,00	585,0	45,0	23,0	1,45	
516.1482	1/2"	80 - 420	60 - 310	1,00	678,0	45,0	23,0	2,10	

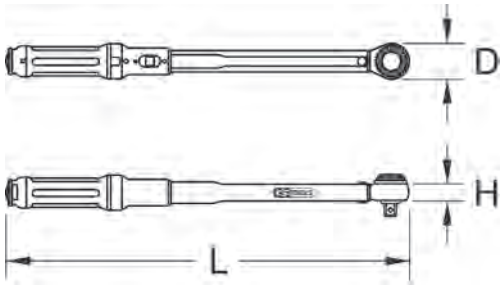

DRIVE TORQUES AND MAXIMUM TENSILE FORCE (1t=1Mp=10KN)

item	Max. torque Nm	max. t
150.2075	200	6
150.2130	-	10
150.2145	300	-
150.2146	300	-
150.2250	200	6
150.2350	300	-
150.3115	40	2,5
150.3130	35	2,5
150.3140	35	2,5
150.3170	35	2,5
152.1005	100	-
152.1006	100	-
152.1007	100	-
152.1008	100	-
152.1010	100	-
152.1012	100	-
152.1014	100	-
152.1080	30	1,5
152.1100	100	-
152.1101	100	-
450.0000	700	15
450.0001	700	15
450.0002	700	15
450.0003	700	15
450.0004	700	15
450.0035	400	12
450.0040	700	20
450.0050	60	10
450.0051	450	10
450.0060	300	-
450.0061	600	-
450.0062	600	-
450.0070	170	7
450.0071	170	7
450.0075	220	-
450.0076	220	-
450.0085	700	10
450.0120	-	20
450.0126	-	20
450.0300	280	-
450.0305	280	-
500.8610	100	2,5
500.8620	180	2,25
500.8700	-	2,6
605.0111	30	2
605.0112	40	2,5
605.0113	70	4
605.0114	90	5
605.0115	140	7
605.0116	150	13
615.0001	30	12
615.0002	60	12
615.0003	60	12
615.0004	70	15
620.0101	80	4,5
620.0102	80	4,5
620.0103	150	6,5
620.0104	150	6,5
620.0105	320	11
620.0106	320	11

item	Max. torque Nm	max. t
620.0107	360	13
620.0108	400	18
620.0301	60	12
620.0302	60	12
620.0303	60	12
620.0304	60	12
620.0305	60	12
620.0306	60	12
620.0307	70	15
620.0501	80	4,5
620.0502	80	4,5
620.0503	150	6,5
620.0504	150	6,5
620.0505	320	11
620.0506	320	11
620.0507	360	13
620.0508	320	11
620.0509	320	11
620.0510	360	13
620.0511	320	11
620.0512	320	11
620.0513	360	13
620.0701	60	12
620.0702	60	12
620.0703	60	12
620.0704	60	12
620.0705	60	12
620.0706	60	12
620.0707	60	12
620.0708	60	12
620.0709	60	12
620.0710	60	12
620.0711	60	12
620.0901	80	4,5
620.0902	80	4,5
620.0903	150	6,5
620.0904	150	6,5
620.1101	80	4,5
620.1102	80	4,5
620.1103	150	6,5
620.1104	150	6,5
620.1301	60	3,5
620.1302	60	3,5
620.1303	120	6
620.1304	120	6
620.1305	150	8
620.1306	150	8
620.1701	80	4,5
620.1702	80	4,5
620.1703	150	6,5
620.1704	150	6,5
620.1705	320	11
620.1706	320	11
620.1901	60	12
620.1902	60	12
620.1903	60	12
620.1904	60	12
620.3001	50	3,5
620.3002	60	4
620.3101	18	1

item	Max. torque Nm	max. t
620.3102	20	1,2
620.3103	24	2
620.3401	50	3,5
620.3402	60	4
620.3601	20	2,5
620.3602	50	3,5
620.3603	60	4
620.3604	120	6
620.3605	120	6
620.3606	120	6
620.3607	120	6
620.3608	120	6
620.3609	120	6
620.3610	120	6
620.3801	60	12
620.3802	60	12
620.3803	60	12
620.3804	60	12
620.3805	60	12
620.3806	60	12
620.4101	25	2,5
620.4102	35	3
620.4103	45	3,5
620.4301	25	2,5
620.4302	35	3
620.4303	45	3,5
620.4304	50	4
620.5201	25	1,5
620.5202	60	3,5
620.5203	80	4,5
620.5301	18	1
620.5302	35	2
620.5401	120	5
620.5402	120	6
620.5403	150	8
620.5501	120	5
620.5502	120	6
620.5503	150	8
630.0101	90	5,5
630.0102	90	5,5
630.0103	180	7
630.0104	180	7
630.0301	60	12
630.0302	60	12
630.0901	90	5
630.0902	90	5
630.0903	150	6,5
630.0904	150	6,5
630.1101	90	5
630.1102	90	5
630.1103	150	6,5
630.1104	150	6,5
630.1701	90	5,5
630.1702	90	5,5
630.1703	180	7
630.1704	180	7
630.1901	60	12
630.1902	60	12
630.2301	400	15
630.3001	60	4

item	Max. torque Nm	max. t
630.3002	70	4,5
630.3101	20	1,2
630.3102	21	1,3
630.3103	40	2,5
630.3401	60	4
630.3402	70	4,5
630.3601	25	3
630.3602	60	4
630.3603	70	4,5
630.3604	220	12
630.3605	220	12
630.3606	220	12
630.3607	220	12
630.3608	220	12
630.3609	220	12
630.3610	220	12
630.3801	60	12
630.3802	60	12
630.3803	60	12
630.3804	60	12
630.3805	60	12
630.3806	60	12
630.3807	60	12
630.4101	25	2,5
630.4102	35	3
630.4103	45	3,5
630.4301	25	2,5
630.4302	35	3
630.4303	45	3,5
630.4304	50	4
640.0110	-	10
640.0120	-	15
640.0130	-	17
640.0140	-	10
640.0150	-	20
640.0160	60	8
640.0165	70	15
640.0170	-	20
640.0180	-	30
640.0190	-	50
640.0210	-	10
640.0215	-	15
640.0217	-	17
640.0220	-	20
640.0230	-	30
640.0250	-	50
640.0310	-	10
640.0315	-	15
640.0317	-	17
640.0320	-	20
640.0330	-	30
640.0350	-	50
640.2315	-	15
640.2317	-	17
640.2415	-	15
640.2417	-	17
640.2420	-	20
640.2430	-	30
640.2450	-	50
660.0601	30	-

DRIVE TORQUES AND MAXIMUM TENSILE FORCE (1t=1Mp=10KN)

item	Max. torque Nm	max. t
660.0602	60	-
660.0603	60	-
660.0604	70	-
660.0605	100	-
670.0013	280	14
670.0014	280	14
670.0015	280	14
670.0021	70	3,5
670.0031	70	3,5
670.0041	60	1,8
670.0051	60	1,8
670.0060	80	4
670.0061	60	4
670.0062	60	4
670.0063	80	4
670.0101	50	-
670.0102	120	-
670.0103	160	-
670.0104	280	-
670.0105	400	-
670.0106	280	-
670.0111	70	3,5
670.0121	40	3,5
670.0122	40	3,5

item	Max. torque Nm	max. t
670.0131	200	10
670.0141		10
670.0151	-	10
670.0161	200	20
670.0171	30	20
670.0181	-	20
670.0191	70	4
670.0201	30	2,5
670.0211	40	2,5
670.0221	60	-
670.0231	120	-
670.0232	120	-
670.0233	120	-
670.0241	120	-
700.1100	35/50	-
700.1120	18	1,2
700.1130	30	1,2
700.1150	45	-
700.1160	80	-
700.1170	80	-
700.1180	80	-
700.1181	10	-
700.1182	40	-
700.1183	60	-

item	Max. torque Nm	max. t
700.1184	80	-
700.1185	30	2
700.1190	30	1,2
700.1191	15	1
700.1192	20	1,5
700.1193	15	1
700.1200	60	10
700.1240	40	2,5
700.1260	35	1,2
700.1300	70	4
700.1400	60/400	10
700.1400-1	60	10
700.1400-5	400	-
700.1405	400	-
700.1410	60	10
700.1415	-	11
700.1420	-	11
700.1470	-	11
700.1500	15	1,5
700.1650	20	1,5
700.1700	250	4,3
700.1710	60	1
700.1711	100	1,9
700.1712	180	3,2

item	Max. torque Nm	max. t
700.1713	250	4,3
700.1740	-	15
700.1750	60	10
700.1755	300	-
700.1757	300	-
700.1790	-	20
700.1791	-	20
700.1796	300	16
700.5610	40	3
700.5615	40	3
700.5620	40	2,5
700.5625	40	2,5
700.5630	70	3,5

Handling puller spindles

The overloading of a spindle is under no circumstances dependent on the number of applications and should therefore be avoided by a considered approach in the
selection (e.g. dimension) or use.
The foundation for a long working life will already be laid at the time of fi st use. If work is done here without the lubrication required, it leads quickly to overheating and thus to spindle wear, which naturally has an abrupt negative influen e on the working life.

To avoid this:

- Excessive heating, e.g. with a welding torch leads to structural alterations in the spindle material, which will adversely influen e characteristics such as breakage resistance and stretchability.
- Ensure that the spindle is precisely positioned in the pulling axis to prevent the spindle suffering from bending stress.
- Introduce work breaks in order to avoid excessive overheating of the spindle, traverse thread or nut.
- Under no circumstances may spindles be operated with electrical or impact wrenches.

Maintenance and care:

- regular cleaning of the spindle with cleaner's solvent, brake cleaner, part-cleaning solution etc.
- After cleaning, lubricate spindle with machine oil
- For conditions of extreme stress the use of a high-performance lubricant is recommended on the stressed spindle parts
- suitable lubricants: See below for high-performance fi ting lubricant
- Check spindles regularly for bending by rolling them on a plane surface
- spindles showing signifi ant bending should be replaced

Special thread compound

This special compound is an outstanding lubricant for static highly-stressed components such as, for example, thread spindles. Influen e factors, e.g. moisture or friction, lead as a rule to increased wear and jamming. Thanks to its special composition and the solids it contains the surface roughness of the surface to be protected is completely filled i . In this way a fully enclosed surface is formed, which signifi antly reduces friction and offers an effective protection from corrosion. This increases the working life of the thread spindles substantially and ensures problem-free functioning even at intense heating of up to max. 1200°C.

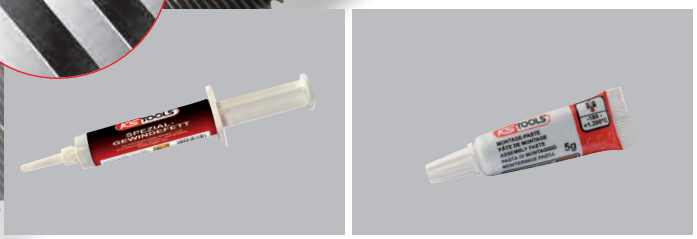

Item		
980.1085	Special thread grease, gun	50
980.1090	Special thread grease, tube	5

BASIC PULLER VARIANTS AND AREAS OF APPLICATION

External pulling

Pulling component of a shaft or axle
e.g.: Ball bearing, tapered roller bearing, gear wheels, belt pulleys, etc.

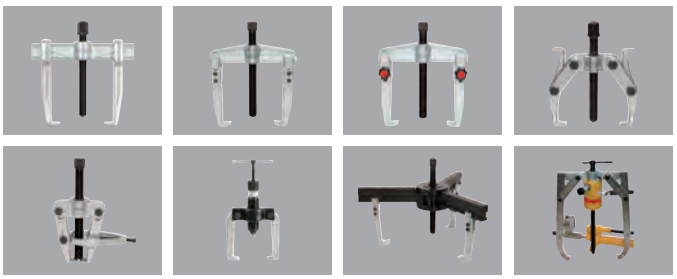

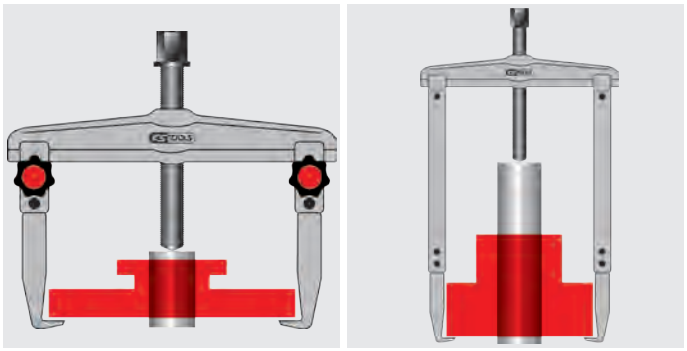

Internal pulling

Component is in a housing (hole)
e.g.: Ball bearing, needle bearing, outer bearing ring, bushes, sleeves, etc.

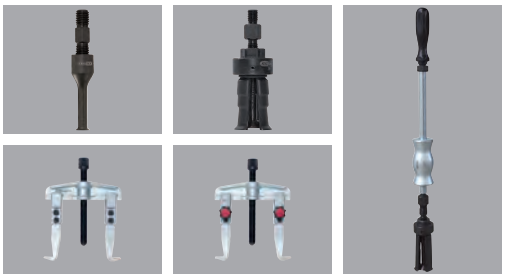

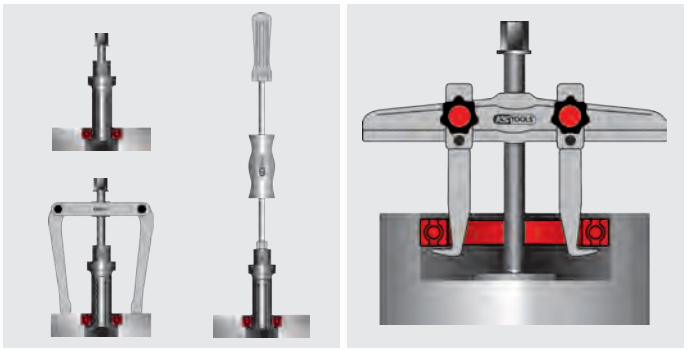

Extraction and pulling from housings

Component is in the housing and on a shaft or axle
e.g.: Ball-bearing



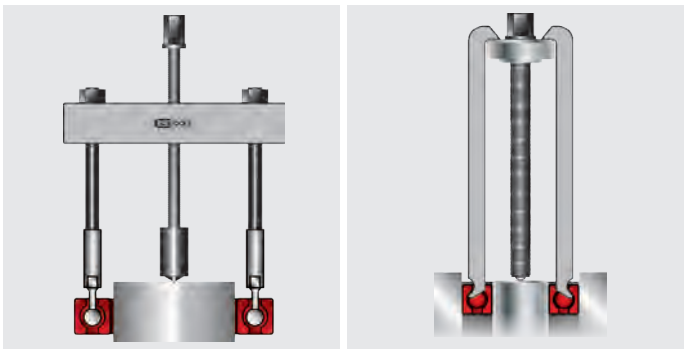

Separator puller

Pull component from a shaft or axle - back is tight or flush on .g.: Ball bearing, roller bearing, gear wheels, bushes, sleeves, etc.



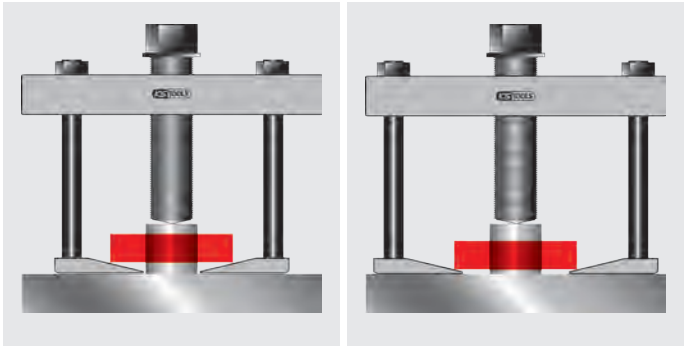

SPECIAL PULLER

Ball bearing extractor

Application areas:

These special pullers are always used when the ball bearing sits on a shaft and at the same time in a housing and cannot be gripped through the hole either from outside or from inside. Thanks to the slim design lower-lying bearings can also be extracted or pulled.

Ball bearing extractor (hemisphere)

Work steps:

1.) Drill bearing cage at two opposite points in each case between two balls
2.) Bend cage plate and create space for the hemisphere adapter
3.) Position puller with the spindle on the shaft spigot
4.) Place appropriate hemisphere into the bearing (ball groove) and turn by 90°
5.) By activating the spindle bring the hooks to the pull and extract earing.

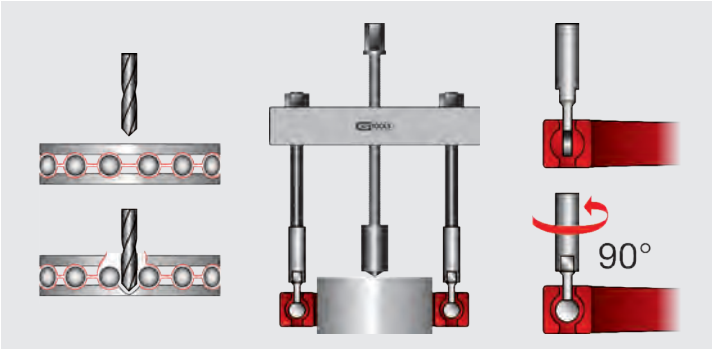

Ball bearing extractor (claws)

Work steps:

1.) Determine the number of ball bearings to be pulled
2.) Using the application table (see below) select the right puller with the appropriate claws.
Tip: If the number of ball bearings to be pulled cannot be define , the distance between the outer and inner bearing ring is to be measured. When this measurement is rounded to the nearest millimetre, the result is usually the shaft strength of the hook required.
3.) Place the hooks as symmetrically as possible after one another with the claws between the balls in the external bearing ring.
4.) Position spindle on the shaft spigot of the shaft end and hang hooks on the traverse.
5.) By activating the spindle bring the hooks to the pull and extract bearing.

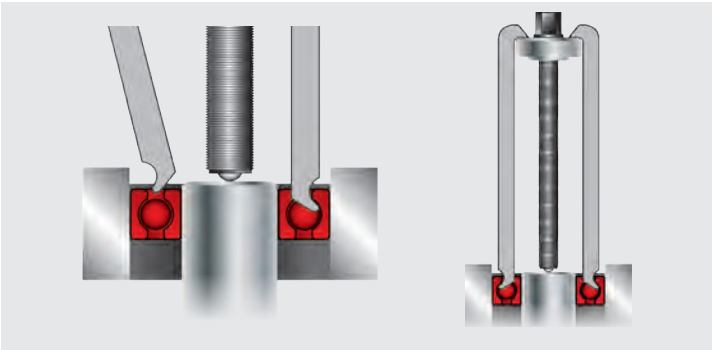

Application table for 650.0010

Extractor no.	Hook set no.	for ISO ball bearing no.			
650.0011	655.0011	6000	6200		
		6001			
		6002			
		6003			
	655.0012	6004	6201		
		6005	6202		
650.0012	655.0013	6006	6203	6300	
	655.0014	6007	6204	6301	
		6008	6205	6302	
	655.0015			6303	
				6304	
650.0013	655.0014				

Extractor no.	Hook set no.	for ISO ball bearing no.			
650.0013	655.0015		6206		
	655.0016		6207	6305	
650.0014	655.0015	6009			
	655.0017		6208	6306	
650.0015	655.0015	6010			
	655.0016	6011			
		6012			
	655.0018		6209	6307	6403
			6210	6308*	6404*
			6211*	6309*	6405*
			6212*	6310*	6406*
					6410*

Ball bearing nos. with (*) are held and pulled with the spacer plates screwed on to the hook base (655.0018).
Using 12 screwed-on, folding spacer plates each, the distance between the inner bearing ring and hook base is variably balanced out.
Unlisted bearings or special sizes are available on demand.

PRECISION INTERNAL EXTRACTOR

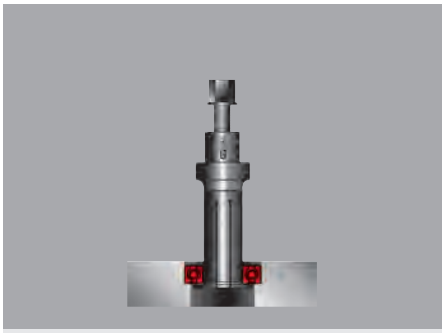

Strut adapter

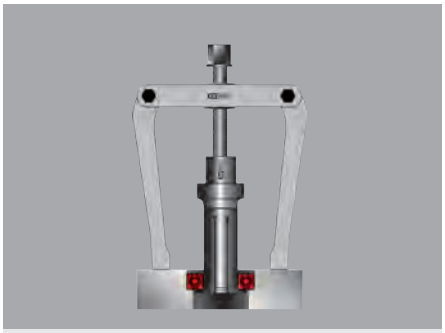

Strut adapter with bridge

Strut adapter with hammer



Item	Ø A mm min. - max.	T mm	Internal extractors need as removing tool suitable: double ended support	Internal extractors need as removing tool suitable: slide hammer	Adaptor thread C	SW1 mm	SW2 mm	max. torque with double ended support: max Nm	max. torque with double ended support: Double ended support
660.0101	5-7	30	660.0601	660.0501 660.0502	M10	10	13	3	660.0601
660.0102	6-8	30	660.0601	660.0501 660.0502	M10	10	13	3	660.0601
660.0103	7-9	30	660.0601	660.0501 660.0502	M10	10	13	7	660.0601
660.0104	8-10	30	660.0601	660.0501 660.0502	M10	10	13	7	660.0601
660.0105	9-12	30	660.0601	660.0501 660.0502	M10	10	13	12	660.0601
660.0106	10-13	30	660.0601	660.0501 660.0502	M10	10	13	15	660.0601
660.0107	12-15	30	660.0601	660.0501 660.0502	M10	10	13	15	660.0601
660.0108	13-17	50	660.0601	660.0501 660.0502	M10	10	13	24	660.0601
660.0109	14-19	60	660.0601	660.0501 660.0502	M10	10	13	28	660.0601
660.0111	15-20	60	660.0601	660.0501 660.0502	M10	10	13	28	660.0601
660.0112	16-21	60	660.0601	660.0501 660.0502	M10	10	13	32	660.0601
660.0113	18-23	60	660.0601	660.0502 660.0503 660.0504	M10	10	17	40	660.0601
660.0114	20-25	60	660.0601	660.0502 660.0503 660.0504	M10	10	17	40	660.0601
660.0115	22-27	60	660.0601	660.0502 660.0503 660.0504	M10	10	17	40	660.0601
660.0116	25-30	60	660.0601	660.0502 660.0503 660.0504	M10	10	17	40	660.0601
660.0117	25-40	45	660.0602	660.0501	M10	13	19	45	660.0601
660.0118	28-35	60	660.0601 660.0602	660.0502 660.0503 660.0504	M10	10	17	45	660.0601
660.0119	30-37	70	660.0601 660.0602	660.0502 660.0503 660.0504	M10	17	22	45	660.0601
660.0121	35-42	70	660.0601 660.0602	660.0502 660.0503 660.0504	M10	17	22	45	660.0601
660.0122	38-45	70	660.0601 660.0602	660.0502 660.0503 660.0504	M10	17	22	45	660.0601
660.0123	40-47	70	660.0601 660.0602	660.0502 660.0503 660.0504	M10	17	22	45	660.0601
660.0124	43-50	70	660.0601 660.0602	660.0502 660.0503 660.0504	M10	17	22	45	660.0601
660.0125	40-75	100	660.0603 660.0604 660.0605	660.0502 660.0503 660.0504 660.0605	G 3/8"	17	27	45	660.0602
660.0126	45-55	100	660.0603 660.0604 660.0605	660.0502 660.0503 660.0504 660.0605	G 3/8"	19	27	45	660.0602
660.0127	50-60	100	660.0603 660.0604 660.0605	660.0502 660.0503 660.0504 660.0605	G 3/8"	19	27	45	660.0602
660.0128	70-115	100	660.0603 660.0604 660.0605	660.0502 660.0503 660.0504 660.0605	G 3/8"	19	27	45	660.0602

STRUCTURE OF A PULLER

Quick-clamp device

- The quick-clamping device enables tool-free and secure clamping of the arms by hand
- To move - loosen the knurled thumb screws

Traverse

- Traverse formed from quenched and tempered steel
- Precision-milled guides
- Designed for the highest stress

Two-screw quick-clamp device

- Using the fixi g screws the hooks are braced securely on the traverse. The lower screw forms a positive connection of the adjustable block with the hooks. The upper screw clamps the adjustable block on the traverse.

Hook with stepping

- Hooks can be moved by loosening the upper quick-clamping device



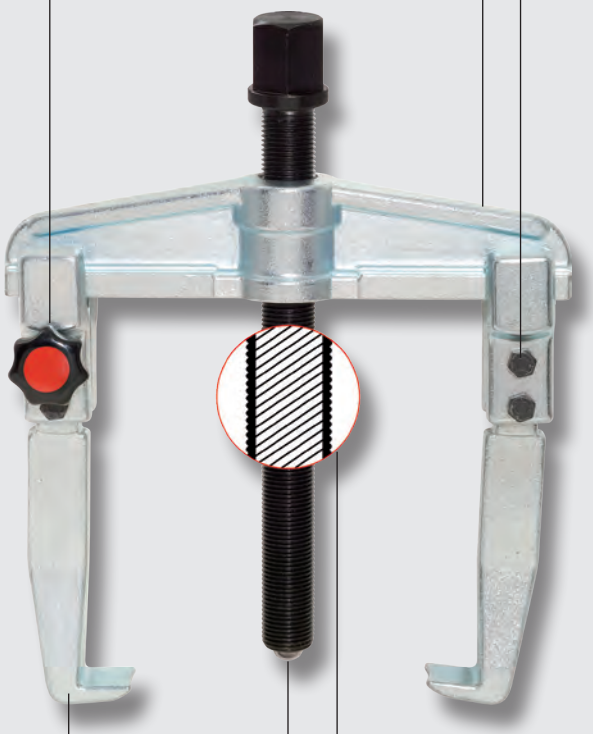

Hook with stepping

- Hooks can be moved by loosening the upper nut



Standard hook without stepping

- Movement of the hooks by loosening the upper fast-action nut not possible. Here the fast-action nuts and lower nuts need to be loosened.



Universal hooks

- Formed from quenched and tempered steel and functional surfaces are precision-milled
- Positive and force-closed connection between traverse hooks

Spindle

- Turned from quenched and tempered steel
- The thread is rolled and thus has a high stability and precision
- Especially wear-resistant, case-hardened spindles, from G1/2“ all spindles inductively hardened
- Hex drive with anti-slip device (collar)

Standard hook without stepping

- Movement of the hooks by loosening the upper fast-action nut not possible. Here both nuts must be loosened.



Different pressure peaks

Spindle with ball

- No wear recognisable
- Central pressing of the spindle continues to be guaranteed

Differences after few work cycles



Spindle with live centre

- Jamming in the spindle body
- Deformation of the dead centre
- Pressing the spindle centrally is no longer possible
- Replacement of the spindle required

HYDRAULIC SPINDLES WITH MECHANICAL DRIVE

Advantages

- low force
- compact form with very high compressive force
- spindle-saving straight-line motion - min. friction at the pressure peaks
- Prevention of turning movement especially with rotating parts
- minimum application of force 60- 70 N•m at maximum output of up to 15t/150KN

Hydraulic press

- Draw-off strength 8t/80KN or 15t/150KN
- short stroke of 8 or 12 mm
- can be used in conjunction with all mechanical pullers
- used between shaft end and puller spindle
- the use saves the thread of the original puller spindle

Grease hydraulic spindle short

- Draw-off strength 10t/100KN / 12t/120KN
- short stroke 10 mm
- use in the module system and special pullers with UN support 1-1/2”x16 thead
- pre-tensioning and positioning via the external thread on the cylinder
- the hydraulics are activated with a tommy bar or hex drive of the pressure spindle
- 12t spindle with safety pin

Grease hydraulic spindle long

- lean form - draw-off strength 12t/120KN or 15t/150KN
- short stroke 12 mm
- use in standard and special pullers with G support 1/2”x14 thread / G 3/4”x14 thread and G 1”x11 thread
- pre-tensioning and positioning via the external thread of the large spindle
- the hydraulics are activated using the small pressure spindle

Guide on switching to a grease hydraulic spindle long

- Loosen stud
- screw off whole cap (SW large)
- screw spindle body into puller
- screw cap back on up to limit stop
- place stud on again and secure by tightening

Working method:
- place on puller
- pre-tension mechanically with large width across fl ts
- secure puller position sichern
- screw pressure spindle into the press
  Caution: Power wrench prohibited
- If the piston stroke is not sufficient or loosening, the work step must be repeated. Turn pressure spindle back, pre-tension again mechanically and screw pressure spindle in again

Safety note:
- Tighten all screw connections before pulling, as otherwise there is a danger of slipping

OIL HYDRAULICS

Advantages

- Highest-performance drive form for the use of 10t/100KN up to max. 50t/100KN
- As screw-in / spindle / fl t-topped and trunk piston cylinder
- Hydraulic pumps optionally as manual / pneumatic or electrical variant
- Hydraulic units work very conveniently and with low application of force
- The advantages lie in the long work path (stroke) of the pistons and the extremely high pressure force

Combination options oil hydraulics with puller

	Spindle hydraulics cylinder		Flat hydraulics cylinder		Screw-in hydraulics cylinder			Trunk piston hydraulics cylinder			
Hydraulics cylinder	**640.0130**		**640.0140**	**640.0150**	**640.0110**	**640.0120**		**640.0170**	**640.0180**	**640.0190**	
Driver thread	G1“ x 11g		2xthread M6 depth gauge 36,6	2xbore hole M10 depth gauge 36,6	UNC 2.1/4“x14	M68x2		UNC 1“ -8	UNC 1.1/4“ -7	UNS 1.5/8“-5.1/2“	
Max. power	17t / 170KN		10t / 100KN	20t / 200KN	10t / 100KN	15t / 150KN		20t / 200KN	30t / 300KN	50t / 500KN	
		Arms/ Mod.					Arms/ Mod.				Arms/ Mod.
Use with puller	**620.0108** **640.0217** **640.0317** **640.2317** **640.2417**	2 B 2 B 3 L 3 BRS 3 LRS	**670.0151** **670.0181**	**670.0181**	**640.0210** **640.0310**	**640.0215** **640.0315** **640.2315** **640.2415**	2 B 3 L 3 BRS 3 LRS	**640.0220** **640.0320** **640.2420**	**640.0230** **640.0330** **640.2430**	**640.0250** **640.0350** **640.2450**	2 L 3 L 3 LRS
Use with puller leg	**645.0217** **645.0317** **645.2317** **645.2417**	3 L 3 BRS 3 LRS			**645.0210** **645.0310**	**645.0215** **645.0315** **645.2315** **645.2415**	3 L 3 BRS 3 LRS	**645.0220** **645.0320** **645.2420**	**645.0230** **645.0330** **645.2430**	**645.0250** **645.0350** **645.2450**	3 L 3 LRS

KS Standard hydraulics coupling appropriate for typical systems in the market such as Celette, Enerpac, Sun, etc.

All oil hydraulics cylinders can be combined or operated with the following pumps:

Loose half - tube side



Fixed half - cylinder side



640.0010

640.0020

640.0030

B = Standard/ bar puller



L = side plate puller

BRS = Standard/ bar puller

with radially swivelling arms

LRS = side plate puller

with radially swivelling arms

COMBINATION OPTIONS FOR STANDARD / BAR PULLER

Mechanical spindle

Hydraulic spindle

Hooks with quick-clamping device

Standard

615.1101-03

Slim design

615.1004-06
Hook base
2 mm

615.1001-03
Hook base
3.6 mm

615.1007-09
Hook base
5 mm

Hooks with two-screw clamping device

Slim design

615.0907-09
Hook base
2 mm

615.0901-03
Hook base
3.6 mm

615.0904-06
Hook base
5 mm

Standard length

615.0501

Standard

615.0101-04

Quick-clamping hooks

No. hooks	for puller
615.1001	620.1101 / 620.1102 630.1101 / 630.1102
615.1002	620.1101 / 620.1102 630.1101 / 630.1102
615.1003	620.1101 / 620.1102 630.1101 / 630.1102
615.1004	620.1101 / 620.1102 630.1101 / 630.1102
615.1005	620.1101 / 620.1102 630.1101 / 630.1102
615.1006	620.1101 / 620.1102 630.1101 / 630.1102
615.1007	620.1103 / 620.1104 630.1103 / 630.1104
615.1008	620.1103 / 620.1104 630.1103 / 630.1104
615.1009	620.1103 / 620.1104 630.1103 / 630.1104
615.1101	620.1701 / 620.1702 630.1701 / 630.1702
615.1102	620.1703 / 620.1704 630.1703 / 630.1704
615.1103	620.1705 / 620.1706 630.1903 / 630.1904

Caution: The hooks marked in red are not the original hooks relating to the pullers indicated, but can be used in these.

Two-screw clamp hooks

No. hooks	for puller
615.0101	620.0101 / 620.0102 630.0101 / 630.0102
615.0102	620.0103 / 620.0104 630.0103 / 630.0104
615.0103	620.0105 / 620.0106 620.0107 620.0303 / 620.0304 620.0305 / 620.0306
615.0104	620.0108 620.0307 630.2301 640.0210 / 640.0215 640.0217 640.2315 /640.2317
615.0501	620.0101 / 620.0102 620.0103 / 620.0104 620.0301 / 620.0302 620.0501 / 620.0502 630.0101 / 630.0102 630.0103 / 630.0104 630.0301 /630.0302
615.0502	620.0103 / 620.0104 620.0503 / 620.0504 620.0701 / 620.0702 630.0103 / 630.0104 630.0301 / 630.0302
615.0503	620.0105 / 620.0106 620.0107 620.0505 / 620.0506 620.0507 620.0703 / 620.0704 620.0705
615.0504	620.0105 / 620.0106 620.0107 620.0508 / 620.0509 620.0510 620.0706 / 620.0707 620.0708
615.0505	620.0105 / 620.0106 620.0107 620.0511 / 620.0512 620.0513 620.0709 / 620.0710 620.0711
615.0506	620.0108 630.2301 640.0210 / 640.0215 640.0217 640.2315 / 640.2317
615.0507	620.0108 630.2301 640.0210 / 640.0215 640.0217 640.2315 / 640.2317
615.0508	620.0108 630.2301 640.0210 / 640.0215 640.0217 640.2315 / 640.2317
615.0901	620.0901 / 620.0902 630.0901 / 630.0902
615.0902	620.0901 / 620.0902 630.0901 / 630.0902
615.0903	620.0901 / 620.0902 630.0901 / 630.0902
615.0904	620.0103 / 620.0104 620.0903 / 620.0904 630.0903 / 630.0904
615.0905	620.0103 / 620.0104 620.0903 / 620.0904 630.0903 / 630.0904
615.0906	620.0103 / 620.0104 620.0903 / 620.0904 630.0903 / 630.0904
615.0907	620.0101 / 620.0102 620.0901 / 620.0902 630.0901 / 630.0902
615.0908	620.0101 / 620.0102 620.0901 / 620.0902 630.0901 / 630.0902
615.0909	620.0101 / 620.0102 620.0901 / 620.0902 630.0901 / 630.0902

INTERNAL EXTRACTORS

Precision internal extractor

- Centering shaft
- For the accurate fi tingl of bearings and bushes
- Special steel

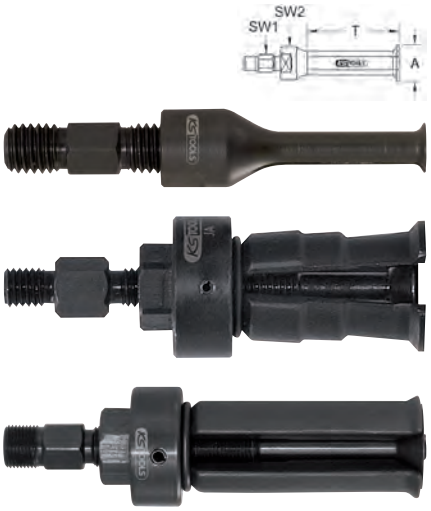

	A mm	Connection thread mm	SW1 mm	SW2 mm	T mm	max N·m	g
660.0101	5-7	M10	10	13	30.0	3	50
660.0102	6-8	M10	10	13	30.0	3	50
660.0103	7-9	M10	10	13	30.0	7	50
660.0104	8-10	M10	10	13	30.0	7	50
660.0105	9-12	M10	10	13	30.0	12	50
660.0106	10-13	M10	10	13	30.0	15	50
660.0107	12-15	M10	10	13	30.0	15	50
660.0108	13-17	M10	10	13	50.0	24	70
660.0109	14-19	M10	10	13	60.0	28	90
660.0111	15-20	M10	10	13	60.0	28	90
660.0112	16-21	M10	10	13	60.0	32	90
660.0113	18-23	M10	10	17	60.0	40	110
660.0114	20-25	M10	10	17	60.0	40	110
660.0115	22-27	M10	10	17	60.0	40	110
660.0116	25-30	M10	10	17	60.0	40	120
660.0117	25-40	M10	13	19	45.0	45	260
660.0118	28-35	M10	10	17	60.0	45	280
660.0119	30-37	M10	17	22	70.0	45	280
660.0121	35-42	M10	17	22	70.0	45	280
660.0122	38-45	M10	17	22	70.0	45	290
660.0123	40-47	M10	17	22	70.0	45	300
660.0124	43-50	M10	17	22	70.0	45	310
660.0125	40-75	G 3/8"	17	27	100.0	45	760
660.0126	45-55	G 3/8"	19	27	100.0	45	650
660.0127	50-60	G 3/8"	19	27	100.0	45	680
660.0128	70-115	G 3/8"	19	27	130.0	45	1400

Double ended support for internal extractor

- Extremely robust spindle with inductively hardened thread
- Special steel

	A mm	max N·m	mm	Internal extractors	mm	kg
660.0601	35-75	30	12	M10	M16x1,5 x 136	0.70
660.0602	60-130	60	19	M10xG3/8"	M24x1,5 x 160	1.60
660.0603	60-130	60	19	G3/8"	M24x1,5 x 160	1.50
660.0604	60-210	70	19	G3/8"	M24x1,5 x 160	3.70
660.0605	55-205	100	22	G3/8"	G1/2"x14g x 210	3.80

Slide hammer

- Suitable for small ball bearings
- Ideal for limited access areas
- Special steel

	L1 mm	L2 mm	D1 mm	D2 mm	mm	kg
660.0501	170	40.0	10,0	30.0	M10	0.40
660.0502	170	80.0	10,0	50.0	M10	0.90
660.0503	250	100.0	16,0	45.0	M10	1.30
660.0504	250	100.0	16,0	45.0	M10+G3/8"	1.40
660.0505	250	100.0	16,0	60.0	G3/8"	2.60

INTERNAL EXTRACTORS SETS

Precision internal extractor set ø 10,0 - 37,0 mm

- Centering shaft
- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case
- For pulling/hitting the pilot bearing

			kg
660.0014	7 pcs	Precision internal extractor set ø 10,0 - 37,0 mm	2.42

consists of:

		g
660.0106	Precision internal extractor, 10-13mm	50
660.0109	Precision internal extractor, 14-19mm	90
660.0114	Precision internal extractor, 20-25mm	110
660.0116	Precision internal extractor, 25-30mm	120
660.0119	Precision internal extractor, 30-37mm	280
660.0601	Double ended support for internal extractor, 35-75mm	700
660.0501	Slide hammer, 170mm, M10, variante1	400

Precision internal extractor set ø 10,0 - 45,0 mm

- Centering shaft
- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

			kg
660.0011	7 pcs	Precision internal extractor set ø 10,0 - 45,0 mm	2.36

consists of:

		g
660.0106	Precision internal extractor, 10-13mm	50
660.0109	Precision internal extractor, 14-19mm	90
660.0114	Precision internal extractor, 20-25mm	110
660.0116	Precision internal extractor, 25-30mm	120
660.0119	Precision internal extractor, 30-37mm	280
660.0122	Precision internal extractor, 38-45mm	290
660.0601	Double ended support for internal extractor, 35-75mm	700

Precision internal extractor set ø 10,0 - 75,0 mm

- Centering shaft
- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

			kg
660.0012	9 pcs	Precision internal extractor set ø 10,0 - 75,0 mm	4.92

consists of:

		g
660.0106	Precision internal extractor, 10-13mm	50
660.0109	Precision internal extractor, 14-19mm	90
660.0114	Precision internal extractor, 20-25mm	110
660.0116	Precision internal extractor, 25-30mm	120
660.0119	Precision internal extractor, 30-37mm	280
660.0122	Precision internal extractor, 38-45mm	290
660.0125	Precision internal extractor, 40-75mm	760
660.0601	Double ended support for internal extractor, 35-75mm	700
660.0602	Double ended support for internal extractor, 60-130mm, M10xG3/8"	1600

Precision internal extractor set ø 15,0 - 75,0 mm

- Centering shaft
- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

			kg	
660.0015	5 pcs	Precision internal extractor set ø 15,0 - 75,0 mm	3.60	

consists of:

		g	
660.0111	Precision internal extractor, 15-20mm	90	
660.0114	Precision internal extractor, 20-25mm	110	
660.0117	Precision internal extractor, 25-40mm	260	
660.0125	Precision internal extractor, 40-75mm	760	
660.0602	Double ended support for internal extractor, 60-130mm, M10xG3/8"	1600	

Precision internal extractor set ø 10,0 - 115,0 mm

- Centering shaft
- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

			kg	
660.0013	10 pcs	Precision internal extractor set ø 10,0 - 115,0 mm	9.72	

consists of:

		g	
660.0106	Precision internal extractor, 10-13mm	50	
660.0109	Precision internal extractor, 14-19mm	90	
660.0114	Precision internal extractor, 20-25mm	110	
660.0116	Precision internal extractor, 25-30mm	120	
660.0119	Precision internal extractor, 30-37mm	280	
660.0122	Precision internal extractor, 38-45mm	290	
660.0125	Precision internal extractor, 40-75mm	760	
660.0128	Precision internal extractor, 70-115mm	1400	
660.0601	Double ended support for internal extractor, 35-75mm	700	
660.0604	Double ended support for internal extractor, 60-210mm	3700	

INTERNAL EXTRACTORS & PULLER SETS

Precision internal extractor and puller set 10 - 45 mm

- Through reversing the arms internal and external applications are possible
- Wide range of arms and hydraulic spindles available
- Centering shaft
- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

			kg	
660.0022	10 pcs	Precision internal extractor and puller set 10 - 45 mm	5.58	

consists of:

		g	
660.0106	Precision internal extractor, 10-13mm	50	
660.0109	Precision internal extractor, 14-19mm	90	
660.0114	Precision internal extractor, 20-25mm	110	
660.0116	Precision internal extractor, 25-30mm	120	
660.0119	Precision internal extractor, 30-37mm	280	
660.0122	Precision internal extractor, 38-45mm	290	
660.0601	Double ended support for internal extractor, 35-75mm	700	
620.0101	Universal 2 arm puller, 20-90mm, legs 100mm	1000	
620.3101	Pole clamp 2-jaw puller, 10-60mm	160	
670.0221	Draw off lining, Ø 5-32mm	1400	

Precision internal extractor and puller set 10 - 75 mm

- Through reversing the arms internal and external applications are possible
- Wide range of arms and hydraulic spindles available
- Centering shaft
- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

			kg	
660.0023	13 pcs	Precision internal extractor and puller set 10 - 75 mm	11.60	

consists of:

		g	
660.0106	Precision internal extractor, 10-13mm	50	
660.0109	Precision internal extractor, 14-19mm	90	
660.0114	Precision internal extractor, 20-25mm	110	
660.0116	Precision internal extractor, 25-30mm	120	
660.0119	Precision internal extractor, 30-37mm	280	
660.0122	Precision internal extractor, 38-45mm	290	
660.0125	Precision internal extractor, 40-75mm	760	
660.0601	Double ended support for internal extractor, 35-75mm	700	
660.0603	Double ended support for internal extractor, 60-130mm, G3/8"	1500	
620.0101	Universal 2 arm puller, 20-90mm, legs 100mm	1000	
620.0103	Universal 2 arm puller, 50-160mm, legs 150mm	3000	
620.3101	Pole clamp 2-jaw puller, 10-60mm	160	
670.0221	Draw off lining, Ø 5-32mm	1400	

www.kstools.com

Precision internal extractor and puller set 10 - 115 mm

- Through reversing the arms internal and external applications are possible
- Wide range of arms and hydraulic spindles available
- Centering shaft
- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

			kg	
660.0021	14 pcs	Precision internal extractor and puller set 10 - 115 mm	15.63	

consists of:

		g	
660.0106	Precision internal extractor, 10-13mm	50	
660.0109	Precision internal extractor, 14-19mm	90	
660.0114	Precision internal extractor, 20-25mm	110	
660.0116	Precision internal extractor, 25-30mm	120	
660.0119	Precision internal extractor, 30-37mm	280	
660.0122	Precision internal extractor, 38-45mm	290	
660.0125	Precision internal extractor, 40-75mm	760	
660.0128	Precision internal extractor, 70-115mm	1400	
660.0601	Double ended support for internal extractor, 35-75mm	700	
660.0605	Double ended support for internal extractor, 55-205mm	3800	
620.0101	Universal 2 arm puller, 20-90mm, legs 100mm	1000	
620.0103	Universal 2 arm puller, 50-160mm, legs 150mm	3000	
620.3101	Pole clamp 2-jaw puller, 10-60mm	160	
670.0221	Draw off lining, Ø 5-32mm	1400	

BALL BEARING EXTRACTORS

Universal ball bearing extractor set

- Less risk of slipage due to the automatically closing draw off arms
- 13 puller variants possible
- Extremely robust spindle with inductively hardened thread
- Excellent power transfer
- Special steel
- Supplied in a durable plastic case

			kg	
650.0010	37 pcs	Universal ball bearing extractor set	8.00	

consists of:

		g	
650.0011	Ball bearing extractor without legs,26mm	300	
650.0012	Ball bearing extractor without legs,34mm	400	
650.0013	Ball bearing extractor without legs,41mm	500	
650.0014	Ball bearing extractor without legs,49mm	900	
650.0015	Ball bearing extractor without legs,63mm	1200	
655.0011	Adaptor legs, 4pcs, 120mm	100	
655.0012	Adaptor legs, 4pcs, 120mm	100	
655.0013	Adaptor legs, 4pcs, 130mm	200	
655.0014	Adaptor legs, 4pcs, 130mm	200	
655.0015	Adaptor legs, 4pcs, 150mm	300	
655.0016	Adaptor legs, 4pcs, 150mm	400	
655.0017	Adaptor legs, 4pcs, 190mm	600	
655.0018	Adaptor legs, 4pcs, 190mm	800	

Ball bearing extractor without legs

- Consists of adaptor and spindle
- For ball bearings in waves or housings
- Extremely robust spindle with inductively hardened thread
- Special steel

	Ø mm	mm	mm	kg	
650.0011	26	M10 x 150	12	0.30	
650.0012	34	M12 x 199	14	0.40	
650.0013	41	M14x1,5 x 200	17	0.50	
650.0014	49	M18x1,5 x 240	19	0.90	
650.0015	63	G1/2"x14g x 230	22	1.20	

Adaptor legs for ball bearing extractor, 4 pcs

- Can be used with adaptor legs and spindles available separately
- For ball bearings in waves or housings
- Special steel

	L mm	Suitable for ISO bearing	kg	
655.0011	120	6000, 6001, 6002, 6003, 6200	0.10	
655.0012	120	6004, 6005, 6201, 6202	0.10	
655.0013	130	6006, 6203, 6300	0.20	
655.0014	130	6007, 6008, 6204, 6205, 6301, 6302	0.20	
655.0015	150	6009, 6010, 6206, 6303, 6304	0.30	
655.0016	150	6011, 6012, 6207, 6305	0.40	
655.0017	190	6208, 6306	0.60	
655.0018	190	6209- 6212, 6307- 6310, 6403- 6406, 6410	0.80	

Universal ball bearing puller set

- For simple and fast removing of ball bearings without removal of the shaft
- Pulling power influen es uniformly on the interior and outside ring
- Special steel
- In durable plastic storage case
- Suited for ISO bearings: 6004-6010, 6201-6206, 6300-6304

Ideal for use in SKF, FAG, Timken, NTN bearings, etc.
Adaptor diameter: 5.5 - 6 - 8 mm

			kg	
700.1500	21 pcs	Universal ball bearing puller set	0.82	

consists of:

		g	
700.1501	Extension set long, 2 pcs	110	
700.1502	Centre point	30	
700.1503	Tie rod set, 2 pcs	60	
700.1504	Ball head bearing adaptor set, 2 pcs, Ø 5.5 mm	24	
700.1505	Ball head bearing adaptor set, 2 pcs, Ø 6.0 mm	24	
700.1506	Ball head bearing adaptor set, 2 pcs, Ø 8.0 mm	26	
700.1507	Extension set short, 2 pcs	30	
700.1508	U disc for tie rod, 4 pack	10	
700.1509	Spindle	164	
700.1510	Traverse	202	
700.1511	Nut set for tie rod, 2 pcs	10	

Universal ball bearing puller set

- For simple and fast removing of ball bearings without removal of the shaft
- Pulling power influen es uniformly on the interior and outside ring
- Special steel
- In durable plastic storage case
- Suited for ISO bearings: 6207-6211, 6205-6208, 6303-6305

Ideal for use in SKF, FAG, Timken, NTN bearings, etc.
Adaptor diameter: 11 - 12.5 - 15 mm

			kg	
700.1600	21 pcs	Universal ball bearing puller set	1.69	

consists of:

		g	
700.1601	Extension set long, 2 pcs	204	
700.1602	Centre point	50	
700.1603	Tie rod set, 2 pcs	178	
700.1604	Ball head bearing adaptor set, 2 pcs, Ø 11.0 mm	88	
700.1605	Ball head bearing adaptor set, 2 pcs, Ø 12.5 mm	96	
700.1606	Ball head bearing adaptor set, 2 pcs, Ø 15.0 mm	110	
700.1607	Extension set short, 2 pcs	88	
700.1608	U disc for tie rod, 4 pack	10	
700.1609	Spindle	130	
700.1610	Traverse	345	
700.1611	Nut set for tie rod, 2 pcs	10	

BEARING AND BUSH DRIVER

Bearing punch set Ø 25.0 mm

- In durable plastic storage case

			g	
156.0425	7 pcs	Bearing punch set Ø 25.0 mm	640	

consists of:

		g	
156.0426	Punch holder without impact	360	
156.0447	Punch attachable head 2 pcs, polyamide, Ø 25 mm	20	
156.0455	Punch attachable head 2 pcs, aluminium, Ø 25 mm	50	
156.0463	Punch attachable head 2 pcs, brass, Ø 25 mm	150	

Bearing punch set Ø 10.0 - 14.0 mm

- In durable plastic storage case

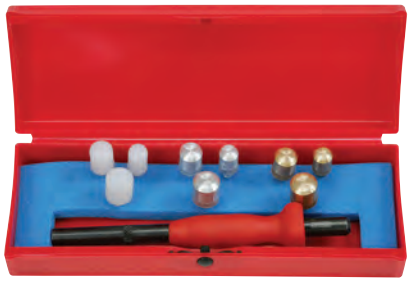

			g
156.0440	10 pcs	Bearing punch set Ø 10.0 - 14.0 mm	240

consists of:

		g
156.0436	Punch holder	100
156.0441	Punch attachable head 2 pcs, polyamide, Ø 10 mm	10
156.0442	Punch attachable head 2 pcs, polyamide, Ø 12 mm	10
156.0443	Punch attachable head 2 pcs, polyamide, Ø 14 mm	10
156.0449	Punch attachable head 2 pcs, aluminium, Ø 10 mm	10
156.0450	Aluminium punch set, 2 pcs., Ø 12 mm	10
156.0451	Punch attachable head 2 pcs, aluminium, Ø 14 mm	20
156.0457	Punch attachable head 2 pcs, brass, Ø 10 mm	20
156.0458	Punch attachable head 2 pcs, brass, Ø 12 mm	20
156.0459	Punch attachable head 2 pcs, brass, Ø 14 mm	50

Universal bearing and bush driver set

- Universal applicable range
- Can be used manually with a hammer or workshop press
- Applications from 18.0 - 65.0 mm
- Pressure plates are for the two driving spindles
- Special steel
- In durable plastic storage case

			kg
700.1350	51 pcs	Universal bearing and bush driver set	8.00

consists of:

		g
700.1348	Reception adaptor, 45mm	500
700.1349	Impact drive knurled grip, 220mm	42
700.1351	Pressure plate, 18mm	12
700.1352	Pressure plate, 19mm	14
700.1353	Pressure plate, 20mm	16
700.1354	Pressure plate, 21mm	20
700.1355	Pressure plate, 22mm	22
700.1356	Pressure plate, 23mm	27
700.1357	Pressure plate, 24mm	30
700.1358	Pressure plate, 25mm	34
700.1359	Pressure plate, 26mm	38
700.1360	Pressure plate, 27mm	43
700.1361	Pressure plate, 28mm	47
700.1362	Pressure plate, 29mm	50
700.1363	Pressure plate, 30mm	53
700.1364	Pressure plate, 31mm	59
700.1365	Pressure plate, 32mm	65

consists of:

		g
700.1366	Pressure plate, 33mm	68
700.1367	Pressure plate, 34mm	72
700.1368	Pressure plate, 35mm	77
700.1369	Pressure plate, 36mm	82
700.1370	Pressure plate, 37mm	89
700.1371	Pressure plate, 38mm	94
700.1372	Pressure plate, 39mm	97
700.1373	Pressure plate, 40mm	105
700.1374	Pressure plate, 41mm	111
700.1375	Pressure plate, 42mm	119
700.1376	Pressure plate, 43mm	125
700.1377	Pressure plate, 44mm	132
700.1378	Pressure plate, 45mm	138
700.1379	Pressure plate, 46mm	144
700.1380	Pressure plate, 47mm	153
700.1381	Pressure plate, 48mm	159
700.1382	Pressure plate, 49mm	165
700.1383	Pressure plate, 50mm	172
700.1384	Pressure plate, 51mm	181
700.1385	Pressure plate, 52mm	188
700.1386	Pressure plate, 53mm	196
700.1387	Pressure plate, 54mm	205
700.1388	Pressure plate, 55mm	213
700.1389	Pressure plate, 56mm	221
700.1390	Pressure plate, 57mm	231
700.1391	Pressure plate, 58mm	238
700.1392	Pressure plate, 59mm	247
700.1393	Pressure plate, 60mm	258
700.1394	Pressure plate, 61mm	266
700.1395	Pressure plate, 62mm	276
700.1396	Pressure plate, 63mm	284
700.1397	Pressure plate, 64mm	294
700.1398	Pressure plate, 65mm	305
700.1399	Support plate, 75mm	500

Brass and aluminium punch

- For extracting bearing, bolts and bushes, etc.
- Rimed handle for better control
- Brass / Aluminium

	Material	Ø mm	L mm	kg
156.0415	brass	20,0	300.0	1.13
156.0416	aluminium	30,0	300.0	1.89

Bearing assembly and deassembly tool set

- Can be used manually with a hammer or workshop press
- Optimal placing through the pressure plates
- For easy and damage free assembly
- For the correct dismantling and assembly of bearings
- Suitable for commercial, agricultural engineering and construction machines
- Forged, robust execution
- Special steel
- In durable plastic storage case

		Replacement jaws	kg
450.0080	5 pcs	450.0081	6.45

consists of:

		kg
450.0082	Pressure plates (use with press)	0.51
450.0083	Impact plates long (use with a hammer)	1.91
450.0084	Special 6 point socket for mandral shaft	0.34
450.0088	Universal 3 jaw thrust piece	0.32
450.0087	Locking bolt for jaw spreading	0.02

UNIVERSAL 2 ARM PULLER

Universal 2 arm puller set with hardened steel legs

- Through reversing the arms internal and external applications are possible
- Hydraulic spindles available for thread G1/2" / G3/4"
- Extremely robust spindle with inductively hardened thread
- Special steel

	A mm	B mm	C mm	max t	mm	D mm	E mm	F mm	G mm	kg
620.1301	15 -80	100	70-130	3,5	M14x1,5 x 130	17	3	12	22	22	0.90
620.1302	15-120	100	80-170	3,5	M14x1,5 x 130	17	3	12	22	22	1.00
620.1303	20-160	150	110-210	6	G1/2"x14g x 210	22	4	16	30	29	2.70
620.1304	20-200	150	120-250	6	G1/2"x14g x 210	27	4	16	30	29	3.00
620.1305	40-250	200	170-300	8	G3/4"x14g x 280	27	6,5	23	43	38	6.50
620.1306	40-350	200	190-400	8	G3/4"x14g x 280	27	6,5	23	43	38	7.60

Universal 2 arm puller

- Through reversing the arms internal and external applications are possible
- Hydraulic spindles available for thread G1/2" / G3/4" / G1"
- Extremely robust spindle with inductively hardened thread
- Special steel



	A mm	B mm	C mm	max t	mm	D mm	E mm	F mm	G mm	kg
620.0101	20-90	100	70-130	4,5	M14x1,5 x 140	17	3	13	25	20	1.00
620.0102	25-130	100	25-130	4,5	M14x1,5 x 140	17	3	13	25	20	1.20
620.0103	50-160	150	50-160	6,5	G1/2"x14g x 210	22	4	16	35	25	3.00
620.0104	60-200	150	60-200	6,5	G1/2"x14g x 210	22	4	16	35	25	3.30
620.0105	80-250	200	80-250	11	G3/4"x14g x 280	27	5	25	54	35	7.40
620.0106	80-350	200	80-350	11	G3/4"x14g x 280	27	5	25	54	35	8.50
620.0107	110-520	200	110-520	13	G3/4"x14g x 280	27	5	25	54	35	13.00
620.0108	170-640	225	170-640	18	G1"x11g x 310	36	10	33	55	50	23.70

Hydraulic universal 2 arm puller

- Quickly modified or internal or external applications
- Different leg varients available
- Includes hydraulic thrust spindle
- Excellent power transfer
- Special steel

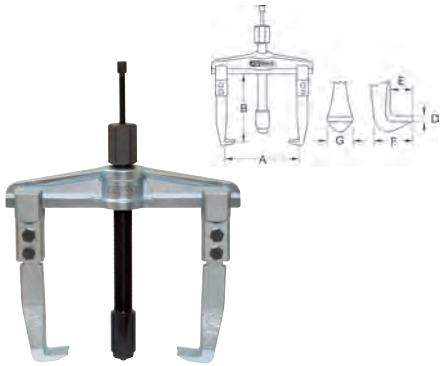

	A mm	B mm	max t	Hydraulic spindle	mm	D mm	E mm	F mm	G mm	kg
620.0301	50-160	145	12	615.0002	13/32	4	16	35	25	3.40
620.0302	50-200	145	12	615.0002	13/32	4	16	35	25	3.80
620.0303	80-250	125	12	615.0003	13/36	5	25	54	35	8.00
620.0304	80-350	125	12	615.0003	13/36	5	25	54	35	9.00
620.0305	110-520	125	12	615.0003	13/36	5	25	54	35	13.50
620.0306	170-640	125	12	615.0003	13/36	5	25	54	35	21.00
620.0307	170-640	210	15	615.0004	17/41	10	33	55	50	27.00

Universal 2 arm puller set with extended legs

- Through reversing the arms internal and external applications are possible
- Hydraulic spindles available for thread G1/2" / G3/4"
- Extremely robust spindle with inductively hardened thread
- Special steel

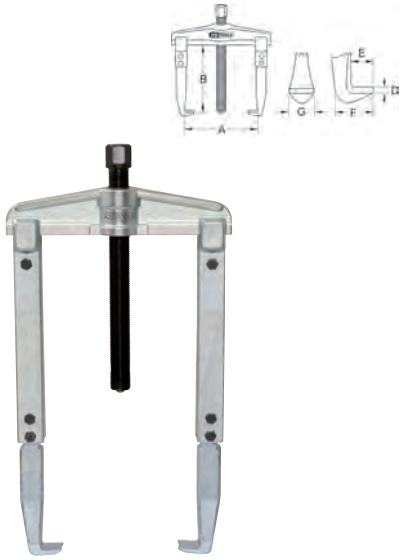

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.0501	20-90	200	4,5	M14x1,5 x 140	17	3	13	25	20	1.50
620.0502	25-130	200	4,5	M14x1,5 x 140	17	3	13	25	20	1.70
620.0503	50-160	300	6,5	G1/2"x14g x 210	22	4	16	35	25	4.00
620.0504	60-200	300	6,5	G1/2"x14g x 210	22	4	16	35	25	4.30
620.0505	80-250	300	11	G3/4"x14g x 280	27	5	25	54	35	9.20
620.0506	80-350	300	11	G3/4"x14g x 280	27	5	25	54	35	10.30
620.0507	110-520	300	13	G3/4"x14g x 280	27	5	25	54	35	14.80
620.0508	80-250	400	11	G3/4"x14g x 280	27	5	25	54	35	10.50
620.0509	80-350	400	11	G3/4"x14g x 280	27	5	25	54	35	11.60
620.0510	110-520	400	13	G3/4"x14g x 280	27	5	25	54	35	16.10
620.0511	80-250	500	11	G3/4"x14g x 280	27	5	25	54	35	11.90
620.0512	80-350	500	11	G3/4"x14g x 280	27	5	25	54	35	13.00
620.0513	110-520	500	13	G3/4"x14g x 280	27	5	25	54	35	17.50

Hydraulic universal 2 arm puller

- Quickly modified or internal or external applications
- Hydraulic spindles available for thread G1/2"
- Includes hydraulic thrust spindle
- Excellent power transfer
- Special steel

	A mm	B mm	C mm	max t	Hydraulic spindle	mm	D mm	E mm	F mm	G mm	kg
620.0701	50-160	225	105-220	12	615.0002	13	4	16	35	25	3.90
620.0702	50-200	225	120-270	12	615.0002	13	4	16	35	25	4.80
620.0703	80-250	225	160-330	12	615.0002	13	5	25	54	35	9.80
620.0704	80-350	225	160-420	12	615.0002	13	5	25	54	35	10.80
620.0705	110-520	225	195-600	12	615.0002	13	5	25	54	35	15.30
620.0706	80-250	325	160-330	12	615.0002	13	5	25	54	35	11.10
620.0707	80-350	325	160-420	12	615.0002	13	5	25	54	35	12.10
620.0708	110-520	325	195-600	12	615.0002	13	5	25	54	35	16.60
620.0709	80-250	425	160-330	12	615.0002	13	5	25	54	35	12.50
620.0710	80-350	425	160-420	12	615.0002	13	5	25	54	35	13.50
620.0711	110-520	425	195-600	12	615.0002	13	5	25	54	35	18.00

Quick release universal 2 arm puller

- Quick release function
- Through reversing the arms internal and external applications are possible
- Hydraulic spindles available for thread G1/2" / G3/4"
- Extremely robust spindle with inductively hardened thread
- Special steel

	A mm	B mm	C mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.1701	20-90	100	70-130	4,5	M14x1,5 x 130	17	3	13	25	20	1.00
620.1702	25-130	100	80-180	4,5	M14x1,5 x 130	17	3	13	25	20	1.20
620.1703	50-160	150	108-220	6,5	G1/2"x14g x 210	22	4	16	35	25	3.00
620.1704	60-200	150	120-270	6,5	G1/2"x14g x 210	22	4	16	35	25	3.30
620.1705	80-250	200	160-330	11	G3/4"x14g x 280	27	5	25	54	35	7.40
620.1706	80-350	200	160-420	11	G3/4"x14g x 280	27	5	25	54	35	8.50

Hydraulic quick release universal 2 arm puller

- Quick release function
- Through reversing the arms internal and external applications are possible
- Different leg variants available
- Includes hydraulic thrust spindle
- Excellent power transfer
- Special steel

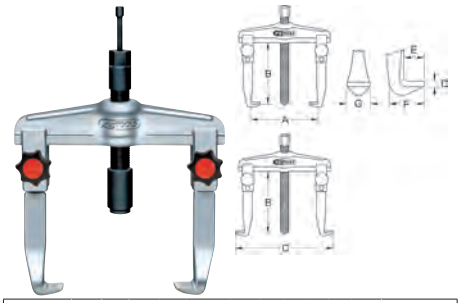

	A mm	B mm	C mm	max t	Hydraulic spindle	mm	D mm	E mm	F mm	G mm	kg
620.1901	50-160	145	105-220	12	615.0003	13/32	4	16	35	25	3.40
620.1902	50-200	145	120-270	12	615.0003	13/32	4	16	35	25	3.80
620.1903	80-250	125	160-330	12	615.0004	13/32	5	25	54	35	8.00
620.1904	80-350	125	160-420	12	615.0004	13/32	5	25	54	35	9.00

Universal 2 arm puller set with narrow legs

- Best suited for limited access areas
- Uniform load distribution and self centered
- Through reversing the arms internal and external applications are possible
- Supplied with different leg variants and hydraulic thrust spindle
- Extremely robust spindle with inductively hardened thread
- Special steel

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.0901	20-90	100	4,5	M14x1,5 x 140	17	3,6	6	13	27	1.00
620.0902	25-130	100	4,5	M14x1,5 x 140	17	3,6	6	13	27	1.20
620.0903	50-160	150	6,5	G1/2x14g x 210	22	5	8	17	40	3.00
620.0904	60-200	150	6,5	G1/2x14g x 210	22	5	8	17	40	3.30

Quick release universal 2 arm puller set with narrow legs

- Quick release function
- Best suited for limited access areas
- Through reversing the arms internal and external applications are possible
- Hydraulic spindles available for thread G1/2"
- Extremely robust spindle with inductively hardened thread
- Special steel

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.1101	20-90	100	4,5	M14x1,5 x 140	17	3,6	6	13	27	1.00
620.1102	25-130	100	4,5	M14x1,5 x 140	17	3,6	6	13	27	1.20
620.1103	50-160	150	6,5	G1/2"x14g x 210	22	5	8	17	40	3.00
620.1104	60-200	150	6,5	G1/2"x14g x 210	22	5	8	17	40	3.30

Battery clamp and wiper arm puller 2 arm

- Ideally suited for drawing-off small parts
- T-handle drive
- Independent pressure of the hooks
- Extremely robust spindle with inductively hardened thread
- Special steel

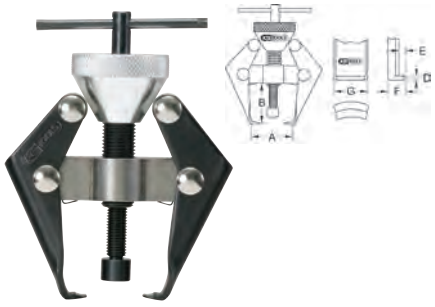

	A mm	B mm	max t	mm	D mm	E mm	F mm	G mm	kg
700.1190	15	32	1,2	M8 x 50	2,5	9	10,5	11	0.30

Pole clamp 2-jaw puller

- Ideally suited for drawing off small parts
- Independent pressure of the hooks
- Extremely robust spindle with inductively hardened thread
- Special steel

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	g
620.3101	10-60	40	1	M8x85	10	1	5	12	8	160
620.3102	10-70	44/74	1,2	M8x85	10	1	5	12	8	200
620.3103	10-90	84	2	M10x105	12	1,8	10	20	12	340

Universal 2 arm puller

- Robust spindle with hexagon drive
- 640.4103 with locking handle
- Special steel

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.4101	10-60	45	2,5	M10x1 x 90	12	2	9	18	10	0.27
620.4102	10-70	65	3	M10x1 x 110	12	2	9	18	10	0.30
620.4103	10-100	80	3,5	M12x1,25 x 140	14	2,3	12	25	13	0.61

Universal 2 arm puller

- Legs are adjustable in the working depth
- Independent pressure of the hooks
- Extremely robust spindle with inductively hardened thread
- Special steel

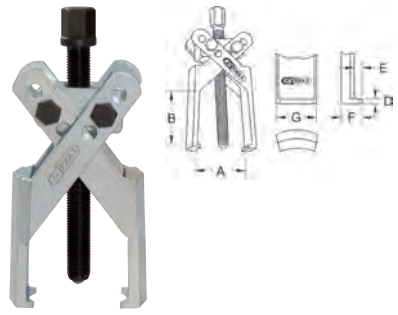

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.5201	6-100	70/85	1,5	M10 x 105	12	2,5	4,5	8,5	23	0.40
620.5202	10-140	85/120	3,5	M14x1,5 x 130	17	3,5	5	10	31	0.90
620.5203	15-140	125/155	4,5	M14x1,5 x 200	17	3,5	5	10	31	1.10

Universal 2 arm puller set with narrow legs

- Legs are adjustable in the working depth
- Ideal for confined spa es
- Independent pressure of the hooks
- Extremely robust spindle with inductively hardened thread
- Special steel

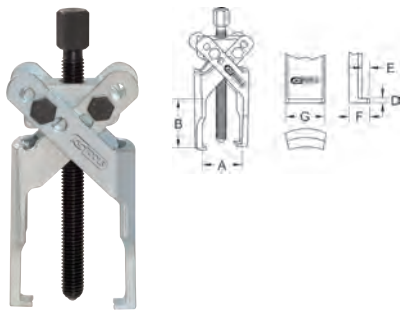

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.5301	6-100	70/85	1	M10 x 105	12	2,5	4,5	8,5	11	0.40
620.5302	15-140	125/155	2	M14x1,5 x 200	17	3,5	5	11	12	1.00

Universal bearing ring puller 2 arm with clamping yoke

- Clamp compresses hooks firm y
- Prevents slippage
- Pressure peak centers itself optimally in the cone of the hub boring
- Extremely robust spindle with inductively hardened thread
- Special steel

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
700.1260	90	100	1,2	M16 x 150	17	6,5	8,5	22,5	27,1	1.76

Universal puller 2 and 3 arm

- Hooks for double sided applications
- Reception star for 2 or 3 hooks
- Extremely robust spindle with inductively hardened thread
- Special steel

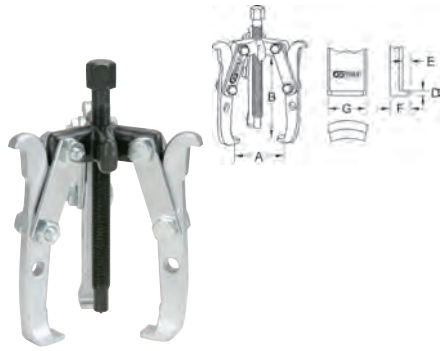

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
700.1120	70	75	1,2	3/8"x24g x 120	13	3,2	8,4	20	8,4	0.96
700.1130	120	150	1,2	M14x1,25 x 175	16	7,2	7	17,8	7,0	1.83

Universal 2 arm puller set with clamping yoke

- Clamping yoke compresses the legs firm y
- Prevents slipping
- Extremely robust spindle with inductively hardened thread
- Special steel

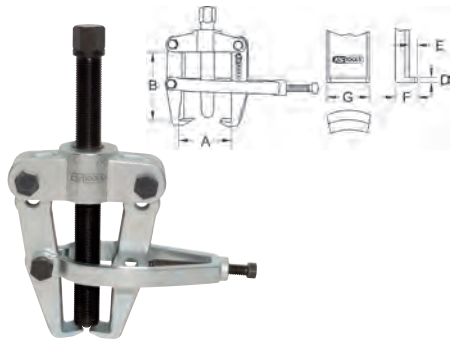

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.5401	80	90	5	M18 x 1,5 x 130	19	3	12	26	24	1.70
620.5402	100	110	6	G1/2"x14g x 210	22	3	14	25	24	2.60
620.5403	150	150	8	G1/2"x14g x 210	22	3	14	25	24	3.40

Universal 2 arm puller set with clamping yoke

- Legs are adjustable in the working depth
- Double ended puller legs
- Clamping yoke compresses the legs firm y
- Prevents slipping
- Ideally suited for flush si ting bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Special steel

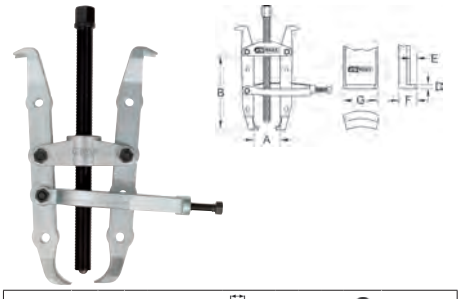

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.5501	110	170	5	M18x1,5 x 240	19	3	12	25	24	2.30
620.5502	150	270	6	G1/2"x14g x 270	22	3	14	25	24	4.10
620.5503	150	330	8	G1/2"x14g x 270	22	3	14	25	24	4.50

Basic universal 2 arm puller

- Extremely robust spindle with inductively hardened thread
- Special steel

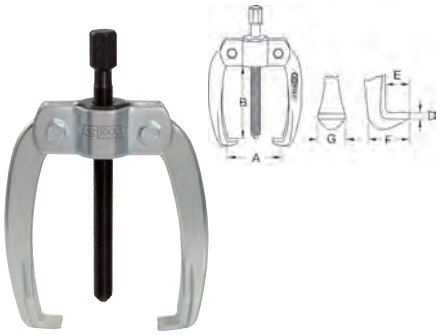

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.4301	10-100	80	2,5	M12x1,25 x 162	14	4	12	26	13	0.68
620.4302	10-120	120	3	M14x1,5 x 193	17	5	14	30	16	1.14
620.4303	20-160	160	3,5	M18x1,5 x 243	19	6	18	36	20	2.00
620.4304	20-200	200	4	M22x2 x 293	24	7	22	40	24	3.50

Universal 2 arm puller

- Double ended legs
- Extremely robust spindle with inductively hardened thread
- Special steel

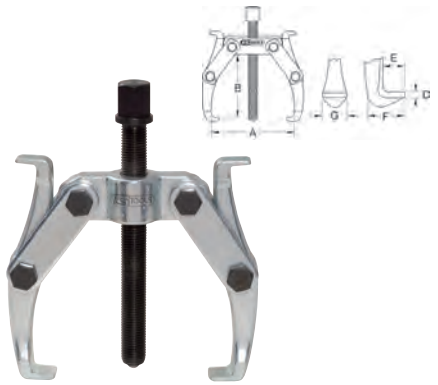

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.3001	20-150	85	3,5	M14x1,5 x 130	17	2	9	21	12	0.90
620.3002	40-220	130	4	M18x1,5 x 240	19	4	11	25	21	2.20

Universal 2 arm puller

- Legs are adjustable in the working depth
- Extremely robust spindle with inductively hardened thread
- Special steel

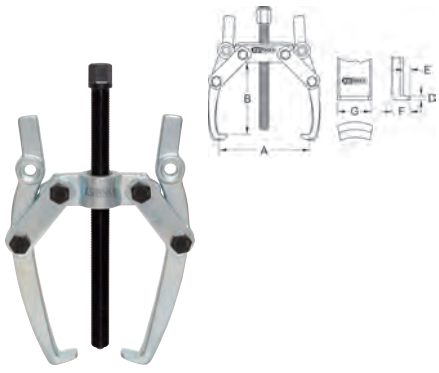

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.3401	20-170	130	3,5	M14x1,5 x 130	17	2	11	23	16	1.00
620.3402	20-230	200	4	M18x1,5 x 240	19	4,5	16	33	20	2.30

Universal 2 arm puller

- Legs are adjustable in the working depth
- Through reversing the arms internal and external applications are possible
- Hydraulic spindles available for thread G1/2"
- Extremely robust spindle with inductively hardened thread
- Special steel

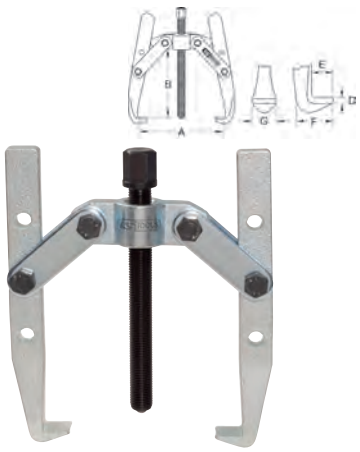

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
620.3601	18-100	85	2,5	M10 x 105	12	2	10	20	14	0.40
620.3602	20-200	150	3,5	M14x1,5 x 130	17	3	14	25	18	1.20
620.3603	35-250	220	4	M18x1,5 x 240	19	4	20	35	25	2.80
620.3604	50-300	250	6	G1/2"x14g x 270	22	5	25	48	30	5.40
620.3605	50-350	350	6	G1/2"x14g x 270	22	5	25	48	30	6.10
620.3606	50-400	400	6	G1/2"x14g x 270	22	5	25	48	30	6.40
620.3607	50-450	450	6	G1/2"x14g x 270	22	5	25	48	30	6.90
620.3608	50-500	500	6	G1/2"x14g x 270	22	5	25	48	30	7.00
620.3609	50-500	650	6	G1/2"x14g x 270	22	5	25	48	30	8.40
620.3610	50-500	1000	6	G1/2"x14g x 270	22	5	25	48	30	11.00

Hydraulic universal 2 arm puller

- Legs are adjustable in the working depth
- Different leg variants available
- Includes hydraulic thrust spindle
- Excellent power transfer
- Special steel

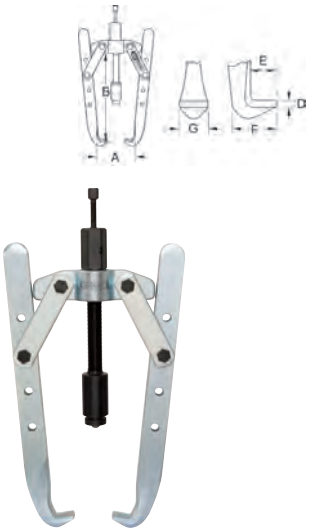

	A mm	B mm	max t	Hydraulic spindle	mm	D mm	E mm	F mm	G mm	kg
620.3801	50-300	175	12	615.0002	13/32	5	25	48	30	5.70
620.3802	50-350	275	12	615.0002	13/32	5	25	48	30	6.40
620.3803	50-400	325	12	615.0002	13/32	5	25	48	30	6.70
620.3804	50-450	375	12	615.0002	13/32	5	25	48	30	7.20
620.3805	50-500	425	12	615.0002	13/32	5	25	48	30	7.30
620.3806	50-500	575	12	615.0002	13/32	5	25	48	30	8.70

UNIVERSAL 2 ARM PULLER SET

Universal puller set

- Through reconnecting the hooks internal and external applications are suitable
- Two armed traverse for 2 or 3 hooks
- Different hook variants and hydraulic spindles can be retrofitted
- Extremely robust spindle with inductively hardened thread
- Special steel

Application range: Gear wheels, bearings, pinions, synchroniser hubs, etc.

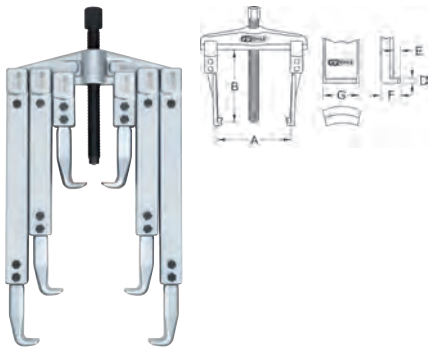

		A mm	B mm	max t	max N·m	mm	mm	kg
700.1320	8 pcs	120	260	4,5	80	M14x1,5x150	17	3.54

consists of:

		g
700.1311	Spindle, M14x1,5	180
700.1312	Two armed traverse	485
700.1321	Draw-off arm, 120mm	260
700.1322	Draw-off arm, 230mm	540
700.1323	Draw-off arm, 280mm	640

Universal 2 arm puller set with display stand

- Through reversing the arms internal and external applications are possible
- Wide range of arms and hydraulic spindles available
- Extremely robust spindle with inductively hardened thread
- Special steel
- Supplied inclusive of substaintial steel bench display

			kg
620.0250	5 pcs	Universal 2 arm puller set with display stand	17.80

consists of:

		kg
620.0101	Universal 2 leg puller, 20-90mm, legs 100 mm	1.00
620.0102	Universal 2 leg puller, 25-130mm, legs 100 mm	1.20
620.0103	Universal 2 leg puller, 50-160mm, legs 150 mm	3.00
620.0104	Universal 2 leg puller, 60-200mm, legs 150 mm	3.30
620.0105	Universal 2 leg puller, 80-250mm, legs 200 mm	7.40

Universal 2 arm puller set with display stand

- Quick release function
- Through reversing the arms internal and external applications are possible
- Wide range of arms and hydraulic spindles available
- Extremely robust spindle with inductively hardened thread
- Special steel
- Supplied inclusive of substaintial steel bench display

			kg	
620.1850	5 pcs	Universal 2 arm puller set with display stand	17.80	

consists of:

		kg	
620.1701	Quick release universal 2 arm puller, 20-90mm	1.00	
620.1702	Quick release universal 2 arm puller, 25-130mm	1.20	
620.1703	Quick release universal 2 arm puller, 50-160mm	3.00	
620.1704	Quick release universal 2 arm puller, 60-200mm	3.30	
620.1705	Quick release universal 2 arm puller, 80-250mm	7.40	

Universal puller set

- Hooks for double sided applications
- Reception star for 2 or 3 hooks
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

			kg	
700.1100	3 pcs	Universal puller set	4.39	

consists of:

		kg	
700.1120	Mechanical 2 and 3 leg puller, 4"	0.96	
700.1130	Mechanical 2 and 3 leg puller, 6"	1.83	
700.1140	Bearing splitter, for max. Ø 50 mm	1.15	

Quick adjustment universal puller set

- With quick release fuction
- Ideal for confined spa es
- Through reconnecting the hooks internal and external applications are suitable
- Different hook variants and hydraulic spindles can be retrofi - ted
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

		A mm	B mm	mm	max t	kg	
625.1701	7 pcs	20 - 90	100	M14 x 1,5	5,5	2.30	

consists of:

		kg	
620.1701	Quick release universal 2 arm puller, 20-90mm	1.00	
630.1701	Quick release 3 arm puller, 20-90mm	1.30	
980.1090	Special thread grease, tube	0.01	

Quick adjustment universal puller set

- With quick release fuction
- Ideal for confined spa es
- Through reconnecting the hooks internal and external applications are suitable
- Different hook variants and hydraulic spindles can be retrofi - ted
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

		A mm	B mm	mm	max t	kg	
625.1703	7 pcs	50 - 160	150	G1/2"x14Gg	5.5	6.50	

consists of:

		kg	
620.1703	Quick release universal 2 arm puller, 50-160mm	3.00	
630.1703	Quick release 3 arm puller, 50-160mm	3.50	
980.1090	Special thread grease, tube	0.01	

Hydraulic universal puller set 2 arm and 3 arm

- Less risk of slipage due to automatically closing pulling arm
- 8 length positions possible
- Extremely robust spindle with inductively hardened thread
- Requires light expenditure of energy
- Special steel
- In durable plastic storage case

			kg	
700.1200	22 pcs	Hydraulic universal puller set 2 arm and 3 arm	16.40	

consists of:

		g	
700.1202	Puller legs, ground pulling lugs, 4"	410	
700.1203	Puller legs, ground pulling lugs, 6"	600	
700.1204	Puller legs, ground pulling lugs, 8"	840	
700.1205	Yoke f.2 legs, quickly modifie	300	
700.1206	Yoke f.3 legs, quickly modifie	760	
700.1207	Thrust bolt extension, 20 mm	50	
700.1208	Thrust bolt extension, 35 mm	130	
700.1209	Thrust bolt extension, 85 mm	320	
700.1210	Pulling ring f.hydraulic thrust bolt	322	
700.1220	Separator/puller tool,for max. Ø 105 mm	2540	
700.1221	Yoke f.bearing separator tool	1480	
700.1222	Spigot f.bearing separator tool, 235mm	1060	
700.1223	Extension f.bearing separator tool,185mm	1110	
700.1400-1	Hydraulic spindle 10 t	1344	

Universal puller set

- Slim hooks
- Ideal for confined spa es
- Uniform load distribution and centered tightening
- Through reconnecting the hooks internal and external applications are suitable
- Different hook variants and hydraulic spindles can be retrofi - ted
- Extremely robust spindle with inductively hardened thread
- Requires light expenditure of energy
- Special steel

			kg	
700.1300	12 pcs	Universal puller set	6.69	

consists of:

		g	
700.1311	Spindle, M14x1,5	180	
700.1312	Two armed traverse	485	
700.1313	Three armed traverse	675	
700.1314	Puller arm, 100mm	250	
700.1315	Puller arm, 210mm	530	
700.1316	Puller arm, 260mm	640	

UNIVERSAL 3 ARM PULLER

Universal 3 arm puller

- Uniform load distribution and self centered
- Through reversing the arms internal and external applications are possible
- Hydraulic spindles available for thread G1/2"
- Excellent power transfer
- Special steel

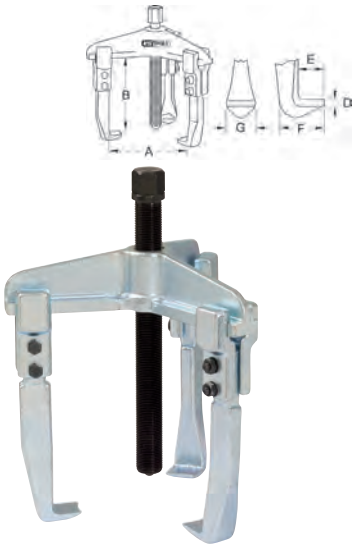

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
630.0101	20-90	100	5,5	M14x1,5 x 130	17	3	13	25	20	1.30
630.0102	25-130	100	5,5	M14x1,5 x 130	17	3	13	25	20	1.50
630.0103	50-160	150	7	G1/2"x14g x 210	22	4	16	35	25	3.50
630.0104	50-200	150	7	G1/2"x14g x 210	22	4	16	35	25	4.00

Quick release 3 arm puller

- Quick release
- Best suited for limited access areas
- Uniform load distribution and self centered
- Through reversing the arms internal and external applications are possible
- Hydraulic spindles available for thread G1/2"
- Extremely robust spindle with inductively hardened thread
- Special steel

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
630.1701	20-90	100	5,5	M14x1,5 x 130	17	3	13	25	20	1.30
630.1702	25-130	100	5,5	M14x1,5 x 130	17	3	13	25	20	1.50
630.1703	50-160	150	7	G1/2"x14g x 210	22	4	16	35	25	3.50
630.1704	60-200	150	7	G1/2"x14g x 210	22	4	16	35	25	4.00

Hydraulic universal 3 arm puller

- Uniform load distribution and self centered
- Through reversing the arms internal and external applications are possible
- Different leg variants available
- Includes hydraulic thrust spindle
- Excellent power transfer
- Special steel

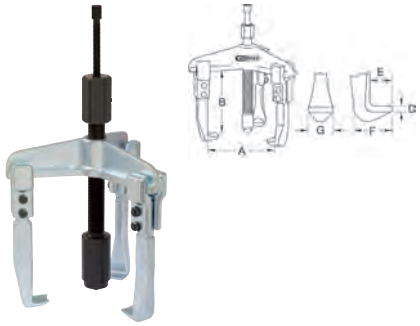

	A mm	B mm	max t	Hydraulic spindle	mm	D mm	E mm	F mm	G mm	kg
630.0301	50-160	145	12	615.0003	13/32	4	16	35	25	4.00
630.0302	60-200	145	12	615.0003	13/32	4	16	35	25	4.40

Hydraulic quick release universal 3 arm puller

- Quick release function
- Uniform load distribution and self centered
- Through reversing the arms internal and external applications are possible
- Different leg variants available
- Includes hydraulic thrust spindle
- Excellent power transfer
- Special steel

	A mm	B mm	max t	Hydraulic spindle	mm	D mm	E mm	F mm	G mm	kg
630.1901	50-100	145	12	615.0002	13/32	4	16	35	25	4.00
630.1902	50-200	145	12	615.0002	13/32	4	16	35	25	4.40

Universal 2 + 3 arm puller

- Hooks for double sided applications
- Reception star for 2 or 3 hooks
- Extremely robust spindle with inductively hardened thread
- Special steel

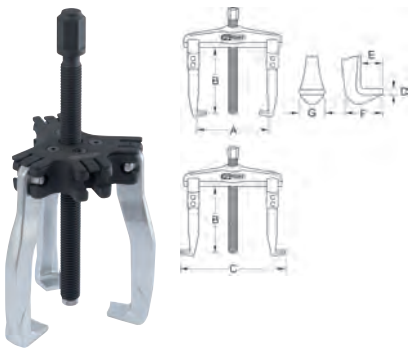

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
640.4203	60	65	2,0	G3/8"x1,06px110	13	3	10	18	11	0.47
640.4204	90	100	5,0	G9/16"x2,0px190	17	4	15,5	29	17	1.60
640.4205	165	170	7,0	G3/4"x2,0px285	22	4	15,5	29	17	3.20

Universal 3 arm puller set with narrow legs

- Best suited for limited access areas
- Uniform load distribution and self centered
- Through reversing the arms internal and external applications are possible
- Hydraulic spindles available for thread G1/2"
- Extremely robust spindle with inductively hardened thread
- Special steel

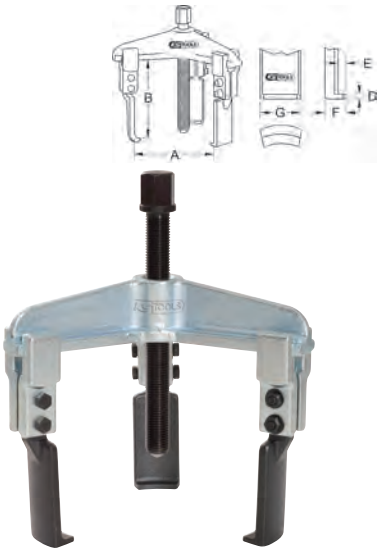

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
630.0901	20-90	100	5	M14x1,5 x 130	17	3,6	6	13	27	1.30
630.0902	25-130	100	5	M14x1,5 x 130	17	3,6	6	13	27	1.50
630.0903	50-160	150	6,5	G1/2"x14g x 210	22	5	8	17	40	3.50
630.0904	60-200	150	6,5	G1/2"x14g x 210	22	5	8	17	40	4.00

Quick release 3 arm puller set with narrow legs

- Quick release
- Best suited for limited access areas
- Uniform load distribution and self centered
- Through reversing the arms internal and external applications are possible
- Hydraulic spindles available for thread G1/2"
- Extremely robust spindle with inductively hardened thread
- Special steel

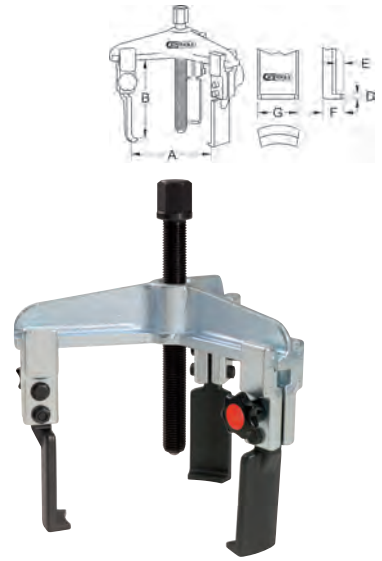

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
630.1101	20-90	100	5	M14x1,5 x 130	17	3,6	6	13	27	1.30
630.1102	25-130	100	5	M14x1,5 x 130	17	3,6	6	13	27	1.50
630.1103	50-160	150	6,5	G1/2"x14g x 210	22	5	8	17	40	3.50
630.1104	60-200	150	6,5	G1/2"x14g x 210	22	5	8	17	40	4.00

Pole clamp 3 arm puller

- Uniform load distribution and self centered
- Ideally suited for extracting small parts
- Automatic pressure on the legs
- Extremely robust spindle with inductively hardened thread
- Special steel



	A mm	B mm	max t	mm	D mm	E mm	F mm	G mm	kg
630.3101	10-60	40	1,2	M8 x 85	10	1	5	12	8	0.20
630.3102	10-70	44/74	1,3	M8 x 85	10	1	5	12	8	0.30
630.3103	10-90	84	2,5	M10 x 105	12	1,8	10	20	12	0.50

Basic universal 3 arm puller

- Uniform load distribution and self centered
- Extremely robust spindle with inductively hardened thread
- Special steel



	A mm	B mm	max t	mm	D mm	E mm	F mm	G mm	kg
630.4301	10-100	80	2,5	M12x1,25 x 162	14	4	12	26	13	0.91
630.4302	10-120	120	3	M14x1,5 x 193	17	5	14	30	16	1.49
630.4303	20-160	160	3,5	M18x1,5 x 243	19	6	18	36	20	2.50
630.4304	20-200	200	4	M22x2 x 293	24	7	22	40	24	4.20

Universal 3 arm puller

- Double ended legs
- Extremely robust spindle with inductively hardened thread
- Special steel



	A mm	B mm	max t	mm	D mm	E mm	F mm	G mm	kg
630.3001	20-150	85	4	M14x1,5 x 130	17	2	9	21	12	1.20
630.3002	40-220	130	4,5	M18x1,5 x 240	19	4	11	25	21	2.90

Universal 3 arm puller

- Locking handle
- Uniform load distribution and self centered
- Ideally suited for extracting small parts
- Automatic pressure on the legs
- Extremely robust spindle with inductively hardened thread
- Special steel



	A mm	B mm	max t	mm	D mm	E mm	F mm	G mm	kg
630.4101	10-60	45	2,5	M10x1 x 90	12	2	9	18	10	0.30
630.4102	10-70	65	3	M10x1 x 110	12	2	9	18	10	0.30
630.4103	10-100	80	3,5	M12x1,25 x 140	14	2,3	12	25	13	0.80

Universal 3 arm puller

- Legs are adjustable in the working depth
- Uniform load distribution and self centered
- Extremely robust spindle with inductively hardened thread
- Special steel



	A mm	B mm	max t	mm	D mm	E mm	F mm	G mm	kg
630.3401	20-170	130	4	M14x1,5 x 130	17	2	11	23	16	1.30
630.3402	20-230	200	4,5	M18x1,5 x 240	19	4,5	16	33	20	3.10

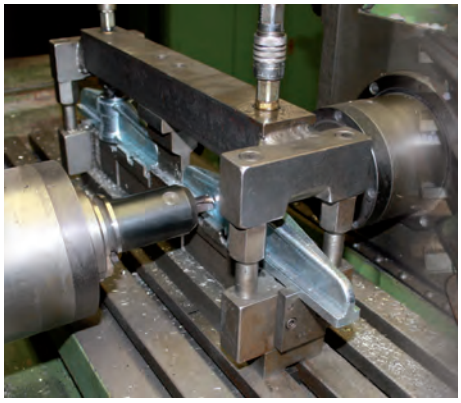

Universal 3 arm puller

- Legs are adjustable in the working depth
- Uniform load distribution and self centered
- Hydraulic spindles available for thread G1/2”
- Extremely robust spindle with inductively hardened thread
- Special steel



	A mm	B mm	max t	mm	D mm	E mm	F mm	G mm	kg
630.3601	18-100	85	3	M10 x 105	12	2	10	20	14	0.50
630.3602	20-200	150	4	M14x1,5 x130	17	3	14	25	18	1.70
630.3603	35-250	220	4,5	M18x1,5 x240	19	4	20	36	25	3.90
630.3604	50-300	250	12	G1/2"x14g x 270	22	5	25	48	30	7.30
630.3605	50-350	350	12	G1/2"x14g x 270	22	5	25	48	30	8.30
630.3606	50-400	400	12	G1/2"x14g x 270	22	5	25	48	30	8.80
630.3607	50-450	450	12	G1/2"x14g x 270	22	5	25	48	30	9.40
630.3608	50-500	500	12	G1/2"x14g x 270	22	5	25	48	30	10.00
630.3609	50-500	650	12	G1/2"x14g x 270	22	5	25	48	30	11.60
630.3610	50-500	1000	12	G1/2"x14g x 270	22	5	25	48	30	16.00

Hydraulic universal 3 arm puller

- Legs are adjustable in the working depth
- Uniform load distribution and self centered
- Different leg variants available
- Includes hydraulic thrust spindle
- Excellent power transfer
- Special steel



	A mm	B mm	max t	mm	D mm	E mm	F mm	G mm	kg
630.3801	50-300	250	12	M14x1,5 x 100	17	5	25	48	30	12.50
630.3802	50-350	350	12	M14x1,5 x 100	17	5	25	48	30	13.50
630.3803	50-400	400	12	M14x1,5 x 100	17	5	25	48	30	14.00
630.3804	50-450	450	12	M14x1,5 x 100	17	5	25	48	30	14.50
630.3805	50-500	500	12	M14x1,5 x 100	17	5	25	48	30	15.00
630.3806	50-500	650	12	M14x1,5 x 100	17	5	25	48	30	16.60
630.3807	50-500	1000	12	M14x1,5 x 100	17	5	25	48	30	21.50

Universal 3 arm puller

- Uniform load distribution and self centered
- Through reversing the arms internal and external applications are possible
- Draw off arms radial revolving
- Wide range of arms and hydraulic spindles available
- Extremely robust spindle with inductively hardened thread
- Special steel



	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg
630.2301	150-700	200	15	G1"x11g x 370	36	10	33	55	50	42.50

UNIVERSAL 3 ARM PULLER SET

Universal puller set

- Hooks for double sided applications
- Reception star for 2 or 3 hooks
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

			kg
700.1100	3 pcs	Universal puller set	4.39

consists of:

		kg
700.1120	Mechanical 2 and 3 leg puller, 4"	0.96
700.1130	Mechanical 2 and 3 leg puller, 6"	1.83
700.1140	Bearing splitter, for max. Ø 50 mm	1.15

Quick adjustment universal puller set

- With quick release fuction
- Ideal for confined spa es
- Through reconnecting the hooks internal and external applications are suitable
- Different hook variants and hydraulic spindles can be retrofi - ted
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

		A mm	B mm	mm	max t	kg
625.1701	7 pcs	20 - 90	100	M14 x 1,5	5,5	2.30

consists of:

		kg
620.1701	Quick release universal 2 arm puller, 20-90mm	1.00
630.1701	Quick release 3 arm puller, 20-90mm	1.30
980.1090	Special thread grease, tube	0.01

Quick adjustment universal puller set

- With quick release fuction
- Ideal for confined spa es
- Through reconnecting the hooks internal and external applications are suitable
- Different hook variants and hydraulic spindles can be retrofi - ted
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

		A mm	B mm	mm	max t	kg
625.1703	7 pcs	50 - 160	150	G1/2"x14Gg	5.5	6.50

consists of:

		kg
620.1703	Quick release universal 2 arm puller, 50-160mm	3.00
630.1703	Quick release 3 arm puller, 50-160mm	3.50
980.1090	Special thread grease, tube	0.01

Hydraulic universal puller set 2 arm and 3 arm

- Less risk of slipage due to automatically closing pulling arm
- 8 length positions possible
- Extremely robust spindle with inductively hardened thread
- Requires light expenditure of energy
- Special steel
- In durable plastic storage case

			kg
700.1200	22 pcs	Hydraulic universal puller set 2 arm and 3 arm	16.40

consists of:

		g
700.1202	Puller legs, ground pulling lugs, 4"	410
700.1203	Puller legs, ground pulling lugs, 6"	600
700.1204	Puller legs, ground pulling lugs, 8"	840
700.1205	Yoke f.2 legs, quickly modifie	300
700.1206	Yoke f.3 legs, quickly modifie	760
700.1207	Thrust bolt extension, 20 mm	50
700.1208	Thrust bolt extension, 35 mm	130
700.1209	Thrust bolt extension, 85 mm	320
700.1210	Pulling ring f.hydraulic thrust bolt	322
700.1220	Separator/puller tool,for max. Ø 105 mm	2540
700.1221	Yoke f.bearing separator tool	1480
700.1222	Spigot f.bearing separator tool, 235mm	1060
700.1223	Extension f.bearing separator tool,185mm	1110
700.1400-1	Hydraulic spindle 10 t	1344

Universal puller set

- Slim hooks
- Ideal for confined spa es
- Uniform load distribution and centered tightening
- Through reconnecting the hooks internal and external applications are suitable
- Different hook variants and hydraulic spindles can be retrofi - ted
- Extremely robust spindle with inductively hardened thread
- Requires light expenditure of energy
- Special steel

			kg
700.1300	12 pcs	Universal puller set	6.69

consists of:

		g
700.1311	Spindle, M14x1,5	180
700.1312	Two armed traverse	485
700.1313	Three armed traverse	675
700.1314	Puller arm, 100mm	250
700.1315	Puller arm, 210mm	530
700.1316	Puller arm, 260mm	640

SEPARATOR PULLER TOOL

Separator puller tool

- To be used with separately available separator device
- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Special steel



	A mm	G	mm	mm	kg
605.0501	5-60	M12	M10 x 120	17	0.40
605.0502	12-75	M12	M12 x 140	19	0.70
605.0503	22-115	M16	M16x1,5 x 180	24	1.90
605.0504	25-155	M20x1,5	M20x1,5 x 250	30	4.20
605.0505	30-220	M20x1,5	M24x1,5 x 410	36	12.00
605.0506	40-280	M24x1,5	M28x1,5 x 410	41	15.80

Yoke for bearing separator tool

- For use with the separator
- The train bolts are screwed into the threads of the separator
- Extremely robust spindle with inductively hardened thread
- Hydraulic thrust spindle available
- Special steel



	A mm	B mm	G	max t	mm	mm	kg
605.0111	40-115	150	M12	2	M14x1,5 x 130	17	0.80
605.0112	45-140	150	M12	2,5	M14x1,5 x 130	17	1.10
605.0113	55-205	210	M16	4	G1/2"x14g x 210	22	2.70
605.0114	90-260	315	M20x1,5	5	G1/2"x14g x 210	22	5.20
605.0115	100-360	305	M20x1,5	7	G3/4"x14g x 280	27	8.80
605.0116	140-435	320	M24x1,5	13	G1"x11g x 370	36	16.70

Hydraulic thrust bolt with yoke for bearing separator tool

- For use with the separator
- The train bolts are screwed into the threads of the separator
- Includes hydraulic thrust spindle
- Excellent power transfer
- Special steel

	A mm	B mm	G	max t	mm	Hydraulic spindle	mm	kg
605.0301	55-205	135	M16	12	M16 x 280	615.0002	13/32	3.20
605.0302	90-260	240	M20x1,5	12	M20x1,5 x 370	615.0002	13/32	5.70
605.0303	100-360	230	M20x1,5	12	M20x1,5 x 370	615.0003	13/36	9.10
605.0304	140-435	230	M24x1,5	15	M24x1,5 x 460	615.0004	17/41	17.60

SEPARATOR PULLER TOOL SET

Separator set inclusive with yoke ø 5,0 - 60,0 mm

- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

			kg
605.0001	3 pcs	Separator set inclusive with yoke ø 5,0 - 60,0 mm	1.90

consists of:

		kg
605.0501	Bearing separator, 5-60mm	0.40
605.0111	Yoke for bearing separator tool, 40-115mm	0.80
605.0401	Extension for pull rod M12 x100mm	0.20

Separator set inclusive with yoke ø 12,0 - 75,0 mm

- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Special steel
- In durable plastic storage case

			kg
605.0002	3 pcs	Separator set inclusive with yoke ø 12,0 - 75,0 mm	2.40

consists of:

		kg
605.0502	Bearing separator, 12-75mm	0.70
605.0112	Yoke for bearing separator tool, 45-140mm	1.10
605.0401	Extension for pull rod M12 x100mm	0.20

Separator set inclusive with yoke ø 22,0 - 115,0 mm

- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Hydraulic thrust spindle available
- Special steel
- In durable plastic storage case

			kg
605.0003	3 pcs	Separator set inclusive with yoke ø 22,0 - 115,0 mm	6.10

consists of:

		kg
605.0503	Bearing separator, 22-115mm	1.90
605.0113	Yoke for bearing separator tool, 55-205mm	2.70
605.0401	Extension for pull rod M12 x100mm	0.20

Separator set inclusive with yoke ø Ø 25,0 - 155,0 mm

- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Hydraulic thrust spindle available
- Special steel
- In durable plastic storage case

			kg	
605.0004	3 pcs	Separator set inclusive with yoke ø Ø 25,0 - 155,0 mm	11.48	

consists of:

		kg	
605.0504	Bearing separator, 25-155mm	4.20	
605.0114	Yoke for bearing separator tool, 90-260mm	5.20	
605.0401	Extension for pull rod M12 x100mm	0.20	

Separator set inclusive with yoke ø 30,0 - 220,0 mm

- For the removal of secure bearings and bushes
- Extremely robust spindle with inductively hardened thread
- Hydraulic thrust spindle available
- Special steel

			kg	
605.0005	3 pcs	Separator set inclusive with yoke ø 30,0 - 220,0 mm	29.00	

consists of:

		kg	
605.0505	Bearing separator, 30-220mm	12.00	
605.0115	Yoke for bearing separator tool, 100-360mm	8.80	
605.0401	Extension for pull rod M12 x100mm	0.20	

ACCESSORIES

Universal clamping yoke

- For universal 2 arm puller
- Clamping yoke compresses the legs firm y
- Prevents slipping
- Special steel

	A mm	g	
615.5101	10-130	800	

Special thread grease for puller and pusher spindles and nuts subjected high loads

- Lubricant for components subjected to high static loads, e.g. threaded spindles
- Prevents excessive wear and seizing
- Irregularities in the surface to be protected are completely filled
- Minimises the friction thanks to the closed surface
- Effective protection against corrosion
- Increases the service life of threaded spindles
- Ensures reliable function even at high temperatures up to max. 1200 °C

		g	
980.1085	Special thread grease	22	
980.1090	Special thread grease	5	

REPLACEMENT HOOK

Puller legs, forged ground steel

- For 2 arm and 3 arm basic universal puller
- Special steel



	For pullers	B mm	D mm	E mm	F mm	G mm	g	
615.4101	620.4101+630.4101	45	2	9	18	10	40	
615.4102	620.4102+630.4102	65	2	9	18	10	50	
615.4103	620.4103+630.4103	80	2,3	12	25	13	100	

Puller legs, forged ground steel

- For 2 arm and 3 arm basic universal puller
- Special steel



	For pullers	B mm	D mm	E mm	F mm	G mm	g	
615.4301	620.4301+630.4301	80	4	12	26	13	130	
615.4302	620.4302+630.4302	120	5	14	30	16	210	
615.4303	620.4303+630.4303	160	6	18	35	20	350	
615.4304	620.4304+630.4304	200	7	22	40	24	600	

Puller legs

- For 2 arm and 3 arm pullers
- Special steel

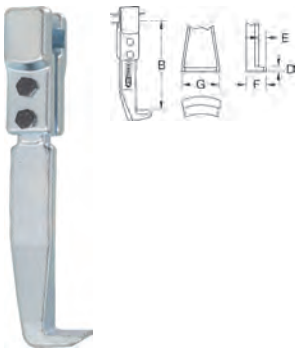

	B mm	max t	D mm	E mm	F mm	G mm	g	
615.0101	100	4,5	3	13	25	20	250	
615.0102	150	6,5	4	16	35	25	650	
615.0103	200	11,0	5	25	54	35	1650	
615.0104	225	11,0	10	33	50	55	2150	

Puller legs, extra long design

- For 2 arm and 3 arm pullers
- Special steel

	B mm	D mm	E mm	F mm	G mm	kg	
615.0501	200	3	13	25	20	0.50	
615.0502	300	4	16	35	25	1.10	
615.0503	300	5	25	54	35	2.50	
615.0504	400	5	25	54	35	3.20	
615.0505	500	5	25	54	35	3.90	
615.0506	300	10	33	55	50	3.00	
615.0507	400	10	33	55	50	3.70	
615.0508	500	10	33	55	50	4.40	

Quick adjustment puller legs

- Quick release function
- For 2 arm and 3 arm pullers
- Special steel



	B mm	D mm	E mm	F mm	G mm	g	
615.1101	100	3	13	25	20	200	
615.1102	150	4	16	35	25	700	
615.1103	200	3	13	25	20	500	

Puller legs, narrow design

- Best suited for limited access areas
- For 2 arm and 3 arm pullers
- Special steel



	B mm	D mm	E mm	F mm	G mm	g	
615.0901	100	3,6	6	13	27	200	
615.0902	200	3,6	6	13	27	500	
615.0903	250	3,6	6	13	27	600	
615.0904	100	2	6	13	27	200	
615.0905	200	2	6	13	27	500	
615.0906	250	2	6	13	27	1100	
615.0907	150	5	8	17	40	600	
615.0908	220	5	8	17	40	800	
615.0909	300	5	8	17	40	1800	

Quick adjustment puller legs, narrow design

- Quick release function
- Best suited for limited access areas
- For 2 arm and 3 arm pullers
- Special steel

	B mm	D mm	E mm	F mm	G mm	g	
615.1001	100	3,6	6	13	27	250	
615.1002	200	3,6	6	13	27	500	
615.1003	250	3,6	6	13	27	600	
615.1004	100	2,0	6	13	27	250	
615.1005	200	2,0	6	13	27	500	
615.1006	250	2,0	6	13	27	600	
615.1007	150	5,0	8	17	40	650	
615.1008	220	5,0	8	17	40	900	
615.1009	300	5,0	8	17	40	1100	

Pair of puller legs

- Legs are adjustable in the working depth
- Special steel



	For pullers	B mm	D mm	E mm	F mm	G mm	g	
615.5201	620.5201	70-85	2,5	4,5	8,5	23	180	
615.5202	620.5202	85-120	3,5	5	10	31	450	
615.5203	620.5203	125-155	3,5	5	10	31	550	

Pair of puller legs, narrow design

- Legs are adjustable in the working depth
- Best suited for limited access areas
- Special steel



	For pullers	B mm	D mm	E mm	F mm	G mm	g	
615.5301	620.5301	70-85	2,5	4,5	8,5	11	150	
615.5302	620.5302	85-120	3,5	5	11	12	500	

Puller legs with clamping yoke

- For puller legs with quick adjustment
- Clamping yoke compresses the legs firm y
- Prevents slipping
- Special steel



	For pullers	B mm	D mm	E mm	F mm	G mm	g	
615.5401	620.5401	90	3	12	26	24	260	
615.5402	620.5402	110	3	14	25	24	320	
615.5403	620.5403	150	3	14	25	24	420	

Puller legs with clamping yoke

- For 2 arm pullers with quick adjustment
- Legs are adjustable in the working depth
- Legs double ended usable
- Clamping yoke compresses the legs firm y
- Extremely robust spindle with inductively hardened thread
- Special steel



	For pullers	B mm	D mm	E mm	F mm	G mm	g	
615.5501	620.5501	170	3	12	25	24	530	
615.5502	620.5502	270	3	14	25	24	800	
615.5503	620.5503	330	3	14	25	24	850	

Puller legs double ended usable

- Legs double ended usable
- Special steel



	For pullers	B mm	D mm	E mm	F mm	G mm	g	
615.3001	620.3001+630.3001	85	2	9	21	12	100	
615.3002	620.3002+630.3002	130	4	11	25	21	320	

Puller legs

- Legs are adjustable in the working depth
- Special steel



	For pullers	B mm	D mm	E mm	F mm	G mm	g	
615.3601	620.3601+630.3601	85	3	14	25	18	100	
615.3602	620.3602+630.3602	150	4	20	36	25	260	
615.3603	620.3603+630.3603	220	5	25	48	30	650	
615.3604	620.3604+630.3604	250	5	25	48	30	1200	
615.3605	620.3605+630.3605	350	5	25	48	30	1600	
615.3606	620.3606+630.3606	400	5	25	48	30	1800	
615.3607	620.3607+630.3607	450	5	25	48	30	2000	
615.3608	620.3608+630.3608	500	5	25	48	30	2200	
615.3609	620.3609+630.3609	650	5	25	48	30	2800	
615.3610	620.3610+630.3610	1000	5	25	48	30	4200	

Puller legs

- Legs are adjustable in the working depth
- Special steel



	For pullers	B mm	D mm	E mm	F mm	G mm	g
615.3401	620.3401+630.3401	130	2	11	23	16	150
615.3402	620.3402+630.3402	200	4,5	16	33	20	400

REPLACEMENT SPINDLE

Spindle

- Extremely robust spindle with inductively hardened thread
- Special steel

	mm	L mm	H mm	Ø mm	mm	g
610.1401	12	150	15	10	M10	100
610.1402	14	190	20	12	M12	200
610.1701	17	60	21	14	M14 x 1,5	100
610.1702	17	130	21	14	M14 x 1,5	200
610.1703	17	200	21	14	M14 x 1,5	300
610.1704	17	250	21	14	M14 x 1,5	550
610.1705	17	60	20	16	M16 x 1,5	100
610.1706	17	70	20	16	M16 x 1,5	100
610.1707	17	90	20	16	M16 x 1,5	200
610.1901	19	70	20	18	M18 x 1,5	200
610.1902	19	130	20	18	M18 x 1,5	300
610.1903	19	170	20	18	M18 x 1,5	400
610.1904	19	240	20	18	M18 x 1,5	500
610.2201	22	110	23	21	G1/2"x14g	300
610.2202	22	160	23	21	G1/2"x14g	400
610.2203	22	175	23	21	G1/2"x14g	500
610.2204	22	210	23	21	G1/2"x14g	600
610.2205	22	235	23	21	G1/2"x14g	700
610.2206	22	270	23	21	G1/2"x14g	800
610.2701	27	180	35	26	G3/4"x14g	1000
610.2702	27	280	35	26	G3/4"x14g	1300
610.2703	27	360	35	26	G3/4"x14g	1700
610.3601	36	310	45	33	G1"x11g	2300
610.3602	36	360	45	33	G1"x11g	2650
610.3603	36	455	45	33	G1"x11g	3100
700.5612	21	113	27	16	M16 x 130	188

Hydraulic compression spindle

- With low effort maximal pressure
- Special steel



	L mm	H mm	max t	Ø Body mm	Body mm	Pressure spindle mm	mm	kg
615.0001	260	23	12	41	UN1.1/2"x16	M11x85	17	1.60
615.0002	410	55	12	32	G1/2"x14	M10x90	13	1.10
615.0003	410	55	12	36	G3/4"x14	M10x90	13	1.60
615.0004	460	80	15	41	G1"x11	M11x1,5x100	17	3.50

HYDRAULIC PULLERS AND PUMP

Universal 2 arm puller for using with hydraulic cylinder

- Consists of traverse and legs
- Through reversing the arms internal and external applications are possible
- Without hydraulic compression spindle / without hydraulic cylinder
- Without hydraulic pump
- Special steel



	A mm	B mm	max t	D mm	E mm	F mm	G mm	kg
640.0210	640	225	10	10	33	55	50	20.00
640.0215	640	225	15	10	33	55	50	20.00
640.0217	640	225	17	10	33	55	50	21.50

Universal 2 arm puller for using with hydraulic cylinder

- Consists of traverse and legs
- Through reversing the arms internal and external applications are possible
- Without hydraulic compression spindle / without hydraulic cylinder
- Without hydraulic pump
- Special steel



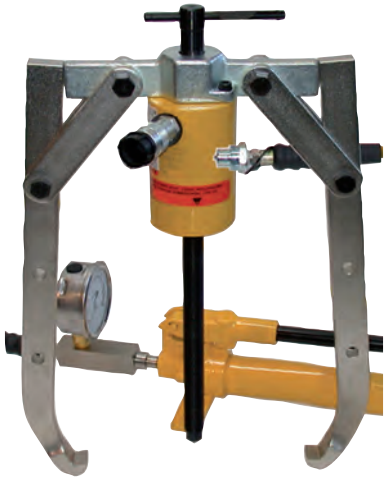

	A mm	B mm	max t	D mm	E mm	F mm	G mm	kg
640.0220	420	290	20	17	16	32	32	11.50
640.0230	700	400	30	24	23	48	40	20.00
640.0250	1000	700	50	35	42	87	50	50.00

Universal 3 arm puller for using with hydraulic cylinder

- Consists of traverse and legs
- Legs are adjustable in the working depth
- Traverse arm radial revolving and interchangeable
- Without hydraulic compression spindle / without hydraulic cylinder
- Without hydraulic pump
- Special steel



	A mm	B mm	mm	max t	D mm	E mm	F mm	G mm	kg
640.0310	350	250	UNC2.1/4" x 14	10	5	25	48	30	9.50
640.0315	350	250	M68 x 2	15	5	25	48	30	7.50
640.0317	350	250	G 1"x11g	17	5	25	48	30	8.50

Universal 3 arm puller for using with hydraulic cylinder

- Consists of traverse and legs
- Legs are adjustable in the working depth
- Traverse arm radial revolving and interchangeable
- Without hydraulic compression spindle / without hydraulic cylinder
- Without hydraulic pump
- Special steel



	A mm	B mm	max t	D mm	E mm	F mm	G mm	kg
640.0320	420	290	20	17	16	32	32	17.00
640.0330	700	400	30	24	23	48	40	30.00
640.0350	1000	700	50	35	42	87	50	70.00

Universal 3 arm puller for using with hydraulic cylinder

- Consists of traverse and legs
- Legs are adjustable in the working depth
- Traverse arm radial revolving and interchangeable
- Without hydraulic compression spindle / without hydraulic cylinder
- Without hydraulic pump
- Special steel



	A mm	B mm	mm	max t	D mm	E mm	F mm	G mm	kg
640.2315	150-700	200	M68x2	15	10	33	55	50	38.00
640.2317	150-700	200	G1"x11g	17	10	33	55	50	40.00

Hydraulic universal 3 arm puller

- Consists of traverse and legs
- Legs are adjustable in the working depth
- Traverse arm radial revolving and interchangeable
- Uniform load distribution and centered tigthening
- Without hydraulic compression spindle / without hydraulic cylinder
- Without hydraulic pump
- Special steel



	A mm	B mm	mm	max t	D mm	E mm	F mm	G mm	kg
640.2415	500	440	M68x2	15	17	16	32	32	22.00
640.2417	500	440	G1"x11g	17	17	16	32	32	24.00

Universal 3 arm puller for using with hydraulic cylinder

- Consists of traverse and legs
- Legs are adjustable in the working depth
- Traverse arm radial revolving and interchangeable
- Uniform load distribution and centered tigthening
- Without hydraulic compression spindle / without hydraulic cylinder
- Without hydraulic pump
- Special steel



	A mm	B mm	max t	D mm	E mm	F mm	G mm	kg
640.2420	500	270	20	17	16	32	32	27.00
640.2430	750	310	30	24	23	48	40	26.00
640.2450	1000	660	50	35	42	87	50	106.00

Spare traverse

- For hydraulic 2 arm puller
- Special steel

	max t	For pullers	kg
645.0210	10	640.0210	16.00
645.0215	15	640.0215	15.00
645.0217	17	640.0217	16.00
645.0220	20	640.0220	5.00
645.0230	30	640.0230	8.00
645.0250	50	640.0250	16.00

Spare traverse

- For hydraulic 3 arm puller
- Special steel

	max t	For pullers	kg
645.0310	10	640.0310	4.00
645.0315	15	640.0315	3.50
645.0317	17	640.0317	4.50
645.0320	20	640.0320	7.00
645.0330	30	640.0330	11.50
645.0350	50	640.0350	20.00
645.2315	15	640.2315	10.00
645.2317	17	640.2317	12.50
645.2415	15	640.2415	10.00
645.2417	17	640.2417	12.50
645.2420	20	640.2420	15.00
645.2430	30	640.2430	27.00
645.2450	50	640.2450	27.00

Traverse arm for hydraulic gear puller

- For hydraulic 3 arm puller
- Special steel

	For pullers	kg
645.2316	640.2315-17	7.00
645.2416	640.2415-17	4.00
645.2421	640.2420	4.00
645.2431	640.2430	5.00
645.2451	640.2450	10.00

Puller legs

- For 2 arm and 3 arm hydraulic pullers
- Special steel



	For pullers	B mm	D mm	E mm	F mm	G mm	kg
645.0251	640.0210-17 +640.2315-17	225	10	33	55	50	2.10
645.0252	640.0210-17 +640.2315-17	300	10	33	55	50	3.00
645.0253	640.0210-17 +640.2315-17	400	10	33	55	50	3.70
645.0254	640.0210-17 +640.2315-17	500	10	33	55	50	4.40
645.0261	640.0220	290	17	16	32	32	3.30
645.0262	640.0230	400	24	23	48	40	6.50
645.0263	640.0250	700	35	42	87	50	17.00
645.0351	640.0310-17	250	5	25	48	30	1.80
645.0352	640.0310-17	350	5	25	48	30	1.90
645.0353	640.0310-17	400	5	25	48	30	2.00
645.0354	640.0310-17	500	5	25	48	30	2.20
645.0361	640.0320	290	17	16	32	32	3.30
645.0362	640.0330	400	24	23	48	40	6.50
645.0363	640.0350	700	35	42	87	50	17.00
645.2461	640.2415-17	440	17	16	32	32	3.30
645.2462	640.2420	270	17	16	32	32	3.30
645.2463	640.2430	310	24	23	48	40	6.50
645.2464	640.2450	660	35	42	87	50	17.00

Hydraulic press

- For mechanical pullers
- Power increase with the normal pressure spindle
- Maximum pressure power with slight power expense
- Special steel

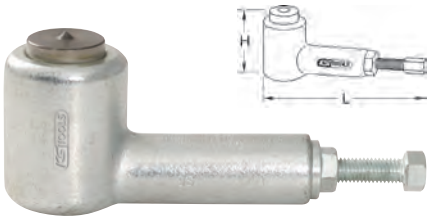

	L mm	H mm	max t	Hydraulic lift mm	mm	kg
640.0160	150.0	75,0	8	8	M14x1,5 x 60	0.80
640.0165	180.0	90,0	15	12	M14x1,5 x 85	1.80

Spindle hydraulic cylinder

- Simply working with spring withdrawal
- Necessary minimal oil volume 120 cm³ = 0,12 l
- Maximum pressure power with slight power expense
- Special steel

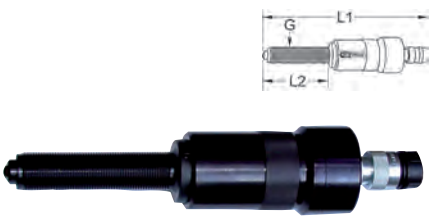

	Connection thread mm	L1 mm	L2 mm	Stroke mm	G	max t	kg
640.0130	3/8" - 18 NPT	403	150.0	156.0	G1"x11g	17	4.50

Flat hydraulic cylinder

- Simple working with spring withdrawal
- Maximum pressure power with slight power expense
- Special steel

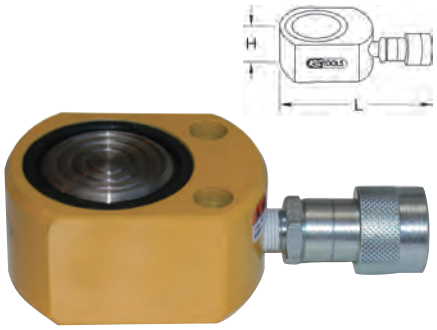

	Connection thread mm	L mm	H mm	Stroke mm	Minimal oil volume cm³/l	max t	kg
640.0140	3/8" - 18 NPT	140	42	12.0	18/0,018	10	1.60
640.0150	3/8" - 18 NPT	170	51	11.0	32/0,032	20	2.80

Single screw hydraulic cylinder

- Simply working with spring withdrawal
- Interchangeable pressure piece
- Low effort maximal pressure
- Special steel

	Connection thread mm	L mm	B mm	Stroke mm	G	max t	kg
640.0110	3/8" - 18 NPT	403	247	156.0	UNC2.1/4x14	10	4.00
640.0120	3/8" - 18 NPT	423	271	152.0	M68x2	15	7.00

Hollow piston hydraulic cylinder with spindle

- Simply working with spring withdrawal
- Nickel plated appliance pipe
- Maximum pressure power with slight power expense
- Special steel

Mounting thread at cylinder: 1.) 2 threaded hole with cylinder base (tube side) 2.) external thread: 20t=3-7/8"x12G30t=4-1/2"x12G50t=6-1/4"x12G



	Connection thread mm	L1 mm	L2 mm	B mm	Stroke mm	G	max t	kg
640.0170	3/8" - 18 NPT	670	162.0	98	49.0	UNC1"-8	20	10.60
640.0180	3/8" - 18 NPT	790	178.0	114	64.0	UNC1.1/4"-7	30	15.20
640.0190	3/8" - 18 NPT	975	247.0	159	76.0	UNC1.5/8"-5 1/2"	50	40.50

Hydraulic hand pump

- Single stage
- Reverse valve for advance and return stroke
- Safety valve for overload protection
- Includes pressure tube 1.8 meters
- Operating pressure max. 700 bar

	Connection thread mm	L mm	B mm	H mm	Flow rate per hub cm³	kg
640.0010	3/8" - 18 NPT	585	133	119	2.62	9.00

Pneumatic hydraulic pump

- Pneumatic working
- For simply agent press cylinders
- Safety valve for overload protection
- Includes pressure tube 1.8 meters
- Usable tank volume 2081cm³ = 2.081l
- Operating pressure max. 700 bar
- Output per stroke:
  0.8 l/min up to 200 bar
  0.1 l/min up to 700 bar

	Connection thread mm	L mm	B mm	H mm	kg
640.0020	3/8" - 18 NPT	255	130	200	11.00

Electric hydraulic pump

- Two stepped for simply agent press cylinders
- Safety valve for overload protection
- Usable tank volume 1900 cm³ = 1.9l
- Includes pressure tube 1.8 meters
- Motor specifi ation 0.37kW - 220/230 V - 50/60 hertz, single phase (3.2 amps)
- 1st Step: max. 13 bar
- 2nd. Step: max. 700 bar
- Output per stroke:
- 1. Steps 3.31 l/min
- 2. Step: 0.32 l/ min

	Connection thread mm	L mm	B mm	H mm	kg
640.0030	3/8“ - 18 NPT	244	244	362	14.00

Hydraulic tension and pressure unit

- For the dismantling and assembly of silent support, steering pin, track rod ends, wheel bearings, etc.
- Extremely high and uniform power construction
- Industrial execution with forged piston
- Suitable for both pressure and train uses
- Ideally suited for commercial vehicles
- Special steel
- In durable plastic storage case

			kg
700.1790	4 pcs	Hydraulic tension and pressure unit	15.40

consists of:

		kg
700.1791	Hydraulic hollow piston cylinder, 20 t	7.30
700.1792	Hydraulic hand pump, 700 bar	5.50
700.1793	Hydraulic hose, 2 m	1.10
700.1796	Feed shaft for hydraulic M20 x 500 mm	1.50

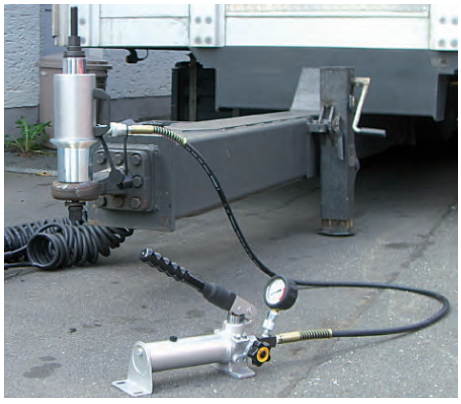

Hydraulic hollow piston spindle

- Simply working with spring withdrawal
- Nickel plated centre tube
- With low effort maximal pressure
- Special steel

Technical data:

Capacity:	20 t
Connection thread:	3/8” NPT IG
Piston:	industrial forged execution

	L mm	H mm	D1 mm	D2 mm	D3 mm	kg
700.1791	164.0	52.0	100.0	26.0	55.0	7.30

Hydraulic hand pump

- For the dismantling and assembly of silent support, steering pin, track rod ends, wheel bearings, etc.
- Extremely high and uniform power construction
- Suitable for both pressure and train uses
- Ideally suited for commercial vehicles
- Supplied without without manometer and hydraulic tube
- Special steel

Technical data:

Connection thread:	3/8“ NPT IG
Hand pump:	700 bar high pressure pump
Dimensions:	410 x 150 x 135

		kg
700.1792	Hydraulic hand pump	5.50

Hydraulics tube, 2 m including connection

- Ideally suited for commercial vehicles

Technical data:

Connection thread:	3/8“ NPT AG x 3/8“ NPT AG
Length:	2000 mm

		kg
700.1793	Hydraulics tube, 2 m including connection	1.10

Feed shaft for hydraulic

- Including nuts and spherical washer

Technical data:

Flat collar nut:	SW 30
Spherical washer :	Ø 36 mm
U-Washer:	Ø 51 x 7.5 mm, with central cone

	L mm	Thread	kg
700.1796	500.0	M 20 x 2.5	1.50

SAFETY COVERING FOIL

Safety covering foil

- Two ply welded
- High tearing resistance
- Variable adjustment
- UV resistant
- Temperature range of -25°C to +50°C

	B mm	L mm	max t	kg
610.0100	510.0	915.0	18	3.90

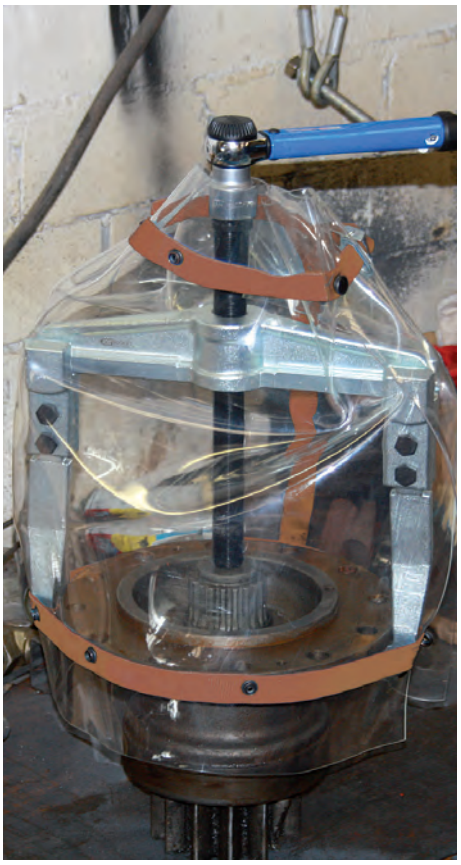

UNIVERSAL BELT PULLER

Universal belt pulley puller 3 arm

- For the damage free drawing off of pulley belts
- Universal suitable for several diameters and different hole divisions
- Less space requirement through compact method of building
- Suited for working on and finishi g engines
- Special steel

	A mm	B mm	mm	mm	D mm	E mm	F mm	G mm	kg	
150.3130	90	30	M16x1,5 x 75	24	10	6	11	12	0.90	

accessories:

		g	
150.3133	Spare traverse for 150.3130	300	

Universal belt pulley puller 2 arm

- For grooved belt pulleys
- Draw-off arms with locking device
- Clamp compresses hooks firm y
- Prevents slippage
- Less space requirement through compact method of building
- Suited for working on and finishi g engines
- Special steel

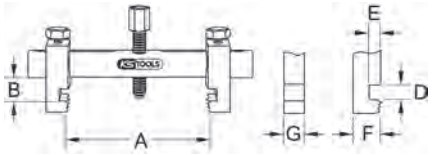

	A mm	B mm	mm	mm	D mm	E mm	F mm	G mm	kg	
150.3170	40-165	30	M12 x 75	17	10	9	18	35	1.60	

Universal camshaft solid wheel puller 2 arm

- Four special hooks for 5 and 6 armed spoked wheels
- Suitable for many VAG models
- Extremely robust spindle with inductively hardened thread
- Special steel

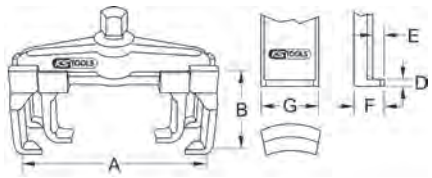

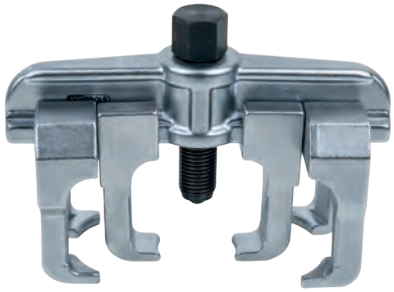

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg	
670.0211	130	44	2,5	M14x1,5 x 55	17	4	9	20	15	0.90	

STEERING WHEEL PULLER

Universal steering wheel puller 2 arm for passenger cars

- Short and long hooks as well as pressure piece for spindle
- Extremely robust spindle with inductively hardened Thread
- Special steel

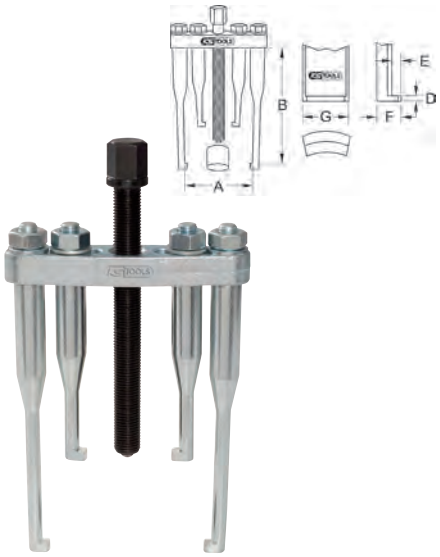

	A mm	B mm	max t	mm	mm	D mm	E mm	F mm	G mm	kg	
670.0201	90	135	2,5	M14x1,5 x 130	17	5	3,5	11	7,5	0.90	

Universal steering wheel puller 3 arm

- For steering wheels with three or four spokes
- Tie rings with rubber sleeve for protection on the steering wheel
- Special steel



	Ø mm	L mm	max t	mm	mm	kg	
670.0191	160	120	4	17	M14x1,5 x 130	1.90	

WINDSCREEN WIPER ARM PULLER

Universal windscreen wiper arm puller type 1

- Special steel

	A mm	B mm	mm	mm	g
700.1193	16	28	M8 x 45	11	140

Universal windscreen wiper arm puller type 2

- Spindle end with brass cap to prevent damage to the windscreen wiper arm
- Special steel

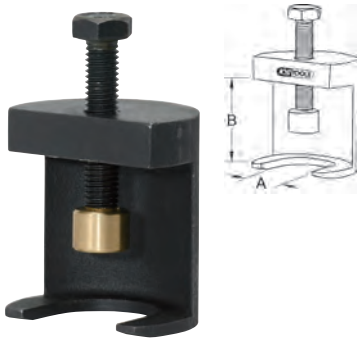

	A mm	B mm	mm	mm	g
700.1191	26	28	M8 x 75	13	450

Universal windscreen wiper arm puller type 3

- Spindle end with brass cap to prevent damage to the windscreen wiper arm
- Heavy execution for loosening the tightest of wiper arms
- Suitable for many automobiles and commercial vehicles
- Special steel

	A mm	B mm	mm	mm	g
700.1192	16	41	M10 x 80	17	510

Universal windscreen wiper arm puller 2 arm

- Hollow draw off spindle to prevent any damage to the rear wiper blades
- Special steel

	A mm	B mm	mm	mm	D mm	E mm	F mm	G mm	kg
700.1185	10-60	34	M12x1,25 x 34	17	3	5	14	15	1.00

Universal windscreen wiper arm puller set

- Suited for a multitude of vehicle types and car brands
- Alternatively can be used mechanically or with an impact spindle
- Special steel
- In durable plastic storage case

			kg
700.1240	13 pcs	Universal windscreen wiper arm puller set	3.81

consists of:

		g
700.1231	Slide hammer	1130
700.1232	Hollow spindle, L=95mm, M12	170
700.1233	Pull hook Gr.1, opening 22 mm, H = 50 mm	110
700.1234	Pull hook Gr.2, opening 25 mm, H = 50 mm	140
700.1235	Pull hook Gr.3, opening 16 mm, H = 60 mm	150
700.1236	Pull hook Gr.4, opening 25 mm, H = 41 mm	110
700.1237	Pull hook Gr.5, opening 30 mm, H = 50 mm	150
700.1238	Pull hook Gr.6, opening 20 mm, H = 50 mm	100
700.1239	Pull hook Gr.7, opening 17 mm, H = 56 mm	100
700.1241	Pull hook Gr 8, opening 16 mm, H = 80 mm	170
700.1242	Universal 2 Arm Wiper arm puller set with two pairs of arms	690
700.1243	Spindle extension, 30 mm, for 700.1232 and 700.1242	20
700.1244	Spindle design hollow, for 700.1232 and 700.1242	20

BALL JOINT PULLERS

Ball joint extractor cap „VIBRO IMPACT“

- Pressure pieces in the spindle rotating mouted
- Spindle suitable for impact wrenches
- Less space required
- Cast forged execution
- Special steel

	A mm	B mm	mm	mm	kg
450.0060	30	58	Tr.22	18	1.10
450.0061	32	90	Tr.24	25	2.51

Ball joint extractor cap „VIBRO IMPACT“

- Pressure pieces in the spindle rotating mouted
- Spindle suitable for impact wrenches
- Less space required
- Cast forged execution
- Special steel
- Without inspection panel

	A mm	B mm	mm	mm	kg
450.0062	39	58	Tr.24	25	2.83

Ball joint puller„VIBRO-IMPACT“ with window

- Pressure pieces in the spindle rotating mouted
- Spindle suitable for impact wrenches
- Less space required
- Cast forged execution
- Special steel

Application range: Universal in the HGV sector, e.g. SCANIA, MB, MAN (e.g. 414 drag link), HINO, etc.

	mm	A mm	B mm	mm	kg
450.0066	Tr.26	39	60	39	3.80

Impact ball joint puller

- Optimal positioning between suspension arm and axle casing
- Mouted spherical centering point
- Special steel

	A mm	B mm	mm	mm	kg
450.0085	35	60	M27 x 130	24	2.52

Universal ball joint ejector

- For many automobiles and commercial vehicles
- Special steel



	A mm	B mm	max t	mm	mm	g
670.0061	23	55	4	17	M16x1,5 x 60	800
670.0062	28	55	4	17	M16x1,5 x 60	800
670.0063	34	63	4	19	M18x1,5 x 70	900

Universal ball joint extractor

- Tools for removing of carrier joint and tie rod joints or track rod joint studs for steering gear, suspension arm, axle casing and stabiliser
- Universal suitable for passenger cars to commercial vehicles
- Compact and durable design
- Extremely robust spindle with inductively hardened thread

			kg
670.0060	3 pcs	23 - 28 - 34 mm	2.90

Brake linkage adjuster extractor, BPW

- Substantial construction for drawing off firm y sitting BPW brake linkage adjusters
- Suitable for older and automatic linkage adjusters
- Special steel



	A mm	B mm	C mm	H mm	mm	mm	kg
450.0305	65	78	160	127	M22x1,5 x 90	32	2.70

Universal ball joint separator

- For many automobiles and commercial vehicles
- Special steel



	A mm	B mm	C mm	max N•m	mm	mm	kg
670.0101	18	40	40	50	M14x1,5x60	17	0.30
670.0102	25	50	50	120	M16x1,5x60	17	0.70
670.0103	29	60	60	160	M18x1,5x75	19	1.00
670.0104	40	80	80	280	G1/2“x14gx110	22	2.10
670.0105	45	100	90	400	G3/4“x14gx125	27	2.80
670.0106	58	80	100	280	G1/2“x14gx110	22	2.10

Brake linkage adjuster extractor, HALDEX

- Substantial construction for drawing off firm y sitting brake linkage adjuster
- Certain stop through ring shaped bearing area
- Special steel

	A mm	B mm	C mm	H mm	mm	mm	kg
450.0300	65	78	160	127	M22x1,5 x 95	32	3.10

Universal ball joint extractor

- Robust model for loosening the track heads and push pole heads
- Optimal positioning through compact design and slim fork piece
- Special steel

	A mm	B mm	C mm	mm	mm	kg
450.0075	45	75	63	24	M22 x 135	1.63
450.0076	55	100	76	24	M22 x 135	1.84

Universal ball joint separator 2 stage adjustable

- Separator 2 stage adjustable
- Ideal for confined spa es
- Spindle hexagonal with additional drive point
- Forged
- Special steel

	A mm	B mm	mm	mm	kg
700.5610	24	0-55	M16 x 90	20	1.05

Universal ball joint separator 4 stage adjustable

- Separator 4 stage adjustable
- Spindle hexagonal with additional drive point
- Forged
- Special steel
- Stage 1: 24 mm
- Stage 2: 30 mm
- Stage 3: 40 mm
- Stage 4: 45 mm

	A mm	B mm	mm	mm	kg
700.5630	20	24-45	M14 x 105	18	1.50

Universal ball joint separator

- Extra fl t execution
- Forged
- Special steel

	A mm	B mm	mm	mm	kg
700.5620	18	20-37	M14 x 85	16	0.97

Universal ball joint separator

- Extra strong execution
- Forged
- Special steel

	A mm	B mm	mm	mm	kg
700.5625	20	20-37	M12 x 85	16	1.07

Universal ball joint extractor

- Robust model for loosening the track heads and push pole heads
- Optimal positioning through compact design and slim fork piece
- Adjustment of the clamp by means of the spindle
- Special steel

	A mm	B mm	mm	mm	kg
450.0070	32	75	M22 x 90	30	2.49
450.0071	45	80	M22 x 90	30	2.61

Ball joint puller HGV, mechanical

- Massive execution for loosening the track heads and push pole heads
- Enormous power through lever transmission
- Special steel



	A mm	B mm	mm	mm	kg
450.0051	36	70	M24x3x160	36	4.34

Hydraulic universal ball joint extractor set

- Massive execution for loosening the track heads and push pole heads
- Enormous power through lever transmission
- Requires light expenditure of energy
- Special steel

			kg
450.0050	3 pcs	Hydraulic universal ball joint extractor set	6.55

consists of:

		kg
450.0051	Ball Joint Puller HGV, mechanical	4.34
450.0052	Adaptor M24 x 3 for Hydraulic Thrust bolt.	0.66
700.1400-1	Hydraulic spindle with centering point - Ag 1.1/2" x 16 G	1.34

Clamp screw ejector set

- For loosening seized clamping screws (M10) on 4-link axles
- For right and left wishbone clamping screws
- For aluminium and steel four link axles
- Release force up to max. 12 t
- Universally applicable hydraulic spindle (mounting thread 1.1/2"x16 start)
- Fine adjustment for optimum efficien y
- In durable plastic storage case

Application range: Audi A4, A6, Volkswagen Passat from 97, identical group vehicles



		A mm	kg
670.0075	4 pcs	65 - 125	4.17

consists of:

		kg
615.0001	Hydraulic pressure spindle,17mm,UN 1.1/2"x16Gx260mm	1.60
670.0074	Clamp screw ejector	0.50
670.0077	Flat thrust piece	0.03
670.0078	Mandrel thruster	0.03

Clamp screw ejector set without spindle

- For loosening seized clamping screws (M10) on 4-link axles
- For right and left wishbone clamping screws
- For aluminium and steel four link axles
- Release force up to max. 12 t
- Universally applicable hydraulic spindle (mounting thread 1.1/2"x16 start)
- Fine adjustment for optimum efficien y
- In durable plastic storage case

Application range: Audi A4, A6, Volkswagen Passat from 97, identical group vehicles



		A mm	kg	
670.0076	3 pcs	65 - 125	2.74	

consists of:

		kg	
670.0074	Clamp screw ejector	0.50	
670.0077	Flat thrust piece	0.03	
670.0078	Mandrel thruster	0.03	

Hydraulic universal ball joint ejector set

- For extracting the ball joints and ball plug at track rod ends, direct transmissions and suspension axles
- Revolving cylinder reception
- Compact construction
- Requires light expenditure of energy
- Special steel

			kg	
450.0120	6 pcs	Hydraulic universal ball joint ejector set	9.57	

consists of:

		kg	
450.0121	Ball joint ejector	2.40	
450.0122	Clevis, Ø max 25mm	1.35	
450.0123	Clevis, Ø max 33mm	1.27	
450.0124	Clevis, Ø max 47mm	1.21	
450.0126	Hydraulic fl t cylinder, 20 t	2.90	
450.0127	Safety chain	0.44	

Universal ball joint separator

- For separating the ball plug in the extension of the ball joint
- Suitable for many vehicles + transporter
- Also suitable for aluminum undercarriages
- Special steel

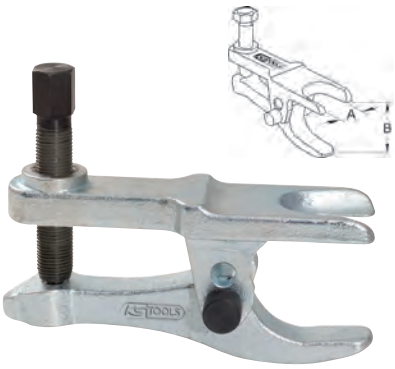

	A mm	B mm	max t	mm	mm	kg	
670.0121	24	50	3,5	17	M16x1,5x70	1.40	
670.0122	24	60-80	3,5	17	M15x1,5x90	1.80	

Universal ball joint separator 2 stage adjustable

- Separator 2 stage adjustable
- Ideal for confined spa es
- Extremely high clamping range
- Spindle hexagonal with additional drive point
- Forged
- Special steel

	A mm	B mm	mm	mm	kg	
700.5615	18-24	23-110	M16 x 130	16	1.20	

Universal ball joint separator

- For separating the ball plug in the extension of the ball joint
- Suitable for many vehicles
- Special steel

	A mm	B mm	max t	mm	mm	kg	
670.0111	18-22	50	3,5	19	M14x1,5x48	0.90	

Universal ball joint separator

- For separating the ball plug in the extension of the ball joints
- Suitable for many vehicles + moderately heavy trucks
- Special steel

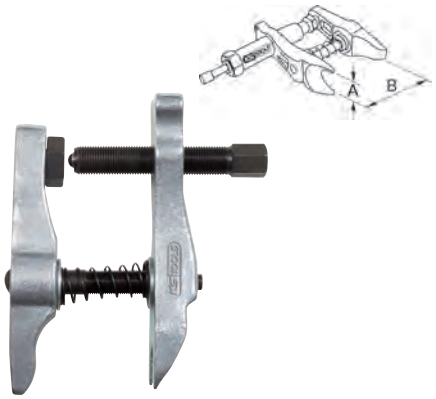

	A mm	B mm	max t	mm	mm	kg	
670.0131	36	90	10	22	G1/2"x14gx110	3.70	

Universal ball joint separator

- For separating the ball plug in the extension of the ball joints
- Suitably for many heavy trucks, buses + low floor bu
- For bolts Ø 35.0 - 45.0 mm
- Special steel

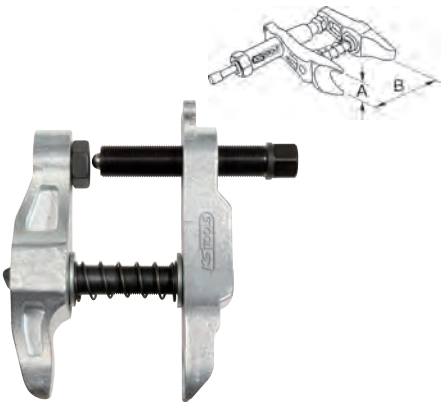

	A mm	B mm	max t	mm	mm	kg	
670.0161	45	115	20	27	G3/4"x14gx125	6.40	

Hydraulic universal ball joint separator

- For separating the ball plug in the extension of the ball joints
- Suitable for many vehicles + moderately heavy trucks
- For bolts Ø 27.0 - 36.0 mm
- Special steel

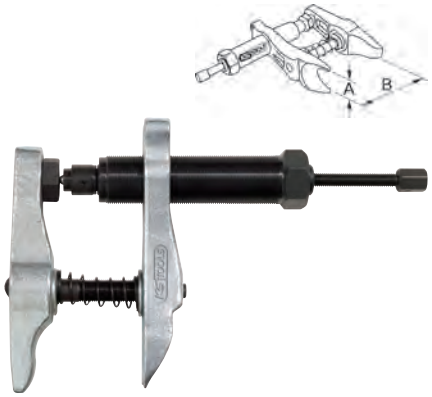

	A mm	B mm	max t	mm	mm	kg	
670.0141	36	90	10	17	1.1/2"x16G	4.70	

Universal ball joint separator without hydraulic cylinder

- For separating the ball plug in the extension of the ball joints
- Suitable for many vehicles + moderately heavy trucks
- For bolts Ø 27.0 - 36.0 mm
- Special steel
- For use with 640.0140

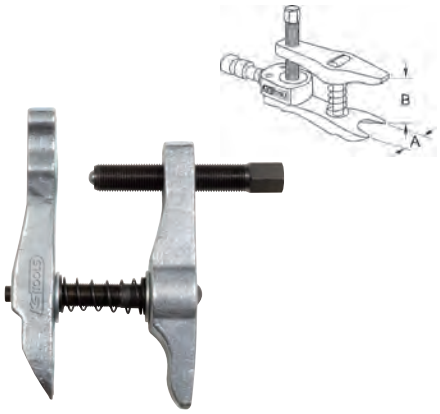

	A mm	B mm	max t	Adjusting screw mm	Ambos spindle mm	mm	kg
670.0151	36	90	10	M18x1,5x120	G1/2"x14x110	22	3.50

Hydraulic universal ball joint separator

- For separating the ball plug in the extension of the ball joints
- Suitably for many heavy trucks, buses + low floor bu
- For bolts Ø 35.0 - 45.0 mm
- Special steel

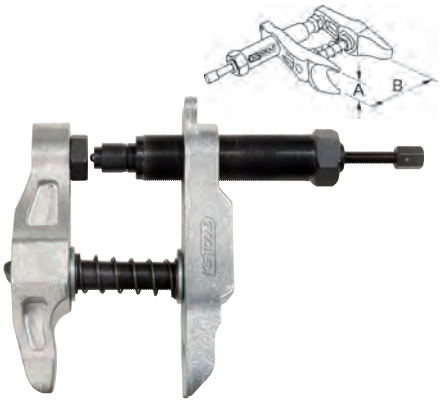

	A mm	B mm	max t	mm	mm	kg
670.0171	45	115	20	17	M14x1,5x50	7.00

Universal ball joint separator without hydraulic cylinder

- For separating the ball plug in the extension of the ball joints
- Suitably for many heavy trucks, buses + low floor bu
- For bolts Ø 35.0 - 45.0 mm
- Special steel
- For use with 640.0140 / 640.0150

	A mm	B mm	max t	mm	mm	kg
670.0181	45	115	20	27	G3/4"x14gx125	6.00

Wheel hub impact puller

- Suitable for removing 4 and 5 hole wheel hubs
- Holes from 100 to 150 mm
- With 1.2 kg impact force
- Optimal grip with plastic handle
- Ideally used when replacing wheel bearings
- Simple handling
- Special steel

	Rim diameter Ø mm	Bolt Ø mm	Hammer Ø mm	Slide rail Ø mm	Adaptor thread mm	kg
670.0001	100-150	max. 14	60	60	M16 x 1,5	3.70

WHEEL HUB EXTRACTOR & DRIVE SHAFT EJECTOR

Flange extractor set

- In order to separate the fla ges in pipes to enable gasket changing or maintenance works
- For screws M16 - M24
- Special steel

		Ø mm	mm	mm	kg
670.0251	2 pcs	80-250	M24x1,5x110	24	5.60

Separating and assembly fork

- For quick loosening of track and steering rod ends steering arms and additional controlling parts
- Ideal for confined spa es
- Special steel

	A mm	L mm	kg
670.0091	18	330.0	0.90
670.0092	23	330.0	0.90
670.0093	31	330.0	1.10
670.0094	35	330.0	1.30
670.0095	45	330.0	1.50

Universal wheel hub extractor set

- For bolt circle diameter up to 250 mm
- Clamp foot hole for bolts 14 mm, 18 mm + 22 mm
- Special steel

			kg
670.0013	5 pcs	Universal wheel hub extractor set	3.60

Universal wheel hub extractor set

- For bolt circle diameter up to 250 mm
- Clamp foot hole for bolts 14 mm, 18 mm + 22 mm
- Special steel

			kg
670.0014	6 pcs	Universal wheel hub extractor set	4.10

Universal wheel hub extractor set

- For bolt circle diameter up to 250 mm
- Clamp foot hole for bolts 14 mm, 18 mm + 22 mm
- Special steel

			kg
670.0015	7 pcs	Universal wheel hub extractor set	4.60

accessories:

		g
670.0017	Traverse bar for weehl hub extractor set	820
670.0018	Puller leg + reception ring Ø14mm + Ø18mm	540
670.0019	Reception ring Ø 14mm	22
670.0020	Reception ring Ø 18mm	16
610.2701	Spindle, 27mm, G3/4"x14Gx180mm	1000

Universal wheel bearing puller and drive shaft puller, hydraulic

- Special tool for expressing the joint hubs or drawing off of the wheel hub
- Massive tool, made out of a one piece
- Special steel

			kg
700.1400	11 pcs	Universal wheel bearing puller and drive shaft puller, hydraulic	9.34

consists of:

		g
700.1400-1	Hydraulic spindle with centering point - Ag 1.1/2" x 16 G	1344
700.1400-2	Disc traverse 100 mm	920
700.1400-3	Puller pull arm set, 5 pcs	500
700.1400-4	Impact spanner, 30mm, L=200mm	935
700.1400-5	Impact spindle	2015
700.1400-7	Extension, small	60

Universal wheel hub extractor

- Variable use for bolt circle diameter up to 300 mm
- Universal use for bolts up to max. Ø 22 mm
- With 2 rods and trapezoid thread spindle
- Optionally upgradeable with hydraulic spindle or slide hammer
- Special steel

			kg
450.0040	12 pcs	Universal wheel hub extractor	15.00

consists of:

		g
450.0041	Tapered thrust bolt Tr.30	1680
450.0043	Traverse, 370 mm	8000
450.0044	Extension and nut	800
450.0045	Thread adaptor, M18 x 1,5	600
450.0046	Thread adaptor, M20 x 1,5	600
450.0055	Thread adaptor, M22 x 1,5	604
450.0048	Locating thrust piece size1, 90 mm / 65 mm	1140
450.0049	Locating thrust piece size2, 110 mm / 85 mm	1340

Universal wheel hub extractor set

- Extra heavy and solid execution
- For the extension of the wheel hub
- Ideal for passenger cars and small vans
- Enormous impact delivery of up to 11 t
- With 6 kg impact weight
- Includes 3 kg additional weight
- With M 20 x 1.5 mm connection thread
- Weights variably attachable and removable
- Special steel

	Rim diameter Ø mm	Bolt Ø mm	mm	L mm	kg
700.1420	98-138	max. M14	AG M20x1,5	930.0	15.27

consists of:

		kg
700.1411	Wheel hub/drive fla ge dismatling tool	2.55
700.1415	Universal slide hammer 6 + 3 kg, 850mm	12.00
700.1421	Adaptor ET UN 1.1/2" x IT M20 x 1.5	0.72

Brake disc puller set for Ford Transit

- For damage free removal of the brake disc
- No damages to wheel bearing and ABS sensor
- Quick attachment - large working freedom
- Optimum release force thanks to axially guided impact
- Extra heavy and solid execution
- Enormous impact delivery of up to 11 t
- With 6 kg impact weight
- Includes 3 kg additional weight
- With M 20 x 1.5 mm connection thread
- Weights variably attachable and removable
- Special steel

Application range:
Ford Transit 2000.5 (01/200 - 05/2006)
Ford Transit 2006.5 (04/2006 -)
except vehicles with reinforced front axle (payload over 1850 kg)

	Bolt Ø mm	mm	L mm	kg
700.1470	M10	AG M20x1,5	1000.0	14.50

consists of:

		kg
700.1415	Universal slide hammer 6+3kg, 850mm	12.00
700.1471	Brake disc puller fla ge Ford Transit	2.00
700.1472	Adaptor for slide hammer f.700.1471	0.50

Wheel hub and bearing dismantling set

- Special tool for expressing the joint hubs or drawing off of the wheel hub
- Massive tool, made out of a one piece
- Special steel

			kg
700.1410	7 pcs	Wheel hub and bearing dismantling set	4.80

consists of:

		g
700.1400-1	Hydraulic spindle with centering point - Ag 1.1/2" x 16 G	1344
700.1411	Wheel hub/drive fla ge dismatling tool	2550
700.1412	Reception ring set, 5 pcs.	150

Universal wheel hub extractor for commercial vehicles

- Extracting the wheel hubs and/or housing over the grease cap thread
- Six sided drive enable unscrewing on the cap
- Robust execution
- Trapezoid thread spindle for high removal power drive SW 30
- Special steel

	Ø mm	mm	mm	kg
450.0000	AG M115x1,5	Tr.30x260	30	3.74
450.0001	AG M125x2,0	Tr.30x260	30	1.56
450.0002	IG M135x2,0	Tr.30x260	30	2.19
450.0003	IG M136x2,5	Tr.30x260	30	1.48
450.0004	AG M155x3,0	Tr.30x260	30	0.71

UNIVERSAL AUTOMOTIVE PULLERS

Draw off lining

- For drawing off the shoulder housings interior ring of light machines, motor parts and other machine parts
- Special steel

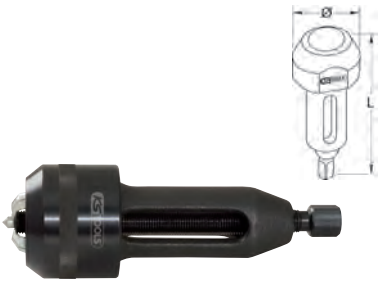

	Ø mm	L mm	max N•m	mm	mm	kg
670.0221	5-32	135	60	17	M14x1,5 x 130	1.40

Universal press support

- Universal adjustable support
- Through the height adjustable bolts a fix ure and vibration safe 3 level points construction is created
- The amount and arrangement at thread enable the conformity to almost every component surface
- Includes lateral safety device

	L mm	B mm	H mm	Replacement bolt & nut set	kg
700.1740	245.0	200.0	40.0	700.1741	8.10

Universal slide hammer

- Extra heavy and solid execution
- For universal use for automobiles + trucks
- Enormous impact delivery of up to 11 tonnes
- With 6 kg impact weight
- Includes 3 kg additional weight
- With M 20 x 1.5 mm connection thread
- Additional weights can be screwed together
- Special steel

	L mm	kg	
700.1415	850.0	12.00	

accessories:

		kg	
700.1411	Wheel hub/drive fla ge dismatling tool	2.55	
700.1421	Adaptor ET UN 1.1/2" x IT M20 x 1.5	0.72	
700.1423	Adaptor for double hook	0.27	
700.1424	Universal hook M20 x 1.5 for ball joints + car body	2.40	
700.1425	Double hook	0.75	
700.1428	Adaptor ET UN 1.1/2" x IT M16 x 2.0	0.72	
700.1430	Adaptor ET UN 1.1/2" x IT M16 x 1,5	0.72	
152.1056	Single screw adaptor AG M17 x 1	0.24	

WHEEL BEARING PULLER

VAG wheel bearing tool set

- For the new VAG models with wheel housings/hub unit
- Required for the correct installation
- High time saving - faster execution at workshop press than at the vehicle ideally suited for Wheel bearing diameters 62 mm / 66 mm / 72 mm (13 "/ 14 "/ 15 „-undercarriages)
- The extension of the wheel housing takes place by means of the available workshop facility

Application range: Volkswagen-Polo new, Audi A2, Skoda Fabia, Seat Ibiza

			kg	
150.2130	14 pcs	VAG wheel bearing tool set	17.20	

consists of:

		kg	
150.2131	Half shell coupling anodized, for bearing Ø 62 mm	1.99	
150.2132	Half shell coupling chrome, for bearing Ø 66 mm	1.46	
150.2133	Half shell coupling black, for bearing Ø 72 mm	1.71	
150.2134	Pressure bell universal M22	2.10	
150.2135	Thrust bearing No. 66 / 72 mm, Length 160 mm	4.20	
150.2136	Thrust bearing No. 62 mm, length 160 mm	4.03	
150.2137	Fixing screw M12 x 1.5, for half shell, set of 2 pieces	0.03	
150.2138	Fixing screw M14 x 1.5, for half shell, set of 3 pieces	0.05	

Tool set for compact wheel hub/bearing unit

- Includes spindle M18/M20
- Enables use directly on the vehicle
- Minimum labour - high time savings
- Safe and simple use
- Use also in connection with workshop press
- Possible expansion for bearing Ø 62+66 mm
- Special steel

Application area: Audi A2 from MY 00, Skoda Fabia from MY 00, Volkswagen Polo from MY 02 / Fox from MY 05, Seat Ibiza from MY 02, etc.

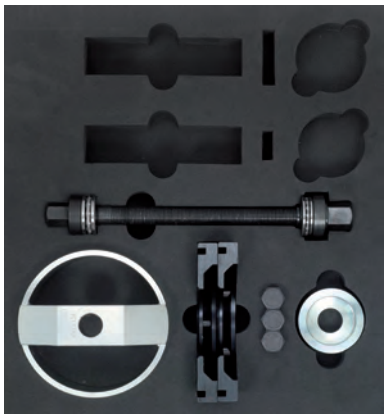

		Ø mm	kg	
150.2145	10 pcs	72,0	9.74	

consists of:

		kg	
150.2146	Drive unit, 3 pcs	0.54	
150.2134	Pressure bell universal	2.10	
150.2133	Half cup pair black f.bearing Ø72mm	1.71	
150.2149	Thrust piece for 150.2143	0.43	
150.2138	Fixing screw f.half cup,M14x1,5, 3 per pack	0.05	

accessories:

		kg	
150.2145-1	Compact wheel hub tool set,Ø72mm -spindle	5.93	

Half cup auxiliary kit Ø 62 mm

- As complement to 150.2145
- Special steel

Application range: Volkswagen Lupo, Audi A2 1,2L, etc.

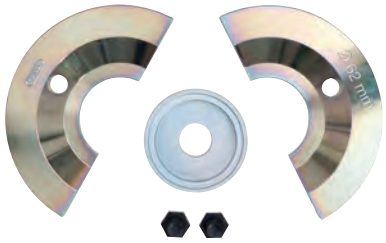

		Ø mm	kg	
150.2141	5 pcs	62,0	3.00	

consists of:

		g	
150.2147	Thrust piece for 150.2141	427	
150.2131	Half cup pair anodised f.bearing Ø62mm	1990	
150.2137	Fixing screw f.half cup,M12x1,5, 2 per pack	30	

Half cup auxiliary kit Ø 66 mm

- As complement to 150.2145
- Special steel

Application range: Volkswagen Polo from MY 02, Skoda Fabia from MY 00, etc.

		Ø mm	kg	
150.2142	6 pcs	66,0	3.10	

consists of:

		kg	
150.2148	Thrust piece for 150.2142	0.43	
150.2132	Half cup pair chrome f.bearing Ø66mm	1.46	
150.2138	Fixing screw f.half cup,M14x1,5, 3 per pack	0.05	

Half cup auxiliary kit Ø 72 mm

- As complement to 150.2145
- Special steel

Application range: Audi A2 from MY 00, Skoda Fabia from MY 00, Volkswagen Polo from MY 02 / Fox from MY 05, Seat Ibiza from MY 02, etc.

		Ø mm	kg	
150.2143	6 pcs	72,0	2.90	

consists of:

		kg	
150.2149	Thrust piece for 150.2143	0.43	
150.2133	Half cup pair black f.bearing Ø72mm	1.71	
150.2138	Fixing screw f.half cup,M14x1,5, 3 per pack	0.05	

Drive spindle

- As complement to wheel bearing puller 150.2145-1
- Special steel

Technical data:

Thread:	M20
Drive spindle:	External hexagon 22,0 mm
Drive nut:	External hexagon 30,0 mm

		L mm	g	
150.2146	3 pcs	300.0	540	

Wheel bearing tool set

- Removal and installation of the compact wheel hubs / bearing unit
- Enables de -and assembly directly on the vehicle
- Minimum labour
- Safe and simple use
- Special steel
- In durable plastic storage case

Application range: Volkswagen T5 Transporter

			kg	
150.2350	13 pcs	Wheel bearing tool set	20.00	

consists of:

		kg	
150.2351	Cross member with threaded ring	2.60	
150.2352	Tie rod set, 2 pcs	1.10	
150.2353	Half cup mounting, 2 pcs	4.95	
150.2354	Half cup set, 2 pcs Removal	1.70	
150.2355	Half cup set, 2 pcs Installation	1.90	
150.2356	Thrust piece removal	0.55	
150.2357	Thrust piece installation	0.95	
150.2358	Trapezoidal threaded spindle with 2x thrust beating and nut	1.25	
980.1085	Special thread grease	0.02	

Wheel hub and bearing extractor supplement set

- By means of this supplement assortment wheel hubs with a hub alliance of more than Ø 75 mm can be correctly dismantled
- The wheel hub- and joint cover dismantling fla ge is through long thread bolts and Distance sheath is a slight distance away so the hub alliance can be placed
- Special bevelled edge which the hub can easily be replaced with contamination to the wheel hub housings
- Includes wall holder

			kg	
700.1435	21 pcs	Wheel hub and bearing extractor supplement set	2.88	

consists of:

		g	
700.1436	Wall holder for supplement set	600	
700.1437	Spacer sleeve, length 40 mm	115	
700.1438	Threaded bolt M12 x 1.5 mm, length 80 mm	90	
700.1439	Threaded bolt M14 x 1.5 mm, length 40 mm	90	
700.1440	Threaded bolt M14 x 1.5 mm, length 80 mm	90	

Universal car wheel bearing tool set

- For the dismantling and assembly of wheel housings and hub directly on the vehicle
- Extension of the suspension strut and axle joint is no longer required
- Correct and protective installation of the housings through the correct pressure point at the bearing outer ring
- Suited for axle tube and for axle with the housing adjoining at an alliance
- High time savings as reactive axle alignment is not necessarily required
- 300 mm gear pulling spindle
- Through enclosed bolts (M12 + M14) wheel hubs can be removed
- Pressure bearing protects against increased friction during the process
- Special steel
- In durable plastic storage case

Application range: Volkswagen, Audi, Opel, Mercedes Benz, Peugeot, Citroen, Renault, Ford, Honda, Mazda, Mitsubishi, Nissan, Toyota, Austin-Maestro, BMW

			kg	
150.2250	31 pcs	Universal car wheel bearing tool set	11.24	

consists of:

		g	
150.2092	Threaded bolt, f.150.2250, M12x1,5 3p	100	
150.2093	Threaded bolt, f.150.2250, M14x1,5 3p	120	
150.2251	Bearing plate #1 f.150.2250	525	
150.2252	Bearing plate #2 f.150.2250	458	
150.2253	Bearing plate #3 f.150.2250	432	
150.2254	Bearing plate #4 f.150.2250	386	
150.2255	Bearing plate #5 f.150.2250	358	
150.2256	Bearing plate #6 f.150.2250	340	
150.2257	Bearing plate #7 f.150.2250	304	
150.2258	Bearing plate #8 f.150.2250	344	
150.2259	Bearing plate #9 f.150.2250	304	
150.2260	Bearing plate #10 f.150.2250	282	
150.2261	Bearing plate #11 f.150.2250	247	
150.2262	Bearing plate #12 f.150.2250	200	
150.2263	Bearing plate #13 f.150.2250	217	
150.2264	Bearing plate #14 f.150.2250	203	
150.2265	Stepped plate, small f.150.2250,Ø77+68mm	608	
150.2266	Stepped plate, large f.150.2250,Ø92+81mm	879	
150.2267	Puller sleeve f.150.2250, 68mm	399	
150.2268	Puller sleeve f.150.2250, 77mm	552	
150.2269	Puller sleeve f.150.2250, 81mm	639	
150.2270	Puller sleeve f.150.2250, 92mm	707	
150.2271	Spindle sleeve f.150.2250	227	
150.2272	Thrust bolt f.150.2250	230	
150.2273	Washer f.150.2250	20	
150.2274	Spindle f.150.2250	911	
150.2275	Bearing f.150.2250	55	

Bearing assembly and deassembly tool set

- Can be used manually with a hammer or workshop press
- Optimal placing through the pressure plates
- For easy and damage free assembly
- For the correct dismantling and assembly of bearings
- Suitable for commercial, agricultural engineering and construction machines
- Forged, robust execution
- Special steel
- In durable plastic storage case

			kg	
450.0080	5 pcs	Bearing assembly and deassembly tool set	6.45	

consists of:

		kg	
450.0082	Pressure plates (use with press)	0.51	
450.0083	Impact plates long (use with a hammer)	1.91	
450.0084	Special 6 point socket for mandral shaft	0.34	
450.0088	Universal 3 jaw thrust piece	0.32	
450.0087	Locking bolt for jaw spreading	0.02	

accessories:

		kg	
450.0081	Spare jaw set for 450.0081, 7 pcs	6.55	

Press and pull sleeve set

- For the disassembly and assembly of bearings
- Ideally for silent bearings, hydro bearings, bushings, ball bearing, simmerrings, etc
- Universal use for automobile, truck, municipally, country and forestery technology, etc.
- Outstanding to use also in connection with workshop press or hollow piston cylinder
- According to use application the sheaths individually can be reworked
- Pressure bearing protects against increased friction during the process
- In durable plastic storage case

Attention: the spindles need to be greased with a good lubricant for each application! Do not overload spindles, otherwise the thread lengthens and the pitch of the nut and spindle no longer match. The result: the nuts will seize up. Always check the applied force at the drive with a torque wrench!

Maximum permitted torque:
Spindle M10x1,5 60 Nm
Spindle M12x1,5 100 Nm
Spindle M14x1,5 180 Nm
Spindle M16x1,5 250 Nm

			kg	
700.1700	36 pcs	Press and pull sleeve set	14.80	

consists of:

		g	
700.1701	Thrust bolt, M10 with bearing	125	
700.1702	Thrust bolt, M12 with bearing	124	
700.1703	Thrust bolt, M14 with bearing	130	
700.1704	Thrust bolt, M16 with bearing	130	
700.1706	Stepped plate, #1	350	
700.1707	Stepped plate, #2	390	
700.1708	Stepped plate, #3	420	
700.1709	Stepped plate, #4	450	
700.1710	Spindle, M10	170	
700.1711	Spindle, M12	253	
700.1712	Spindle, M14	350	
700.1713	Spindle, M16	473	
700.1714	Pressure sleeve, Internal Ø: 34 mm, External Ø: 44 mm	250	
700.1715	Pressure sleeve, Internal Ø: 36 mm, External Ø: 46 mm	260	
700.1716	Pressure sleeve, Internal Ø: 38 mm, External Ø: 48 mm	280	
700.1717	Pressure sleeve, Internal Ø: 40 mm, External Ø: 50 mm	290	
700.1718	Pressure sleeve, Internal Ø: 42 mm, External Ø: 52 mm	300	
700.1719	Pressure sleeve, Internal Ø: 44 mm, External Ø: 54 mm	320	
700.1720	Pressure sleeve, Internal Ø: 46 mm, External Ø: 56 mm	330	
700.1721	Pressure sleeve, Internal Ø: 48 mm, External Ø: 58 mm	340	
700.1722	Pressure sleeve, Internal Ø: 50 mm, External Ø: 60 mm	350	
700.1723	Pressure sleeve, Internal Ø: 52 mm, External Ø: 62 mm	370	
700.1724	Pressure sleeve, Internal Ø: 54 mm, External Ø: 64 mm	380	
700.1725	Pressure sleeve, Internal Ø: 56 mm, External Ø: 66 mm	390	
700.1726	Pressure sleeve, Internal Ø: 58 mm, External Ø: 68 mm	410	
700.1727	Pressure sleeve, Internal Ø: 60 mm, External Ø: 70 mm	420	
700.1728	Pressure sleeve, Internal Ø: 62 mm, External Ø: 72 mm	430	
700.1729	Pressure sleeve, Internal Ø: 64 mm, External Ø: 74 mm	440	
700.1730	Pressure sleeve, Internal Ø: 66 mm, External Ø: 76 mm	460	
700.1731	Pressure sleeve, Internal Ø: 68 mm, External Ø: 78 mm	470	
700.1732	Pressure sleeve, Internal Ø: 70 mm, External Ø: 80 mm	480	
700.1733	Pressure sleeve, Internal Ø: 72 mm, External Ø: 82 mm	490	

Press and pull sleeve kit

- For the assembly and disassembly of bearings
- Ideally for silent bearings, hydro bearings, bushings, ball bearings, simmer rings, etc.
- Universal use for passenger cars, trucks, communal, agricultural and forest vehicles
- Outstanding to use also in connection with workshop press or hollow piston cylinder
- According to use application the sheaths individually can be reworked
- Pressure bearing protects against increased friction during the process
- In durable plastic storage case

Caution: The spindles must be greased before fi st use! Overloading leads to unwanted material stresses or breakage Always check the power settings on the drive with a torque wrench Not to be combined with other systems

Maximum allowable torque moments:
Spindle (ACME) M10 x P1.5 60 Nm
Spindle (ACME) M12 x P2.0 120 Nm
Spindle (ACME) M14 x P2.0 150 Nm
Spindle (ACME) M16 x P2.5 250 Nm

			kg	
700.1550	29 pcs	Press and pull sleeve kit	17.00	

consists of:

		g	
700.1550-34	Pull sleeve,internal Ø 34mm,external Ø 44mm	250	
700.1550-36	Pull sleeve,internal Ø 36mm,external Ø 46mm	260	
700.1550-38	Pull sleeve,internal Ø 38mm,external Ø 48mm	280	
700.1550-40	Pull sleeve,internal Ø 40mm,external Ø 50mm	290	
700.1550-42	Pull sleeve,internal Ø 42mm,external Ø 52mm	300	
700.1550-44	Pull sleeve,internal Ø 44mm,external Ø 54mm	320	
700.1550-46	Pull sleeve,internal Ø 46mm,external Ø 56mm	330	
700.1550-48	Pull sleeve,internal Ø 48mm,external Ø 58mm	340	
700.1550-50	Pull sleeve,internal Ø 50mm,external Ø 60mm	350	
700.1550-52	Pull sleeve,internal Ø 52mm,external Ø 62mm	360	
700.1550-54	Pull sleeve,internal Ø 54mm,external Ø 64mm	380	
700.1550-56	Pull sleeve,internal Ø 56mm,external Ø 66mm	390	
700.1550-58	Pull sleeve,internal Ø 58mm,external Ø 68mm	410	
700.1550-60	Pull sleeve,internal Ø 60mm,external Ø 70mm	420	
700.1550-62	Pull sleeve,internal Ø 62mm,external Ø 72mm	430	
700.1550-64	Pull sleeve,internal Ø 64mm,external Ø 74mm	440	
700.1550-66	Pull sleeve,internal Ø 66mm,external Ø 76mm	460	
700.1550-68	Pull sleeve,internal Ø 68mm,external Ø 78mm	470	
700.1550-70	Pull sleeve,internal Ø 70mm,external Ø 80mm	480	
700.1550-72	Pull sleeve,internal Ø 72mm,external Ø 82mm	490	
700.1550-75	Pull sleeve,internal Ø 75mm,external Ø 85mm	500	
700.1550-80	Pull sleeve,internal Ø 80mm,external Ø 90mm	520	
700.1551	Spindle M10x1.5	170	
700.1552	Spindle M12x2.0	200	
700.1553	Spindle M14x2.0	350	
700.1554	Spindle M16x2.5	380	
700.1555	Pressure adapter for step panel hgv size	350	
700.1556	Step panel adaptor with 3 holes, A+B side	350	
700.1551-01	Pressure nut for M10 x P1,5	30	
700.1551-02	Pressure nut with bearing for M10xP1,5	30	
700.1552-01	Pressure nut for M12 x P1,75	30	
700.1552-02	Pressure nut with bearing for M12xP1,75	30	
700.1553-01	Pressure nut for M14 x P2,0	30	
700.1553-02	Pressure nut with bearing for M14xP2,0	30	
700.1554-01	Pressure nut for M16 x P2,0	30	
700.1554-02	Pressure nut with bearing for M16xP2,0	30	

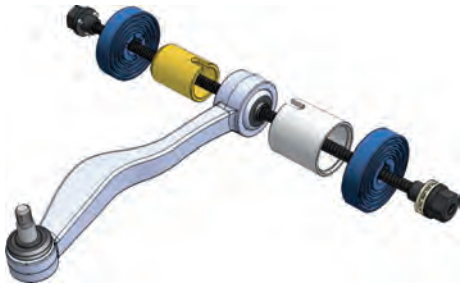

Press and pull sleeve set BASIC

- For the disassembly and assembly of bearings
- Ideally for silent bearings, hydro bearings, bushings, ball bearing, simmerrings, etc
- Universal use for automobile, truck, municipally, country and forestery technology, etc.
- Outstanding to use also in connection with workshop press or hollow piston cylinder
- According to use application the sheaths individually can be reworked
- Pressure bearing protects against increased friction during the process
- In durable plastic storage case

Attention: the spindles need to be greased with a good lubricant for each application! Do not overload spindles, otherwise the thread lengthens and the pitch of the nut and spindle no longer match. The result: the nuts will seize up. Always check the applied force at the drive with a torque wrench!

Maximum permitted torque:
Spindle M10x1,5 60 Nm
Spindle M12x1,5 100 Nm
Spindle M14x1,5 180 Nm
Spindle M16x1,5 250 Nm

			kg	
700.1760	20 pcs	Press and pull sleeve set BASIC	8.32	

consists of:

		g	
700.1702	Thrust bolt, M12	124	
700.1704	Thrust bolt, M16	130	
700.1706	Stepped plates,#1	350	
700.1707	Stepped plates,#2	390	
700.1708	Stepped plates,#3	420	
700.1709	Stepped plates,#4	450	
700.1711	Spindles, M12	253	
700.1713	Spindles, M16	473	
700.1714	Pull sleeve, internal Ø 34mm, external Ø 44mm	250	
700.1718	Pull sleeve, internal Ø 42mm, external Ø 52mm	300	
700.1719	Pull sleeve, internal Ø 44mm, external Ø 54mm	320	
700.1720	Pull sleeve, internal Ø 46mm, external Ø 56mm	330	
700.1723	Pull sleeve, internal Ø 52mm, external Ø 62mm	370	
700.1729	Pull sleeve, internal Ø 64mm, external Ø 74mm	440	
700.1732	Pull sleeve, internal Ø 70mm, external Ø 80mm	480	
700.1733	Pull sleeve, internal Ø 72mm, external Ø 82mm	490	

Universal car wheel bearing tool set

- For the dismantling and assembly of wheel housings and hub directly on the vehicle
- Extension of the suspension strut and axle joint is no longer required
- Suited for axle tube and for axle with the housing adjoining at an alliance
- High time savings as reactive axle alignment is not necessarily required
- With 300 mm gear pulling spindle
- Through enclosed bolts (M12 + M14) wheel hubs can be removed
- Extra long execution 65 mm pressure nut for better load distribution
- Pressure bearing protects against increased friction during the process
- Special steel
- In durable plastic storage case

Application range: Volkswagen, Audi, Opel, Mercedes Benz, Peugeot, Citroen, Renault, Ford, Honda, Mazda, Mitsubishi, Nissan, Toyota, Austin-Maestro, BMW

			kg	
150.2075	19 pcs	Universal car wheel bearing tool set	7.51	

consists of:

		g	
150.2076	Ball bearing Adaptor 55.5 mm	175	
150.2077	Ball bearing Adaptor 59 mm	200	
150.2078	Ball bearing Adaptor 62 mm	220	
150.2079	Ball bearing Adaptor 65 mm	245	
150.2080	Ball bearing Adaptor 66 mm	250	
150.2081	Ball bearing Adaptor 71.5 mm	315	
150.2082	Ball bearing Adaptor 73 mm	335	
150.2083	Ball bearing Adaptor 78 mm	380	
150.2084	Ball bearing Adaptor 84 mm	470	
150.2085	Reducing sheath 76 mm	270	
150.2086	Bell 88 mm	850	
150.2087	Bell 91 mm	920	
150.2089	Spindle includes Nut, bearing, Discs and sheaths	540	
150.2092	Threaded bolt Set M12 x 1.5 (3 pieces)	100	
150.2093	Threaded bolt Set M14 x 1.5 (3 pieces)	120	

Universally press frame with hydraulic spindle

- For the use in connection with the pressure and pull sleeve set 700.1700 for pressing out and pressing on of silent bearings, hydro bearings, bushings, etc.
- Enables de- and assembly directly on the vehicle
- Through the long trailing arm also especially high housings release themselves without problem on and pressing out
- Extremely robust spindle with inductively hardened thread
- Special steel

			kg	
700.1750	6 pcs	Universally press frame with hydraulic spindle	9.80	

consists of:

		kg	
700.1400-1	Hydraulic spindle with centering point - Ag 1.1/2" x 16 G	1.34	
700.1751	Universally-press frame-set, 5 pcs without hydraulic spindle	8.90	

Universal press frame, 5 pcs without hydraulic spindle

			kg	
700.1751	5 pcs	Universal press frame, 5 pcs without hydraulic spindle	8.90	

accessories:

		kg	
700.1751-1	Connection bar 205 mm for 700.1751 (1 piece)	0.71	
700.1751-2	Connection bar 350 mm for 700.1751 (1 piece)	1.20	

C-clamp and adaptor set, long

- Very robust execution
- Valuable supplement to the pressure set and hub sheath set 700.1700
- The drive can be used alternatively mechanically or hydraulically
- Suitable for impact wrenches
- Through use of trapezoid spindle and Impact screw maximum power can be tranferred (Hammer impact effect)
- Removeable spindle and clamping device with staged reception plate
- Silent bearings, sheaths, bushings etc. lets it incorporated itself in that or expanded condition on and compressed
- Trapezoid thread spindle Tr.27 with ball stored pressure tip
- Special steel

		Max span width mm	Max span depth mm	Length mm	Width mm	kg	
700.1755	5 pcs	245.0	95.0	380.0	180.0	7.82	

consists of:

		kg	
700.1754	Threaded adaptor with AG 1-1/2" x 16G and IG trapazoid thread Tr.27	0.60	
700.1756	Universal C-clamp	7.00	
700.1757	Spindle with trapazoid thread Tr.27, length 300 mm, drive 24 mm	2.00	
700.1758	Spindle reception adaptor	0.80	
700.1759	C-Clamp reception adaptor	0.60	

accessories:

		g	
700.1400-1	Hydraulic spindle with centering point - Ag 1.1/2" x 16 G	1344	
700.1208	Thrust bolt extension, 35 mm	130	
700.1209	Thrust bolt extension, 85 mm	320	

Silent bearing tool set for VAG Front axle consoles

- With this tool the plastic silent bearing of the front axle console can be correctly and quickly dismantled and mounted
- By means of the specially pressure piece the plastic housing is safely accepted by what means a damage-free assembly is enabled
- With this the tool it can incorporated the condition and can the costly correction of the axle alingment and the dismantling of often strongly console-reinforcements-screws that cam be corroded
- Simple handling
- Enables use directly on the vehicle
- High time savings
- Adapter with protective axle-pressure thrust bearing -spindle
- Axle alignment can been omitted
- In durable plastic storage case

Application range: Volkswagen Polo (9N), Seat Ibiza IV, Cordoba (from model 2002), Altea, Skoda Fabia, Roomster, Audi A2 + structurally identical group vehicles

			kg	
700.1650	8 pcs	Silent bearing tool set for VAG Front axle consoles	3.20	

consists of:

700.1651	Working spindle M10 x 1,25, 180 mm	170
700.1652	Spindle extension M10 x 1,25, 200 mm	140
700.1653	Special nut with cone shaft 45mm	80
700.1654	Special adaptor with thrust bearing	160
700.1655	Thrust plate stepped Ø 74mm, Installation	390
700.1656	Special thrust piece Ø 74mm, installation	1070
700.1657	Distance piece with knurled, extension	240
700.1658	Distance piece with collar, extension	240

INJECTOR & GLOW PLUG EXTRACTORS

Glow plug extractor for CDI engines

- For turning off and pulling out the glow plugs from the glow plug canal in the cylinder head
- Especially suitable in glow plugs jammed by corrosion and/ or soot coal
- Optimum power transmission with rotary and train movements
- Correct easy and damage free dismantling of the glow plug
- Chrome vanadium

Application range: Glow plug dim/10 mm, CDI engines.

3/8"

	■	L mm	
152.1080	3/8"	190.0	315

Injector extractor for 1.25 kg impact weight

- For Mercedes CDI Bosch common rail injectors
- For the extraction of the firm y burned injectors in the cylinder head
- Arched lever area on the handle hook for exact extraction
- Tilting and jamming of the injector is avoided
- Claw and impact weight can be used separately
- Includes impact weight
- Special steel

	Impact weight kg	Thread impact weight	L mm	Replacement claw	Replacement impact weight	
152.1050	1.25	M10 x 1,5	410.0	152.1045	152.1040	1.45

Injector extractor with 6 + 3 kg impact weight

- For Mercedes CDI Bosch common rail injectors
- Robust execution
- For the extraction of the firm y burned injectors in the cylinder head
- Enables short and intensive impact through impact weight
- Cylinder head does not work against the thrust bearing
- Tilting and jamming of the injector is avoided
- Includes impact weight
- Special steel

152.1055	3 pcs	Injector extractor with 6 + 3 kg impact weight	12.50

consists of:

700.1415	Universal slide hammer 6 + 3 kg, 850mm	12.00
152.1056	Single screw adaptor AG M17 x 1	0.24
152.1057	Hexagon socket, tamperproof 10 mm	0.10

STUD BOLT PULLER

Stud bolt puller

- For screwing in or extracting out stud bolts
- Clockwise and anticlockwise clamping function
- Also suitable for extra long stud bolts
- Special steel

	Ø mm	max N·m	⬢	
670.0231	5 - 15	120	19 mm	360
670.0232	10 - 19	120	19 mm	400
670.0233	18 - 28	120	19 mm	450

Stud bolt puller

- For screwing in or extracting out stud bolts
- Clockwise and anticlockwise clamping function
- Also suitable for extra long stud bolts
- Special steel

	Ø mm	max N·m	⬢	
670.0241	5 - 20	120	19 mm	400

Eccentric clamping and turning device

- For the removal and rotation of the round or hexagonal track rod joints (steering and wheel end)
- Due to the knurled eccentric cam it allows from optimal grip even at the joints without drive (round)
- 1/2" drive
- For use on the workbench or directly on the vehicle
- Additional stopper prevents slipping during the splitting process
- Special steel

1/2"

	Ø mm	Ø mm	
150.1640	23-45	31-35	300

Eccentric clamping and turning device

- For the removal and rotation of the round or hexagonal track rod joints (steering and wheel end)
- Due to the knurled eccentric cam it allows from optimal grip even at the joints without drive (round)
- 1/2" drive
- For use on the workbench or directly on the vehicle
- Additional stopper prevents slipping during the splitting process
- Special steel

1/2"

	Ø mm	Ø mm	
150.1642	25-55	25-46	800

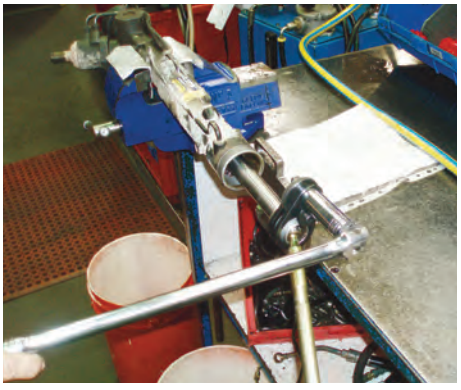

Stud bolt puller

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- External drive hexagon socket 21 mm
- Right and left hand clamping function
- Safe clamping due to 3 rollers
- Stud screws can be screwed in or out without using counter nuts on the bolt
- Also for extra long studs that will go through the through socket
- Chrome plated and mirror polished
- Chrome vanadium

		g
152.1005	M5	150
152.1006	M6	160
152.1007	M7	160
152.1008	M8	170
152.1010	M10	180
152.1012	M12	200
152.1014	M14	200

Screw bolt puller set

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- External drive hexagon socket 21 mm
- Right and left hand clamping function
- Safe clamping due to 3 rollers
- Stud screws can be screwed in or out without using counter nuts on the bolt
- Also for extra long studs that will go through the through socket
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic storage case

			kg
152.1100	4 pcs	M6 - M8 - M10 - M12	0.79

Screw bolt puller set

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- External drive hexagon socket 21 mm
- Right and left hand clamping function
- Safe clamping due to 3 rollers
- Stud screws can be screwed in or out without using counter nuts on the bolt
- Also for extra long studs that will go through the through socket
- Chrome plated and mirror polished
- Chrome vanadium
- In durable plastic case

			kg
152.1101	7 pcs	M5 - M6 - M7 - M8 - M10 - M12 - M14	1.50

NUT SPLITTER

Mechanical nut splitter set

- For the splitting of seized or over tightened bolts without damage to the bolt thread
- Suitable for nuts to a tensile strength class 6
- Special steel

		kg
700.1180	4 pcs	Mechanical nut splitter set	1.58

consists of:

		g
700.1181	Nut splitter 9 - 12 mm, drive 12 mm	90
700.1182	Nut splitter 12 - 16 mm, drive 14 mm	170
700.1183	Nut splitter 16 - 22 mm, drive 19 mm	380
700.1184	Nut splitter 22 - 27 mm, drive 21 mm	660

Hydraulic nut splitter set

- For the splitting of seized or over tightened bolts without damage to the bolt thread
- Working range from 7.0 - 36.0 mm
- Inductively hardened cutting edge
- Suitable for nuts to a tensile strength class 10
- Requires light expenditure of energy
- Special steel

			kg
700.1170	7 pcs	Hydraulic nut splitter set	5.00

consists of:

		g
700.1150	Hydraulic nut splitter 7.0 - 21.0 mm	700
700.1163	Nut splitter	3600
700.1151	Replacement chisel small	50
700.1152	Replacement plate small	50
700.1161	Replacement chisel large	100
700.1162	Replacement plate large	100
151.2073	Hexagon key 3/8" for replacement plate large	110

Hydraulic nut splitter

- Small execution
- Suitable for nuts to a tensile strength class 10
- Work pressure max. 5 t
- Especially suitable for narrow hard to access areas

	mm	L mm	g
700.1150	7 -21	210.0	700

Hydraulic nut splitter set

- Large execution
- Suitable for nuts to a tensile strength class 10
- Work pressure max. 13 t
- In durable plastic storage case

			kg
700.1160	4 pcs	22 - 36 mm; M14 - M24	3.80

consists of:

		g
700.1161	Replacement chisel large	100
700.1162	Replacement plate large	100
700.1163	Nut splitter	3600
151.2073	Hexagon key 3/8" for replacement plate large	110

COIL SPRING COMPRESSOR

Coil spring compressor with safety latch

- Change without removing the shock absorber strut
- Variable safety bar prevents slipping
- For vehicles up to max. 2000 kg
- Meets the requirements of the professional (ZH1/454)
- GS approved
- Special steel

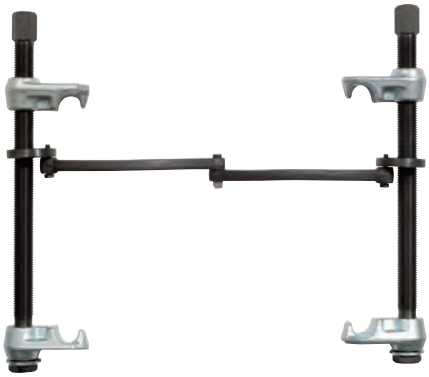

	Ø mm	H mm	max N·m	Max travel mm	max t	mm	mm	kg
670.0021	110-180	240	70	200	3,5	M18x2x280	19	2.40
670.0041	110-180	300	60	300	1,8	M16x2x380	17	2.80

Coil spring compressor with safety latch and plastic coated hook

- Change without removing the shock absorber strut
- Variable safety bar prevents slipping
- For vehicles up to max. 2000 kg
- Meets the requirements of the professional (ZH1/454)
- GS approved
- Special steel

	Ø mm	H mm	max N·m	Max travel mm	max t	mm	mm	kg
670.0031	110-180	240	70	200	3,5	M18x2x280	19	2.50
670.0051	110-180	300	60	300	1,8	M16x2x380	17	2.90

Universal telescopic centre clamp kit

- For removal/installation of spiral springs on spring strut and independent multilink suspensions
- Safe removal and installation without dismantling the axle
- High time savings
- New, revised version with longer clamping stroke
- Suitable cup springs for reliable holding of the spiral spring
- Clamps the spring reliably in the middle of the spring
- Good positioning thanks to compact form
- Overload protection with torsion drive element
- Suitable for use on vehicles with very small access bores
- Only coil spring compressor which can be used for Volkswagen Touran, Citroen C3, Skoda Octavia and Peugot 107
- Spring holder with special geometry



Technical data:

Opening of jaws min:	95.0 mm
Jaw width max:	220.0 mm
Square drive:	1/4"
Spring force max:	2500 kg

			kg
500.8610	6 pcs	Universal telescopic centre clamp kit	4.42

consists of:

		kg
500.8611	Spring compressor based unit, 2500 kg	0.64
500.8612	Spring holder pair Ø 90-120 mm	0.84
500.8613	Spring holder pair Ø120-140 mm	1.15
500.8614	Torsion drive 1/2"x1/2", 100 Nm	0.26

Coil spring compressor set

- Universal for 90% of all common types of vehicles
- With 2 standard jaw holders
- Simple and secure clamping in the vise
- Ergonomic high-tech polyurethane grip
- With working spindle that can be used with an impact wrench
- Jaw holders plastic coated
- Jaws are fi ted with a nose that locks the spring during stretching to increase security and safety
- Can bear according to the TÜV approval extraordinarily high loads with a maximum capacity of 2250 kg
- A shear pin protects against overload
- Special steel

technical data:

Spring force max:	2250 kg
Opening of jaws min:	65.0 mm
Jaw width max:	375.0 mm
Spring capacity:	80,0 - 195,0 mm

			kg
500.8620	5 pcs	Coil spring compressor set	11.66

consists of:

		kg
500.8621	Base body max. load 2250 kg	5.20
500.8504	Special jaws for spring compressor 80 - 165 mm ➡ 500.8501/8601/8621	1.30
500.8505	Special jaws for spring compressor 145 - 195 mm ➡ 500.8501/8601/8621	1.70

accessories:

		kg
500.8503	Standard spring jaw, 1 pcs	3.36
500.8504	Standard spring jaw No.III 80-145mm, 1 pair	1.30
500.8505	Standard spring jaw No.V, 145-195mm, 1 pair	1.70
500.8507	Standard spring jaw, 1 pcs, Ø 80-145mm	1.44
500.8509	Spring holder, for BMW and Renault	2.40
500.8510	Spring holder, for MERCEDES C classe type 203	0.80
500.8511	Standard jaw, 1 pc, Ø 140-170mm, 1 pcs	3.50
500.8513	Special jaw, 1 pc, Mercedes E class+Renault Megane2	2.40
500.8514	Special spring holder, Peugeot Break+ Citroën C15	2.32
500.8515	Special jaw, 1 pc, Chrysler voyager	2.80

Other tools in relation to special automotive tools can be found in our special automotive catalogue or on our homepage: www.kstools.com

Universal coil spring compressor set

- For all standard vehicle springs in the cars and vans sector
- 2 standard jaw holders
- Robust execution
- Cost effective and robust alternative to conventional spring compressor
- Also suitable for conical and ball springs
- Universal for 90% of all common types of vehicles
- Working spindle that can be used with an impact wrench
- Jaw holders plastic coated
- Can bear according to the TÜV approval extremely high loads, with a maximum load of 2600 kg
- A shear pin protects against overload
- Special steel
- Includes safety arrester rope

Technical data:

Spring force max:	2600 kg
Opening of jaws min:	50.0 mm
Jaw width max:	310.0 mm
Spring capacity:	80,0 - 195,0 mm

			kg
500.8700	5 pcs	Universal coil spring compressor set	13.50

consists of:

		kg
500.8701	Spring compressor based unit, 500 mm, max spring pressure. 2600 kg	8.20
500.8703	Safety pin set 4 + 5 mm, 10 pcs.	0.10
500.8705	Standard spring holder with a double stop fuction, gr. 1 80 - 160 mm	3.50
500.8706	Standard spring holder with a double stop fuction, gr. 2 140 - 195 mm	4.00
500.8707	Safety rope for 500.8700	0.20

Adaptor set for Mercedes Benz and BMW

- For Mercedes Benz C-and E-class, BMW 3 Series (E64) and 5 series (E39)
- Can be used in conjunction with the spring compressor 500.8700
- Adapter is used in conjunction with the standard jaws
- Special steel

			g
500.8710	2 pcs	Adaptor set for Mercedes Benz and BMW	500

consists of:

		g
500.8711	Adaptor large	350
500.8712	Adaptor small	150

Special adaptor for BMW E90/81

- For BMW E 90/81
- Use only in combination with adapter set 500.8710
- For spring compressor 500.8700
- Adapter is used in conjunction with the standard jaws
- Special steel

		kg
500.8713	Special adaptor for BMW E90/81	1.34

Spring compressor bracket

- Bracket specially designed for spring compressor 500.8700
- Makes working on suspension struts easy and safe
- Can be wall or vice mounted
- Special steel

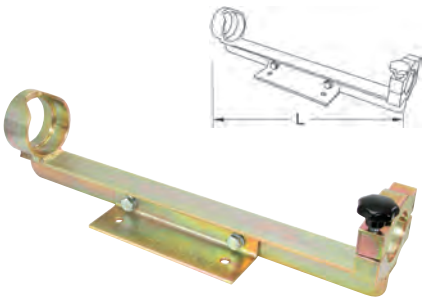

	L mm	kg
500.8704	500.0	1.50

KS TOOLS®

Innovation is our mission!

PULLERS

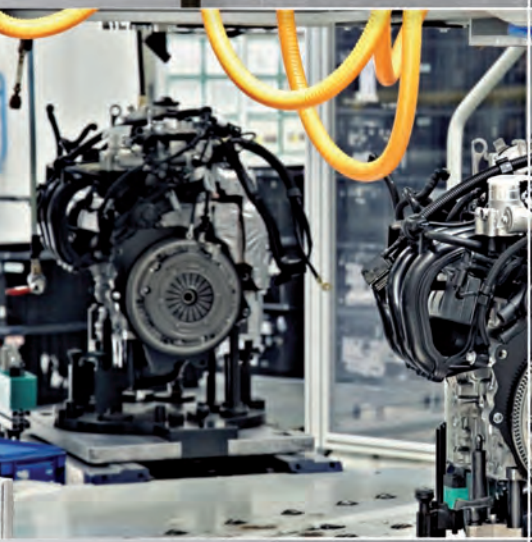

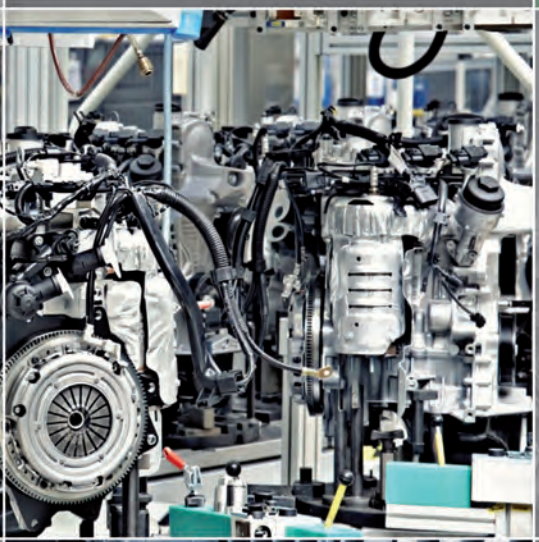

11 VIDEOSCOPE TECHNOLOGY

KS TOOLS®

Innovation is our mission!

	PAGE
ULTIMATE*vision* MASTER VIDEOSCOPE SETS	362 - 363
ULTIMATE*vision* MASTER CAMERA PROBE	363 - 365
ULTIMATE*vision* MASTER PROBE ACCESSORIES	365
ULTIMATE*vision* SUPERCHARGED VIDEOSCOPE SETS	365 - 366
ULTIMATE*vision* SUPERCHARGED CAMERA PROBE	366
ULTIMATE*vision* SUPERCHARGED PROBE ACCESSORIES	366 - 367
GENERAL ACCESSORIES	367

VIDEOSCOPE TECHNOLOGY

Technical Videoscope

The application of videoscope in the technical area has grown in the course of the last years and increased in importance. Not only under the aspect of the simple and recognized investigation but can also be used as proof to suppliers, however in particularly in regard to warranty quotations and statements to service providers towards future manufacturing. Another plus for the acquisition of a videoscope lies in the partly immense saving of valuable working hours with searching for the repair.

To be able to do justice to the different demands for the devices or equipment, now there are 3 different executions within the KS Tools range for the correct choice. All the same whether you simply want to consider or review in parallel by video / photo or audio admission, we are sure that you will find a suitable device over the next pages. The operation of the devices is very user friendly and, moreover, can be communicated in the provided, simply understandable manuals.

Concerning the assigned sofeware, first of all, the probes set new graduations. So the picture is produced directly in a mini camera head of the probe end and with led lights that are adjustable in perfect quality and transfered by data cable to the handle (wireless) or to the hand device.
Also the light appears directly in the probe head white, adjustable high performance LEDs grant a perfect illumination.

Various application possibilities e.g.:

Automotive
Engine, transmission, tank, car body, dashboard, expert etc.

Aviation
Engine, turbine, conduit systems etc.

Construction
Evaluation of building substance, water damage, parasite attack etc.

Pipeline construction
Welding seams, tracking down of foreign objects, leakages etc.

Hydraulic systems
Cylinders leakages etc

Heating sanitary air conditioning
Ovens, fireplaces, boiler, air conditioning, sewage systems etc.

Pest control etc
Hives, wasp nest, bird nest, insect infestations etc.

Police, customs.
Contraband, stolen goods, drugs, house searches, espionage etc.

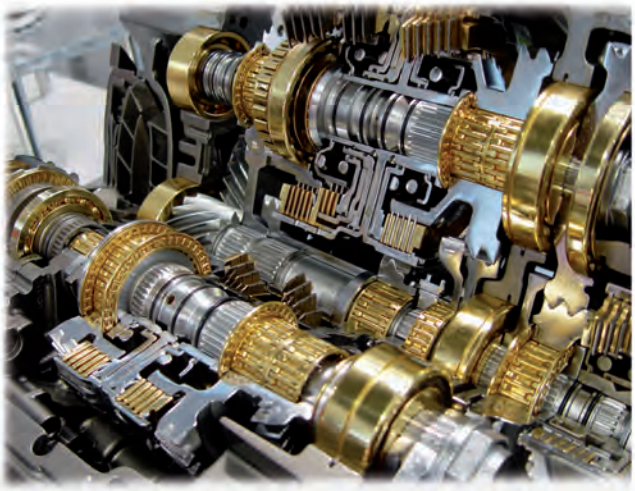

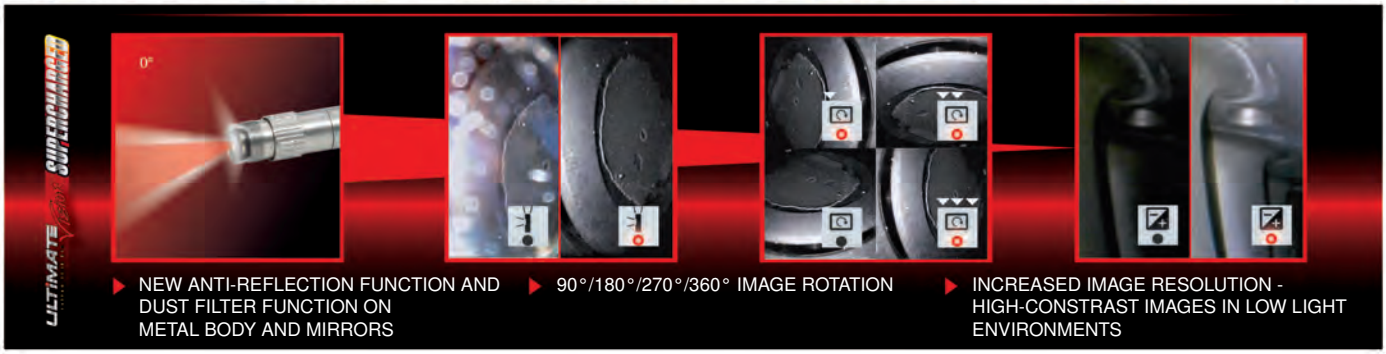

VIDEOSCOPE TECHNOLOGY Accessories

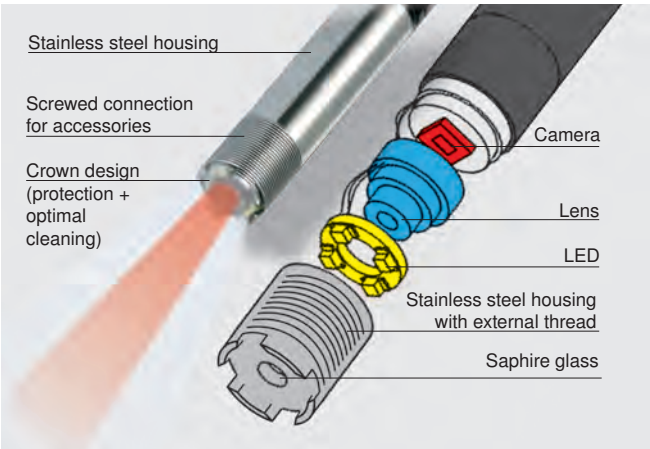

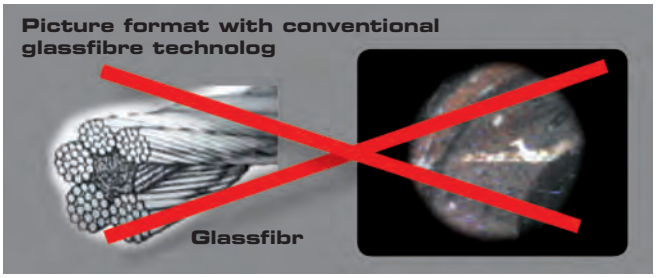

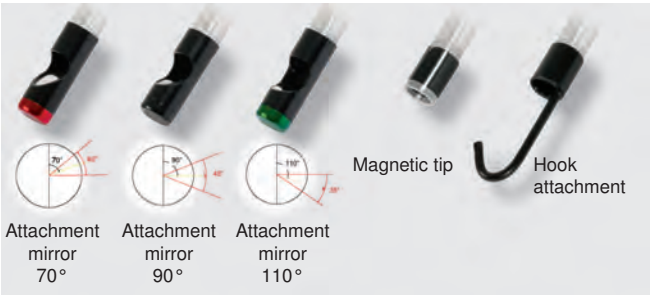

SUPERCHARGED probes

MASTER probes

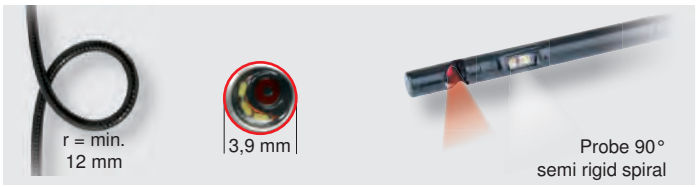

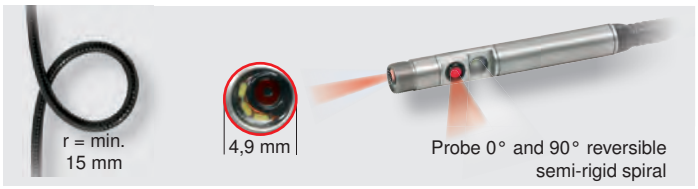

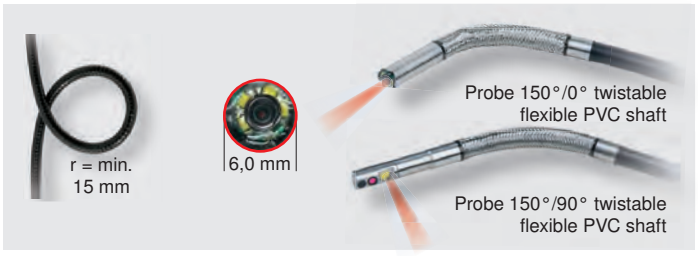

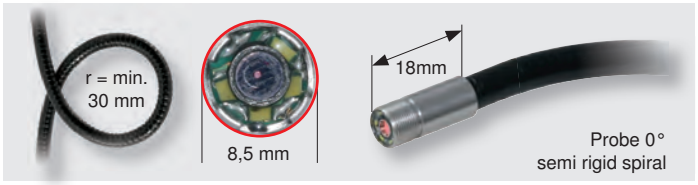

ULTIMATE*vision* MASTER VIDEOSCOPE SETS

ULTIMATE*vision* MASTER Videoscope set

- Adjustable function for the angle of vision through the one way sending device
- 3 adjustable Mini-LED-lamps
- Mobile and network independent system
- Optimal handling through network or independent working
- Probes substantially stronger and less breakage, as no glass fibre cable
- Working temperature of + 0 °C to +55 °C
- Excellent picture quality and viewing through special camera in the probe head
- Optionally expandable with other probes
- Very good picture and video quality
- Picture reception in JPEG format
- Video records in MPEG4 format
- View on a TV monitor with AV cable possible
- Multilingual menu (14 languages)
- Versatile usage
- Incl. 4xAA batteries
- 2-component housing protects against light impacts
- With high-quality foam protection material
- In durable plastic storage case

Scope of delivery:
- Basic unit
- AV cable
- 4 GB SD card
- USB data cable
- Battery set 4xAA
- Selected videoscope probe

Technical data hand held unit:

Screen:	3,5" TFT LCD VGA
Output format:	NTSC and PAL
Picture storage format:	AVI, JPG (640x480)
Storage medium:	SD card up to a max. 32 GB
Battery:	4 x AA
Operating time:	ca. 4 h
Operating temperature:	-20 °C to +60 °C
Language manual:	DE, EN, FR, ES, IT, DA, ZH, RU, NL, AR, JA, PL, BG

technical data sensor:

Bend radius:	min. 15 mm
Lens type:	aspherical
Camera protection:	designed out of sapphire glasse camera sheath made out of stainless steel
Protection class:	IP 67
Aperture angle:	horizontal 46° - vertical 34° - diagonal 56°
Camera resolution:	640 (H) x 480 (V) = 307,200 Pixel
Focused depth of field:	1 cm - 6 cm
AV Magnification:	is up to 15" over cinch
Resistance:	waterproof to a max. of 1m oil and petrol resistant probe
Mirror attachment:	line of vision 70° - aperture angle 40° line of vision 90° - aperture angle 36° line of vision 110° - aperture angle 32°
Light source:	3 dimmable white mini LED lamps
Brightness:	0 ~ 275 LUX / 4cm

consists of:

		g	
550.7999	ULTIMATE Vision handset, no probe	340	
550.5008	4 GB SD card	12	
550.5003	AV-Cable 2 m	20	
550.5018	USB data cable	30	

ULTIMATE*vision* MASTER Videoscope set with 90° front camera probe, semi-rigid spiral shaft, 6-pcs.

Ø	1 m	2 m	3 m
3,9 mm	**550.7391**	**550.7392**	**550.7393**

ULTIMATE*vision* MASTER Videoscope set with 90° front camera probe, semi-rigid spiral shaft, 6-pcs.

Ø	1 m	2 m	3 m
5,5 mm	**550.7591**	**550.7592**	**550.7593**

ULTIMATE*vision* MASTER Videoscope set with 0° + 90° probe, reversible, 6-pcs.

Ø	1 m	2 m	3 m
4,9 mm	**550.7049**	**550.7462**	**550.7463**

ULTIMATE*vision* MASTER Videoscope set with 150°/0° camera probe, fl xible PVC shaft 6-pcs.

Ø	1 m	2 m	3 m
6,0 mm	**550.7611**	**550.7612**	**550.7613**

ULTIMATE*vision* MASTER Videoscope set with 0° front camera probe, semi-rigid spiral shaft, 6-pcs.

Ø	1 m	2 m	3 m
5,5 mm	**550.7055**	**550.7502**	**550.7503**

ULTIMATE*vision* MASTER Videoscope set with 150°/90° front camera probe, fl xible PVC shaft 6-pcs.

Ø	1 m	2 m	3 m
6,0 mm	**550.7621**		

ULTIMATE*vision* MASTER Videoscope set with 0° front camera probe, semi-rigid spiral shaft, 6-pcs.

Ø	1 m	2 m	3 m
8,5 mm	**550.7801**	**550.7802**	**550.7803**

ULTIMATE*vision* MASTER CAMERA PROBE

ULTIMATE*vision* Cable extension

- Cable diameter: 8.5 mm
- Connection diameter: 16 mm
- Universal for all ULTIMATE*vision* Videoscope applicable

	L m		
550.7854	3.0	600	

ULTIMATE*vision* MASTER 90° front camera probe semi rigid spiral shaft

- 4 adjustable mini LED lamps
- Bend radius max. 15 mm
- Suitable for connection to ULTIMATE*vision* MASTER videoscope

Technical data probe:

Format:	semi rigid
Bend radius:	min. 15 mm
Lens type:	aspherical
Camera protection:	designed out of sapphire glasse camera sheath made out of stainless steel
Protection class:	IP 67
Aperture angle:	horizontal 46° - vertical 34° - diagonal 56°
Camera resolution:	320 (H) x 240 (V) = 76,800 Pixel
Focused depth of field:	1 cm - 6 cm
Operating temperature:	0°C to 75°C
AV Magnification:	is up to 15" over cinch
Resistance:	waterproof to a max. of 1m oil and petrol resistant probe
Light source:	4 dimmable white mini LED lamps
Brightness:	0 ~ 275 LUX / 4cm

	Head Ø mm		L m		
550.7351	3.9	90°	1.0	180	
550.7352	3.9	90°	2.0	250	
550.7353	3.9	90°	3.0	320	

ULTIMATE*vision* MASTER Camera probe reversible, 0° and 90°

- Contains 2 cameras and 2 independent light sources
- Bend radius max. 15 mm
- Semi rigid spiral shaft
- The tip of the probe's head is threaded for convenient attachment of different accessories (mirror / hook / magnet)
- Compatible with KS Tools ULTIMATE*vision* MASTER videoscope

Technical data probe:

Format:	semi rigid
Bend radius:	min. 15 mm
Lens type:	aspherical
Camera protection:	designed out of sapphire glasse camera sheath made out of stainless steel
Aperture angle:	horizontal 46° - vertical 34° - diagonal 56°
Camera resolution:	640 (H) x 480 (V) = 307,200 Pixel
Focused depth of field:	1 cm - 6 cm
AV Magnification:	is up to 15" over cinch
Operating temperature:	+0°C to +60°C
Light source:	3 dimmable white mini LED lamps
Brightness:	0 ~ 275 LUX / 4cm

	Head Ø mm		L m		
550.7491	4.9	0°/90°	1.0	105	
550.7492	4.9	0°/90°	2.0	105	
550.7493	4.9	0°/90°	3.0	105	

ULTIMATE*vision* MASTER 0° front camera probe semi rigid spiral shaft

- 4 adjustable mini LED lamps
- Bend radius max. 15 mm
- Suitable for connection to ULTIMATE*vision* MASTER videoscope

Technical data probe:

Format:	semi rigid
Bend radius:	min. 15 mm
Lens type:	aspherical
Camera protection:	designed out of sapphire glasse camera sheath made out of stainless steel
Protection class:	IP 67
Aperture angle:	horizontal 46° - vertical 34° - diagonal 56°
Camera resolution:	320 (H) x 240 (V) = 76,800 Pixel
Focused depth of field:	1 cm - 6 cm
Operating temperature:	0°C to 75°C
AV Magnification:	is up to 15" over cinch
Resistance:	waterproof to a max. of 1m oil and petrol resistant probe
Light source:	4 dimmable white mini LED lamps
Brightness:	0 ~ 275 LUX / 4cm

	Head Ø mm		L m		
550.7551	5.5	0°	1.00	140	
550.7552	5.5	0°	2.00	140	
550.7553	5.5	0°	3.00	140	

ULTIMATE*vision* MASTER 90° front camera probe semi rigid spiral shaft

- 4 adjustable mini LED lamps
- Bend radius max. 15 mm
- Suitable for connection to ULTIMATE*vision* MASTER videoscope

Technical data probe:

Format:	semi rigid
Bend radius:	min. 15 mm
Lens type:	aspherical
Camera protection:	designed out of sapphire glasse camera sheath made out of stainless steel
Protection class:	IP 67
Aperture angle:	horizontal 46° - vertical 34° - diagonal 56°
Camera resolution:	320 (H) x 240 (V) = 76,800 Pixel
Focused depth of field:	1 cm - 6 cm
Operating temperature:	0°C to 75°C
AV Magnification:	is up to 15" over cinch
Resistance:	waterproof to a max. of 1m oil and petrol resistant probe
Light source:	4 dimmable white mini LED lamps
Brightness:	0 ~ 275 LUX / 4cm

	Head Ø mm		L m		
550.7571	5.5	90°	1.00	230	
550.7572	5.5	90°	2.00	200	
550.7573	5.5	90°	3.00	400	

ULTIMATE*vision* MASTER front camera probe 150°/0° fl xible PVC shaft

- 4 adjustable mini LED lamps
- Bend radius max. 15 mm
- Suitable for connection to ULTIMATE*vision* MASTER videoscope

Technical data probe:

Format:	fl xible PVC casing
Bend radius:	min. 15 mm
Lens type:	aspherical
Camera protection:	designed out of sapphire glasse camera sheath made out of stainless steel
Operating temperature:	+0°C to +55°C
Line of vision:	0°, revolving in 2 directions each to 150°
Aperture angle:	horizontal 46° - vertical 34° - diagonal 56°
Camera resolution:	320 (H) x 240 (V) = 76,800 Pixel
Focused depth of fi ld:	1 cm - 6 cm
AV Magnifi ation:	is up to 15" over cinch
Light source:	4 dimmable white mini LED lamps
Brightness:	0 ~ 275 LUX / 4cm

	Head Ø mm		L m	g	
550.7601	6.0	150°/0°	1.00	140	
550.7602	6.0	150°/0°	2.00	180	
550.7603	6.0	150°/0°	3.00	220	

ULTIMATE*vision* MASTER front camera probe 150°/90° fl xible PVC shaft

- 4 adjustable mini LED lamps
- Bend radius max. 15 mm
- Suitable for connection to ULTIMATE*vision* MASTER videoscope

Technical data probe:

Format:	fl xible PVC casing
Bend radius:	min. 15 mm
Lens type:	aspherical
Camera protection:	designed out of sapphire glasse camera sheath made out of stainless steel
Operating temperature:	+0°C to +55°C
Line of vision:	90°, revolving in 2 directions each to 150°
Aperture angle:	horizontal 46° - vertical 34° - diagonal 56°
Camera resolution:	320 (H) x 240 (V) = 76,800 Pixel
Focused depth of fi ld:	1 cm - 6 cm
AV Magnifi ation:	is up to 15" over cinch
Light source:	4 dimmable white mini LED lamps
Brightness:	0 ~ 275 LUX / 4cm

	Head Ø mm		L m	g	
550.7606	6.0	150°/90°	1.00	140	

ULTIMATE*vision* MASTER 0° front camera probe semi rigid spiral shaft

- 6 adjustable mini LED lamps
- Bend radius max. 30 mm
- Suitable for connection to ULTIMATE*vision* MASTER Videoscope

Technical data probe:

Format:	semi rigid
Bend radius:	min. 30 mm
Lens type:	aspherical
Camera protection:	designed out of sapphire glasse camera sheath made out of stainless steel
Protection class:	IP 67
Aperture angle:	horizontal 46° - vertical 34° - diagonal 56°
Camera resolution:	320 (H) x 240 (V) = 76,800 Pixel
Focused depth of fi ld:	1 cm - 6 cm
Operating temperature:	+0°C to +55°C
AV Magnifi ation:	is up to 10" over cinch
Resistance:	waterproof to a max. of 1m oil and petrol resistant probe
Mirror attachment:	line of vision 90° - aperture angle 36°
Light source:	6 dimmable white mini LED lamps
Brightness:	0 ~ 420 LUX / 4 cm

	Head Ø mm		L m	g	
550.7851	8.5	0°	1.0	140	
550.7852	8.5	0°	2.0	140	
550.7853	8.5	0°	3.0	140	

ULTIMATE*vision* MASTER videoscope set with sensor drum

- Probe with dimensionally stable pushrod
- Flexible probe head for optimum bend fl xibility
- 8 dimmable white mini LED lamps
- Mobile and network independent system
- Abrasion resistant, spring sheathed probe head shaft
- Excellent picture quality and viewing through special camera in the probe head
- Very good picture and video quality
- 1.5 times digital zoom function
- Horizontal picture refle tion function
- Picture reception in JPEG format
- Video records in MPEG4-format
- View on large monitor with AV cable
- Data transfer directly through USB cable possible
- SD port for SD card
- Multi lingual menu (14 languages)
- Wide range of applications in pipes and shafts
- 2 Component housing protects against light impacts
- In durable plastic storage case

Contents:
Sensor drum with pushrod + camera head
Basic unit ULTIMATE*vision* MASTER
2 GB SD card

Technical data hand held unit:

Screen:	3,5" TFT LCD VGA
Output format:	NTSC and PAL
Picture storage format:	AVI, JPG (640x480)
Storage medium:	SD card up to a max. 32 GB
Battery:	4 x AA
Operating time:	ca. 4 h
Operating temperature:	-20°C to +60°C
Language manual:	DE, EN, FR, ES, IT, DA, ZH, RU, NL, AR, JA, PL, BG
Length:	24,3 mm
Ø:	28,0 mm

Technical data probe head:

Aperture angle:	diagonal 150.8°
Camera resolution:	320 (H) x 240 (V) = 76,800 Pixel
Focused depth of fi ld:	10 ~ ∞ mm
AV Magnifi ation:	is up to 15" over cinch
Light source:	8 dimmable white mini LED lamps
Brightness:	33 Lux
Operating temperature:	-20°C to +60°C
Camera protection:	designed out of sapphire glasse camera sheath made out of stainless steel
Bend radius:	max. 30 mm
Application:	40-100mm - 90° bend fl xibility above Ø50mm

Technical data drum with pushrod:

Length:	22.00 m
Ø:	6 mm
Bend radius:	min. 150 mm
Operating temperature:	-10°C up tp +70°C
Protection class:	IP 65
Drum Ø:	300 mm

			kg	
550.7221	3 pcs	ULTIMATE*vision* MASTER videoscope set with sensor drum	10.60	

Aluminium adaptor for videoscope

- Suitable for use with videoscopes

	Ø mm	L mm	g	
550.7229	50,0	36.0	61	

Brush for videoscope

- Suitable for use with videoscopes
- For centric use of the camera

	DN	L mm	g	
550.7228	100	150.0	64	
550.7227	150	150.0	151	

ULTIMATE*vision* MASTER PROBE ACCESSORIES

ULTIMATE*vision* MASTER 2 in 1 Magnet sleeve + hook attachment

- Suitable for connection to ULTIMATE*vision* MASTER Videoscope

	Head Ø mm	g	
550.7459	4.9	2	

ULTIMATE*vision* MASTER Mirror attachment

- Suitable for connection to ULTIMATE*vision* MASTER Videoscope

	Head Ø mm		g	
550.7555	5.5	70°	3	
550.7556	5.5	90°	3	
550.7557	5.5	110°	3	

ULTIMATE*vision* MASTER Magnet sleeve

- Suitable for connection to ULTIMATE*vision* MASTER Videoscope

	Head Ø mm	g	
550.7559	5.5	2	

ULTIMATE*vision* MASTER Hook attachment

- Suitable for connection to ULTIMATE*vision* MASTER Videoscope

	Head Ø mm	g	
550.7558	5.5	2	

ULTIMATE*vision* MASTER Mirror attachment

- Suitable for connection to ULTIMATE*vision* MASTER Videoscope

	Head Ø mm		g	
550.7857	8.5	70°-110°	2	

ULTIMATE*vision* MASTER Magnet sleeve

- Suitable for connection to ULTIMATE*vision* MASTER Videoscope

	Head Ø mm	g	
550.7859	8.5	3	

ULTIMATE*vision* MASTER Hook attachment

- Suitable for connection to ULTIMATE*vision* MASTER Videoscope

	Head Ø mm	g	
550.7858	8.5	2	

SUPERCHARGED

ULTIMATE*vision* SUPERCHARGED VIDEOSCOPE SETS

ULTIMATE*vision* SUPERCHARGED Videoscope set

- Adjustable function for the angle of vision through the one way sending device
- 3 adjustable Mini-LED-lamps
- Mobile and network independent system
- Optimal handling through network or independent working
- Probes substantially stronger and less breakage, as no glass fibre cable
- Working temperature of + 0 °C to +55 °C
- Excellent picture quality and viewing through special camera in the probe head
- Optionally expandable with other probes
- Very good picture and video quality
- Picture reception in JPEG format
- Video records in MPEG4-format
- View on a TV monitor with AV cable possible
- Multilingual menu (14 languages)
- Versatile usage
- Incl. 4xAA batteries
- 2-component housing of the basic unit protects against light impacts with high-quality foam insert
- In durable plastic storage case

Scope of delivery:

- Basic unit
- Mirror attachment
- AV cable
- 4 GB SD card
- USB data cable
- Battery set 4xAA
- Selected videoscope probe

Technical data hand held unit:

Screen:	3,5" TFT LCD VGA
Output format:	NTSC and PAL
Picture storage format:	AVI, JPG (640x480)
Storage medium:	SD card up to a max. 32 GB
Battery:	4 x AA
Operating time:	ca. 4 h
Operating temperature:	-20 °C to +60 °C
Language manual:	DE, EN, FR, ES, IT, DA, ZH, RU, NL, AR, JA, PL, BG

technical data sensor:

Bend radius:	min. 15 mm
Lens type:	aspherical
Camera protection:	designed out of sapphire glasse camera sheath made out of stainless steel
Protection class:	IP 67
Aperture angle:	horizontal 46° - vertical 34° - diagonal 56°
Camera resolution:	640 (H) x 480 (V) = 307,200 Pixel
Focused depth of field:	1 cm - 6 cm
AV Magnification:	is up to 15" over cinch
Resistance:	waterproof to a max. of 1m oil and petrol resistant probe
Mirror attachment:	line of vision 70° - aperture angle 40° line of vision 90° - aperture angle 36° line of vision 110° - aperture angle 32°
Light source:	3 dimmable white mini LED lamps
Brightness:	0 ~ 275 LUX / 4cm

consists of:

		g	
550.7999	ULTIMATE Vision handset, no probe	340	
550.5008	4 GB SD card	12	
550.5003	AV-Cable 2 m	20	
550.5018	USB data cable	30	

ULTIMATE*vision* SUPERCHARGED Videoscope set with 0° front camera probe, fl xible spiral shaft, 7-pcs.

SUPERCHARGED

Ø	1 m	2 m	3 m
5,5 mm	**550.8055**	**550.8002**	

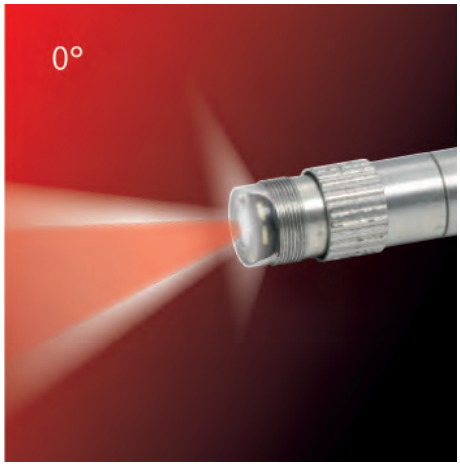

ULTIMATE*vision* SUPERCHARGED Videoscope set with 0° front camera probe, fl xible PVC-shaft, 7 pcs.

SUPERCHARGED

Ø	1 m	2 m	3 m
6,0 mm	**550.8061**	**550.8062**	

ULTIMATE*vision* SUPERCHARGED CAMERA PROBE

ULTIMATE*vision* Cable extension

- Cable diameter: 8.5 mm
- Connection diameter: 16 mm
- Universal for all ULTIMATE*vision* Videoscope applicable

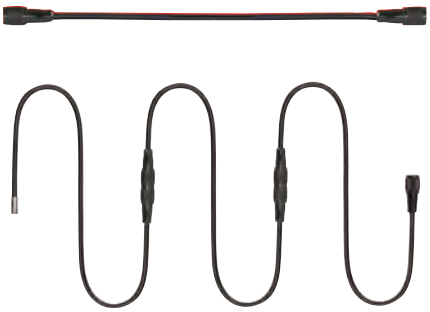

	L m	
550.7854	3.0	600

ULTIMATE*vision* SUPERCHARGED 0° front camera probe fl xible spiral shaft

- 4 adjustable mini LED lamps
- Bend radius max. 15 mm
- Suitable for connection to ULTIMATE*vision* SUPERCHARGED videoscope

SUPERCHARGED

Technical data probe:

Format:	fl xible PVC casing
Bend radius:	min. 15 mm
Lens type:	aspherical
Camera protection:	designed out of sapphire glasse camera sheath made out of stainless steel
Protection class:	IP 67
Aperture angle:	horizontal 46° - vertical 34° - diagonal 56°
Camera resolution:	320 (H) x 240 (V) = 76,800 Pixel
Focused depth of fi ld:	1 cm - 6 cm
Operating temperature:	0°C to 75°C
AV Magnifi ation:	is up to 15" over cinch
Resistance:	waterproof to a max. of 1m oil and petrol resistant probe
Light source:	4 dimmable white mini LED lamps
Brightness:	0 ~ 275 LUX / 4cm

	Head Ø mm		L m		
550.8551	5.5	0°	1.00	140	
550.8552	5.5	0°	2.00	140	

ULTIMATE*vision* SUPERCHARGED 0° front camera probe fl xible PVC shaft

- 4 adjustable mini LED lamps
- Bend radius max. 15 mm
- Suitable for connection to ULTIMATE*vision* SUPERCHARGED videoscope

SUPERCHARGED

Technical data probe:

Format:	fl xible PVC casing
Bend radius:	min. 15 mm
Lens type:	aspherical
Camera protection:	designed out of sapphire glasse camera sheath made out of stainless steel
Protection class:	IP 67
Aperture angle:	horizontal 46° - vertical 34° - diagonal 56°
Camera resolution:	320 (H) x 240 (V) = 76,800 Pixel
Focused depth of fi ld:	1 cm - 6 cm
Operating temperature:	0°C to 75°C
AV Magnifi ation:	is up to 15" over cinch
Resistance:	waterproof to a max. of 1m oil and petrol resistant probe
Mirror attachment:	line of vision 70° - aperture angle 40° line of vision 90° - aperture angle 36° line of vision 110° - aperture angle 32°

	Head Ø mm		L m		
550.8601	6.0	150°	1.00	140	
550.8602	6.0	150°	2.00	140	

ULTIMATE*vision* SUPERCHARGED PROBE ACCESSORIES

ULTIMATE*vision* SUPERCHARGED Mirror attachment

- Suitable for connection to ULTIMATE*vision* SUPERCHARGED videoscope

SUPERCHARGED

	Head Ø mm		
550.8555	5.5	70°	3
550.8556	5.5	90°	3
550.8557	5.5	110°	3

ULTIMATE*vision* SUPERCHARGED Hook attachment

- Suitable for connection to ULTIMATE*vision* SUPERCHARGED Videoscope

SUPERCHARGED

	Head Ø mm	
550.8558	5.5	3

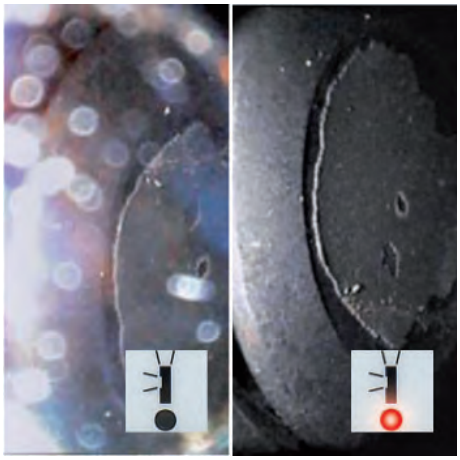

ULTIMATE*vision* SUPERCHARGED Mirror attachment

- Suitable for connection to ULTIMATE*vision* SUPERCHARGED videoscope

SUPERCHARGED

	Head Ø mm		g	
550.8605	6.0	70°	3	
550.8606	6.0	90°	3	
550.8607	6.0	110°	3	

GENERAL ACCESSORIES

AV cable

- Suitable for all ULTIMATE*vision* Videoscopes
- Does not transmit sound
- Available plugs: AV jack on video cinch

	L m	g	
550.5003	1.00	20	

4 GB SD card

- Suitable for all ULTIMATE*vision* Videoscopes

		g	
550.5008	4 GB SD card	12	

USB-Data cable

- Suitable for all ULTIMATE*vision* Videoscopes

		g	
550.5018	USB-Data cable	30	

Alcohol cleaning set

- Suitable for all ULTIMATE*vision* Videoscopes

		g	
550.7998	Alcohol cleaning set	50	

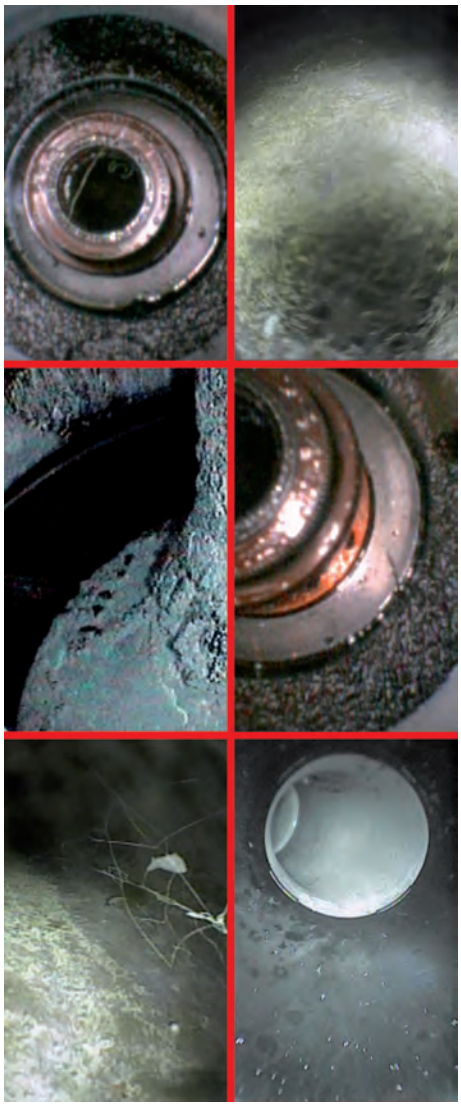

USB video grabber

- Just process the fil s and then burn DVDs, VCDs and more
- Live image broadcasting to TV and laptop
- Supports qualitative high-quality video resolution
- With video software
- Universal serial bus specifi ation Rev.2.0
- NTSC, PAL, video format
- Video and audio input
- USB bus power

Technical data:

Main memory:	256 MB
Operating system:	Windows 2000, XP, 7, Vista 32 bit
Hard disc capacity:	50 MB (free)
USB port:	USB 2.0

		g	
550.8603	USB video grabber	135	

Measurement software

- Only usable in association with ULTIMATEvision MASTER videoscope with 0° 5,5 mm probe
- Ideal for bonding in technical documentation
- Only now with this software it is possible to correctly estimate, measure and interpret damages
- Measuring of angles
- Measuring of gaps
- Measurement of radius
- Calculation of arreas
- Saving of the arranged photos
- JPEG data format
- Contains distance blade in the delivery



		g	
550.5015	Measurement software	300	

PNEUMATIC TOOLS

KSTOOLS®

Innovation is our mission!

	PAGE
REVERSIBLE RATCHET	372
DIE & ANGLE DRILLING MACHINES	373
SPOT WELD DRILLING MACHINES	374
PIN & DIE GRINDERS	374 - 375
ANGLE DIE GRINDER	375 - 376
BURNISHER	376
GRINDING MACHINES	377
BELT SANDER	377
ROUGH GRINDERS	378
RANDOM ORBIT SANDERS	378
MULTIGRINDER	379
ERASER	379
CHISEL HAMMER	379 - 380
NEEDLE SCALER	380
NIBBLERS	380
SAWING	381
LONG-DISC CUTTER	381 - 382
METAL SHEARS	382
IMPACT WRENCHES	382 - 384
IMPACT WRENCH SETS	384
RIVETING TOOLS PISTOL	385
OSCILLATING CUTTER	385
VIBRO EXTRACTOR	385
AXLE BOOTS ASSEMBLY DEVICES	386
OILS & GREASES	386
GREASE GUN	386
WHEEL FILLING GAUGE	386 - 387
SPRAY GUNS	387
AIR BLOW OUT TOOLS	387 - 388
VACUUMS	388
PNEUMATIC HOSE	388
AIR SERVICE UNIT	389
PNEUMATIC ADAPTERS & COUPLINGS	389 - 390

PNEUMATIC TOOLS

Advantages

Composition

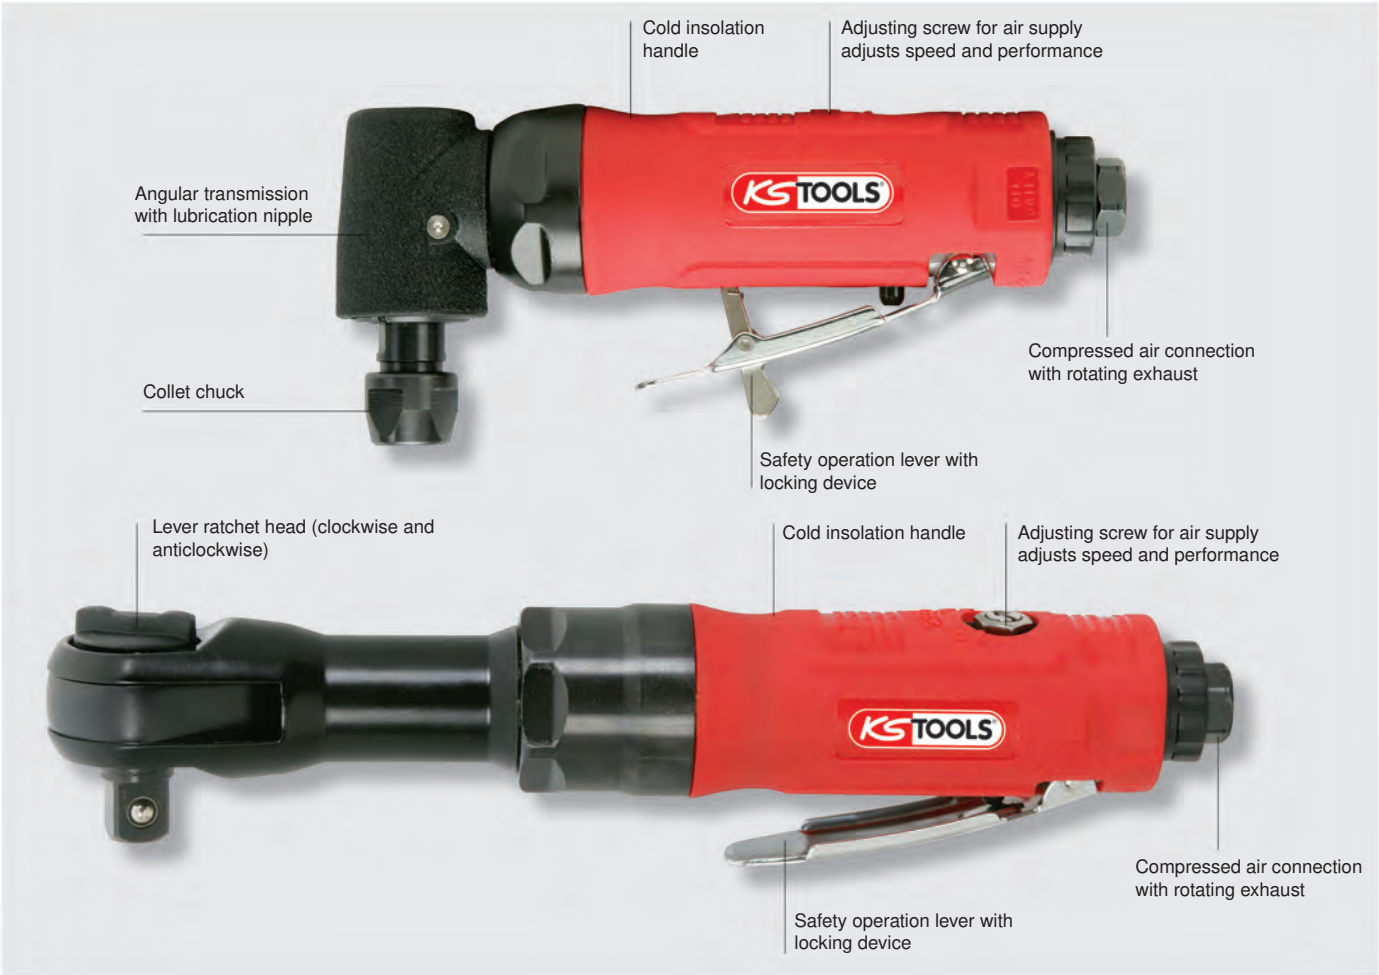

Our pneumatic tools correspond to the demands of the following standards:

Standards 2006/42/EC
EN ISO 12100-1+A1:2009
EN ISO 12100-2+A1:2009
EN ISO 14121-1:2007, EN 792-6+A1:2008
EN ISO 15744:2008, EN ISO 8662-7:1997

Striking mechanisms

Single hammer striking mechanisms

- Traditional approved construction
- Grease lubrication

Pin clutch

- Reliable construction
- Low vibration
- Fast torque progression
- Oil lubrication

Twin hammer striking mechanisms / cluch

- Excellent power to weight ratio
- Low sensitivity to air pressure flu tuations
- Constant impact with continuous torque progression
- Suitable for heavey and light duty
- Grease lubrication
- Industrial striking mechanisms e.g 515.1215

Pneumatic profil

Reversing ratchets

Drilling machines

Spot weld drilling machines

Grinding tools

Burnishing tools

Erasing machines

Needle scaler

Pneumatic-nibbler

Impact wrenches

Blind rivet gun

Oscillating cutter

Grease guns

Wheel filling gaug

Combination spray guns

Compressed air guns

Sawing

REVERSIBLE RATCHET

SlimPOWER mini-pneumatic-reversing ratchet

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Air exhaust through the handle rear end
- With ratchet head reversing lever (clockwise and anticlockwise)
- Easy operation
- Triple teeth
- With stepless speed regulation
- Vibration dampened
- Very compact construction
- Includes 1/4" coupling connector
- Robust housing

1/4"

Technical data:

Square drive:	1/4"
Max. tightening torque:	34 N•m
Max. loosening torque:	34 N•m
No load current:	420 r.p.m.
Vibration:	< 2,3 ms²
Noise performance level:	92 dbA
Noise pressure level:	85 dbA
Recomended torque:	25 N•m
Air consumption:	240.66 l/min
Operating pressure:	max. 5,5 bar (80 psi)
Min. tube diameter:	1/4" - 4,8 mm
Connection thread:	1/4"PT

	B mm	L mm	g
515.5005	35.5	135.0	400

Mini pneumatic reversing ratchet

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Air exhaust through the handle rear end
- With ratchet head reversing lever (clockwise and anticlockwise)
- Easy operation
- Triple teeth
- With stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing special plastic

1/4"

Technical data:

Square drive:	1/4"
Max. tightening torque:	40,6 N•m
Max. loosening torque:	40,6 N•m
No load current:	250 r.p.m.
Vibration:	< 4,4 ms²
Noise performance level:	97 dbA
Noise pressure level:	87 dbA
Recomended torque:	30 N•m
Air consumption:	90 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	1/4" - 6,35 mm
Connection thread:	1/4"PT

	B mm	L mm	g
515.3080	41.0	180.0	600

SlimPOWER mini-pneumatic-reversing ratchet

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Air exhaust through the handle rear end
- With ratchet head reversing lever (clockwise and anticlockwise)
- Easy operation
- Triple teeth
- With stepless speed regulation
- Vibration dampened
- Includes 1/4" coupling connector
- Robust housing

3/8"

Technical data:

Square drive:	3/8"
Max. tightening torque:	34 N•m
Max. loosening torque:	34 N•m
No load current:	420 r.p.m.
Vibration:	< 2,3 ms²
Noise performance level:	92 dbA
Noise pressure level:	85 dbA
Recomended torque:	25 N•m
Air consumption:	240.66 l/min
Operating pressure:	max. 5,5 bar (80 psi)
Min. tube diameter:	3/8" - 4,8 mm
Connection thread:	1/4"PT

	B mm	L mm	g
515.5010	35.5	135.0	400

Pneumatic reversing ratchet

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Air exhaust through the handle rear end
- With ratchet head reversing lever (clockwise and anticlockwise)
- Easy operation
- Triple teeth
- With stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing special plastic

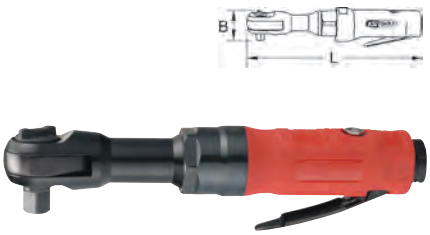

Technical data:

Square drive:	3/8"
Max. tightening torque:	68 N•m
Max. loosening torque:	68 N•m
No load current:	160 r.p.m.
Vibration:	< 1,0 ms²
Noise performance level:	97 dbA
Noise pressure level:	85 dbA
Recomended torque:	50 N•m
Air consumption:	250 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg
515.3085	50.0	260.0	1.20

SlimPOWER mini-pneumatic-reversing ratchet

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Air exhaust through the handle rear end
- With ratchet head reversing lever (clockwise and anticlockwise)
- Easy operation
- Triple teeth
- With stepless speed regulation
- Vibration dampened
- Very compact construction
- Includes 1/4" coupling connector
- Robust housing

1/2"

Technical data:

Square drive:	1/2"
Max. tightening torque:	34 N•m
Max. loosening torque:	34 N•m
No load current:	420 r.p.m.
Vibration:	< 2,3 ms²
Noise performance level:	92 dbA
Noise pressure level:	85 dbA
Recomended torque:	25 N•m
Air consumption:	240.66 l/min
Operating pressure:	max. 5,5 bar (80 psi)
Min. tube diameter:	1/4" - 4,8 mm
Connection thread:	1/4"PT

	B mm	L mm	g
515.5015	35.5	135.0	400

Pneumatic reversing ratchet

- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Air exhaust through the handle rear end
- With ratchet head reversing lever (clockwise and anticlockwise)
- Easy operation
- Triple teeth
- With stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing from special plastic

Technical data:

Square drive:	1/2"
Max. tightening torque:	68 N•m
Max. loosening torque:	68 N•m
No load current:	175 r.p.m.
Vibration:	< 1,0 ms²
Noise performance level:	97 dbA
Noise pressure level:	85 dbA
Air consumption:	85 l/min
Recomended torque:	50 N•m Nm
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg
515.3090	52.0	265.0	1.40

DIE & ANGLE DRILLING MACHINES

SlimPOWER mini-pneumatic straight drill

- Straight design
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- Not reversible
- With quick release chuck capacity 1 - 6,5 mm
- For hard to reach places
- Ideally suited for car bodywork and industrial working
- With stepless speed regulation
- Vibration dampened through double bearing guides
- Includes 1/4" coupling connector
- Robust housing

Technical data:

Chuck capacity:	1 - 6,5 mm
Chuck thread reception:	3/8" x 24 UNF
Capacity:	190 Watt
No load current:	6000 r.p.m.
Vibration:	< 0,7 ms²
Noise performance level:	95 dbA
Noise pressure level:	80 dbA
Air consumption:	240.66 l/min
Min. tube diameter:	1/4" - 4,8 mm
Operating pressure:	max. 5,5 bar (80 psi)
Connection thread:	1/4"NPT

	B mm	L mm	g
515.5020	35.5	145.0	400

SlimPOWER mini-pneumatic angle drill

- Angled version
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- Not reversible
- With gear rim drill chuck width 1 - 6,5 mm
- For hard to reach places
- Ideally suited for car body work
- With stepless speed regulation
- Vibration dampened through double bearing guides
- Includes 1/4" coupling connector
- Robust housing

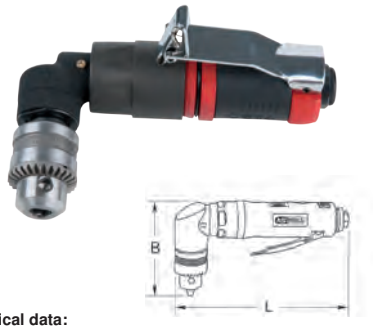

Technical data:

Chuck capacity:	1 - 6,5
Chuck thread reception:	3/8" x 24 UNF
Capacity:	230 Watt
No load current:	4500 r.p.m.
Vibration:	< 0,7 ms²
Noise performance level:	95 dbA
Noise pressure level:	83 dbA
Air consumption:	240.66 l/min
Min. tube diameter:	1/4" - 6,4 mm
Operating pressure:	max. 6,3 bar (90 psi)
Connection thread:	1/4"

	B mm	L mm	g
515.5025	90.0	145.0	700

Pneumatic pistol grip drill

- Very handy and compact construction
- With non slip soft grip handle
- Air exhaust through the handle
- For one handed operation with ergonomic design
- With quick release chuck capacity 0 - 10 mm
- With practical clockwise and anticlockwise switch
- Suitable for continuous duty
- For working in hard to access areas
- Ideally suited for car bodywork and industrial working
- With stepless speed regulation
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing from special plastic

Technical data:

Chuck capacity:	1 - 10 mm
Chuck thread reception:	3/8" x 24 UNF
Capacity:	330 Watt
No load current:	1800 r.p.m.
Vibration:	< 0,1 ms²
Noise performance level:	95 dbA
Noise pressure level:	82 dbA
Air consumption:	113 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT

	B mm	L mm	g
515.3030	165.0	150.0	920

Pneumatic straight drill

- Straight design
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- Not reversible
- With quick release chuck capacity 0 - 10 mm
- For hard to reach places
- Ideally suited for car bodywork and industrial working
- With stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened through double bearing guides
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing from special plastic

Technical data:

Chuck capacity:	1 - 10 mm
Chuck thread reception:	3/8" x 24 UNF
Capacity:	330 Watt
No load current:	2600 r.p.m.
Vibration:	< 0,1 ms²
Noise performance level:	95 dbA
Noise pressure level:	82 dbA
Air consumption:	85 l/min
Min. tube diameter:	3/8" - 10 mm
Operating pressure:	max. 6,3 bar (90 psi)
Connection thread:	1/4"NPT

	B mm	L mm	g
515.3025	44.0	215.0	750

Pneumatic angle drill

- Angled version
- With planetary gearing
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- Not reversible
- With gear rim drill chuck width 0 - 10 mm
- For hard to reach places
- Ideally suited for car body work
- With stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened through double bearing guides
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing from special plastic

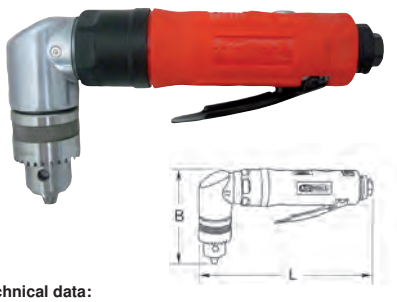

Technical data:

Chuck capacity:	1 - 10
Chuck thread reception:	3/8" x 24 UNF
Capacity:	330 Watt
No load current:	1800 r.p.m.
Vibration:	< 0,15 ms²
Noise performance level:	95 dbA
Noise pressure level:	87 dbA
Air consumption:	85 l/min
Operating pressure:	6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT

	L mm	B mm	kg
515.1265	200,0	100.0	1.15

Pneumatic pistol grip drill

- Low rotation speed
- Non slip soft grip handle
- Ultra light robust housing from special plastic
- Air exhaust through the handle
- Quick release chuck capacity 0 - 13 mm
- Practical clockwise and anticlockwise switch
- Suitable for continuous duty
- Ideally suited for working with hard to machine materials
- For spot weld drills, polishing and grinding wheels, erasing rubbers etc.
- Very substaintial guide
- Stepless speed regulation
- Vibration dampened
- Handle for 2 hand operation 360° revolving and lockable
- Cold insulated handle
- Includes 1/4" coupling connector

Technical data:

Chuck capacity:	1,5 - 13 mm
Chuck thread reception:	3/8" x 24 Gang
Capacity:	330 Watt
No load current:	450 r.p.m.
Vibration:	< 0,15 ms²
Noise performance level:	95 dbA
Noise pressure level:	87 dbA
Air consumption:	113 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"NPT

	B mm	L mm	T mm	kg
515.3035	200.0	230.0	43.0	1.60

SPOT WELD DRILLING MACHINES

Pneumatic spot weld drill

- Air exhaust through the handle
- Easy operation
- Suitable for continuous duty
- Ideally suited for internal and external spot welds
- For spot weld drills
- Very substaintial guide
- With adjustable milling machine depth ring in steps of 0,05 mm
- With revolving and removable frame to the fi ation on the object
- With large frame for deep lying points
- Feed achievement through pneumatic cylinder
- With stepless speed regulation
- Includes 1/4" coupling connector
- Robust machined housing

Technical data:

Drive:	Ø 8 mm with set screw
Capacity:	500 Watt
No load current:	1600 r.p.m.
Vibration:	< 0,3 ms²
Noise performance level:	90 dbA
Noise pressure level:	81 dbA
Air consumption:	280 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4" IG

	B mm	L mm	kg	
515.1206	200.0	235.0	2.20	

accessories:

		g	
515.1207	Counter bracket, small for 515.1206	300	
515.1208	Counter bracket, large for 515.1206	500	

Pneumatic spot weld drill set

- Air exhaust through the handle
- Easy operation
- Suitable for continuous duty
- Ideally suited for internal and external spot welds
- For spot weld drills
- Very substaintial guide
- Adjustable milling machine depth ring in steps of 0,05 mm
- Revolving and removable frame on the fi ation on the object
- Large frame for deep lying points
- Feed achievement through pneumatic cylinder
- Stepless speed regulation
- Includes 1/4" coupling connector
- Robust machined housing
- In durable plastic case

Technical data:

Drive:	Ø 8 mm with set screw
Capacity:	500 Watt
No load current:	1600 r.p.m.
Vibration:	< 0,2 ms²
Noise performance level:	90 dbA
Noise pressure level:	81 dbA
Air consumption:	280 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4" IG

			kg	
515.1205	9 pcs	Pneumatic spot weld drill set	2.20	

consists of:

		kg	
515.1206	1/2" pneumatic spot weld drill	2.20	
515.1207	Counter bracket, small for 515.1206	0.30	
515.1208	Counter bracket, large for 515.1206	0.50	
332.0108	HSSE spot weld drill, Ø 8,0mm	0.02	
515.3361	Pneumatic tool oil, 100ml	0.25	

Fastdrill pneumatic spot weld drill

- Special drive for high torque
- With non-slip soft-grip-handle
- Air exhaust through the handle
- Suitable for continuous duty
- Ideally suited for internal and external spot welds
- For carbide spot weld drills
- Very substantial guide
- With revolving and removable frame on the fi ation on the object
- Feed achievement through pneumatic-cylinder
- With stepless speed regulation
- Cold insulated handle
- Includes 1/4" coupling connector
- Robust machined housing

Technical data:

Drive in mm	8 mm
Capacity:	280 Watt
No load current:	1000 r.p.m.
Vibration:	< 0,233 ms²
Noise performance level:	95.4 dbA
Noise pressure level:	82.4 dbA
Air consumption:	340 l/min
Operating pressure:	6 bar
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg	
515.1311	175.0	315.0	1.85	

accessories:

		g	
515.1312	Bracket, small, for Fastdrill	550	
515.1313	Bracket, big, for Fastdrill	800	

Fastdrill pneumatic spot weld drill set

- Special gearbox for high torque
- With non slip soft grip handle
- Air exhaust through the handle
- Suitable for continuous duty
- Ideally suited for internal and external spot welds
- For carbide spot weld drills
- Very substaintial guide
- With revolving and removable frame on the fi ation on the object
- Feed achievement through Pneumatic-cylinder
- With stepless speed regulation
- Cold insulated handle
- Includes 1/4" coupling connector
- Robust machined housing

Technical data:

Drive in mm	8 mm
Capacity:	280 Watt
No load current:	1000 r.p.m.
Vibration:	< 0,233 ms²
Noise performance level:	95.4 dbA
Noise pressure level:	82.4 dbA
Air consumption:	340 l/min
Operating pressure:	6 bar
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

			kg	
515.1310	3 pcs	Fastdrill pneumatic spot weld drill set	2.40	

consists of:

		kg	
515.1311	Fastdrill pneumatic spot weld drill	1.85	
515.1312	Bracket, small, for Fastdrill	0.55	
515.1314	T-handle wrench	0.04	

Spot weld drills can be found in the Cutting tools/brushes and fil s section.

PIN & DIE GRINDERS

Pneumatic pencil grinder, 70.000 rpm

- Straight design
- Air exhaust through the used air tube
- Ideal for carbide, corundum and tungsten carbide burrs
- For working in hard to access areas
- Very handy and compact construction
- Suitable for different repair works
- With stepless speed regulation
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector and chuck wrench
- Aluminium housing

Technical data:

Tube length:	1 m
Tube diameter:	5 mm
Chuck capacity:	3 mm
Capacity:	150 KW
No load current:	70000 r.p.m.
Vibration:	< 2,5 ms²
Noise performance level:	86 dbA
Noise pressure level:	74 dbA
Air consumption:	140 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	1/4" - 6,35 mm
Connection thread:	1/4"PT

	D mm	L mm	g	
515.3198	16.0	132.0	330	

SlimPOWER mini-pneumatic die grinder, straight

- Straight design
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For working in hard to access areas
- Very handy and compact construction
- Secure operation lever with locking device
- With stepless speed regulation
- Vibration dampened
- Very compact construction
- Includes 1/4" coupling connector
- Robust housing

Technical data:

Chuck:	6 mm
Capacity:	230 Watt
No load current:	25000 r.p.m.
Vibration:	< 1,5 ms²
Noise performance level:	95 dbA
Noise pressure level:	81 dbA
Air consumption:	319.93 l/min
Min. tube diameter:	1/4" - 6,4 mm
Operating pressure:	max. 5,5 bar (80 psi)
Connection thread:	1/4"PT

	B mm	L mm	g	
515.5030	35.0	123.0	300	

Mini pneumatic die grinder, straight

- Straight design
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For working in hard to access areas
- Very handy and compact construction
- Secure operation lever with locking device
- With stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing from special plastic

Technical data:

Chuck:	6 mm
Capacity:	250 Watt
No load current:	25000 r.p.m.
Vibration:	< 0,1 ms²
Noise performance level:	95 dbA
Noise pressure level:	82 dbA
Air consumption:	85 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	g
515.3005	365.0	155.0	920

Long shaft die grinder

- Straight design
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For working in deep lying areas
- Secure operation lever with locking device
- With stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing special plastic

Technical data:

Chuck:	6 mm
Capacity:	330 Watt
No load current:	22000 r.p.m.
Vibration:	< 0,1 ms²
Noise performance level:	95 dbA
Noise pressure level:	82 dbA
Air consumption:	85 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg
515.3015	26.5	280.0	1.08

consists of:

		kg
515.3015	Long shaft die grinder, 22,000 r.p.m.	1.08
337.2005	High performances thin disk,1mm,pack of 25	0.10
515.3017	Clamping mandrel M6 f. thin cutting disk	0.07

Thin disks can be found in the Cutting tools/brushes and fil s section on page 533.

ANGLE DIE GRINDER

SlimPOWER mini-pneumatic angled die grinder

- Straight design
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For working in hard to access areas
- Secure operation lever with locking device
- With stepless speed regulation
- Vibration dampened
- Very compact construction
- Includes 1/4" coupling connector
- Robust housing



Technical data:

Chuck:	6 mm
Capacity:	190 Watt
No load current:	19000 r.p.m.
Vibration:	< 1,5 ms²
Noise performance level:	95 dbA
Noise pressure level:	82 dbA
Air consumption:	240.66 l/min
Min. tube diameter:	1/4" - 4,8 mm
Operating pressure:	max. 5,5 bar (80 psi)
Connection thread:	1/4"

	B mm	L mm	g
515.5035	75.0	123.0	300

Pneumatic die grinder

- Straight design
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For working in hard to access areas
- Very handy and compact construction
- Secure operation lever with locking device
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing special plastic

Technical data:

Chuck:	6 mm
Capacity:	330 Watt
No load current:	21000 r.p.m.
Vibration:	< 0,1 ms²
Noise performance level:	95 dbA
Noise pressure level:	82 dbA
Air consumption:	85 l/min
Operating pressure:	6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	g
515.3010	44.0	175.0	920

Long shaft die grinder set

- With 25 mini grinding wheels and mounting mandrel
- Straight design
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- For HM mills, mini cutting discs and grindstone with 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For working in deep lying areas
- Secure operation lever with locking device
- With stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing from special plastic

Technical data:

Chuck:	6 mm
Capacity:	330 Watt
No load current:	22000 r.p.m.
Vibration:	< 0,1 ms²
Noise performance level:	95 dbA
Noise pressure level:	82 dbA
Air consumption:	85 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg
515.3016	26.5	280.0	1.25

SlimPOWER mini-pneumatic angled die grinder

- Straight design
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For working in hard to access areas
- Secure operation lever with locking device
- With stepless speed regulation
- Vibration dampened
- Includes 1/4" coupling connector
- Robust housing



Technical data:

Chuck:	6 mm
Capacity:	230 Watt
No load current:	20000 r.p.m.
Vibration:	< 1,5 ms²
Noise performance level:	95 dbA
Noise pressure level:	83 dbA
Air consumption:	319.93 l/min
Min. tube diameter:	1/4" - 6,4 mm
Operating pressure:	max. 6,3 bar (90 psi)
Connection thread:	1/4"

	B mm	L mm	g	
515.5040	70.0	270.0	700	

Pneumatic angled die grinder

- 90° offset execution
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- For HM mills, mini cutting discs and grinding heads with a 6 mm shaft
- Ideal for grinding, polishing and engraving work
- For working in hard to access areas
- Secure operation lever with locking device
- With stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing from special plastic
- Grease nipple for maintenance on striking mechanism ensures long life (KS grease gun 980.1070)



Technical data:

Angle size:	80 mm
Chuck:	6 mm
Capacity:	330 Watt
No load current:	18000 r.p.m.
Vibration:	< 0,1 ms²
Noise performance level:	95 dbA
Noise pressure level:	82 dbA
Air consumption:	85 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg	
515.3020	80.0	180.0	0.92	

BURNISHER

SlimPOWER mini-pneumatic burnisher

- 90° offset execution
- Air exhaust through the handle rear end
- For one hand operation
- Ideal for curved cutting
- For working in hard to access areas
- Secure operation lever with locking device
- With stepless speed regulation
- Vibration dampened
- Very compact construction
- Receiver: External thread
- Includes 3 Velcro receivers
- Includes 1/4" coupling connector
- Robust housing

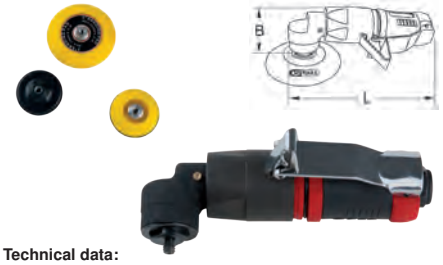

Technical data:

Capacity:	190 Watt
No load current:	4000 r.p.m.
Sponge diameter:	50 + 75 mm
Polishing sponge diameter:	46 mm
Vibration:	1,5 ms²
Noise performance level:	95 dbA
Noise pressure level:	81 dbA
Air consumption:	240.66 l/min
Min. tube diameter:	1/4" - 4,8 mm
Operating pressure:	max. 5,5 bar (80 psi)
Connection thread:	1/4"

	B mm	L mm	g	
515.5125	55.0	140.0	600	

Grinding disc

- With Velcro receiver
- With internal thread receiver

	Ø mm	Material	Content	g	
515.5101	46,0	fl xible	5	275	
515.5102	75,0	fl xible	5	125	
515.5103	46,0	rigid	5	55	

Burnishing pads

- For burnishing of smooth surfaces

	Ø mm	Material	Colour code	Content	g	
515.5126	50,0	plastic	yellow	5	10	
515.5122	85,0	plastic	yellow	5	55	
515.5127	50,0	plastic	white	5	10	
515.5123	85,0	plastic	white	5	55	
515.5128	50,0	plastic	black	5	10	
515.5129	50,0	leather		5	48	
515.5124	80,0	leather		5	80	

Mini pneumatic burnisher set

- For hard to reach places and improvement work
- With non-slip soft-grip-handle
- 90° offset execution
- Air exhaust through the handle rear end
- For one hand operation
- Ideal for curved cutting
- For working in hard to access areas
- Vibration dampened
- Very compact construction
- Grinding disc with Velcro
- Includes 1/4" coupling connector
- Receiver: Internal thread
- Robust housing
- In durable plastic storage case

Technical data:

No load current:	2500 r.p.m.
Vibration:	1,5 ms²
Noise performance level:	92 dbA
Noise pressure level:	81 dbA
Air consumption:	113 l/min
Operating pressure:	max. 5,2
Min. tube diameter:	10 mm
Connection thread:	1/4"

			kg	
515.5120	5 pcs	Mini pneumatic burnisher set	1.80	

consists of:

		g	
515.5121	1/4" mini burnishing machine	1000	
515.5122	Burnishing pads yellow, Ø 85,0mm	55	
515.5123	Burnishing pads weiß, Ø 85,0mm	55	
515.5124	Burnishing pads, Ø 80,0mm	80	
515.5112	Grinding disc Ø76.5 mm	20	

Grinding disc

- With Velcro receiver
- With external thread receiver

	Ø mm	Material	Content	g	
515.5113	46,0	fl xible	5	13	
515.5112	76,5	fl xible	5	20	

Burnishing pads

- For burnishing of smooth surfaces

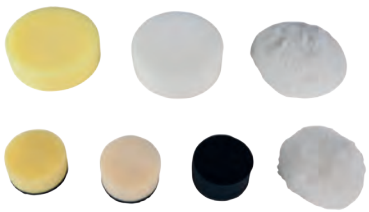

	Ø mm	Material	Colour code	Content	g	
515.5126	50,0	plastic	yellow	5	10	
515.5122	85,0	plastic	yellow	5	55	
515.5127	50,0	plastic	white	5	10	
515.5123	85,0	plastic	white	5	55	
515.5128	50,0	plastic	black	5	10	
515.5129	50,0	leather		5	48	
515.5124	80,0	leather		5	80	

GRINDING MACHINES

SlimPOWER mini-pneumatic grinding machine

- 90° offset execution
- Air exhaust through the handle rear end
- For one hand operation
- Ideal for curved cutting
- For working in hard to access areas
- Secure operation lever with locking device
- With stepless speed regulation
- Vibration dampened
- Very compact construction
- Includes 1/4" coupling connector
- Receiver: External thread
- Robust housing
- Incl. three grinding discs



Technical data:

Capacity:	190 Watt
No load current:	16500 r.p.m.
Sponge diameter:	50 + 75 mm
Polishing sponge diameter:	46 mm
Vibration:	< 1,5 ms²
Noise performance level:	95 dbA
Noise pressure level:	81 dbA
Air consumption:	240.66 l/min
Min. tube diameter:	1/4" - 4,8 mm
Operating pressure:	max. 5,5 bar (80 psi)
Connection thread:	1/4"

	B mm	L mm	g	
515.5100	40.0	120.0	300	

Grinding disc

- With Velcro receiver
- With internal thread receiver

	Ø mm	Material	Content	g	
515.5101	46,0	fl xible	5	275	
515.5102	75,0	fl xible	5	125	
515.5103	46,0	rigid	5	55	

Grinding pads

- For polishing rough surfaces made from wood, metal, varnish and natural stone
- For breaking edges

	Ø mm	Grain	Content	g	
515.5119	50,0	320	10	16	
515.5116	75,0	320	10	19	
515.5118	50,0	400	10	16	
515.5115	75,0	400	10	19	
515.5117	50,0	600	10	16	
515.5114	75,0	600	10	19	

SlimPOWER mini-pneumatic grinding machine for small pads

- 90° offset execution
- Air exhaust through the handle rear end
- For one hand operation
- Ideal for curved cutting
- For working in hard to access areas
- Secure operation lever with locking device
- With stepless speed regulation
- Vibration dampened
- Very compact construction
- For screw in pads with 26.7 mm diameter
- Includes 1/4" coupling connector
- Receiver: Internal thread
- Robust housing



Technical data:

No load current:	16500 r.p.m.
Vibration:	< 1,5 ms²
Noise performance level:	92 dbA
Noise pressure level:	81 dbA
Air consumption:	240.66 l/min
Min. tube diameter:	1/4" - 4,8 mm
Operating pressure:	max. 5,5 bar (80 psi)
Connection thread:	1/4"

	B mm	L mm	g	
515.5070	65.0	120.0	300	

Grinding pads 26.7 mm

- For polishing rough surfaces made from wood, metal, varnish and natural stone
- For breaking edges
- With external thread receiver

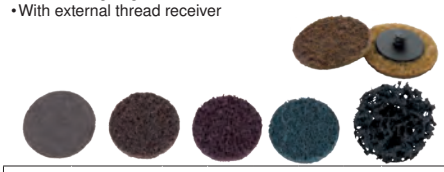

	Material	Ø mm	Grain	Colour code	Content	g	
515.5071		26,7	60	brown	10	10	
515.5072		26,7	80	brown	10	20	
515.5073		26,7	150	purple	10	20	
515.5074		26,7	300	blue	10	20	
515.5075	Strip Rad	26,7		black	10	25	

SlimPOWER mini-pneumatic grinding machine for large pads

- 90° offset execution
- Air exhaust through the handle rear end
- For one hand operation
- Ideal for curved cutting
- For working in hard to access areas
- Secure operation lever with locking device
- With stepless speed regulation
- Vibration dampened
- Very compact construction
- For screw in pads with 50.0 mm diameter
- Includes 1/4" coupling connector
- Receiver: Internal thread
- Robust housing



Technical data:

No load current:	16500 r.p.m.
Vibration:	< 1,5 ms²
Noise performance level:	92 dbA
Noise pressure level:	81 dbA
Air consumption:	240.66 l/min
Min. tube diameter:	1/4" - 4,8 mm
Operating pressure:	max. 5,5 bar (80 psi)
Connection thread:	1/4"

	B mm	L mm	g	
515.5080	70.0	120.0	300	

Grinding pads 50.0 mm

- For polishing rough surfaces made from wood, metal, varnish and natural stone
- For breaking edges
- With external thread receiver

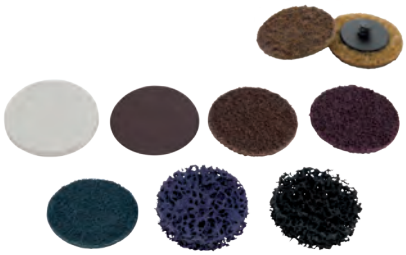

	Material	Ø mm	Grain	Colour code	Content	g	
515.5081	Scouring wool	50,0		white	10	60	
515.5083	Sand paper	50,0	80	brown	10	60	
515.5084	Sand paper	50,0	150	purple	10	60	
515.5082	Sand paper	50,0	240	brown	10	30	
515.5085	Sand paper	50,0	300	blue	10	60	
515.5086	Strip Rad	50,0		purple	10	100	
515.5087	Strip Rad	50,0		black	10	100	

BELT SANDER

Belt sander

- With non slip soft grip handle
- Air exhaust through the handle rear end
- Working head is 360° ajustable
- Adjustable for quick sanding belt change
- Ideal for narrow areas (10 mm belt width)
- Secure operation lever with locking device
- With stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Light aluminium housing



Technical data:

Belt speed:	1188 m/min
No load current:	18000 r.p.m.
Vibration:	< 2,0 ms²
Noise performance level:	81 dbA
Noise pressure level:	73 dbA
Air consumption:	142 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	L1 mm	L2 mm	g	
515.3549	150.0	170.0	800	

Sanding belt for belt sander

- Sanding belt for belt sander 515.3549

	Grain	Content	g	
515.3551	80	10	60	
515.3552	100	10	80	
515.3553	120	10	100	

ROUGH GRINDERS

Pneumatic disc cutter

- Air exhaust through the handle rear end
- For grinding wheels up to Ø 125 mm x 22 mm
- With safety cover
- For grinding metal sheet and steel
- Secure operation lever with locking device
- With detachable second handle
- With stepless speed regulation
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing from special plastic

Technical data:

Tool holder:	5/8" - 11 Gang
No load current:	10000 r.p.m.
Capacity:	700 Watt
Vibration:	< 0,2 ms²
Noise performance level:	103 dbA
Noise pressure level:	90 dbA
Air consumption:	142 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg	
515.3045	95.0	210.0	1.75	

Pneumatic disc cutter

- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- For cutting wheels up to Ø 75 mm x 10 mm
- With safety cover
- For cutting metal sheet and steel
- Secure operation lever with locking device
- For working in inaccessible places
- With stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing special plastic

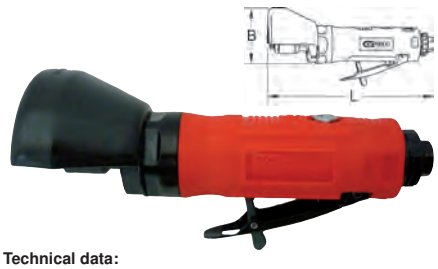

Technical data:

Tool holder:	5/16" - 24 mm
No load current:	21000 r.p.m.
Capacity:	330 Watt
Vibration:	< 0,2 ms²
Noise performance level:	95 dbA
Noise pressure level:	82 dbA
Air consumption:	85 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg	
515.3040	80.0	195.0	1.00	

RANDOM ORBIT SANDERS

Mini pneumatic random orbital sander set

- For hard to reach places and improvement work
- With non-slip soft-grip-handle
- 90° offset execution
- Air exhaust through the handle rear end
- For one hand operation
- Ideal for curved cutting
- For working in hard to access areas
- Vibration dampened
- Very compact construction
- Includes ¼" coupling connector
- Receiver: Internal thread
- Robust housing
- Grinding disc with Velcro
- In durable plastic storage case

Technical data:

No load current:	15000 r.p.m.
Vibration:	< 1,5 ms²
Noise performance level:	92 dbA
Noise pressure level:	81 dbA
Air consumption:	113 l/min
Operating pressure:	max. 5,2
Min. tube diameter:	10 mm
Connection thread:	1/4"

			kg	
515.5110	63 pcs	Mini pneumatic random orbital sander set	1.45	

consists of:

		g	
515.5111	Mini random orbital sander	700	
515.5119	Grinding pads, grit 320 Ø 50mm, 10 pcs	16	
515.5118	Grinding pads, grit 400 Ø 50mm, 10 pcs	16	
515.5117	Grinding pads, grit 600 Ø 50mm, 10 pcs	16	
515.5116	Grinding pads, grit 320 Ø 75mm, 10 pcs	19	
515.5115	Grinding pads, grit 400 Ø 75mm, 10 pcs	19	
515.5114	Grinding pads, grit 600 Ø 75mm, 10 pcs	19	
515.5113	Grinding disc Ø 46.0 mm	13	
515.5112	Grinding disc Ø76.5 mm	20	

Grinding disc

- With Velcro receiver
- With external thread receiver

	Ø mm	Material	Content	g	
515.5113	46,0	fl xible	5	13	
515.5112	76,5	fl xible	5	20	

Grinding pads

- For polishing rough surfaces made from wood, metal, varnish and natural stone
- For breaking edges

	Ø mm	Grain	Content	g	
515.5119	50,0	320	10	16	
515.5116	75,0	320	10	19	
515.5118	50,0	400	10	16	
515.5115	75,0	400	10	19	
515.5117	50,0	600	10	16	
515.5114	75,0	600	10	19	

Fine finish e centric sander with dust extraction

- Air exhaust through the used air tube
- With ergonomic design for fatigue free working
- Compact constuction height and light composite housing for controlled working
- For sanding or polishing
- Alternatively can be used with dust bag or industrial vacuum cleaner
- Includes fabric dust collection bag
- With 6 punched hole in pitch circle: 80 mm / Ø 11 mm
- With stepless speed regulation
- Low vibration
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing special plastic

Technical data:

Sanding radius:	2,5 mm
Velcro disc receiver:	Ø 152,4 mm = 6"
Tube length:	2 m
Capacity:	240 Watt
No load current:	10000 r.p.m.
Vibration:	3,5 ms²
Noise performance level:	71 dbA
Noise pressure level:	60 dbA
Air consumption:	255 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	D mm	L mm	kg	
515.3061	150.0	196.0	1.50	

Rapid removal eccentric sander with dust extraction

- Air exhaust through the used air tube
- With ergonomic design for fatigue free working
- Compact construction height and light composite housing for controlled working
- For sanding or polishing
- Alternatively can be used with dust bag or industrial vacuum cleaner
- Includes fabric dust collection bag
- With 6 punched hole in pitch circle: 80 mm / Ø 11 mm
- With stepless speed regulation
- Low vibration
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing special plastic

Technical data:

Sanding radius:	5 mm
Velcro disc receiver:	Ø 152,4 mm = 6"
Tube length:	2 m
Capacity:	240 Watt
No load current:	10000 r.p.m.
Vibration:	3,5 ms²
Noise performance level:	71 dbA
Noise pressure level:	60 dbA
Air consumption:	225 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	1/4" - 6,35 mm
Connection thread:	1/4"PT

	D mm	L mm	g	
515.3066	150.0	100.0	900	

MULTIGRINDER

Pneumatic multi-grinder set

- For removing underbody coating, sealant, rust, corrosion, clingages, paints, film , text as well as for paint stripping
- With non-slip soft-grip-handle
- For hard to reach places
- Air exhaust through the handle rear end
- Easy operation
- Ideal for grinding and erasing work
- For working in hard to access areas
- Vibration dampened
- Includes 1/4 coupling connector
- Robust housing
- In durable plastic storage case

Technical data:

No load current:	3500 r.p.m.
Vibration:	< 4,4 ms²
Noise performance level:	94 dbA
Noise pressure level:	88 dbA
Air consumption:	113 l/min
Operating pressure:	6,2
Min. tube diameter:	1/4“ - 6,3 mm
Connection thread:	1/4“

			kg	
515.5130	17 pcs	Pneumatic multi-grinder set	4.67	

consists of:

		g	
515.5131	Mini multi-grinder with handle, 272 mm	1400	
515.5132	Film eraser, light execution, 105mm, pack of 5	1325	
515.5133	Film eraser, dark execution, 105mm, pack of 5	1400	
515.5134	Adaptor for film e aser, pack of 5	100	
515.5135	Brushing belt, coarse, curved tips, 11 mm, pack of 5	250	
515.5136	Brushing belt, coarse, curved tips, 23 mm, pack of 5	375	
515.5137	Brushing belt, straight tips, 11 mm, pack of 5	325	
515.5138	Brushing belt, straight tips, 23 mm, pack of 5	350	
515.5139	Eliminator disc 15 mm, pack of 5	500	
515.5166	Adaptor for 11 mm Ø brushing belt, pack of 5	80	
515.5167	Adaptor for individual eliminator disc, 19 mm, pack of 5	550	
515.5168	Adaptor for double eliminator disc, 31 mm, pack of 5	650	

ERASER

Pneumatic erasing machine

- Straight design
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- Ideal for removing of stickers glue and color remainders
- Includes neutral colored rubber eraser disc
- Stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4” coupling connector
- Ultra light robust housing from special plastic

Technical data:

Tool holder:	5/16” - 24
Capacity:	330 Watt
No load current:	2600 r.p.m.
Vibration acceleration:	< 0,70 m/s²
Noise performance level:	95 dbA
Noise pressure level:	82 dbA
Air consumption:	85 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8” - 10 mm
Connection thread:	1/4”PT

	B mm	L mm	Eraser wheels	kg	
515.1244	40.0	225.0	515.1243	1.08	

Rubber eraser disc

- For removing of stickers, glue and color remainders on varnished areas
- Includes neutral colored rubber eraser preventing a smearing on the surface
- Not suitable for pneumatic die grinders

Technical data:

Speed:	4000 rpm
Shaft:	M8

	B mm	D mm	Content	g	
515.1243	15.0	90.0	1	110	
515.1285	15.0	90.0	6	660	

CHISEL HAMMER

Pneumatic chisel set

- Non slip soft grip handle
- Air exhaust through the handle
- Ultra light housing from two component plastic
- Ergonomic designed handle
- For ripping out car body sheet metal with pneumatic air
- Ideal for industry
- Also suitable for loosening firm y rusted fi tings
- Stepless impact regulation
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- In durable plastic case

Technical data:

Chisel holder:	10 mm
Number of blows:	3000 blows/min
No load current:	3200 r.p.m.
Vibration:	8,5 ms²
Noise performance level:	99.2 dbA
Noise pressure level:	110.9 dbA
Air consumption:	270 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8“ - 10 mm
Connection thread:	1/4“PT

			kg	
515.3810	7 pcs	Pneumatic chisel set	1.70	

consists of:

		g	
515.3801	Pointed chisel	137	
515.3802	Sheet metal cutting chisel	147	
515.3803	Rivet cutting chisel, curved	146	
515.3804	Flat chisel 19 mm	150	
515.3805	Curved cutting chisel	146	
515.3806	Pneumatic chisel with 1/4“ connector	1550	
515.3815	Holder for air chisel set	126	

Pneumatic chisel set

- Non slip soft grip handle
- Air exhaust through the handle
- Ergonomic designed handle
- For ripping out car body sheet metal with pneumatic air
- Ideal for industry
- Also suitable for loosening firm y rusted fi tings
- Quick release chuck for quick chisel changing
- Stepless impact regulation
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector and chuck
- Ultra light housing from two component plastic
- In durable plastic case

Technical data:

Chisel holder:	10 mm
Number of blows:	2900 blows/min
Vibration:	5,35 ms²
Noise performance level:	104.9 dbA
Noise pressure level:	90.4 dbA
Air consumption:	77.3 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Connection thread:	1/4"PT

			kg	
515.3840	7 pcs	Pneumatic chisel set	1.70	

consists of:

		kg	
515.3841	AIR CHISEL	1.73	
515.3842	Rivet cutting chisel	0.17	
515.3843	Spot weld chisel	0.16	
515.3844	Flat chisel	0.16	
515.3845	Pointed chisel	0.16	
515.3846	Curved sheet metal cutting chisel	0.16	
515.3847	Quick change retainer	0.32	

Vibro impact pneumatic chisel hammer set

- With non slip soft grip handle
- Air exhaust through the handle
- Ergonomic designed handle
- Ideal for industry
- Efficien , gentle loosening of screw fi tings
- With stepless impact regulation
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light housing from two component plastic

			kg	
515.3880	6 pcs	Vibro impact pneumatic chisel hammer set	5.70	

consists of:

		kg	
515.3881	Pneumatic chisel hammer	2.17	
515.3882	Holder for pneumatic chisel hammer	1.55	
515.3886	Pneumatic chisel track rod loosener,110mm	0.14	
515.3887	Pneumatic chisel hammer,110mm	0.15	
515.3888	Pneumatic chisel loosening adapter,130mm	0.16	
515.3889	Pneumatic chisel loosening mandrel,100x25x12mm	0.19	

Special Vibro chisel set

- For loosening seized screw joints and loosening components
- Gentle peeling and driving
- Vibration is transmitted directly to the screw connections
- Impact mandrel attachment as ingenious aid to any removal operation
- For hexagonal and round 10 mm machine mountings
- Including pressure plate adapter for driving out bearings, sleeves, bushings

Caution: Use only in conjunction with a pneumatic hammer chisel!

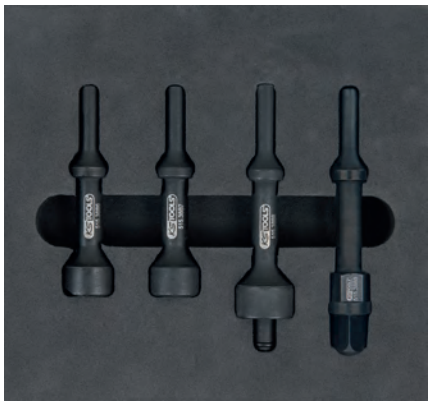

			g	
515.3885	4 pcs	Special Vibro chisel set	774	

consists of:

		g	
515.3886	Pneumatic chisel track rod loosener,110mm	138	
515.3887	Pneumatic chisel hammer,110mm	148	
515.3888	Pneumatic chisel loosening adapter,130mm	159	
515.3889	Pneumatic chisel loosening mandrel,100x25x12mm	190	

NEEDLE SCALER

Pneumatic needle scaler

- In handy pistol design
- Air exhaust through the handle
- For removing and/or derusting of coatings and solid metal parts
- Is coarser than a sand balsting and finer han rust hammers
- Equipped with 19 needles of 3 mm a piece
- With adjustable needle cover
- Cold insulated handle
- Includes 1/4" coupling connector
- Robust steel housing

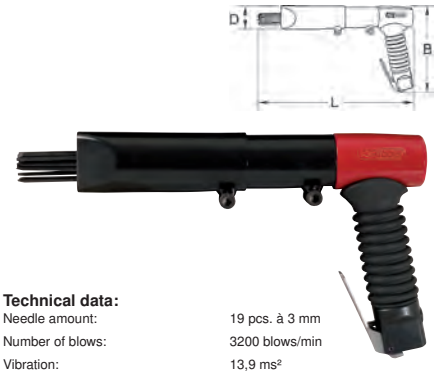

Technical data:

Needle amount:	19 pcs. à 3 mm
Number of blows:	3200 blows/min
Vibration:	13,9 ms²
Noise performance level:	110 dbA
Noise pressure level:	97 dbA
Air consumption:	170 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	D mm	L mm	Replacement needle pack	kg	
515.3070	205.0	45.0	330.0	515.3071	2.60	

NIBBLERS

Pneumatic nibbler

- 90° offset execution
- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- Ideal for curved and straight cutting
- Cut is made by punching a series of holes sequentially in sheet metal
- Also suitable for plastic cutting
- For extremely small radius
- With stepless speed regulation
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing special plastic

Technical data:

Cutting speed:	2,6 m/min
Cutting output:	steel 1,2 mm
	Aluminium 1,6 mm
Cutting width:	4,5 mm
Capacity:	330 Watt
Vibration:	< 0,5 ms²
Noise performance level:	95 dbA
Noise pressure level:	82 dbA
Air consumption:	85 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg	
515.3050	100.0	190.0	1.15	

SAWING

SlimPOWER mini-pneumatic reciprocating bodywork key hole saw

- Air exhaust through the used air tube to the rear
- For one handed operation
- For works in car body panels, beams and profil
- Secure operation lever with locking device
- Suitable for small sawing radius
- Stepless speed regulation
- Vibration dampened
- Includes 1/4" coupling connector
- Robust metal housing



Technical data:

Stroke:	7.9 mm
Cutting strokes:	5760 strokes/min
Capacity:	190 Watt
Vibration:	< 16,4 ms²
Noise pressure level:	92 dbA
Noise performance level:	81.0 dbA
Air consumption:	240.66 l/min
Operating pressure:	max. 5,5 bar (80 psi)
Min. tube diameter:	4,8 mm
Connection thread:	1/4“

	B mm	L mm		g	
515.5045	36.0	170.0	129.3740-46	500	

Pneumatic reciprocating bodywork saw, low vibration

- Air exhaust through the used air tube to the rear
- For one handed operation with ergonomic design
- For works in car body panels, beams and profil
- Secure operation lever with locking device
- Suitable for small sawing radius
- Stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Robust metal housing

Technical data:

Stroke:	10.0 mm
Cutting strokes:	5760 strokes/min
Vibration:	< 9,1 ms²
Noise pressure level:	69.2 dbA
Noise performance level:	81.0 dbA
Air consumption:	196 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8“ - 10 mm
Connection thread:	1/4“PT

	B mm	L mm		kg	
515.3000	45.0	790.0	129.3740-46	0.80	

LONG-DISC CUTTER

SlimPOWER mini-pneumaticshort disc cutter

- Air exhaust through the handle rear end
- For cutting wheels up to Ø 50,4 x 11 x 9,56 mm
- For grinding wheels up to Ø 59,0 x 4,0 x 9,56 mm
- Ideal for loosening worn down and/or rusted connections
- Adjustable sparkguard
- For working in inaccessible places
- Long service life
- Secure operation lever with locking device
- With stepless speed regulation
- Vibration dampened
- Includes 1/4" coupling connector
- Robust housing

Technical data:

Tool holder:	9,60 mm
Capacity:	230 Watt
No load current:	16500 r.p.m.
Vibration:	< 2,0 ms²
Noise performance level:	95 dbA
Noise pressure level:	81 dbA
Air consumption:	240.66 l/min
Operating pressure:	max. 5,5 bar (80 psi)
Min. tube diameter:	1/4“ - 4,8 mm
Connection thread:	1/4“

	B mm	L mm	g	
515.5050	60.0	125.0	400	

SlimPOWER mini-pneumatic long-disc cutter

- Air exhaust through the handle rear end
- For cutting wheels up to Ø 75.0 x 1.35 x 9.56 mm
- Ideal for loosening worn down and/or rusted connections
- Fixed sparkguard
- For working in inaccessible places
- Long service life
- Secure operation lever with locking device
- With stepless speed regulation
- Vibration dampened
- Very compact construction
- Includes 1/4" coupling connector
- Robust housing



Technical data:

Tool holder:	9,56 mm
Capacity:	230 Watt
No load current:	19000 r.p.m.
Vibration:	< 1,5 ms²
Noise performance level:	99.9 dbA
Noise pressure level:	81 dbA
Air consumption:	319.93 l/min
Operating pressure:	max. 6,2 bar (90 psi)
Min. tube diameter:	1/4“ - 6,4 mm
Connection thread:	1/4“

	B mm	L mm	g	
515.5055	50.0	230.0	500	

SlimPOWER mini-pneumatic disc cutter, long

- Air exhaust through the handle rear end
- For cutting wheels up to Ø 75.0 x 1.35 x 9.56 mm
- Ideal for loosening worn down and/or rusted connections
- Fixed sparkguard
- For working in inaccessible places
- Long service life
- Secure operation lever with locking device
- With stepless speed regulation
- Vibration dampened
- Very compact construction
- Includes 1/4" coupling connector
- Robust housing



Technical data:

Tool holder:	9,56 mm
Capacity:	230 Watt
No load current:	19000 r.p.m.
Vibration:	< 1,5 ms²
Noise performance level:	99.9 dbA
Noise pressure level:	86 dbA
Air consumption:	319.93 l/min
Operating pressure:	max. 6,2 (90 psi)
Min. tube diameter:	1/4“ - 6,4 mm
Connection thread:	1/4“

	B mm	L mm	g	
515.5060	50.0	275.0	700	

High performances thin cutting disk

- Exact and clean cut
- No deburring necessary
- Very short cutting times
- Machine load reduced
- Inox stainless steel



	RPM max	D1 mm	D2 mm	H mm	Content	g	
515.5056	3600	50,0	10	1.1	50	650	
515.5057	20100	75,0	10	1.5	50	710	

Allround fla wheel, curved

- For universal usage
- High level of fl xibilty
- Consistent high cutting power

Ideal for use in metal and stainless steel.



	RPM max	D1 mm	D2 mm	H mm	Content	g
515.5058	22000	59,0	9.56	4.0	25	600

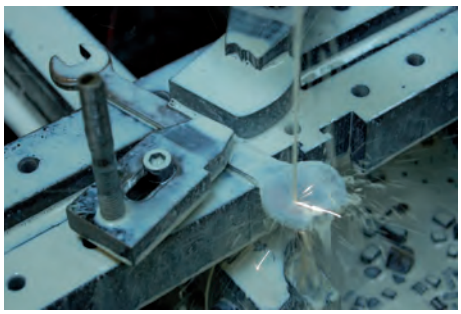

Long disc cutter

- Air exhaust through the handle rear end
- With practical clockwise and anticlockwise switch
- For cutting wheels up to Ø 100 x 1,0 x 10 mm
- Ideal for loosening worn down and/or rusted connections
- Adjustable sparkguard
- For working in inaccessible places
- Long service life
- Secure operation lever with locking device
- With stepless speed regulation
- Number of revolutions adjustable through regulating wheel
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing special plastic
- Grease nipple for maintenance on striking mechanism ensures long life (KS grease gun 980.1070)



Technical data:

No load current:	12000 r.p.m.
Vibration:	< 2,0 ms²
Noise performance level:	100 dbA
Noise pressure level:	90 dbA
Air consumption:	142 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Drive:	16 mm / M10 x 1.0 mm
Min. tube diameter:	1/4“ - 6,35 mm
Connection thread:	1/4“PT

	B mm	L mm	Replacement cut off wheels	kg
515.3075	60.0	400.0	337.2010	1.80

High performances thin cutting disk

- Exact and clean cut
- No deburring necessary
- Very short cutting times
- Machine load reduced
- Inox stainless steel

Ideal for use in very thin materials until 2.5 mm, tool steel, sheet metal, thin walled pipes and profil s all type suited for locksmiths, car body building, sanitary and heating fi ting, plumbing, sheet metal processing, carpentry, joinery, roofi g, metal processing and all motor vehicles businesses.



	RPM max	D1 mm	D2 mm	H mm	Content	g
337.2010	15250	100,0	16.0	1.6	25	1200

METAL SHEARS

Pneumatic sheet metal shear

- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- Ideal for the cutting of car body sheet metal and aluminium sheet
- Eccentric cutting drive
- For curved cutting up to 100 mm radius
- With stepless speed regulation
- Number of revolutions adjustable through regulating screw
- Vibration dampened
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing special plastic

Technical data:

Cutting speed:	2,6 m/min
Cutting output:	steel 1,2 mm
	Aluminium 1,6 mm
Cutting width:	5,0 mm
Vibration:	< 9,1 ms²
Noise performance level:	95 dbA
Noise pressure level:	82 dbA
Air consumption:	85 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8“ - 10 mm
Connection thread:	1/4“PT

	B mm	L mm		kg
515.3055	59.0	250.0	515.3055-40	1.25

IMPACT WRENCHES

miniMONSTER High Performance Pneumatic impact wrench 1.390 Nm

- With non slip soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- High performance industrial jumbo mechanism
- Long service life
- Cold insulated handle
- Includes 1/4” coupling connector
- Ultra light housing

1/2"

Technical data:

Square drive:	1/2”
Max. tightening torque:	1 = 270 N•m
	2 = 640 N•m
	3 = 965 N•m
Max. loosening torque:	1.390 N•m
No load current:	10000 r.p.m.
Vibration acceleration:	< 9,18 m/s²
Noise performance level:	113 dbA
Noise pressure level:	102 dbA
Recomended torque:	615 N•m
Air consumption:	135 l/min
Operating pressure:	max. 6,3 bar
Max. screw size:	M 16
Min. tube diameter:	3/8” - 10 mm
Connection thread:	1/4”PT

	B mm	L mm	kg
515.1270	95.0	190.0	1.34

Mini pneumatic impact wrench 433 N•m

- With non slip soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- Low vibration
- High performance double hammer mechanism
- Long service life
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light magnesium housing
- Grease nipple for maintenance on striking mechanism ensures long life (KS grease gun 980.1070)

1/2"

Technical data:

Square drive:	1/2“
Max. tightening torque:	1 = 217 N•m
	2 = 346 N•m
	3 = 433 N•m
Max. loosening torque:	433 N•m
No load current:	10000 r.p.m.
Vibration:	< 2.01 m/s²
Noise performance level:	103.8 dbA
Noise pressure level:	92.8 dbA
Recomended torque:	448 N•m
Air consumption:	75 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8“ - 10 mm
Max. screw size:	M13

	B mm	L mm	kg
515.1275	150.0	185.0	1.56

Pneumatic impact wrench 850 N•m

- With ergonomic soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- Low vibration
- High performance pin hammer mechanism
- Long service life
- Cold insulated handle
- Includes 1/4" coupling connector
- Light aluminium housing

1/2"

Technical data:

Square drive:	1/2"
Max. tightening torque:	1 = 474 N•m 2 = 609 N•m 3 = 677 N•m
Max. loosening torque:	850 N•m
No load current:	7000 r.p.m.
Vibration:	< 1.13 m/s²
Noise performance level:	106.1 dbA
Noise pressure level:	95.4 dbA
Recomended torque:	493 N•m
Air consumption:	128 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Max. screw size:	M16
Min. tube diameter:	1/4" - 8 mm
Connection thread:	1/4"PT

	B mm	L mm	kg
515.1290	180.0	187.6	2.50

MONSTER High Performance Pneumatic impact wrench 1.690 N•m

- With non slip soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- High performance double hammer mechanism
- Long service life
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light Aluminium housing

1/2"

Technical data:

Square drive:	1/2"
Max. tightening torque:	1 = 510 N•m 2 = 680 N•m 3 = 931 N•m
Max. loosening torque:	1.690 N•m
No load current:	7930 r.p.m.
Vibration acceleration:	< 13,56 m/s²
Noise performance level:	104 dbA
Noise pressure level:	88 dbA
Recomended torque:	542 N•m
Air consumption:	178 l/min
Operating pressure:	max. 6,3 bar
Max. screw size:	M 16
Min. tube diameter:	1/2" - 13 mm
Connection thread:	1/4"PT

	B mm	L mm	kg
515.1210	195.0	200.0	2.15

Pneumatic impact wrench 1490 N•m

- With non slip soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- Low vibration
- High performance double hammer mechanism
- Long service life
- Cold insulated handle
- Includes 3/8" coupling connector
- Ultra light magnesium housing

1"

Technical data:

Square drive:	1"
Max. tightening torque:	1 = 969 N•m 2 = 1267 N•m 3 = 1490 N•m
Max. loosening torque:	1490 N•m
No load current:	5500 r.p.m.
Vibration:	< 2,64 ms²
Noise performance level:	106.3 dbA
Noise pressure level:	95.3 dbA
Recomended torque:	1089 N•m
Air consumption:	204 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Max. screw size:	M 30
Min. tube diameter:	1/2"
Connection thread:	3/8"PT

	B mm	L mm	kg
515.3750	230.0	227.0	5.75

Pneumatic impact wrench 1490 N•m

- With non slip soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- Low vibration
- High performance double hammer mechanism
- Long service life
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light magnesium housing

1/2"

Technical data:

Square drive:	1/2"
Max. tightening torque:	1 = 444 N•m 2 = 592 N•m 3 = 810 N•m
Max. loosening torque:	1490 N•m
No load current:	7500 r.p.m.
Vibration:	< 2,69 ms²
Noise performance level:	104 dbA
Noise pressure level:	88 dbA
Recomended torque:	542 N•m
Air consumption:	128 l/min
Operating pressure:	max. 6,3 bar
Max. screw size:	M 16
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg
515.1215	190.0	208.0	2.86

Pneumatic impact wrench 1490 N•m

- With non slip soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- Low vibration
- High performance double hammer mechanism
- Long service life
- Cold insulated handle
- Includes 3/8" coupling connector
- Ultra light magnesium housing

3/4"

Technical data:

Square drive:	3/4"
Max. tightening torque:	1 = 969 N•m 2 = 1267 N•m 3 = 1490 N•m
Max. loosening torque:	1490 N•m
No load current:	5500 r.p.m.
Vibration:	< 2,64 ms²
Noise performance level:	106.3 dbA
Noise pressure level:	95.3 dbA
Recomended torque:	1084 N•m
Air consumption:	206 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Max. screw size:	M 30
Min. tube diameter:	1/2"
Connection thread:	3/8"PT

	B mm	L mm	kg
515.3735	197.0	227.0	5.70

Pneumatic impact wrench 2169 N•m

- With non slip handle
- Air exhaust through the handle rear end
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- Low vibration
- High performance double hammer mechanism
- Long service life
- Cold insulated handle
- Includes 1/2" coupling connector
- Ultra light magnesium housing



1"

Technical data:

Square drive:	1"
Max. tightening torque:	1 = 651 N•m 2 = 1085 N•m 3 = 1518 N•m 4 = 2169 N•m
Max. loosening torque:	2169 N•m
No load current:	4500 r.p.m.
Vibration:	< 3,0 ms²
Noise performance level:	123.6 dbA
Noise pressure level:	111.3 dbA
Recomended torque:	1590 N•m
Air consumption:	283 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Max. screw size:	M 33
Min. tube diameter:	3/4" - 19 mm
Connection thread:	1/2"PT

	B mm	L mm	kg
515.3770	230.0	334.0	9.74

Pneumatic impact wrench 3388 N•m

- With non slip handle
- Air exhaust through the handle rear end
- With practical clockwise and anticlockwise switch
- Easy operation
- 4 stage torque adjustment
- Low vibration
- High performance double hammer mechanism
- Long service life
- Includes 1/2" coupling connector
- Ultra light magnesium housing

1"

Technical data:

Square drive:	1"
Max. tightening torque:	1 = 1016 N•m
	2 = 1694 N•m
	3 = 2372 N•m
	4 = 3388 N•m
Max. loosening torque:	3388 N•m
No load current:	4200 r.p.m.
Vibration:	< 3,32 ms²
Noise performance level:	114.7 dbA
Noise pressure level:	103.8 dbA
Recomended torque:	2481 N•m
Air consumption:	283 l/min
Operating pressure:	max. 6,3 bar (90 psi)
Max. screw size:	M 50
Min. tube diameter:	3/4" - 19 mm
Connection thread:	1/2"PT

	B mm	L mm	kg
515.3765	230.0	630.0	16.20

Pneumatic impact wrench 2,441 N•m

- With non-slip handle
- Air exhaust through the handle sidewards
- With 3 stages torque control for loosening and tightening
- Draw-off is integrated in the handle
- Low vibration
- Low sound level
- With rubber housing
- High performance double hammer mechanism
- With bore for locking pin
- Long service life
- Includes 1/2" coupling connector
- Ultra light housing from aluminium

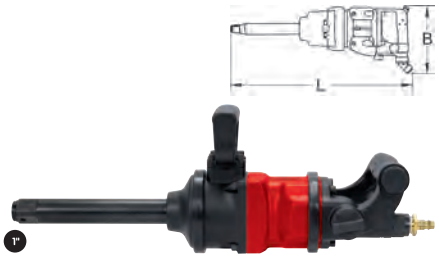

1"

Technical data:

Square drive:	1"
Max. tightening torque:	2033 Nm
Max. loosening torque:	2441 Nm
Vibration:	12,5 ms²
No load current:	6000 r.p.m.
Noise performance level:	86 dbA
Noise pressure level:	96 dbA
Operating pressure:	max. 6,3 bar (90 psi)
Air consumption:	282 l/min
Min. tube diameter:	1/2" - 13 mm
Max. screw size:	M 38
Connection thread:	1/2"PT

	B mm	L mm	kg
515.3745	170.0	467.0	7.30

IMPACT WRENCH SETS

Pneumatic impact wrench set

- With ergonomic soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- Low vibration
- High performance pin hammer mechanism
- Long service life
- Cold insulated handle
- Includes 1/4" coupling connector
- Light aluminium housing
- In durable plastic storage case

1/2"

			kg
515.5140	17 pcs	Pneumatic impact wrench set	6.18
1 x		677 Nm	
10 x		12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 21 - 22 mm	
3 x		17 - 19 - 21 mm	
1 x		1/4"	
1 x		125 mm	
1 x		68 mm	

Pneumatic impact wrench set

- With non slip soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- Low vibration
- High performance double hammer mechanism
- Long service life
- Cold insulated handle
- Includes 1/4" coupling connector
- In durable plastic storage case
- Ultra light magnesium housing

1/2"

			kg
515.1220	17 pcs	Pneumatic impact wrench set	6.32
1 x		740 Nm	
10 x		12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 21 - 22 mm	
3 x		17 - 19 - 21 mm	
1 x		1/4"	
1 x		125 mm	
1 x		68 mm	



Pneumatic impact wrench set

- With ergonomic soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- Low vibration
- High performance pin hammer mechanism
- Long service life
- Cold insulated handle
- Includes 1/4" coupling connector
- Light aluminium housing
- In durable plastic storage case

1/2"

			kg
515.5150	17 pcs	Pneumatic impact wrench set	5.69
1 x		1690 Nm	
10 x		12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 21 - 22 mm	
3 x		17 - 19 - 21 mm	
1 x		1/4"	
1 x		125 mm	
1 x		68 mm	

RIVETING TOOLS PISTOL

Pneumatic riveting tool pistol

- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- For pop rivet working
- With swivel joint at the coupling connector for fl xible use
- Cold insulated
- Includes 1/4" coupling connector
- Robust aluminium housing

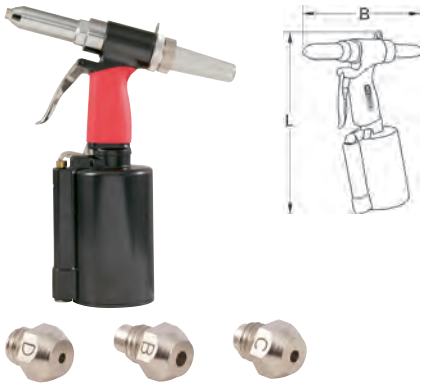

Technical data:

Rivet sizes:	2,4 - 3,2 - 4,0 - 4,8 mm
Stroke length:	14 mm
Driving power:	8677,5 N
Vibration:	< 2,5 ms²
Noise performance level:	98.6 dbA
Noise pressure level:	85 dbA
Air consumption:	1 l/Hub
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg	
515.3102	195.0	290.0	1.50	

Pneumatic riveting tool pistol

- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- For professional riveting, continuous operation
- For steel, aluminium, stainless steel or copper riveting up to 6,4 mm
- With 6 mouth pieces, 4,8 mm is pre assembled
- Especially low noise level
- Swivel joint at the connection thread for fl xible use
- Cold insulated
- Includes 1/4" coupling connector
- Robust aluminium housing

Technical data:

Rivet sizes:	3,2 - 4,0 - 4,8 - 6,4 mm
Stroke length:	19 mm
Driving power:	13839,5 N
Vibration:	< 2,5 ms²
Noise performance level:	85 dbA
Noise pressure level:	73.3 dbA
Air consumption:	1,8 l/Hub
Operating pressure:	max. 6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg	
515.3101	210.0	340.0	2.00	

OSCILLATING CUTTER

Pneumatic oscillating cutter

- 90° offset execution
- Air exhaust through used air tube
- For one handed operation with ergonomic design
- For the professional dismantling of vehicle discs
- Universal blade reception for all standard blades
- Secure operation lever with locking device
- Stepless speed regulation
- Includes 1/4" coupling connector and blade changing spanner
- Robust steel housing

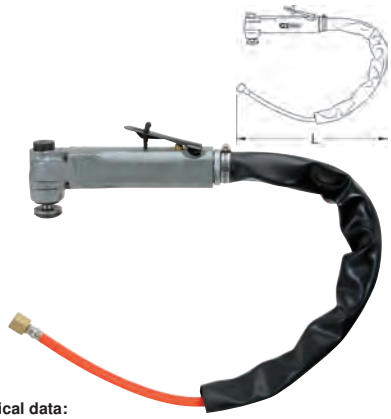

Technical data:

Oscillating speed:	2000/min
No load current:	22000 r.p.m.
Vibration:	4,3 m/s²
Noise performance level:	79.8 dbA
Noise pressure level:	69.9 dbA
Air consumption:	300 l/min
Operating pressure:	6,3 bar (90 psi)
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	L mm	Drive	kg	
140.2251	725.0	Ø 22 mm	1.27	

Pneumatic oscillating cutter set

- 90° offset execution
- Air exhaust through used air tube
- For one handed operation with ergonomic design
- For the professional dismantling of vehicle discs
- Universal blade reception for all standard blades
- Secure operation lever with locking device
- Stepless speed regulation
- Includes 1/4" coupling connector and blade changing spanner
- Robust steel housing

			kg	
140.2219	6 pcs	Pneumatic oscillating cutter set	2.04	

1 x		57 mm
1 x		16 mm
1 x		57 mm
1 x		90 mm
1 x		50 mm
1 x		35 mm

Cutting / scraper blades

- For the pneumatic oscillating cutter
- Special steel

		g	
140.2252	Scraper blade, offset, blade width 16 mm	20	
140.2255	Cutting blade, straight, offset, length 50 mm	20	
140.2256	Cutting blade, straight, offset, length 90 mm	30	
140.2261	Cutting blade, angled, offset, cutting depth 55 mm	20	
140.2263	Cutting blade, straight, cutting depth 35 mm	10	

		g	
515.5093	Scraper blade, curved, curved, blade length 16 mm	13	
515.5094	Scraper blade, curved, curved, blade length 36 mm	13	
515.5095	Scraper blade, curved, curved, blade length 63 mm	13	
515.5096	Scraper blade, curved, curved, blade length 90 mm	25	
515.5097	Scraper blade, curved, straight, blade length 24 mm	12	

VIBRO EXTRACTOR

Glow plug vibration extractor set

- Ideal for loosening and extracting jammed glow plugs
- Especially suitable in glow plugs jammed by corrosion and/ or soot coal
- Produces controlled vibration impulse
- Suitable for all current glow plugs
- Loosening torque in 4 stages in accordance with manufacturer guidelines
- Extensive cost intensive repairs can be avoided through dismantling glow plugs
- Includes 1/4" coupling connector
- In durable steel storage case

Technical data:

Square drive:	1/4"
Max. tightening torque:	40 Nm
Max. loosening torque:	1 = 10 Nm
	2 = 20 Nm
	3 = 30 Nm
	4 = 40 Nm
No load current:	7500 r.p.m.
Vibration:	< 2,69 ms²
Noise performance level:	104 dbA
Noise pressure level:	88 dbA
Recomended torque:	42 Nm
Air consumption:	128 l/min
Operating pressure:	max. 6,3 (90 psi)
Max. screw size:	M16
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

			kg	
152.1060	5 pcs	Glow plug vibration extractor set	1.80	

consists of:

		g	
152.1061	1/4" Vibration extractor 10-40 N•m	900	
152.1062	1/4" Impact wrench socket long 8 mm	30	
152.1063	1/4" Impact wrench socket long 10 mm	40	
152.1064	1/4" Impact wrench socket long 12 mm	50	
152.1065	1/4" Universal joint	40	

AXLE BOOTS ASSEMBLY DEVICES

Pneumatic assembly tool for CV joint boots

- Air exhaust through the handle rear end
- Suitable for all universal and original vehicle CV joint boots
- For CV joint boots diameter from 20 - 120 mm
- Expanding of the joint arms through pneumatic air
- Air pressure is regulated through a button
- No additional lubricant necessary
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light robust housing from special plastic

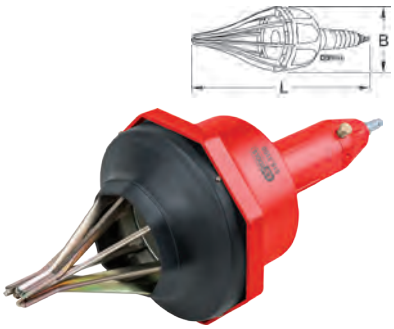

Technical data:

Max. expansion diameter:	25 - 115 mm
Operating pressure:	max. 8 bar
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

	B mm	L mm	kg	
515.3100	200.0	490.0	2.27	

OILS & GREASES

Pneumatic tool oil

- For the lubrication of pneumatic tools
- With lockable nozzle
- Contents 100 ml

	B mm	L mm	g	
515.3361	60.0	148.0	250	

Precision oiler

- In ball point pen form
- Practical pocket clip
- Protective cap
- Oil dosage through pushing a button
- Smallest angles and corners reached
- Suitable for a wide range of applications
- Light aluminium housing

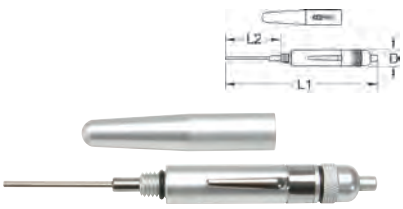

	D mm	L1 mm	L2 mm	g	
550.1035	15.0	140.0	50.0	50	

Mini grease gun

- Grease gun for maintenance work
- Precise, exact dosage per pressure button with return spring
- For tubes
- Includes long, rigid nozzle
- Tube contents 100 g

	Replacement tube	g	
980.1070	980.1075	205	

Mini grease gun set

- Grease gun for maintenance work
- Precise, exact dosage per pressure button with return spring
- For exchangeable cartridges and bucket goods
- Includes long, rigid nozzle and an additional nozzle extension
- Tube contents 110 g

			g	
980.1095	3 pcs	Mini grease gun set	265	

accessories:

		g	
980.1096	Lubricant 110 g	110	
980.1097	Replacement tip for mini grease gun, 1 mm	1	
980.1098	Replacement tip for mini grease gun long execution	30	

GREASE GUN

Pneumatic grease gun

- Air exhaust through the handle
- For one handed operation with balanced ergonomic design
- For cartridges and bucket goods and/or also for loose grease
- Includes fl xible hose and nozzle
- Cold insulated handle
- Includes 1/4" coupling connector

Technical data:

Output pressure:	260 bar
Hauling capacity:	288 cm³/min
Capacity:	400g
Air consumption:	170 l/min
Operating pressure:	6,3 bar (90 psi)
Connection thread:	1/4"PT

	B mm	L mm	kg	
515.3900	165.0	400.0	1.50	

Grease gun adaptor set

- For standard hand, cordless and pneumatic grease guns
- Adaptor with sliding sleeve for break-proof connection
- Straight and angled grease nipple
- For grease nipples out of steel, brass and stainless steel

Application range: Cone, funnel, ball and fl t grease nipples

			kg	
980.1100	7 pcs	Grease gun adaptor set	1.99	

WHEEL FILLING GAUGE

Tyre filli g gauge

- For one hand operation
- Rubber coated manometer
- Manometer with bar and psi scale
- Filling lever and pressure release button
- Tube with integrated locking male nipple
- Robust rubber coated housing

Technical data:

Working range:	0 - 11 bar
	9 - 160 psi
Tube length:	490 mm
Operating pressure:	max 6,3 bar (90 psi)
Connection thread:	1/4"PT

	Total length mm	g	
515.1950	530.0	600	

Calibrated tyre filli g gauge

- For one handed operation with ergonomic design
- Rubber coated manometer
- Manometer with bar scale
- With filli g lever and pressure release button
- Tube with integrated locking male nipple
- Hanging hole
- Includes 1/4” coupling connector
- Robust rubber coated housing

Technical data:

Working range:	0 - 10 bar
Tube length:	400 mm
Operating pressure:	max. 6,3 bar (90 psi)
Connection thread:	1/4“PT

	Total length mm	g	
515.1960	600.0	450	

SPRAY GUNS

Pneumatic combination spray gun

- For underbody coating or acoustic protection or body cavity sealing with wax
- Handy and light
- For standard 1000 ml cartridges
- Attached, fl xible 500 mm-hose with spreader nozzle for all-round wax mist permits unproblematic wax application in cavities and interspaces
- Easy application of the underbody coating (or acoustic protection) with standard installed nozzles
- Application tip: Open cartridge, immerse suction pipe and screw in cartridge. Finished!
- Robust housing
- Includes 1/4" coupling connector

Technical data:

Air consumption:	225 l/min
Min. tube diameter:	1/4“ - 6,3 mm
Operating pressure:	6,3 bar (90 psi)
Connection thread:	1/4“PT

	L mm	g	
515.5065	220.0	400	

AIR BLOW OUT TOOLS

Compressed blow out pen

- In ball point pen form
- With practical pocket clip
- Controllable air volume
- With 2,5 mm nozzle
- With Euro connection
- Direct air coupling suitable for connection
- Light aluminium housing

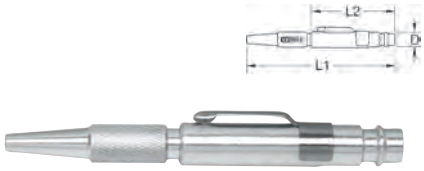

Technical data:

Input pressure:	max. 12 bar
Operating pressure:	max. 6,3 bar (90 psi)
Max. fl w rate:	360 l/min
Noise pressure level:	90 dbA
Connection thread:	1/4“PT

	D mm	L1 mm	L2 mm	g	
515.1908	10.0	110.0	70.0	150	

Pneumatic blow out pistol with extension

- Ergonomic handle
- Controllable air volume
- With 2,5 mm nozzle
- Direct air coupling suitable for connection
- Easily operated
- With hanging hole
- Includes 1/4" coupling connector
- Solid metal base body
- Robust metal housing

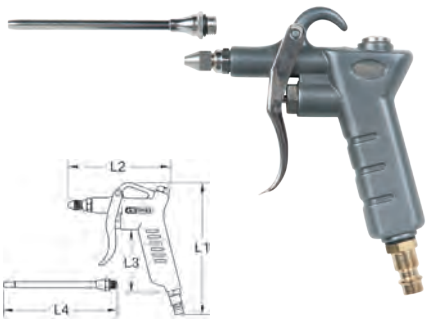

Technical data:

Input pressure:	max. 15 bar
Operating pressure:	max. 6,3 bar (90 psi)
Max. fl w rate:	130 l/min
Noise pressure level:	90 dbA
Connection thread:	1/4“PT

	L1 mm	L2 mm	L3 mm	L4 mm	g	
515.1930	125.0	110.0	75.0	125.0	180	

Pneumatic blow out pistol with fl w regulation

- With universal mouth piece
- Ideal for cleaning and removing of foreign objects
- Ergonomic handle
- Controllable air volume
- With hanging function
- Direct air coupling suitable for connection
- Easily operated
- Slip proof handle
- Includes 1/4" coupling connector
- Ultra light robust housing from special plastic



Technical data:

Input pressure:	max. 15 bar
Operating pressure:	max. 6,3 bar (90 psi)
Max. fl w rate:	300 l/min
Noise pressure level:	90 dbA
Connection thread:	1/4“PT

	L1 mm	L2 mm	L3 mm	g	
515.1901	235.0	100.0	75.0	150	

Universal pneumatic blow out pistol

- Ideal for cleaning and removing of foreign objects
- Ergonomic handle
- Controllable air volume
- With hanging function
- Direct air coupling suitable for connection
- Easily operated
- Slip proof handle
- Includes 1/4” coupling connector
- Ultra light robust housing from special plastic

Technical data:

Input pressure:	max. 15 bar
Operating pressure:	max. 6,3 bar (90 psi)
Max. fl w rate:	300 l/min
Noise pressure level:	90 dbA
Connection thread:	1/4“PT

	L1 mm	L2 mm	L3 mm	g	
515.1902	235.0	95.0	75.0	170	
515.1903	470.0	330.0	75.0	240	
515.1904	650.0	510.0	75.0	280	

Telescopic pneumatic blow out pistol

- With stepless extendable nozzle
- Telescopic blast pipe in length and angle adjustable 65 - 280 mm / 360°
- Ideal for cleaning and removing of foreign objects
- Ergonomic handle
- Controllable air volume
- With hanging function
- Direct air coupling suitable for connection
- Easily operated
- Slip proof handle
- Includes 1/4" coupling connector



	L2 mm	L3 mm	L4 mm	g
515.1907	110.0	55.0	140.0	230

Pneumatic blow out pistol set

- Ideal for cleaning and removing of foreign objects
- Ergonomic handle
- Controllable air volume
- With hanging function
- Direct air coupling suitable for connection
- Easily operated
- Slip proof handle
- Includes 1/4" coupling connector
- Ultra light robust housing from special plastic

			g
515.1921	3 pcs	Pneumatic blow out pistol set	690
1 x		100 mm	
1 x		330 mm	
1 x		490 mm	

VACUUMS

Pneumatic suction and blow gun

- Includes reinforced fabric dust collection bag
- Versatile usage
- Includes 1/4" coupling connector
- Robust housing

Technical data:

Operating pressure:	max. 6,3 bar (90 psi)
Max. fl w rate:	96 l/min
Noise performance level:	97 dbA
Noise pressure level:	92 dbA
Min. tube diameter:	3/8" - 10 mm
Connection thread:	1/4"

	L mm	g
515.5090	145.0	670

PNEUMATIC HOSE

PU pneumatic spiral coiled tube

- Flexible, crush resistant polyurethane hose
- Tube ends with anti kink device
- Rotating fi ting
- Flexible in cold
- Oil and petrol resistant

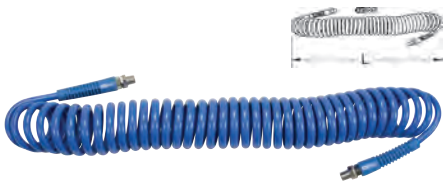

Technical data:

Max. pressure: 12 bar

	Tube inner Ø mm	Connection	L m	suitable coupling	suitable inlet connector	kg
515.3330	6	G1/4" AG	8.00	515.3483	515.3492	0.60
515.3335	8	G1/4" AG	15.00	515.3483	515.3492	1.20
515.3340	10	G3/8" AG	15.00	515.3484	515.3493	1.80

PU pneumatic hose

- High quality pneumatic hose
- Suitable for pneumatic and water
- Light and crush free material
- Suitable accessories
- Long service life
- Oil and petrol resistant

Technical data:

Temperature constancy:	-40°C - +70°C
Max. pressure:	15 bar

	Ø Tube mm	Connection	L m	suitable coupling	suitable inlet connector	kg
515.3344	6 x 9	G1/4" AG	20.00	515.3483	515.3492	1.00
515.3345	9 x 12	G1/4" AG	20.00	515.3483	515.3492	1.75

Automatic pneumatic hose reel Ø 6 mm x 15 m

- With wall mounting bracket
- For pneumatic and water
- Drum 180° freely tiltable by means of wall mounting
- Flexible PVC hose
- Automatic hose return
- Multi gearlock per rotation
- Device adjusting lock
- Include 1 m connecting hose
- Impact resistant plastic housing



Technical data:

Tube diameter:	6 mm
Hose external diameter:	12 mm
Tube length:	15 + 1 m m
Max. pressure:	20,0 bar
Connection thread:	1/4" - 6,35 mm

	B mm	L mm	kg
515.3310	435.0	400.0	12.50

Air line hose reel

- With wall mounting bracket
- For pneumatic and water
- Drum 180° freely tiltable by means of wall mounting
- Flexible, crush resistant Hybrid-Polymer hose
- Automatic hose return
- Multi gearlock per rotation
- Device adjusting lock
- Include 1 m connecting hose
- Impact resistant plastic housing

Technical data:

Tube diameter:	10.0 mm
Tube length:	15 m
Max. pressure:	20,0 bar

	Connection thread mm	kg
515.3410	3/8" - 10 mm	6.00
515.3415	1/2" - 13 mm	9.70

AIR SERVICE UNIT

Pneumatic water trap

- For separating condensation
- Assembly directly in the access direction
- Made out of sitered metal

1/4"

	D1	D2	mm	L mm	g	
515.3370	G1/4"AG	G1/4"IG	14	88.0	140	

Pneumatic side oiler

- For automatic oiling of pneumatic tools
- To test oil state through transparent visibility glass
- Compact execution
- Usably in most pneumatic tool
- Extends the service life of pneumatic tools
- Refillabl
- Assembly directly in the access direction

1/4"

	D1	D2	mm	L mm	g	
515.3360	G1/4"AG	G1/4"IG	17	54.0	110	

Air service unit

- Suitable for wall mounting
- Consists of fil er pressure reducer, oil regulator and manom- eter
- Inspection glass for fluid inspe tion
- For the assembly of pneumatic tools
- Output pressure regulates independent of the input pressure
- Filters dirt particles and condensation
- With adjustable oil regulator
- With integrated wall mouting bracket



Technical data:

Max. pressure:	16 bar
Max. working pressure:	12 bar
Pressure gauge:	0,5 - 12 bar
Allowable temparture range:	-10° - +55°C
Air pressure up to 6,3 bar:	1/4" = 1800 l/min
	3/8" = 5000 l/min
	1/2" = 5000 l/min
Filter pressure more inferior:	1/4" = 30 ml
	3/8" = 50 ml
	1/2" = 50 ml
Oil trap:	1/4" = 40 ml
	3/8" = 170 ml
	1/2" = 170 ml

	Connection	B mm	L1 mm	L2 mm	kg	
515.3355	1/4"	140.0	200.0	135.0	0.43	
515.3350	3/8"	140.0	200.0	135.0	1.14	
515.3356	1/2"	140.0	200.0	135.0	1.30	

PNEUMATIC ADAPTERS & COUPLINGS

Metal swivel joint

- For compressed air tools 1/4"
- Prevents damages of the pneumatic tube
- Execution with pneumatic regulator
- Body made out of metal

1/4"

	D1	D2	mm	L mm	g	
515.3396	G1/4"AG	G1/4"IG	16	39.0	80	

Metal ball joint fi ting nipple

- Prevents damages of the pneumatic tube
- 360 ° rotating head and 30° angled
- For pneumatic tools 1/4" AG
- Ideal for use with paint sprayers
- Body made out of metal



1/4"

	D1	mm	L mm	g	
515.3395	G1/4"AG	21	56.0	50	

Metal ball joint fi ting nipple

- Prevents damage of the pneumatic tube
- Joint takes rotatable movements on the paint sprayer
- 360° rotating head and 30° angled
- For pneumatic tools 1/4" IG
- Ideal for use with paint sprayers
- Body made out of metal



1/4"

	D2	mm	L mm	g	
515.3394	G1/4"IG	16	46.0	30	

Coupling with male thread

- With one handed operation
- Self sealing on the coupling
- Size 22
- Body made of brass



	D1	mm	L mm	g	
515.3480	G1/4"AG	22	40.0	70	
515.3481	G3/8"AG	22	41.0	90	
515.3482	G1/2"AG	22	43.0	90	

Male coupling with male thread

- Size 17, 19 and 24
- Body made of brass





	D1	mm	L mm	g	
515.3489	G1/4"AG	17	33.0	20	
515.3490	G3/8"AG	19	33.0	25	
515.3491	G1/2"AG	24	35.0	41	

Brass coupling with female thread

- Self sealing on the coupling
- Unilaterally closing off
- Size 22 and 24
- Body made of brass

	D2	mm	L mm	g	
515.3483	G1/4"IG	22	41.0	80	
515.3484	G3/8"IG	22	41.0	85	
515.3485	G1/2"IG	24	43.0	90	

Brass male coupling with female thread

- Size 17, 19 and 24
- Body made of brass

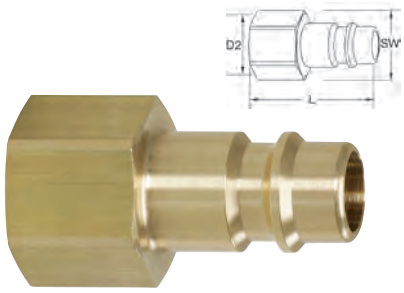

	D2	mm	L mm	g	
515.3492	G1/4"IG	17	33.0	22	
515.3493	G3/8"IG	19	33.0	22	
515.3494	G1/2"IG	24	35.0	40	

Brass Coupling with hose connector

- With one handed operation
- Roller latch
- Non return valve
- Size 21
- Body made of brass

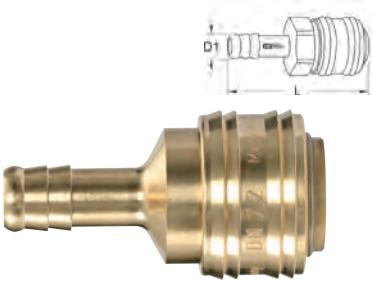

	D1 mm	L mm	g	
515.3486	Ø 6mm	55.0	70	
515.3487	Ø 9mm	55.0	80	
515.3488	Ø 13mm	55.0	90	

Male coupling with hose connector

- Body made of brass

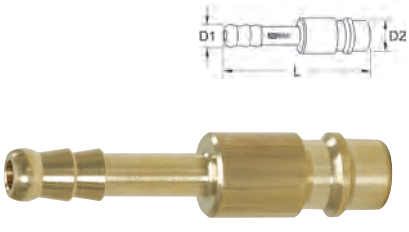

	D1 mm	D2 mm	L mm	g	
515.3495	Ø 6mm	7.2	44.0	10	
515.3496	Ø 9mm	7.2	44.0	20	
515.3497	Ø 13mm	7.2	46.0	25	

Brass reducing nipple

- Size 19 and 24
- Body made of brass

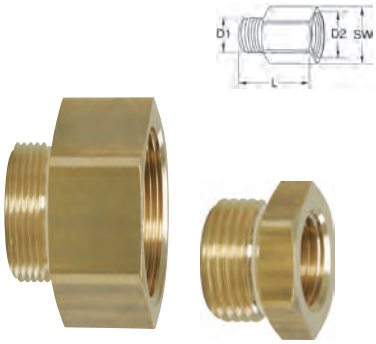

	D1	D2	mm	L mm	g	
515.3383	G3/8"AG	G1/4"IG	19	14.0	10	
515.3384	G1/2"AG	G3/8"IG	24	26.0	30	
515.3385	G3/8"AG	G1/2"IG	24	26.0	50	
515.3386	G1/4"AG	G3/8"IG	19	18.0	60	

Brass reducing nipple

- Size 17, 19 and 24
- Body made of brass

	D1	mm	L mm	g	
515.3380	G1/4"AG	17	23.0	20	
515.3381	G3/8"AG	19	23.0	30	
515.3382	G1/2"AG	24	30.0	50	

Brass pneumatic regulator

- With regulation wheel
- For regulating the air fl w volume
- Assembly directly in the access direction
- Completely lockable
- Body made of brass



1/4"

	D1	D2	mm	L mm	g	
515.3365	G1/4"AG	G1/4"IG	18	43.0	80	

Brass pneumatic 3 way separator

- Connection of 3 departure directions 1/4" IG at each access point
- Body made of soild brass



1/4"

	D1	D2	mm	L mm	g	
515.3375	G1/4"IG	3xG1/4"IG	19	32.0	160	

Brass hose nipple with male thread

- Size 17, 19 and 24
- Inner cone 45°
- Body made of brass



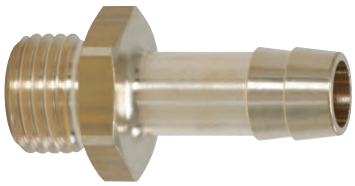

	D1	D2 mm	mm	L mm	g	
515.3387	G1/4"AG	Ø 6mm	17	35.0	20	
515.3388	G1/4"AG	Ø 9mm	17	35.0	20	
515.3389	G3/8"AG	Ø 9mm	19	36.0	30	
515.3390	G3/8"AG	Ø 13mm	19	42.0	30	
515.3391	G1/2"AG	Ø 9mm	24	40.0	50	
515.3392	G1/2"AG	Ø 13mm	24	46.0	50	

Ear protection can be found in the Industrial safety & workwear section.

KS TOOLS®

Innovation is our mission!

PNEUMATIC TOOLS

SLIMPOWER

- For hard to reach places
- Particularly low air consumption
- Low vibration
- Long service life
- Easy operation
- Supplied incl. DL connection

MONSTER

- Particularly low air consumption
- Low vibration
- Cold insulated handle
- Long service life
- Easy operation
- Supplied incl. DL connection

13 CORDLESS TOOLS

KS TOOLS®

Innovation is our mission!

	PAGE
CORDLESS REVERSIBLE RATCHETS	396
CORDLESS IMPACT WRENCH	396 - 397
CORDLESS DRILL MACHINES	397
CORDLESS GRINDER	397 - 398
CORDLESS ANGLE GRINDER	398
CORDLESS POLISHER	398
CORDLESS GREASE GUN	398
CORDLESS CARTRIDGE GUN	398 - 399
RIVETING TOOLS PISTOL	399
RECHARGEABLE BATTERIES AND CHARGERS	399
BOOSTER	400
ACCESSORIES FOR RECHARGEABLE BOOSTER PACKS	400

CORDLESS TOOLS Lithium Ion technology

- The high performance cordless tools for the perfect job
- Working without cables with Lithium ion technology
- Ergonomic design, perfect weight distribution
- Low vibration for fatigue free working

Advantages

- Lithium is the lightest metal and supplies the largest energy per unit of weight density (approximatly double that of a Standard Nickel Cadmium battery).
- No formatting, a single charge is enough
- Almost no self discharge
- No memory effect
- 30% less weight than conventional rechargeable batteries

One battery for several devices

Universal spare batteries 10.8V / 1.5Ah

Cordless reversible ratchet

Cordless drills / drivers

Cordless grinder

Cordless impact wrench

Cordless screwdriver

Universal spare batteries 18V / 3.0Ah

All 18 V batteries are suitable for fast charging and have a condition status

Display by pushing a button

Capacity:	25%	50%	75%	100%
LED:				

Cordless impact wrench

Cordless polisher

Cordless grease gun

Cordless impact wrench

- The high performance pneumatic tools for the hardest application
- Working without cables with Lithium ion technology
- Ergonomic design
- Perfect weight distribution
- Low vibration for fatigue free working

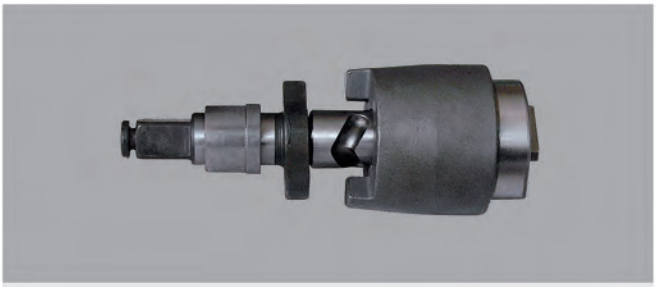

Striking mechanism:
- High performance striking mechanism, full metal execution
- Highest blow energy due to the extra large anvil weight
- Conventional striking mechanism

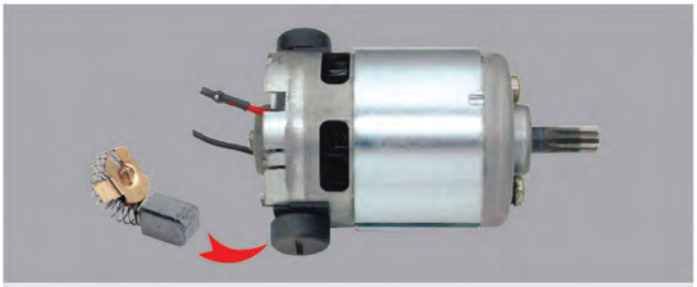

Motor/brushes:
- Super compact high performance motor
- High speed with extra strong torque
- Special carbon brushes, exchangeable
- 40% extended lifespan due to the special carbon brush conductors
- Up to 3-4 brushes changes possible without changing the motor

CORDLESS REVERSIBLE RATCHETS

Cordless reversible ratchet

- Light weight
- Handy and ergonomic dual component housing
- Square drive adaptor to DIN 3120 / ISO 1174
- With practical clockwise and anticlockwise reversing function
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing



1/4"

Technical data:

Drive:	1/4"
Capacity:	10,8 V
Speed:	220 r.p.m.
Torque max.	34 Nm
No load current:	5 A
Charging time:	1 hour
Rechargeable battery:	10,8 V - 1,5 Ah
Weight (basic unit + battery):	905 g

	L1 mm	L2 mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of batteries	Charger	kg
515.3499	275.0	60.0	30.0	35.0	515.3595	515.3592	0	0	1.00
515.3500	275.0	60.0	30.0	35.0	515.3595	515.3592	1	1	1.90
515.3501	275.0	60.0	30.0	35.0	515.3595	515.3592	2	1	2.10

Cordless reversible ratchet

- Light weight
- Handy and ergonomic dual component housing
- Square drive adaptor to DIN 3120 / ISO 1174
- With practical clockwise and anticlockwise reversing function
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing



3/8"

Technical data:

Drive:	3/8"
Capacity:	10,8 V
Speed:	220 r.p.m.
Torque max.	49 Nm
No load current:	5 A
Charging time:	1 hour
Rechargeable battery:	10,8 V - 1,5 Ah
Weight (basic unit + battery):	980 g

	L1 mm	L2 mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of batteries	Charger	kg
515.3504	270.0	55.0	30.0	35.0	515.3595	515.3592	0	0	1.00
515.3505	270.0	55.0	30.0	35.0	515.3595	515.3592	1	1	1.90
515.3506	270.0	55.0	30.0	35.0	515.3595	515.3592	2	1	2.10

Cordless reversible ratchet

- Light weight
- Handy and ergonomic dual component housing
- Square drive adaptor to DIN 3120
- With practical clockwise and anticlockwise reversing function
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing



1/2"

Technical data:

Drive:	1/2"
Capacity:	10,8 V
Speed:	180 rpm
Torque max.	62 Nm
No load current:	5 A
Charging time:	1 hour
Rechargeable battery:	10,8 V - 1,5 Ah
Weight (basic unit + battery):	1,30 kg

	L1 mm	L2 mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of batteries	Charger	kg
515.3509	300.0	80.0	40.0	45.0	515.3595	515.3592	0	0	1.20
515.3510	300.0	80.0	40.0	45.0	515.3595	515.3592	1	1	2.10
515.3511	300.0	80.0	40.0	45.0	515.3595	515.3592	2	1	2.30

CORDLESS IMPACT WRENCH

Cordless impact screwdriver

- Light weight
- Handy and ergonomic dual component housing
- Tool holder female hexagon 6 point to DIN 3163 - E6,3
- With practical clockwise and anticlockwise reversing function
- Stepless controllable motor speed through electronic switch
- With industrial hammer mechanism
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing
- In durable plastic storage case

1/4"

Technical data:

Drive:	1/4"
Capacity:	10,8 V
Speed:	0 - 1870 rpm
Torque max.	117 Nm
No load current:	3,5 A
Charging time:	1 hour
Rechargeable battery:	10,8 V - 1,5 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of batteries	Charger	kg
515.3539	190.0	55.0	195.0	515.3595	515.3592	0	0	1.50
515.3540	190.0	55.0	195.0	515.3595	515.3592	1	1	2.40
515.3541	190.0	55.0	195.0	515.3595	515.3592	2	1	2.60

Cordless impact wrench

- Light weight
- Handy and ergonomic dual component housing
- Square drive adaptor to DIN 3120
- With practical clockwise and anticlockwise reversing function
- Stepless controllable motor speed through electronic switch
- With industrial hammer mechanism
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing
- In durable plastic storage case

Technical data:

Drive:	3/8"
Capacity:	10,8 V
Speed:	0 - 1870 rpm
Torque max.	117 Nm
No load current:	3,5 A
Charging time:	1 hour
Rechargeable battery:	10,8 V - 1,5 Ah
Weight (basic unit + battery):	1,10 kg

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of batteries	Charger	kg
515.3514	190.0	55.0	195.0	515.3595	515.3592	0	0	1.80
515.3515	190.0	55.0	195.0	515.3595	515.3592	1	1	2.40
515.3516	190.0	55.0	195.0	515.3595	515.3592	2	1	2.60

Cordless impact wrench

- Handy and ergonomic dual component housing
- Square drive adaptor to DIN 3120
- With practical clockwise and anticlockwise switch
- Stepless controllable motor speed through electronic switch
- With industrial hammer mechanism
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing
- In durable plastic storage case

Technical data:

Drive:	1/2"
Capacity:	18 V
Speed:	0 - 2000 rpm
Torque max.	402 Nm
No load current:	3,5 A
Charging time:	1 hour
Rechargeable battery:	18 V - 3,0 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg	
515.3519	240.8	80.0	273.0	515.3596	515.3599	0	0	2.30	
515.3520	240.8	80.0	273.0	515.3596	515.3599	1	1	3.60	
515.3521	240.8	80.0	273.0	515.3596	515.3599	2	1	4.40	

Cordless impact wrench with torque control

- Handy and ergonomic dual component housing
- Square drive adaptor to DIN 3120
- With practical clockwise and anticlockwise reversing function
- With 6 torque-stages
- With industrial hammer mechanism
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing
- In durable plastic storage case

1/2"

Technical data:

Drive:	1/2"
Capacity:	18 V
Speed:	0 - 1800 rpm
Torque max.	539 Nm
Torque stages:	6 stages
No load current:	3,5 A
Charging time:	1 hour
Rechargeable battery:	18 V - 3,0 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg	
515.3524	256.0	80.0	273.0	515.3596	515.3599	0	0	2.50	
515.3525	256.0	80.0	273.0	515.3596	515.3599	1	1	3.80	
515.3526	256.0	80.0	273.0	515.3596	515.3599	2	1	4.60	

CORDLESS DRILL MACHINES

Cordless screwdriver

- Light weight
- Handy and ergonomic dual component housing
- Tool holder female hexagon 6 point to DIN 3126 - E6,3
- With practical clockwise and anticlockwise reversing function
- Stepless controllable motor speed through electronic switch
- With torque control
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing
- In durable plastic storage case

Technical data:

Drive:	1/4"
Capacity:	10,8 V
Speed:	0 - 400 rpm
Torque max.	24 Nm
Torque stages:	1 - 16 stages
No load current:	2,9 A
Charging time:	1 hour
Rechargeable battery:	10,8 V - 1,5 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg	
515.3529	148.0	55.0	190.0	515.3595	515.3592	0	0	1.50	
515.3530	148.0	55.0	190.0	515.3595	515.3592	1	1	2.40	
515.3531	148.0	55.0	190.0	515.3595	515.3592	2	1	2.60	

Cordless drill machine

- Light weight
- Handy and ergonomic dual component housing
- Universal use through robust quick release chuck
- With practical clockwise and anticlockwise reversing function
- Stepless controllable motor speed through electronic switch
- With torque control
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing
- In durable plastic storage case

Technical data:

Chuck capacity:	1 - 10 mm
Capacity:	10,8 V
Speed:	0 - 1870 rpm
Torque max.	24 Nm
No load current:	3,5 A
Charging time:	1 hour
Rechargeable battery:	10,8 V - 1,5 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg	
515.3534	190.0	55.0	200.0	515.3595	515.3592	0	0	1.60	
515.3535	190.0	55.0	200.0	515.3595	515.3592	1	1	2.50	
515.3536	190.0	55.0	200.0	515.3595	515.3592	2	1	2.70	

CORDLESS GRINDER

Cordless high performance grinder

- Light weight
- Handy and ergonomic dual component housing
- Ideal for carbide, corundum and tungsten carbide burrs
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing
- In durable plastic storage case

Technical data:

Chuck capacity:	3 mm
Capacity:	10,8 V
Speed:	22000 rpm
No load current:	3 A
Charging time:	1 hour
Rechargeable battery:	10,8 V - 1,5 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg	
515.3544	145.0	50.0	180.0	515.3595	515.3592	0	0	1.20	
515.3545	145.0	50.0	180.0	515.3595	515.3592	1	1	2.10	
515.3546	145.0	50.0	180.0	515.3595	515.3592	2	1	2.30	

Cordless grinder

- Light weight
- Handy and ergonomic dual component housing
- For powerful grinding and polishing on small areas
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing
- In durable plastic storage case

Technical data:

Capacity:	10,8 V
Speed:	3200 rpm
Velcro disc receiver:	Ø 75 mm
No load current:	3 A
Charging time:	1 hour
Rechargeable battery:	10,8 V - 1,5 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg	
515.3548	130.0	50.0	185.0	515.3595	515.3592	0	0	1.30	
515.3550	130.0	50.0	185.0	515.3595	515.3592	1	1	2.20	
515.3558	130.0	50.0	185.0	515.3595	515.3592	2	1	2.40	

CORDLESS ANGLE GRINDER

Cordless angle grinder

- Light weight
- Handy and ergonomic dual component housing
- For powerful grinding and polishing on small areas
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing
- In durable plastic storage case

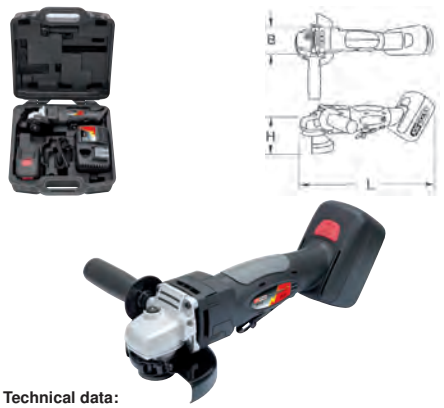

Technical data:

Velcro disc receiver:	Ø 115 mm = 4.1/2"
Capacity:	18.0 V
Speed:	7000 r.p.m.
No load current:	8,5 A
Charging time:	1 hour
Rechargeable battery:	18 V - 3,0 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg	
515.4109	390.0	56.0	80.0	515.3596	515.3599	0	0	3.78	
515.4110	390.0	56.0	80.0	515.3596	515.3599	1	1	5.03	
515.4111	390.0	56.0	80.0	515.3596	515.3599	2	1	5.83	

CORDLESS POLISHER

Cordless polisher

- Handy and ergonomic dual component housing
- Polishing with a fast and excellent work result
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- Blow mould plastic housing
- With lambswool bonnet
- In durable plastic storage case

Technical data:

Capacity:	18 V
Speed:	1600 - 2300 rpm
Polishing sponge diameter:	Ø 125 mm / 5"
No load current:	3 A
Charging time:	1 hour
Rechargeable battery:	18 V - 3,0 Ah
Weight (basic unit + battery):	2,5 kg

	L mm	B mm	H mm	Replacement pads	Lamswool bonnet	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg	
515.3554	420.0	60.0	100.0	515.3555-21	515.3555-22	515.3596	515.3599	0	0	4.00	
515.3555	420.0	60.0	100.0	515.3555-21	515.3555-22	515.3596	515.3599	1	1	5.30	
515.3756	360.0	60.0	100.0	515.3555-21	515.3555-22	515.3596	515.3599	2	1	6.06	

CORDLESS GREASE GUN

Cordless grease gun 400 ml

- Handy and ergonomic dual component housing
- For standard grease cartridges or direct filli g
- Ideal for heavy greasing with counter pressure
- With fl xible 750 mm filli g tube
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- With a rechargeable battery that can be process up to 15 cartridges
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- In durable plastic storage case

Technical data:

Operating pressure:	420 bar / 42 MPa
NLGI class:	< 2
Grease filli g:	75 g / min
Capacity of the unit:	400 ml
No load current:	3 A
Operating current:	2,0 ~ 5,5 A
Charging time:	1 hour
Rechargeable battery:	18 V - 3,0 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg	
515.3559	237.0	80.0	487.0	515.3596	515.3599	0	0	5.40	
515.3560	237.0	80.0	487.0	515.3596	515.3599	1	1	6.70	
515.3561	237.0	80.0	487.0	515.3596	515.3599	2	1	7.50	

Grease gun adaptor set

- For standard hand, cordless and pneumatic grease guns
- Adaptor with sliding sleeve for break-proof connection
- Straight and angled grease nipple
- For grease nipples out of steel, brass and stainless steel

Application range: Cone, funnel, ball and fl t grease nipples

			kg	
980.1100	7 pcs	Grease gun adaptor set	1.99	

consists of:

		L mm	g	
980.1101	90° Lubricant adaptor	114.0	150	
980.1102	Tube extension, 300 mm	390.0	240	
980.1103	Straight extension	155.0	230	
980.1104	90° fl t nipple adaptor	135.0	160	
980.1105	Rubber grease tip	155.0	150	
980.1106	Needle shaped tip	135.0	143	
980.1107	360° Adaptor, adjustable	185.0	265	

CORDLESS CARTRIDGE GUN

Cordless cartridge gun 310 ml

- Handy and ergonomic dual component housing
- Ideal for glue, silicone or acrylic based cartridges
- Drop free mechanism
- Stepless controllable feed
- Carbon brushes interchangeable
- With lithium ion high performance rechargeable battery
- Processing quantity per rechargeable battery load at room temparture 20°C is up to 15 cartridges
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- In durable plastic storage case

Technical data:

Capacity:	10,8 V
Capacity of the unit:	310 ml
Propulsion without load:	6,1 mm / sec
Output pressure:	392 kgf
Charging time:	1 hour
Rechargeable battery:	10,8 V - 1,5 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg	
515.3569	410.0	138.0	245.0	515.3595	515.3592	0	0	3.60	
515.3570	410.0	138.0	245.0	515.3595	515.3592	1	1	4.50	
515.3571	410.0	138.0	245.0	515.3595	515.3592	2	1	4.70	

Cordless cartridge gun 400 ml

- Handy and ergonomic dual component housing
- Ideal for glue, silicone or acrylic based cartridges
- Drop free mechanism
- Stepless controllable feed
- Carbon brushes interchangeable
- Lithium ion high performance rechargeable battery
- Processing quantity per rechargeable battery load at room temparture 20°C is up to 15 cartridges
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- In durable plastic storage case

Technical data:

Capacity:	10,8 V
Capacity of the unit:	400 ml
Propulsion without load:	6,1 mm / sec
Output pressure:	392 kgf
Charging time:	1 hour
Rechargeable battery:	10,8 V - 1,5 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg
515.3574	450.0	138.0	245.0	515.3596	515.3592	0	0	3.70
515.3575	450.0	138.0	245.0	515.3596	515.3592	1	1	4.60
515.3576	450.0	138.0	245.0	515.3596	515.3592	2	1	4.80

Cordless cartridge gun 600 ml

- Handy and ergonomic dual component housing
- Ideal for glue, silicone or acrylic based cartridges
- Drop free mechanism
- Stepless controllable feed
- Carbon brushes interchangeable
- Lithium ion high performance rechargeable battery
- Processing quantity per rechargeable battery load at room temparture 20°C is up to 15 cartridges
- Longer running time through higher load capacity
- Fast charging function (1 hour)
- Automatic turn off charging station
- In durable plastic storage case

Technical data:

Capacity:	10,8 V
Capacity of the unit:	600 ml
Propulsion without load:	6,1 mm / sec
Output pressure:	392 kgf
Charging time:	1 hour
Rechargeable battery:	10,8 V - 1,5 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg
515.3579	560.0	138.0	245.0	515.3595	515.3592	0	0	4.10
515.3580	560.0	138.0	245.0	515.3595	515.3592	1	1	5.10
515.3581	560.0	138.0	245.0	515.3595	515.3592	2	1	5.20

RIVETING TOOLS PISTOL

Cordless riveting tool pistol

- Handy and ergonomic dual component housing
- Universal use for aluminium and steel rivets Ø 2.4/3.2/4.0/4.8 mm
- Approx. 220 rivets per battery
- With practical clockwise and anticlockwise reversing function
- Very short setup time
- Fast change of rivets
- Short processing time
- Stepless controllable motor speed through electronic switch
- 40% extended lifespan due to changeable special carbon brush conductors
- With lithium-ion high performance rechargeable battery
- Includes automatic turn off charging station
- Fast charging function (1 hour)
- Blow mould plastic housing
- In durable plastic storage case

Technical data:

Rivet sizes:	2,4 / 3,2 / 4,0 / 4,8 mm
Stroke length:	15 mm
Vibration:	3,2 ms²
Noise performance level:	86,9 dbA
Noise pressure level:	75.9 dbA
Driving power:	4.900
Capacity:	10,8 V
Rechargeable battery:	10,8 V - 1,5 Ah

	L mm	B mm	H mm	Spare carbon brushes set	Battery pack	Number of Charger batteries		kg
515.4104	235.0	55.0	200.0	515.3595	515.3592	0	0	2.04
515.4105	235.0	55.0	200.0	515.3595	515.3592	1	1	2.80
515.4106	235.0	55.0	200.0	515.3595	515.3592	2	1	2.85

RECHARGEABLE BATTERIES AND CHARGERS

Universal spare batteries

- Lithium ion high performance rechargeable battery
- Impact resistant polyethylene housing

Technical data:

Battery type:	Lithium-ion high performance rechargeable battery
Charging time:	1 hour
Working temperature:	-5° / +45°

		Ah	L mm	B mm	H mm	g
515.3592	10,8 V	1,5	60.5	54.0	84.8	200

Universal push in batteries

- Lithium ion high performance rechargeable battery
- Integrated automatic safety switching off
- With control LED to discharge
- Impact resistant polyethylene housing
- Ca. 1 hour charge time

Technical data:

Battery type:	Lithium-ion high performance rechargeable battery
Charging time:	1 hour
Working temperature:	-5° / +45°

		Ah	L mm	B mm	H mm	g
515.3597	10,8 V	1,5	73.0	80.0	109.6	300
515.3599	18 V	3,0	73.0	80.0	129.8	800

Universal fast charger

- Suitable for 10,8 V Ah lithium ion high performance rechargeable battery
- Integrated automatic safety switching off
- Impact resistant polyethylene housing

Technical data:

Battery type:	10,8 V
Charging time:	1 hour
Charging voltage:	AC 100 - 240 V ~ 50 / 60 Hz
Working temperature:	-5° / +45°

	L mm	B mm	H mm	g
515.3590	145.0	100.0	55.0	500

Universal fast charger

- Suitable for 18,0 V Ah lithium ion high performance rechargeable battery
- Integrated automatic safety switching off
- Impact resistant polyethylene housing

Technical data:

Battery type:	10,8 V - 18,0 V
Charging time:	1 hour
Charging voltage:	AC 100 - 240 V ~ 50 / 60 Hz
Working temperature:	-5° / +45°

	L mm	B mm	H mm	g
515.3591	175.0	115.0	65.0	700

BOOSTER

12 V battery booster - mobile starting aid 700 A

- Ideal for IC and diesel engines from passenger cars to transporters
- Fully insulated terminal clamps (1000 A)
- Integrated electronics protection
- Charge control indicator at press of button
- Acoustic warning if polarity is reversed
- 1.6 m cable length
- With sturdy 35 mm² cable cross section
- Current-free cable connection to the vehicle battery
- Charger and cable set included in scope of supply
- Cable can be conveniently stored on the housing
- Impact-resistant housing with rubberised base area

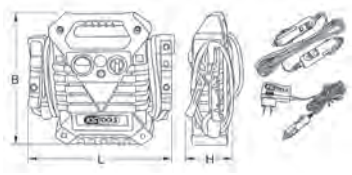

Technical data:

Battery:	12 Volt / 22 Ah
Starting current:	700 A
Peak voltage:	2200 A
Cable cross section:	35 mm²
Battery charger:	12V DC / 4 A

	L mm	B mm	H mm	Charger spare	Charging cable	kg
550.1710	405.0	380.0	120.0	550.1711	550.1712	10.00

12 V + 24 V battery booster - mobile starting aid 1400 A

- Ideal for IC and diesel engines from passenger cars to HGV < 12 t
- Fully insulated terminal clamps (1000 A)
- Integrated electronics protection
- Charge control indicator at press of button
- Acoustic warning if polarity is reversed
- 1.6 m cable length
- With sturdy 35 mm² cable cross section
- Current-free cable connection to the vehicle battery
- Automatic mains charger and cable set included in scope of supply
- Cable can be conveniently stored on the housing
- Impact-resistant housing with rubberised base area

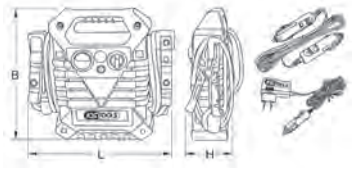

Technical data:

Battery:	2 x 12 Volt / 22 Ah
Starting current:	1400 / 700 A
Peak voltage:	4400 / 2200 A
Cable cross section:	35 mm²
Battery charger:	12V DC / 4 A

	L mm	B mm	H mm	Charger spare	Charging cable	kg
550.1720	405.0	380.0	180.0	550.1721	550.1712	18.00

12 V + 24 V Battery Booster - mobile starting aid 3000 A

- Ideal for petrol and diesel engines in passenger cars or commercial vehicles
- Fully insulated battery clips (1000A)
- Integral electronics protection (voltage peak protected)
- Heavy-duty copper cable, cross-section 75 mm²
- 2.0 m cable length
- Intelligent, fully-integrated 3-stage automatic charging unit
- Multi-function display with coloured LED bars
- Intelligent protective circuits
- Polarity protection optical/acoustic
- Current-free cable connection to the vehicle battery
- Robust, wheeled housing with cable storage compartments
- Delivery scope includes vehicle charging cable

Technical data:

Battery:	2 x 12 Volt / 50 Ah
Starting current:	3000 / 1500 A
Peak voltage:	7200 / 3400 A
Cable cross section:	75 mm²

	L mm	B mm	H mm	kg
550.1725	450.0	300.0	750.0	47.00

ACCESSORIES FOR RECHARGEABLE BOOSTER PACKS

Battery charger for battery booster

- Designed for continuous usage
- Intergrated automatic safety switching off
- Impact resistant polyethylene housing

		Input current	Output current	g
550.1711	550.1710	220 - 240 V	12 V / 4 A	439
550.1721	550.1720	220 - 240 V	24 V / 4 A	439

Car charger lead

- For temporary charge
- No safety switching off
- 1.6 mm cable diameter
- 2.0 m cable length
- With double connector

		g
550.1712	➡ 550.1710 + 550.1720	62

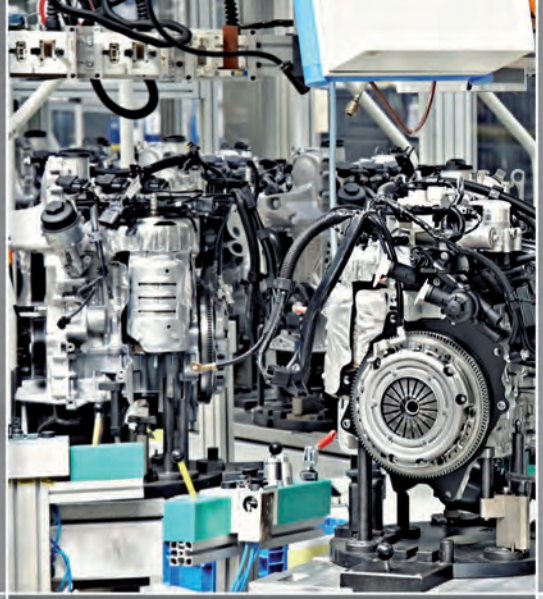

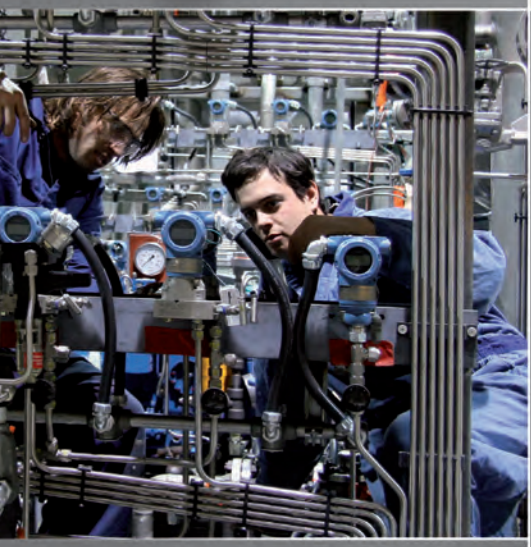

KS TOOLS®

Innovation is our mission!

CORDLESS BATTERY TOOLS

LITHIUM ION TECHNOLOGY

- The high performance cordless tools for the perfect job
- Working without cables with Lithium ion technology
- Ergonomic design, perfect weight distribution
- Low vibration for fatigue free working

LIGHTING TECHNOLOGY

KSTOOLS®

Innovation is our mission!

	PAGE
LED-BALL POINT PEN	406
EMERGENCY LAMPS	406
HEAD LAMPS	406
INSPECTION LAMPS	406 - 407
LED HAND LAMPS	407 - 408
WORKSHOP LAMPS	408
FLASHLIGHTS	409
ACCESSORIES FOR FLASH LIGHTS	409
FLASH LIGHTS WITH CABLE REELS	410
WORK LAMPS	410 - 411
WORK LAMPS WITH TRIPODS	411 - 413
ACCESSORIES FOR WORK LAMPS	413

LIGHTING TECHNOLOGY

Construction LEDMAX POWER STRIPE LED battery operating lamp

LED Cordless workshop lamp

- Ideal for very long network independent working
- 6 Watt Citizen Power LED
- Housing 180° foldable
- Housing body covered with high quality rubber
- Weatherproof protection IP64
- Shock and impact resistant
- Revolving hooks for suspending
- Magnetic
- With control LED to discharge
- Includes automatic turn off charging station
- 3 hours charging time
- 3 hours lamp duration
- Impact resistant Polycarbonate housing

Technical data

Capacity:	illumination time 3 hours
Light source:	6 W POWER Stripe LED
Luminosity:	420 lumen
Rechargeable battery:	3,6 V / 3600 mAh
Battery type:	Li-polymer
Capacity:	6 Watt
Charging voltage:	AC 100-240 V ~ 50 / 60 Hz DC 12-24 V
Working temperature:	-5° / +45°
Weight:	0.50 kg

Important basic concepts of light engineering

Technical data on the torch market are confusing and often not comparable.

lumens



Luminous fl x in lumens (lm)
The luminous fl x is the most important term to characterise the output of a lamp.
It describes the actual light quantity or light energy emitted from a light source.
What is actually measured? Some manufacturers specify the luminous fl x of the LED or light bulb and in the process don't mention that this is signifi antly reduced in the refle tor/lamp head (sometimes by more than 30%). Our luminous fl x values are values measured with spectrometers, which the lamps emit with new batteries from the refle tors.

lux

Illuminance in lux
This value indicates how intensely a surface is illuminated. This comes from photography and light architecture. There are clear specifi ations as to what illuminance work places or supermarket halls have to have.
The illuminance is measured with luxmeters.

candela

Light intensity in candela (cd)
The light intensity denotes - in a simplified orm - the intensity of the light output. This is dependent on the luminous fl x (quantity of light) and the output angle of the light. Example: 5 mm LEDs have different beam angles, e.g. 10 and 120°.
Despite the same light energy the 10° diode has 12 times more light intensity as the 120° diode. The same quantity of light is distributed once to 10 and once to 120°. 10 m away a 10° diode only operates at an angle of 10°, whereas the 120° diode operates at the same light at an angle of 120°. The light intensity is the designation for the part of the luminous fl x emitted in a certain direction.

LED (Light Emitting Diode)
Light emitting diodes are microstructural solid states and completely unsusceptible to vibrations. They last 1000 times longer than conventional light bulbs, unlike halogen lamps they produce no shades, hardly produce warmth and use less electricity. LEDs contain no harmful filli g gases and produce no ultraviolet rays.

Power consumption
The power consumption of a lamp and their bright performance are two completely different things. The fact that a lamp uses a lot of energy by no means that they produce a lot of light. The largest part of the energy is still moved in warmth.
This is also applies to LEDs a high efficient 1 att diode which can supply more light than one low quality 5 watt diode.

Light efficienc

1% Light*	1% Light**	13% Light*	13% Light*	20% Light*
Flash lights light bulb	Light bulb	High end LED	High end power chip	High end CREE chip
100 Hours*	1000 Hours*	100,000 Hours***	100,000 Hours***	80,000 Hours***

* In this juncture, it is about calculated average values. According to type of the lamp abnormalities can occur. ** With 15 / 25 watt lamps. According to type of the lamp abnormalities can occur. *** After 100.000 working hours LEDs still shine with 50% of the brightness.

Light engineering lines

LED ball point pen

Emergency lamps

Head lamps

Inspection lamps

LED hand lamps

Workshop lamps

Flash lights

Work lamps

Cable reels

IP Protection class identification mar

The housing protection degree, is fi ed as the standards IEC 529 or DIN EN 60 52 which contain several different protection types.
The illustration below shows an overview of the protection classes which are represented as follows.

- If for the designation the 1st or 2nd place is not important, it is replaced by X.
- Perhaps 3rd place Additional touch protection / perhaps 4th place Supplementary character
- Representation in accordance to DIN VDE 0470, DIN EN 60 529, IEC 60529

IP Protection class definitio

1. ref. number	range of protection
0	no touch protection, no protection against compact foreign objects
1	protection against extensive touch with hand protection against foreign objects Ø >50 mm
2	protection against touch with fi gers protection against foreign objects Ø >12 mm
3	protection against touch with tools, wire etc with Ø >2,5 mm protection against foreign objects Ø >2,5 mm
4	protection against touch with tools, wire etc with Ø >1 mm protection against foreign objects Ø >1 mm
5	protection against touch protection against dust deposit inside
6	complete protection against touch protection against entry of dust

2. ref. number	range of protection
0	no protection against water
1	protection against vertical falling raindrops
2	protection against angular falling raindrops (every angle up to 15° to vertical)
3	protection against water in every angle up to 60° to vertical
4	protection against splash water from all directions
5	protection against jet of water (blast pipe) every angle
6	protection against temporary floodi g
7	protection against ingress of water during temporary immersion
8	protection against pressure water during constant immersion

LED BALL POINT PEN

4 in 1 LED ball point pen

- Ball point pen
- LED lamp
- Laser pointer
- Handheld pencil
- Clip for the breast pocket
- Approx. 60 hours lamp duration
- Includes 4 x LP 41 button cell
- Impact proof housing

	L mm	D mm	g	
10010	150.0	13.0	110	

3 in 1 LED ball point pen

- Ball point pen
- LED lamp
- Laser pointer
- Focus lens
- Clip for the breast pocket
- Approx. 60 hours lamp duration
- Includes 3 x LP 41 button cell
- Impact proof housing

	L mm	D mm	g	
10012	130.0	13.0	100	

EMERGENCY LAMPS

Emergency light

- In the event of an emergency
- 9 warning functions
- Magnetic
- With suspension device
- Ingress protection according to IP54
- Includes 1 x CR 123 battery
- Impact-resistant

Technical data:

Luminosity:	13.000 mcd
Battery:	CR 123
Working temperature:	-10° to +40°C

	Ø mm	H mm	g	
550.1360	107	35.0	230	

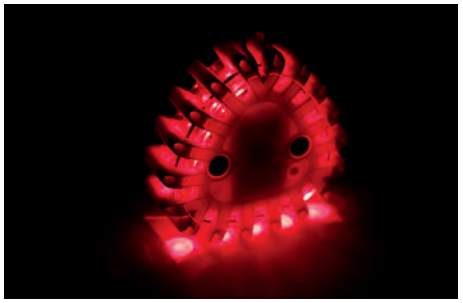

HEAD LAMPS

LEDMAX CREE Power LED headlamp with focus

- 3 Watt CREE Chip Power LED
- Luminous fl x 100 Lumen
- Headlight range of up to 100 meters
- Zoom from spot to flood l ght
- Multifunctional-button with 4 modes: On/Off / 5W / 3W / Blink
- Adjustable front and head band for comfort and to stay in place
- Lamp can be additionally tilted in 5 click stops
- Weatherproof protection IPX3
- 3 hours lamp duration
- Includes 3 x AAA 1,5V batteries



Technical data:

Headlight range:	max. 100,0 m
Luminosity:	3 W
Working temperature:	0° / +40°C

	D mm	H mm	L1 mm	L2 mm	g	
550.1238	30.0	40.0	65.0	30.0	170	

INSPECTION LAMPS

LEDMAX CREE-Power LED torch

- Ideal for smock and shirt pockets
- 1 Watt CREE Chip LED
- 85 Lumens luminous fl x
- 25 m headlight range
- Ingress protection according to IPX3
- Clip for the breast pocket
- 5 - 10 hours lamp duration
- Includes 2 x AA 1,5 V batteries
- Ultra light and impact resistant aluminium housing

Technical data:

Headlight range:	max. 25,0 m
Luminosity:	1 W
Working temperature:	0° / +40°C

	L mm	D mm	g	
150.4370	140.0	16.0	92	

Flexible UV inspection lamp

- LED UV lamp
- Flexible shaft
- Localizes leaks in air conditioning systems
- Clip for the breast pocket
- Approx. 60 hours lamp duration
- Includes 3 x AAAA batteries
- Impact proof housing

	L mm	D mm	Spare bulb	g	
550.1165	450.0	7.5	550.1167	150	

Flexible inspection set

- Halogen lamp
- Flexible shaft
- Includes flexible fibreglass attachment
- Clip for the breast pocket
- Approx. 60 hours lamp duration
- Includes 3 x 1,5 V AAA batteries
- Impact proof housing

	L mm	B mm	H mm	g
550.1160	210.0	150.0	25.0	230

Flexible inspection lamp with magnet

- Halogen lamp
- Flexible long shaft, 400 mm
- With optional clip-on light-flooded magnet
- Includes extension 500 mm
- Approx: 60 hours lamp duration
- Includes 3 x AA batteries
- Impact proof housing

	L mm	D mm	Spare bulb	g
550.1185	600.0	7.0	550.1188	120

Flexible inspection lamp with magnet and mirror

- Halogen lamp
- Flexible long shaft, 400 mm
- With optional attachable flexible mirror (20 x 35 mm)
- With optional clip-on light-flooded magnet
- Includes extension 500 mm
- Approx: 60 hours lamp duration
- Includes 3 x AA batteries
- Impact proof housing

	L mm	D mm	Mirror size mm	Spare bulb	g
550.1138	600.0	7.0	20 x 35	550.1188	215

LED HAND LAMPS

MONSTER CREE-Power LED lamp 800

- Ideal for network independent working
- On/off mode
- 1 x CREE LED light
- 800 lumens luminous flux
- 300 m range
- Scratchproof with hard-coat anodising
- shockproof and waterproof
- splashproof in accordance with IP65
- includes 1 x 3.7V lithium battery (BRC 18650)
- shockproof aluminium housing
- incl. belt clip
- incl. automatically switch off loading station

Technical data:

Light source:	1 x Cree Power LED
Headlight range:	max. 300,0 m
Luminosity:	800 lumen
Rechargeable battery:	3,7 V / 3000 mAh
Battery type:	Lithium-ion
Capacity:	10 Watt
Charging voltage:	AC 100-240 V ~ 50 / 60 Hz DC 12-24 V
Working temperature:	-10° / +50°C

	L mm	D mm	Replacement battery	g
150.4360	145.0	45.0	150.4361	115

MONSTER CREE-Power LED lamp 2300

- Ideal for network independent working
- 5 lighting modes 3 levels of brightness, SOS and stroboscope
- 5 x CREE LED lights
- 2300 lumens luminous flux
- 300 m range
- digitally controlled for consistent brightness
- Aluminium reflector
- Clear glass lens
- Scratchproof with hard-coat anodising
- shockproof and waterproof
- splashproof in accordance with IP65
- includes 3 x 3.7V lithium battery (26650)
- shockproof aluminium housing
- incl. belt clip
- incl. automatically switch off loading station

Technical data:

Light source:	5 x Cree Power LEDs
Headlight range:	max. 300,0 m
Luminosity:	2300 lumen
Rechargeable battery:	3,7 V / 4000 mAh
Battery type:	Lithium-ion
Capacity:	24 Watt
Charging voltage:	AC 100-240 V ~ 50 / 60 Hz DC 12-24 V
Working temperature:	-10° / +50°C

	L mm	D mm	Replacement battery	g
150.4365	310.0	62.0	150.4362	600

MONSTER CREE-Power LED lamp 2800

- Ideal for network independent working
- 5 lighting modes 3 levels of brightness, SOS and stroboscope
- 7 x CREE LED lights
- 2800 lumens luminous flux
- 300 m range
- digitally controlled for consistent brightness
- Aluminium reflector
- Clear glass lens
- Scratchproof with hard-coat anodising
- shockproof and waterproof
- splashproof in accordance with IP65
- includes 3 x 3.7V lithium battery (26650)
- shockproof aluminium housing
- incl. belt clip
- incl. automatically switch off loading station

Technical data:

Light source:	7 x Cree Power LEDs
Headlight range:	max. 300,0 m
Luminosity:	2800 lumen
Rechargeable battery:	3,7 V / 4000 mAh
Battery type:	Lithium-ion
Capacity:	35 Watt
Charging voltage:	AC 100-240 V ~ 50 / 60 Hz DC 12-24 V
Working temperature:	-10° / +50°C

	L mm	D mm	Replacement battery	g
150.4366	320.0	63.0	150.4362	535

MONSTER CREE-Power LED lamp 3000

- Ideal for network independent working
- 5 lighting modes 3 levels of brightness, SOS and stroboscope
- 9 x CREE LED lights
- 3000 lumens luminous flux
- 300 m range
- digitally controlled for consistent brightness
- Aluminium reflector
- Clear glass lens
- Scratchproof with hard-coat anodising
- shockproof and waterproof
- splashproof in accordance with IP65
- includes 3 x 3.7V lithium battery (26650)
- shockproof aluminium housing
- incl. automatically switch off loading station

Technical data:

Light source:	9 x Cree Power LEDs
Headlight range:	max. 300,0 m
Luminosity:	3000 lumen
Rechargeable battery:	3,7 V / 4000 mAh
Battery type:	Lithium-ion
Capacity:	32 Watt
Charging voltage:	AC 100-240 V ~ 50 / 60 Hz DC 12-24 V
Working temperature:	-10° / +50°C

	L mm	D mm	Replacement battery	g
150.4367	325.0	78.0	150.4362	665

MONSTER CREE-Power LED lamp 4000

- Ideal for network independent working
- 5 lighting modes 3 levels of brightness, SOS and stroboscope
- 12 x CREE LED lights
- 4000 lumens luminous flux
- 300 m range
- digitally controlled for consistent brightness
- Aluminium reflector
- Clear glass lens
- Scratchproof with hard-coat anodising
- shockproof and waterproof
- splashproof in accordance with IP65
- includes 3 x 3.7V lithium battery (26650)
- shockproof aluminium housing
- incl. automatically switch off loading station

Technical data:

Light source:	12 x Cree Power LEDs
Headlight range:	max. 300,0 m
Luminosity:	4000 lumen
Rechargeable battery:	3,7 V / 4000 mAh
Battery type:	Lithium-ion
Capacity:	36 Watt
Charging voltage:	AC 100-240 V ~ 50 / 60 Hz
	DC 12-24 V
Working temperature:	-10° / +50°C

	L mm	D mm	Replacement battery	g	
150.4368	415.0	89.0	150.4362	1000	

WORKSHOP LAMPS

LEDMAX LED Cordless work lamp

- Ideal for very long network independent working
- 30 Power Chip LEDs
- Housing body covered with high quality rubber
- Weatherproof protection IP54
- Shock and impact resistant
- Revolving hooks for suspending
- Magnetic
- With control LED to discharge
- Includes automatic turn off charging station
- 4-5 hours charging time
- 9 hours lamp duration
- Impact resistant Polycarbonate housing

Technical data:

Capacity:	illumination time 9 hours
Light source:	30 + 1 W LED
Luminosity:	800 Lux
Rechargeable battery:	3,7 V / 3500 mAh
Battery type:	Lithium-ion
Capacity:	1,2 Watt
Charging voltage:	AC 100-240 V ~ 50 / 60 Hz
	DC 12-28 V
Working temperature:	-5° / +45°

	L mm	D mm	g	
150.4240	280.0	50.0	940	

LEDMAX SMD Cordless work lamp

- Ideal for very long network independent working
- 30 SMDs
- Housing body covered with high quality rubber
- Weatherproof protection IP54
- Shock and impact resistant
- Revolving hooks for suspending
- Magnetic
- With control LED to discharge
- Includes automatic turn off charging station
- 4-5 hours charging time
- 9 hours lamp duration
- Impact resistant Polycarbonate housing

Technical data:

Capacity:	illumination time 9 hours
Light source:	30 SMDs
Luminosity:	95 lumen
Rechargeable battery:	3,7 V / 3500 mAh
Battery type:	Lithium-ion
Capacity:	1,2 Watt
Charging voltage:	AC 100-240 V ~ 50 / 60 Hz
	DC 12-28 V
Working temperature:	-5° / +45°

	L mm	D mm	g	
150.4330	280.0	50.0	920	

LEDMAX SUPER BRIGHT LED Cordless work lamp

- Ideal for very long network independent working
- 3 + 1 W SUPER BRIGHT LED's
- Housing body covered with high quality rubber
- Weatherproof protection IP54
- Shock and impact resistant
- Revolving hooks for suspending
- Magnetic
- With control LED to discharge
- Includes automatic turn off charging station
- 4-5 hours charging time
- 4-5 hours lamp duration
- Impact resistant Polycarbonate housing

Technical data:

Capacity:	illumination time 4-5 hours
Light source:	3 + 1 W SUPER BRIGHT LEDs
Luminosity:	2500 Lux
Rechargeable battery:	3,7 V / 3500 mAh
Battery type:	Lithium-ion
Capacity:	2,5 Watt
Charging voltage:	AC 100-240 V ~ 50 / 60 Hz
	DC 12-24 V
Working temperature:	-5° / +45°

	L mm	D mm	g	
150.4340	280.0	50.0	930	

LEDMAX STRIPE LED-Cordless work lamp

- Ideal for very long network independent working
- 2,5 W Stripe LED
- Housing body covered with high quality rubber
- Weatherproof protection IP54
- Shock and impact resistant
- Revolving hooks for suspending
- Magnetic
- With control LED to discharge
- Includes automatic turn off charging station
- 4-5 hours charging time
- 4-5 hours lamp duration
- Impact resistant Polycarbonate housing

Technical data:

Capacity:	illumination time 4-5 hours
Light source:	2,5 W Stripe LED
Luminosity:	180 lumen
Rechargeable battery:	3,7 V / 3500 mAh
Battery type:	Lithium-ion
Capacity:	2,5 Watt
Charging voltage:	AC 100-240 V ~ 50 / 60 Hz
	DC 12-24 V
Working temperature:	-5° / +45°

	L mm	D mm	g	
150.4350	280.0	50.0	950	

LEDMAX POWER STRIPE LED Cordless working lamp, foldable

- Ideal for very long network independent working
- 6 Watt Citizen Power LED
- Housing 180° foldable
- Housing body covered with high quality rubber
- Weatherproof protection IP64
- Shock and impact resistant
- Revolving hooks for suspending
- Magnetic
- With control LED to discharge
- Includes automatic turn off charging station
- 3 hours charging time
- 3 hours lamp duration
- Impact resistant Polycarbonate housing

Technical data:

Capacity:	illumination time 3 hours
Light source:	6 W CITIZEN POWER LED
Luminosity:	420 lumen
Rechargeable battery:	3,6 V / 3600 mAh
Battery type:	Li-polymer
Capacity:	6 Watt
Charging voltage:	AC 100-240 V ~ 50 / 60 Hz
	DC 12-24 V
Working temperature:	-5° / +45°

	L mm	D mm	g	
150.4310	290.0	56.0	500	

FLASHLIGHTS

Basic workshop inspection hand lamp 8 watts

- Protection pipe out of polycarbonate
- Impact resistant impact strength IK09
- High quality rubber hand grip casing
- Revolving hooks for suspending
- With contour connector according to CEE 7/17
- Integrated connector
- Includes lamp

Technical data:

Luminosity:	8 W
Lamp length:	500.0 mm
Connection cable length:	5 m
Cable:	H05RN-F 2x1,0 mm²
Operational voltage:	AC 220-240 V
Protection class:	II

	L mm	Ø mm	g	
550.1371	500.0	30,0	470	

Pro workshop inspection hand lamp 8 watts

- Industrial quality
- Double insulation
- Protection pipe out of polycarbonate
- Impact resistant - impact strength IK09
- High quality rubber hand grip casing
- Revolving hooks for suspending
- With contour connector according to CEE 7/17
- Ingress protection according to IP20
- With integrated connector
- Lamp extension tube interchangeable
- Includes lamp

Technical data:

Luminosity:	8 W
Lamp length:	500.0 mm
Connection cable length:	5 m
Cable:	H05RN-F 2x1,0 mm²
Operational voltage:	AC 220-240 V
Protection class:	II
Weatherproof protection:	IP20

	L mm	Ø mm	g	
550.1376	500.0	30,0	660	

Pro XL workshop inspection hand lamp 11 watts

- Industrial quality
- Double insulation
- Protection pipe out of polycarbonate
- Impact resistant - impact strength IK09
- High quality rubber hand grip casing
- Revolving hooks for suspending
- With contour connector according to CEE 7/17
- Ingress protection according to IP20
- With integrated connector
- Lamp extension tube interchangeable
- Includes lamp

Technical data:

Luminosity:	11 W
Lamp length:	630.0 mm
Connection cable length:	5 m
Cable:	H05RN-F 2x1,0 mm²
Operational voltage:	AC 220-240 V
Protection class:	II
Weatherproof protection:	IP20

	L mm	Ø mm	g	
550.1381	630.0	35,0	710	

Pro XXL workshop inspection hand lamp 13 watts

- Industrial quality
- Double insulation
- Protection pipe out of polycarbonate
- Impact resistant - impact strength IK09
- High quality rubber hand grip casing
- Revolving hooks for suspending
- With contour connector according to CEE 7/17
- Ingress protection according to IP20
- With integrated connector
- Lamp extension tube interchangeable
- Includes lamp

Technical data:

Luminosity:	13 W
Lamp length:	720.0 mm
Connection cable length:	5 m
Cable:	H05RN-F 2x1,0 mm²
Operational voltage:	AC 220-240 V
Protection class:	II
Weatherproof protection:	IP20

	L mm	Ø mm	g	
550.1386	720.0	35,0	750	

Professional XXL workshop inspection hand lamp with expander holder

- Optimum lighting
- Self-clamping and securable
- Span length = 1,335 - 1,800 mm
- Expanding bracket with large, adjustable and rubber coated hooks
- Industrial quality
- Double insulation
- Protection pipe out of polycarbonate
- Impact resistant - impact strength IK09
- High quality rubber hand grip casing
- Revolving hooks for suspending
- With contour connector according to CEE 7/17
- Ingress protection according to IP54
- With integrated connector
- Lamp extension tube interchangeable
- Includes lamp

Technical data:

Luminosity:	30 W
Adjusatbel length:	1.335-1.800 mm
Connection cable length:	5 m
Cable:	H05RN-F 2x1,0 mm²
Operational voltage:	AC 220-240V
Protection class:	II
Weatherproof protection:	IP54

	L mm	Ø mm	kg	
150.4305	1335-1800	74,0	2.60	

ACCESSORIES FOR FLASH LIGHTS

Magnet holder for workshop lamps

- Universal mouting clip for workshop lamps
- Extra large pivoting range
- Magnet completely rubberised
- Stop peg out of spring steel

	max Ø pipe mm	Ø magnetic base mm	g	
150.4219	43,0	31,0	79	

Workshop cable reel

- Practical and space-saving
- Extra strong, automatic return mechanism
- With endstopper
- 180° freely revolving
- Cable working length 20 m
- Connection cable 1.5 m
- Metal wall reinforcement rail 270 mm

Technical data:

Work cable length m:	20 m
Connection cable length:	1,5 m
Operational voltage:	230 V

		kg	
150.4320	Workshop cable reel	6.50	

FLASH LIGHTS WITH CABLE REELS

Cable reel with Basic workshop inspection hand lamp 8 watts

- Protection pipe out of polycarbonate
- Impact resistant impact strength IK09
- High quality rubber hand grip casing
- 360° revolving hooks for suspending
- With contour connector according to CEE 7/17
- Ingress protection according to IP44
- Integrated connector
- Includes lamp
- Includes workshop cable reel

Technical data:

Luminosity:	8 W
Lamp length:	500.0 mm
Connection cable length:	5 m
Work cable length m:	20 m
Cable:	H05RN-F 2x1,0 mm²
Operational voltage:	AC 220-240 V
Protection class:	II
Weatherproof protection:	IP44

	L mm	Ø mm	kg
550.1370	500.0	30,0	8.10

Cable reel with pro workshop inspection hand lamp 8 watts

- Industrial quality
- Double insulation
- Protection pipe out of polycarbonate
- Impact resistant - impact strength IK09
- High quality rubber hand grip casing
- 360° revolving hooks for suspending
- With contour connector according to CEE 7/17
- Ingress protection according to IP44
- With integrated connector
- Includes lamp
- Includes cable reel 20 m

Technical data:

Luminosity:	8 W
Lamp length:	500.0 mm
Connection cable length:	5 m
Work cable length m:	20 m
Cable:	H05RN-F 2x1,0 mm²
Operational voltage:	AC 220-240 V
Protection class:	II
Weatherproof protection:	IP44

	L mm	Ø mm	kg
550.1375	500.0	30,0	8.11

Cable reel with pro XL workshop inspection hand lamp 11 watts

- Industrial quality
- Double insulation
- Protection pipe out of polycarbonate
- Impact resistant - impact strength IK09
- High quality rubber hand grip casing
- 360° revolving hooks for suspending
- With contour connector according to CEE 7/17
- Ingress protection according to IP54
- With integrated connector
- Includes lamp
- Includes cable reel 20 m

Technical data:

Luminosity:	11 W
Lamp length:	630.0 mm
Connection cable length:	5 m
Work cable length m:	20 m
Cable:	H05RN-F 2x1,0 mm²
Operational voltage:	AC 220-240 V
Protection class:	II
Weatherproof protection:	IP44

	L mm	Ø mm	kg
550.1380	630.0	35,0	8.15

Cable reel with pro XXL workshop inspection hand lamp 13 watts

- Industrial quality
- Double insulation
- Protection pipe out of polycarbonate
- Impact resistant - impact strength IK09
- High quality rubber hand grip casing
- 360° revolving hooks for suspending
- With contour connector according to CEE 7/17
- Ingress protection according to IP54
- With integrated connector
- Includes lamp
- Includes cable reel 20 m

Technical data:

Luminosity:	13 W
Lamp length:	720.0 mm
Connection cable length:	5 m
Work cable length m:	20 m
Cable:	H05RN-F 2x1,0 mm²
Operational voltage:	AC 220-240 V
Protection class:	II
Weatherproof protection:	IP44

	L mm	Ø mm	kg
550.1385	720.0	35,0	8.17

WORK LAMPS

Professional cold light work lamp 36 watts

- Industrial quality
- 2.900 lumens luminous fl x
- Polycarbonate protection glass
- Housing cover also rubber
- Impact resistant impact strength IK10
- Hooks for double sided applications and with contour connector according to CEE 7/17
- Ingress protection according to IP54
- Integrated connector
- Lamp extension tube interchangeable
- Includes lamp
- Blow mould plastic housing

Technical data:

Luminosity:	36 W
Connection cable length:	5 m
Operational voltage:	230 V
Accessory outlet:	-
Protection class:	II
Weatherproof protection:	IP54

	H mm	B mm	T mm	Spare bulb	kg
150.4255	230.0	340.0	110.0	150.4256	2.36

Professional cold light work lamp 72 watts

- Industrial quality
- 5.800 lumens luminous fl x
- With 2 x 230 V isolated outlet on the back
- Polycarbonate protection glass
- Housing cover also rubber
- Impact resistant impact strength IK10
- Hooks for double sided applications and pedestal with contour connector according to CEE 7/17
- Ingress protection according to IP54
- Integrated connector
- Lamp extension tube interchangeable
- Includes lamp
- Blow mould plastic housing

Technical data:

Luminosity:	72 W
Connection cable length:	5 m
Operational voltage:	230 V
Accessory outlet:	2 x 230 V Schuko
Protection class:	II
Weatherproof protection:	IP54

	H mm	B mm	T mm	Spare bulb	kg
150.4260	285.0	495.0	110.0	150.4261	5.02

Professional cold light work lamp 108 watts

- Industrial quality
- 8.700 lumens luminous fl x
- With 1 x 230 V isolated outlet on the back
- Polycarbonate protection glass
- Housing cover also rubber
- Impact resistant impact strength IK10
- Hooks for double sided applications and pedestal with contour connector according to CEE 7/17
- Ingress protection according to IP54
- Integrated connector
- Lamp extension tube interchangeable
- Includes lamp
- Blow mould plastic housing

Technical data:

Luminosity:	108 W
Connection cable length:	5 m
Operational voltage:	230 V
Accessory outlet:	1 x 230 V Schuko
Protection class:	II
Weatherproof protection:	IP54

	H mm	B mm	T mm	Spare bulb	kg	
150.4265	290.0	500.0	110.0	150.4261	5.82	

Pro Bridgelux LED inspection hand lamp 50 watts

- Industrial quality
- 1x Bridgelux LED lamp
- 6500 Kelvin
- Extremely impact resistant
- With contour connector according to CEE 7/17
- Waterproof according to IP65
- With integrated connector
- Corresponding to 500W halogen
- Floodlight with modern LED technology
- With mounting bracket
- Safety glass, transparent
- 100% luminosity without power-on delay
- Mercury-free
- Energy efficien y class: A
- Includes lamp

Technical data:

Luminosity:	50 W
Connection cable length:	1,5 m
Cable:	H05RN-F 3x0,75 mm²
Operational voltage:	AC 100-240 V
Protection class:	II
Weatherproof protection:	IP65

	H mm	B mm	T mm	kg	
150.4385	238.0	288.0	150.0	3.10	

Pro Bridgelux LED inspection hand lamp 100 watts

- Industrial quality
- 1x Bridgelux LED lamp
- 6500 Kelvin
- Extremely impact resistant
- With contour connector according to CEE 7/17
- Waterproof according to IP65
- With integrated connector
- Corresponding to 1000W halogen
- Floodlight with modern LED technology
- With mounting bracket
- Safety glass, transparent
- 100% luminosity without power-on delay
- Mercury-free
- Energy efficien y class: A
- Includes lamp

Technical data:

Luminosity:	100 W
Connection cable length:	1,5 m
Cable:	H05RN-F 3x0,75 mm²
Operational voltage:	AC 100-240 V
Protection class:	II
Weatherproof protection:	IP65

	H mm	B mm	T mm	kg	
150.4390	367.0	285.0	101.0	5.60	

Pro Bridgelux LED inspection hand lamp 150 watts

- Industrial quality
- 3x Bridgelux LED lamps
- 6500 Kelvin
- Extremely impact resistant
- With contour connector according to CEE 7/17
- Waterproof according to IP65
- With integrated connector
- Corresponding to 1,500W halogen
- Floodlight with modern LED technology
- With mounting bracket
- Safety glass, transparent
- 100% luminosity without power-on delay
- Mercury-free
- Energy efficien y class: A
- Includes lamp

Technical data:

Luminosity:	150 W
Connection cable length:	1,5 m
Cable:	H05RN-F 3x0,75 mm²
Operational voltage:	AC 100-240 V
Protection class:	II
Weatherproof protection:	IP65

	H mm	B mm	T mm	kg	
150.4395	327.0	427.0	185.0	10.00	

WORK LAMPS WITH TRIPODS

Professional cold light work lamp 36 watts with tripod

- Industrial quality
- 2.900 lumens luminous fl x
- Polycarbonate protection glass
- Housing cover also rubber
- Impact resistant - impact strength IK10
- With contour connector according to CEE 7/17
- Ingress protection according to IP54
- With integrated connector
- Lamp extension tube interchangeable
- Includes lamp
- Blow mould plastic housing
- Fully adjustable through 2 wing screws
- Work height 1.0 to 2.7 m
- With cable holder device
- Galvanised steel pipe
- 3 castor wheels with special rubber tyre

Technical data:

Luminosity:	36 W
Connection cable length:	5 m
Operational voltage:	230 V
Accessory outlet:	-
Protection class:	II
Weatherproof protection:	IP54

	H mm	B mm	T mm	Spare bulb	kg	
150.4257	230.0	340.0	110.0	150.4256	9.28	

consists of:

		kg	
150.4255	Professional cold light work lamp 36 watts	2.36	
150.4267	Extending tripod for work lamps	5.92	
150.4268	Castor wheel sets for 150.4267	1.00	

Professional cold light work lamp 72 watts with tripod

- Industrial quality
- 5.800 lumens luminous fl x
- With 2 x 230 V isolated outlet on the back
- Polycarbonate protection glass
- Housing cover also rubber
- Impact resistant - impact strength IK10
- With contour connector according to CEE 7/17
- Ingress protection according to IP54
- With integrated connector
- Lamp extension tube interchangeable
- Includes lamp
- Blow mould plastic housing
- Fully adjustable through 2 wing screws
- Work height 1.0 to 2.7 m
- With cable holder device
- Galvanised steel pipe
- 3 castor wheels with special rubber tyre

Technical data:

Luminosity:	72 W
Connection cable length:	5 m
Operational voltage:	230 V
Accessory outlet:	2 x 230 V Schuko
Protection class:	II
Weatherproof protection:	IP54

	H mm	B mm	T mm	Spare bulb	kg
150.4263	285.0	495.0	110.0	150.4261	11.94

consists of:

		kg
150.4260	Professional cold light work lamp 72 watts	5.02
150.4267	Extending tripod for work lamps	5.92
150.4268	Castor wheel sets for 150.4267	1.00

Professional cold light work lamp 108 watts with tripod

- Industrial quality
- 8.700 lumens luminous fl x
- With 1 x 230 V isolated outlet on the back
- Polycarbonate protection glass
- Housing cover also rubber
- Impact resistant - impact strength IK10
- With contour connector according to CEE 7/17
- Ingress protection according to IP54
- With integrated connector
- Lamp extension tube interchangeable
- Includes lamp
- Blow mould plastic housing
- Fully adjustable through 2 wing screws
- Work height 1.0 to 2.7 m
- With cable holder device
- Galvanised steel pipe
- 3 castor wheels with special rubber tyre

Technical data:

Luminosity:	108 W
Connection cable length:	5 m
Operational voltage:	230 V
Accessory outlet:	1 x 230 V Schuko
Protection class:	II
Weatherproof protection:	IP54

	H mm	B mm	T mm	Spare bulb	kg
150.4271	290.0	500.0	110.0	150.4261	12.74

consists of:

		kg
150.4265	Professional cold light work lamp 108 watts	5.82
150.4267	Extending tripod for work lamps	5.92
150.4268	Castor wheel sets for 150.4267	1.00

Professional Bridgelux LED work lamp 50 watts with tripod

- Industrial quality
- 1x Bridgelux LED lamp
- 6500 Kelvin
- Extremely impact resistant
- With contour connector according to CEE 7/17
- Waterproof according to IP65
- With integrated connector
- Corresponding to 500W halogen
- Floodlight with modern LED technology
- With mounting bracket
- Safety glass, transparent
- 100% luminosity without power-on delay
- Mercury-free
- Energy efficien y class: A
- Includes lamp
- Fully adjustable through 2 wing screws
- Work height 1.0 to 2.7 m
- With cable holder device
- Galvanised steel pipe
- 3 castor wheels with special rubber tyre

Technical data:

Luminosity:	50 W
Connection cable length:	1,5 m
Operational voltage:	AC 100 - 240V / DC24V
Protection class:	II
Weatherproof protection:	IP65

	H mm	B mm	T mm	kg
150.4386	238.0	288.0	150.0	9.93

consists of:

		kg
150.4385	Pro Bridgelux LED inspection hand lamp 50 watts	3.10
150.4267	Extending tripod for work lamps	5.92
150.4268	Castor wheel sets for 150.4267	1.00

Professional Bridgelux LED-work lamp 100 watts with tripod

- Industrial quality
- 1x Bridgelux LED lamp
- 6500 Kelvin
- Extremely impact resistant
- With contour connector according to CEE 7/17
- Waterproof according to IP65
- With integrated connector
- Corresponding to 1000W halogen
- Floodlight with modern LED technology
- With mounting bracket
- Safety glass, transparent
- 100% luminosity without power-on delay
- Mercury-free
- Energy efficien y class: A
- Includes lamp
- Fully adjustable through 2 wing screws
- Work height 1.0 to 2.7 m
- With cable holder device
- Galvanised steel pipe
- 3 castor wheels with special rubber tyre

Technical data:

Luminosity:	100 W
Connection cable length:	1,5 m
Operational voltage:	AC 100 - 240V / DC24V
Protection class:	II
Weatherproof protection:	IP65

	H mm	B mm	T mm	kg	
150.4391	367.0	285.0	101.0	12.52	

consists of:

		kg	
150.4390	Pro Bridgelux LED inspection hand lamp 100 watts	5.60	
150.4267	Extending tripod for work lamps	5.92	
150.4268	Castor wheel sets for 150.4267	1.00	

Professional Bridgelux LED-work lamp 150 watts with tripod

- Industrial quality
- 3x Bridgelux LED lamps
- 6500 Kelvin
- Extremely impact resistant
- With contour connector according to CEE 7/17
- Waterproof according to IP65
- With integrated connector
- Corresponding to 1500W halogen
- Floodlight with modern LED technology
- With mounting bracket
- Safety glass, transparent
- 100% luminosity without power-on delay
- Mercury-free
- Energy efficien y class: A
- Includes lamp
- Fully adjustable through 2 wing screws
- Work height 1.0 to 2.7 m
- With cable holder device
- Galvanised steel pipe
- 3 castor wheels with special rubber tyre

Technical data:

Luminosity:	150 W
Connection cable length:	1,5 m
Operational voltage:	AC 100 - 240V / DC24V
Protection class:	II
Weatherproof protection:	IP65

	H mm	B mm	T mm	kg	
150.4396	327.0	427.0	185.0	16.92	

consists of:

		kg	
150.4395	Pro Bridgelux LED inspection hand lamp 150 watts	10.00	
150.4267	Extending tripod for work lamps	5.92	
150.4268	Castor wheel sets for 150.4267	1.00	

ACCESSORIES FOR WORK LAMPS

Scaffolding clamp for work lamps

- Universal scaffolding clamp for cold light work lamps
- For all current scaffoldings and pipes up to 50 mm
- Heavy and robust execution
- Galvanised steel

	max Ø pipe mm	kg	
150.4269	50,0	1.06	

Extending tripod for work lamps

- Universal tripod for work lamps
- Expandable through optional extensions
- Optimal illuminating guaranteed
- Secure stand
- Extremely compact transportation size
- On fold away tripod foot part
- Fully adjustable through 2 wing screws
- Work height 1,0 to 2,7 m
- With cable holder device
- Galvanised steel pipe

	H mm	Castor wheel set	kg	
150.4267	1000 - 2700	150.4268	5.92	

Castor wheel sets for 150.4267

- 3 castor wheels with special rubber tyre
- Includes reinforcement screw
- With backing plate on every castor

			kg	
150.4268	3 pcs	Castor wheel sets for 150.4267	1.00	

15 WORKSHOP EQUIPMENT

KSTOOLS®

Innovation is our mission!

	PAGE
WORKBENCHES	418
WORKBENCHES	418 - 420
BACK WALL SYSTEMS	420
WALL CUPBOARDS	420
CLOAKROOM CUPBOARD	420
HINGED DOOR CABINET	420 - 421
BENCH VICES	421
HOOK ASSORTMENT	422 - 426
HOLE WALL	426 - 427
SERVICE TROLLEYS	427 - 428
PLATFORM TROLLEY	428
PLATFORM	428
SUPPORTS	429
TRANSPORT TROLLEY	429 - 430
PROTECTIVE KNEELING MATS	430
STOOLS	430
AXLE STANDS	431
LIFTING TOOLS	431
WORKSHOP EQUIPMENT	431

WORKSHOP EQUIPMENT

- Workbenches suitable for any requirement.
- Diverse program for an intelligent system and good overview.
- Many different combinations of drawers and doors.
- Different lengths from 600 mm to 2,000 mm. Fixed workbenches or workbenches with fi able rollers.
- All workbenches are made of sturdy folded sheet steel.
- Surfaces are treated with an environmentally friendly powder coating.
- Individual workplace design with many different combination possibilities.

Perforated plates

10 standard colours,
4 different sizes

= 40 variations

Available in
other colours as desired.

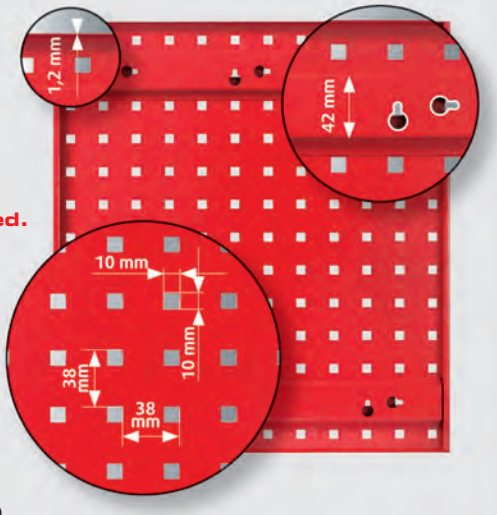

RAL5010 RAL5015 RAL5012 RAL7035 RAL9010 RAL6011 RAL7015 RAL9005 RAL1023 RAL3020

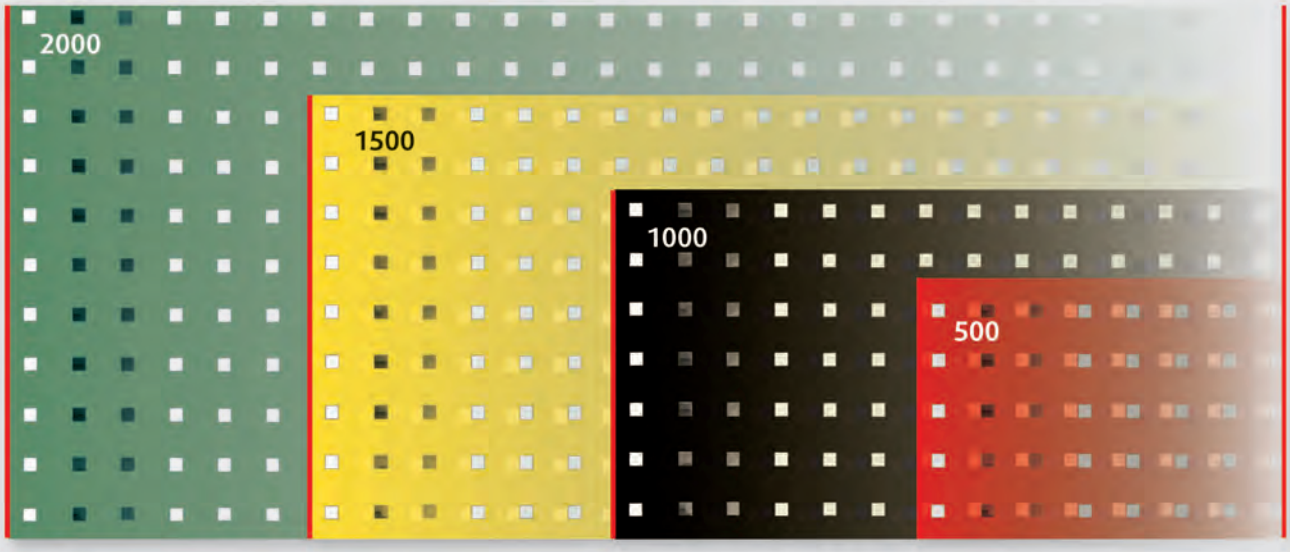

Range of hooks with other 80 different possibilities

Single hook

Double hook

Round holder

And much more...

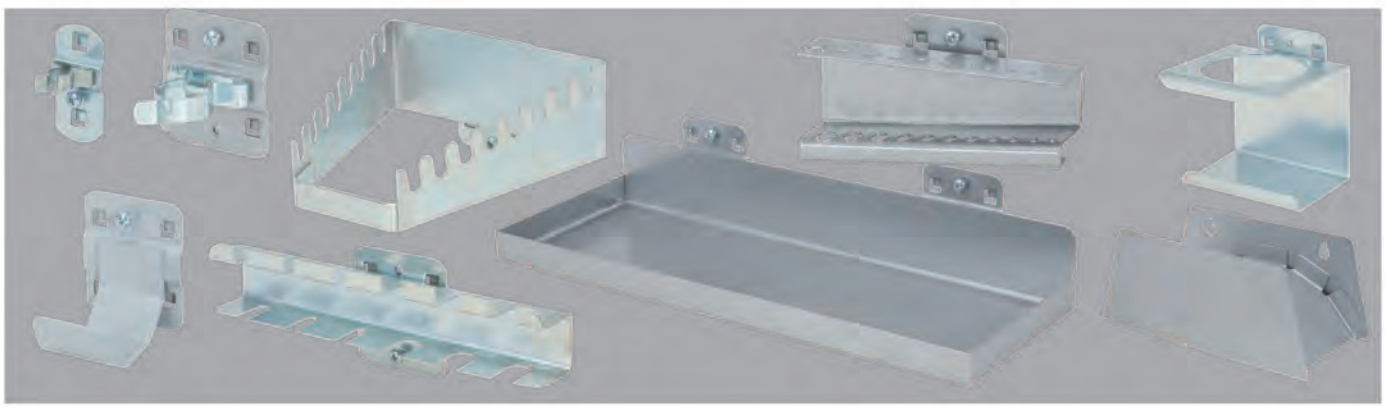

WORKBENCHES

Mechanics workbench

- Mobile workbench ideally for vice work
- Foldable for transporting
- Laminated wooden work surface
- Waterproof and resistant to chemicals
- Metal protective edge
- High level of stability due to splayed table legs

	Total depth mm	Width mm	Depth mm	kg
914.1300	850.0	1070.0	620.0	40.00

Mechanics workbench

- Mobile workbench ideally for vice work
- Foldable for transporting
- Laminated wooden work surface
- Waterproof and resistant to chemicals
- Metal protective edge
- High level of stability due to splayed table legs

	Total depth mm	Width mm	Depth mm	kg
914.2000	850.0	1220.0	620.0	34.00

WORKBENCHES

Workbench

- Robust and stable steel construction with 1,0 mm sheet steel - distortion resistant
- High level of stability
- General construction from robust steel - square type tube
- Laminated wooden board
- Waterproof and resistant to chemicals
- With metal protective edge
- High stability due to all metal parts being welded
- Electrostatic powder coating

	Total depth mm	Width mm	Depth mm	kg
865.0013	840.0	1200.0	500.0	27.00

Workbench with 1 door

- Robust and stable steel construction with 1,0 mm sheet steel distortion resistant
- High level of stability
- General construction from robust steel square type tube
- Laminated wooden board
- Waterproof and resistant to chemicals
- Metal protective edge
- High stability due to all metal parts being welded
- Lockable door
- Electrostatic powder coating

	Total depth mm	Width mm	Depth mm	kg
865.0012	840.0	600.0	600.0	42.00

Workbench with 3 drawers

- Robust and stable steel construction with 1,0 mm sheet steel - distortion resistant
- High level of stability
- General construction from robust steel - square type tube
- Laminated wooden board
- Waterproof and resistant to chemicals
- With metal protective edge
- High stability due to all metal parts being welded
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Side mounted handle
- Electrostatic powder coating

	Total depth mm	Width mm	Depth mm	kg
865.0010	840.0	600.0	600.0	51.00

Workbench with 1 door

- Robust and stable steel construction with 1,0 mm sheet steel distortion resistant
- High level of stability
- General construction from robust steel square type tube
- Laminated wooden board
- Waterproof and resistant to chemicals
- Metal protective edge
- High stability due to all metal parts being welded
- Lockable door
- Electrostatic powder coating

Technical data:

Door dimensions:	H 425 x B 430 mm
Total load capacity:	400,0 kg

	Total depth mm	Width mm	Depth mm	kg
865.0001	840.0	1200.0	600.0	71.00

PROFI workbench with 2 doors

- Robust and stable steel construction with 1,0 mm sheet steel distortion resistant
- High level of stability
- General construction from robust steel square type tube
- Laminated wooden board
- Waterproof and resistant to chemicals
- Metal protective edge
- High stability due to all metal parts being welded
- Lockable door
- Electrostatic powder coating

Technical data:

Door dimensions:	H 425 x B 430 mm
Total load capacity:	400,0 kg

	Total depth mm	Width mm	Depth mm	kg
865.0002	840.0	1200.0	600.0	85.00

Workbench with 3 drawers and 1 door

- Robust and stable steel construction with 1,0 mm sheet steel distortion resistant
- High level of stability
- General construction from robust steel square type tube
- Laminated wooden board
- Waterproof and resistant to chemicals
- Metal protective edge
- High stability due to all metal parts being welded
- Lockable door
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Side mounted handle
- Electrostatic powder coating

Technical data:

Drawer dimensions:	2 x H 85 x B 430 x T 520 mm
	1 x H 165 x B 430 x T 520 mm
Door dimensions:	H 425 x B 430 mm
Total load capacity:	400,0 kg
Load capacity of each drawer:	35,0 kg

	Total depth mm	Width mm	Depth mm	kg
865.0003	840.0	1200.0	600.0	86.00

Workbench with 6 drawers

- Robust and stable steel construction with 1,0 mm sheet steel - distortion resistant
- High level of stability
- General construction from robust steel - square type tube
- Laminated wooden board
- Waterproof and resistant to chemicals
- With metal protective edge
- High stability due to all metal parts being welded
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Side mounted handle
- Electrostatic powder coating

Technical data:

Drawer dimensions:	4 x H 85 x B 430 x T520 mm
	2 x H 165 x B 430 x T 520 mm
Total load capacity:	400,0 kg
Load capacity of each drawer:	35,0 kg

	Total depth mm	Width mm	Depth mm	kg
865.0004	840.0	1200.0	600.0	86.00

Mobile workbench with 3 drawers and 1 door

- Robust and stable steel construction with 1,0 mm sheet steel distortion resistant
- High level of stability
- General construction from robust steel square type tube
- Laminated wooden board
- Waterproof and resistant to chemicals
- Metal protective edge
- High stability due to all metal parts being welded
- Lockable door
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- With two castor wheels 125 mm with rolling and turning brake
- Drawers with non slip rubber mat
- Side mounted handle
- Electrostatic powder coating

Technical data:

Drawer dimensions:	2 x H 85 x B 430 x T 520 mm
	1 x H 165 x B 430 x T 520 mm
Door dimensions:	H 425 x B 430 mm
Total load capacity:	400,0 kg
Load capacity of each drawer:	35,0 kg

	Total depth mm	Width mm	Depth mm	kg
865.0101	840.0	1200.0	600.0	71.00

Workbench with 4 drawers and 1 door

- Robust and stable steel construction with 1,0 mm sheet steel distortion resistant
- High level of stability
- General construction from robust steel square type tube
- Laminated wooden board
- Waterproof and resistant to chemicals
- Metal protective edge
- High stability due to all metal parts being welded
- Lockable door
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Side mounted handle
- Electrostatic powder coating

	Total depth mm	Width mm	Depth mm	kg
865.0006	840.0	1200.0	500.0	99.00

Workbench with 8 drawers

- Robust and stable steel construction with 1,0 mm sheet steel - distortion resistant
- High level of stability
- General construction from robust steel - square type tube
- Laminated wooden board
- Waterproof and resistant to chemicals
- With metal protective edge
- High stability due to all metal parts being welded
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Side mounted handle
- Electrostatic powder coating

	Total depth mm	Width mm	Depth mm	kg
865.0007	840.0	1200.0	500.0	113.00

Mobile workbench with 6 drawers

- Robust and stable steel construction with 1,0 mm sheet steel distortion resistant
- High level of stability
- General construction from robust steel square type tube
- Laminated wooden board
- Waterproof and resistant to chemicals
- Metal protective edge
- High stability due to all metal parts being welded
- Lockable door
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- With two castor wheels 200 mm with rolling and turning brake
- Drawers with non slip rubber mat
- Side mounted handle
- Electrostatic powder coating

	Total depth mm	Width mm	Depth mm	kg
865.0011	840.0	1200.0	600.0	103.00

XXL workbench with 3 drawers and 1 door

- Robust and stable steel construction with 1,0 mm sheet steel distortion resistant
- High level of stability
- General construction from robust steel square type tube
- Laminated wooden board
- Waterproof and resistant to chemicals
- High stability due to all metal parts being welded
- Lockable door
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non slip rubber mat
- Electrostatic powder coating

Technical data:

Drawer dimensions:	2 x H 85 x B 430 x T 520 mm
	1 x H 165 x B 430 x T 520 mm
Door dimensions:	H 425 x B 430 mm
Total load capacity:	400,0 kg
Load capacity of each drawer:	35,0 kg

	Total depth mm	Width mm	Depth mm	kg
865.0201	840.0	2000.0	680.0	86.00

BACK WALL SYSTEMS

Extension back wall system for workbenches

- 2 x posts
- 2 x hole wall
- For the accommodation of additional tools
- For organising and fastening tools
- Steel sheet construction

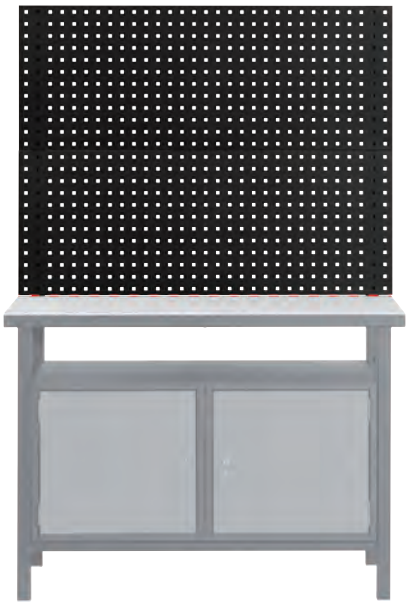

	Total depth mm	Width mm	kg
865.0008	710.0	1200.0	8.00

Extension back wall system for workbenches with cupboard

- 2 x posts
- 1 x hole wall
- 1 x high level cupboard system, lockable
- For the accommodation of additional tools
- For organising and fastening tools
- Steel sheet construction

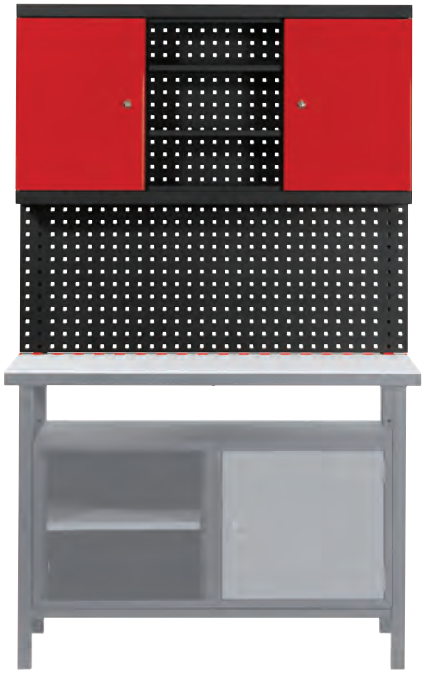

	Total depth mm	Width mm	Depth mm	kg
865.0009	710.0	1200.0	200.0	38.00

WALL CUPBOARDS

Tool cabinet with 2 doors

- Robust and stable steel construction with 1,0 mm sheet steel distortion resistant
- High level of stability
- Central locking system on all doors through the cylinder lock
- Cupboard back wall with hole system
- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- 2 mounting rails with 4 connection holes
- Continuous opening without stop
- Electrostatic powder coating

Technical data:

Door dimensions:	H 425 x B 430 mm
Usable depth:	164.0 mm

	Total depth mm	Width mm	Depth mm	kg
865.0205	470.0	970.0	200.0	22.00

CLOAKROOM CUPBOARD

Cloakroom stand

- Robust and stable steel construction with 1,0 mm sheet steel distortion resistant
- High level of stability
- Base and reinforced doors
- All parts have electrostatic powder coating
- Compartment with hat base, clothes rail and 3 adjustable coat hooks
- Lockable by cylinder lock

	Compartment	Total depth mm	Width mm	Depth mm	kg
850.0502	2	1800.0	600.0	500.0	26.00
850.0503	3	1800.0	890.0	500.0	35.00

HINGED DOOR CABINET

Lockable cupboard

- Robust and stable steel construction with 1,0 mm sheet steel distortion resistant
- High level of stability
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Front side edges are rounded
- Inside recumbent hinges and locking bar
- 4 shelves have universal height adjustment
- Internal storage wall with square punching, approx. 340 mm high
- Side mounted handle
- Electrostatic powder coating

Technical data:

Drawer dimensions:	H 70 x B 680 x T 310 mm
Total load capacity:	400,0 kg
Load capacity of each drawer:	35,0 kg

	Total depth mm	Width mm	Depth mm	kg
865.0000	1920.0	780.0	380.0	84.00

Lockable cupboard

- High quality welded sheet metal
- High level of stability
- Reinforced doors with 3-point safety lock
- Inside-recumbent hinges and locking bar
- Galvanised shelves can be adjusted in 25 mm intervals
- Load capacity per shelf max. 60 kg with even load distribution
- Powder coated

	Total depth mm	Width mm	Depth mm	kg
865.0005	1950.0	950.0	500.0	68.00

BENCH VICES

Bench vice

- Swivel base
- Interchangeable jaws
- Includes pipe vice attachment
- Absolutely parallel with adjustable centric drive
- Extra high possible clamping jaws shaped by large embossed casting
- Large anvil for straightening and compression work
- Induction hardened jaws and anvil
- Vise forward opening
- Ground jaws, anvil plate and slide corners
- Special steel

	Jaw length	Jaw length mm	Clamping range mm	kg
914.0003	3“	75.0	100,0	7.50
914.0004	4“	100.0	120,0	8.70
914.0005	5“	130.0	140,0	11.00
914.0006	6“	150.0	170,0	14.50
914.0008	8“	200.0	200,0	20.50

Bench vice

- With adjusting screw and pipe clamps
- Forged front and rear jaws
- Extra high possible clamping jaws shaped by large embossed casting
- Durable prismatic guide
- With mounting screws for turntable
- Induction hardened jaws and anvil
- Double start trapezoidal thread for quick opening and closing
- Vise forward opening
- Ground jaws, anvil plate and slide corners
- Special steel





	Jaw length mm	Clamping range mm	T mm	H mm	L mm	Cudgel ø mm	kg
914.0026	100.0	125,0	70,0	140.0	320.0	12.0	5.00
914.0031	125.0	155,0	80,0	180.0	395.0	14.0	11.00
914.0036	150.0	180,0	98,0	220.0	485.0	16.0	20.00
914.0041	175.0	205,0	110,0	240.0	550.0	18.0	29.00

Turntable for bench vice

- Ideal supplement for KS-vices 914.0027 - 914.0041
- Enables accurate positioning of the workpiece
- 360° freely rotatable
- Safe and quick locking via handle
- Flat and stable construction
- Inclusive fastening screws for vice

		Ø mm	kg
914.0027	914.0026	100,0	1.40
914.0032	914.0031	125,0	2.80
914.0037	914.0036	150,0	3.75
914.0042	914.0041	175,0	4.85

Bench vice with turntable

- With adjusting screw and pipe clamps
- Forged front and rear jaws
- Extra high possible clamping jaws shaped by large embossed casting
- Durable prismatic guide
- With mounting screws for turntable
- Induction hardened jaws and anvil
- Double start trapezoidal thread for quick opening and closing
- Vise forward opening
- Ground jaws, anvil plate and slide corners
- Special steel

		Jaw length mm	kg
914.0025	2 pcs	100.0	6.40
914.0030	2 pcs	125.0	13.80
914.0035	2 pcs	150.0	23.75
914.0040	2 pcs	175.0	33.85

Aluminium bench vice protective jaws with textured surface

- Suitable for all bench vices
- The profile is ight angled and level parallel
- Integrated special magnet hold the protective jaws safely on the vice
- For material protection and non slip grip on sensitive materials
- For coarse to medium fine ork pieces
- Fine textured
- Aluminium

	Protective jaws mm	g	
914.0080	100.0	170	
914.0081	120.0	210	
914.0082	140.0	240	
914.0083	160.0	260	
914.0084	175.0	290	

Aluminium bench vice protective jaws with trapezoid notches

- Suitable for all bench vices
- The profile is ight angled and level parallel
- Integrated special magnet hold the protective jaws safely on the vice
- For material protection and non slip grip on sensitive materials
- For different shaped materials
- For trapezoid use
- Aluminium

	Protective jaws mm	g	
914.0085	100.0	145	
914.0086	120.0	187	
914.0087	140.0	210	
914.0088	160.0	226	
914.0089	175.0	248	

Aluminium bench vice protective jaws with rubber insert

- Suitable for all bench vices
- The profile is ight angled and level parallel
- Integrated special magnet hold the protective jaws safely on the vice
- For material protection and non slip grip on sensitive materials
- For thin walled wood and plastic parts
- Smooth
- Aluminium / rubber

	Protective jaws mm	g	
914.0090	100.0	163	
914.0091	120.0	207	
914.0092	140.0	224	
914.0093	140.0	204	
914.0094	175.0	276	

HOOK ASSORTMENT

Hook assortment for hole wall system

- Peg range for work areas
- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

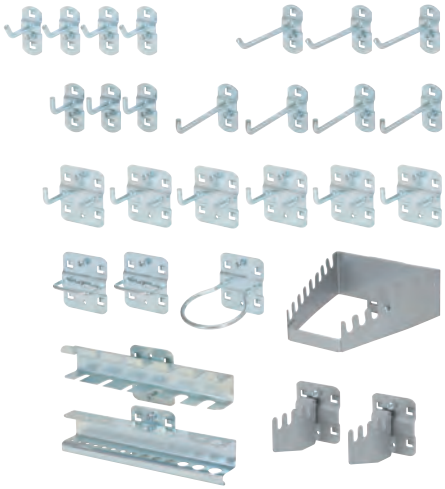

			kg
860.0888	28 pcs	Hook assortment for hole wall system	1.78

1 x		150 x 55 mm
1 x		65 x 25 mm
2 x		55 mm
2 x		150 mm
1 x		150 x 55 mm
1 x		150 x 55 mm
14 x		3 x 35 mm - 4 x 50 mm - 4 x 75 mm 3 x 100 mm
6 x		35 mm

Tool holder with straight end Ø 6 mm

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	Ø mm	L mm	g	
860.0801	6,0	50.0	30	
860.0802	6,0	100.0	40	
860.0803	6,0	150.0	40	

Double tool holder with angled hook end Ø 6 mm

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel



	Ø mm	L mm	g	
860.0812	6,0	35.0	60	
860.0813	6,0	50.0	60	
860.0814	6,0	75.0	80	
860.0815	6,0	150.0	110	

Double tool holder with straight end Ø 6 mm

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel



	Ø mm	L mm	g	
860.0820	6,0	35.0	60	
860.0821	6,0	50.0	80	
860.0822	6,0	75.0	110	

Tool holder with vertical hook end Ø 6 mm

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	Ø mm	L mm	g	
860.0809	6,0	35.0	30	
860.0810	6,0	75.0	40	
860.0811	6,0	125.0	90	

Tool holder with angled hook end Ø 6 mm

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	Ø mm	L mm	g	
860.0804	6,0	50.0	30	
860.0805	6,0	100.0	40	
860.0806	6,0	150.0	50	
860.0807	6,0	200.0	60	

Double tool holder with vertical hook end Ø 6 mm

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	Ø mm	L mm	g	
860.0816	6,0	35.0	60	
860.0817	6,0	50.0	70	
860.0818	6,0	75.0	90	
860.0819	6,0	150.0	100	

Tool clip, single small

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	Ø mm	g	
860.0824	6,0	20	
860.0825	10,0	20	
860.0826	13,0	20	
860.0827	16,0	20	
860.0828	19,0	20	

Angled hook for nuts and sockets Ø 6 mm

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	Ø mm	L mm	g	
860.0823	6,0	40.0	30	

Power tool holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	Ø mm	g	
860.0841	40,0	50	
860.0842	60,0	70	
860.0843	80,0	80	

Tool clip, double small

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	Ø mm	g	
860.0829	6,0	40	
860.0830	10,0	40	
860.0831	13,0	40	
860.0832	16,0	40	
860.0833	19,0	50	

Pliers holder depth 20 mm

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	Ø mm	g	
860.0837	35,0	60	
860.0838	55,0	50	
860.0839	75,0	60	

Tool holder 3 way

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

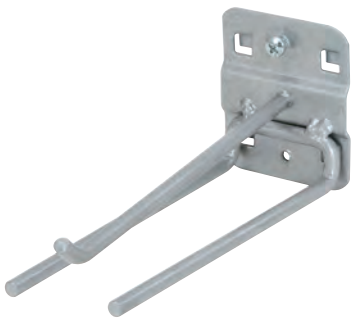

	Ø mm	L mm	g	
860.0844	6,0	150.0	150	

Tool clip, single large

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel



	Ø mm	g	
860.0834	25,0	50	
860.0835	28,0	50	
860.0836	32,0	50	

Round holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	L mm	B mm	g	
860.0840	65.0	25.0	70	

Cable holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

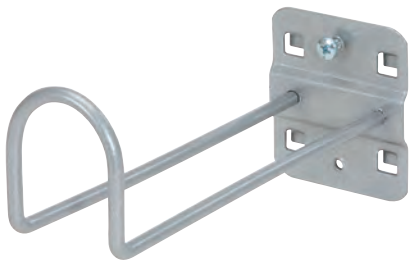

	L mm	B mm	H mm	g	
860.0874	150.0	37.0	50.0	110	
860.0875	200.0	37.0	50.0	120	

Tool holder for euro blister packaging

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel



	L mm	B mm	g	
860.0876	125.0	40.0	80	
860.0877	150.0	40.0	90	

Screwdriver holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	No. holes	L mm	B mm	g	
860.0850	6	150.0	55.0	170	
860.0851	12	150.0	55.0	320	

Storage shelf without partition

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

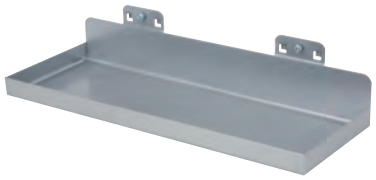

	L mm	B mm	kg	
860.0857	350.0	125.0	1.10	
860.0858	450.0	150.0	1.50	

Six way tool holder hook ends 45° angled

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

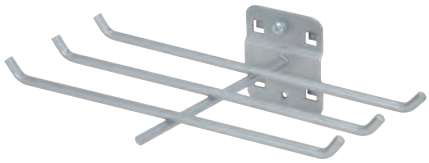

	Ø mm	L mm	B mm	g	
860.0845	6,0	240.0	140.0	240	

Drill- and hexagon socket holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

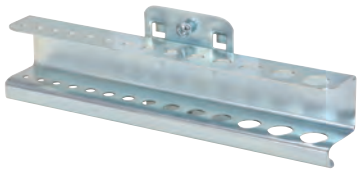

	No. holes	L mm	B mm	g	
860.0852	14	150.0	55.0	200	
860.0853	28	150.0	55.0	550	

Lin bin holder single

- For size 7 and 8
- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

		g	
860.0859	Lin bin holder single	60	

Combination holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

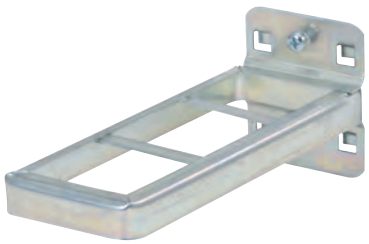

	L mm	B mm	g	
860.0846	150.0	55.0	110	

Saw holder

- To be used in pairs
- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	No. holes	L mm	g	
860.0854	4	150.0	70	

Base plate

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

		g	
860.0860	Base plate	20	
860.0861	Base plate	40	

Spanner holder horizontal

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

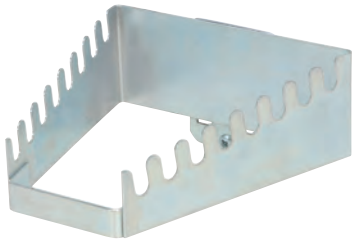

	No. holes	L mm	B mm	g	
860.0849	8	150.0	55.0	200	

Pipe holder

- To be used in pairs
- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	Ø mm	B mm	g	
860.0855	60,0	35.0	100	
860.0856	100,0	35.0	150	

Lin bin holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	B mm	H mm	g	
860.0862	550.0	40.0	520	
860.0863	550.0	60.0	660	

Spanner holder tapered for 10 spanners

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	No. holes	L mm	B mm	H mm	g
860.0864	5	145/75,0	50.0	220.0	310
860.0865	5	225/125,0	50.0	255.0	480

Can holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	No. holes	Ø mm	L mm	g
860.0866	1	70,0	100.0	170
860.0867	3	70,0	300.0	580

Pipe holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	L mm	B mm	g
860.0868	230.0	70.0	700

Small component tray with partition

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	L mm	B mm	g
860.0847	150.0	55.0	240

Small component tray without partition

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	L mm	B mm	g
860.0848	150.0	55.0	210

Universal tool holder self drill

- With plastic pad for DIY drilling
- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	L mm	B mm	g
860.0869	70.0	120.0	340
860.0870	45.0	390.0	1030

Universal tool storage box

- With wooden insert for DIY drilling
- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	L mm	B mm	H mm	kg
860.0871	155.0	120.0	55.0	1.25

Magnet set, pack of 10

- Different colours
- Ideally suited for metal surfaces
- Plastic coated magnet



	Colour code	Ø mm	g
860.0882		25,0	90
860.0883		25,0	90
860.0884		25,0	100

Sheet steel tray

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	L mm	B mm	g
860.0878	250.0	435.0	1390

Socket holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

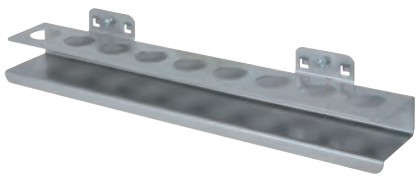

	No. holes	B mm	H mm	g
860.0873	9	390.0	30.0	150

Paper roll holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

	L mm	B mm	H mm	g
860.0879	100.0	355.0	120.0	710

Document holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

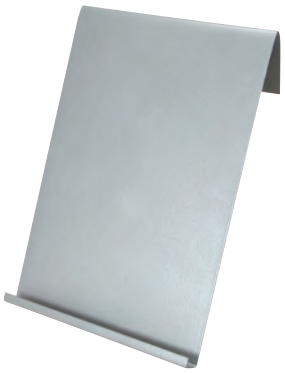

	B mm	H mm	g	
860.0880	220.0	310.0	750	

Works order holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1.5 mm
- Zinc coated
- Sheet steel

	B mm	H mm	g	
860.0881	220.0	310.0	690	

Magnetic holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1.5 mm
- Zinc coated
- Sheet steel

	Ø mm	g	
860.0885	40,0	150	

Drill holder for MK 2 and MK 3 shafts

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1,5 mm
- Zinc coated
- Sheet steel

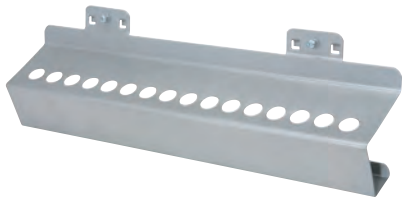

	No. holes	B mm	H mm	g	
860.0886	16	395.0	85.0	570	

Bit holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1.5 mm
- Zinc coated
- Sheet steel

	No. holes	L mm	B mm	g	
860.0887	7	35.0	150.0	150	

Hexagon socket holder

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- For Ø 1 - 11 mm
- Baseplate thickness 1.5 mm
- Zinc coated
- Sheet steel

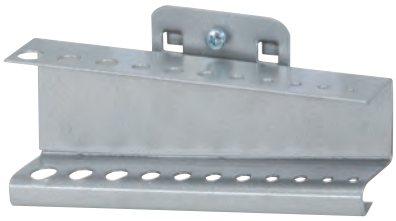

	No. holes	B mm	H mm	g	
860.0872	11	145.0	70.0	190	

Socket holder for 1/2“ sockets

- Suitable for hole measurements 10 x 10 mm hole distance 38 mm
- Includes fixi g screws
- Baseplate thickness 1.5 mm
- Zinc coated
- Sheet steel

	No. holes	g	
860.0894	6	200	
860.0895	13	360	

HOLE WALL

Hole wall gentian blue

- Versitile and practical
- 1,25 mm thick steel sheet
- Beveled all around
- Impact and scratch resistant plastic coating
- Electrostatic powder coating

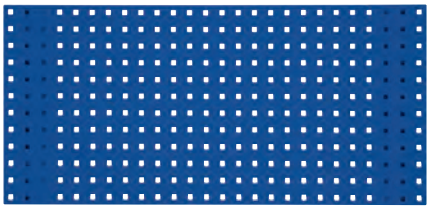

	RAL	L mm	B mm	kg	
860.0889EB	5010	500.0	450.0	2.00	
860.0890EB	5010	1000.0	450.0	5.00	
860.0891EB	5010	1500.0	450.0	7.00	
860.0892EB	5010	2000.0	450.0	9.00	

Hole wall sky blue

- Versitile and practical
- 1,25 mm thick steel sheet
- Beveled all around
- Impact and scratch resistant plastic coating
- Electrostatic powder coating

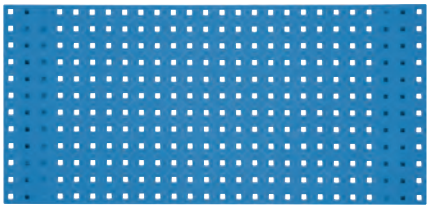

	RAL	L mm	B mm	kg	
860.0889HB	5015	500.0	450.0	2.00	
860.0890HB	5015	1000.0	450.0	5.00	
860.0891HB	5015	1500.0	450.0	7.00	
860.0892HB	5015	2000.0	450.0	9.00	

Hole wall light blue

- Versitile and practical
- 1,25 mm thick steel sheet
- Beveled all around
- Impact and scratch resistant plastic coating
- Electrostatic powder coating

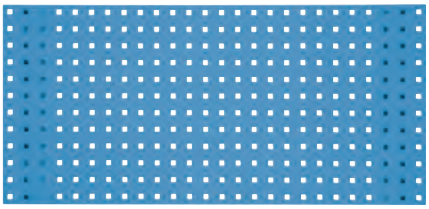

	RAL	L mm	B mm	kg	
860.0889LB	5012	500.0	450.0	2.00	
860.0890LB	5012	1000.0	450.0	5.00	
860.0891LB	5012	1500.0	450.0	7.00	
860.0892LB	5012	2000.0	450.0	9.00	

Hole wall light grey

- Versitile and practical
- 1,25 mm thick steel sheet
- Beveled all around
- Impact and scratch resistant plastic coating
- Electrostatic powder coating

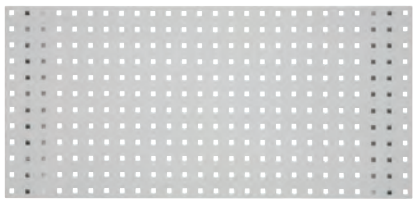

	RAL	L mm	B mm	kg
860.0889LG	7035	500.0	450.0	2.00
860.0890LG	7035	1000.0	450.0	5.00
860.0891LG	7035	1500.0	450.0	7.00
860.0892LG	7035	2000.0	450.0	9.00

Hole wall slate grey

- Versitile and practical
- 1,25 mm thick steel sheet
- Beveled all around
- Impact and scratch resistant plastic coating
- Electrostatic powder coating

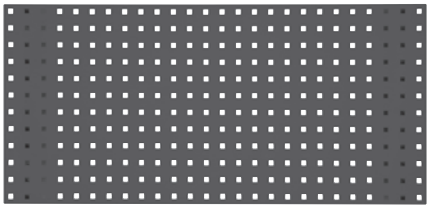

	RAL	L mm	B mm	kg
860.0889SG	7015	500.0	450.0	2.00
860.0890SG	7015	1000.0	450.0	5.00
860.0891SG	7015	1500.0	450.0	7.00
860.0892SG	7015	2000.0	450.0	9.00

Hole wall bright red

- Versitile and practical
- 1,25 mm thick steel sheet
- Beveled all around
- Impact and scratch resistant plastic coating
- Electrostatic powder coating

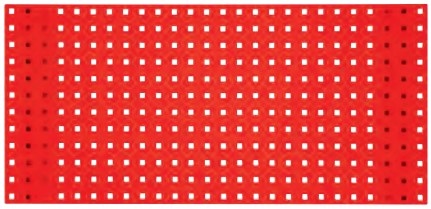

	RAL	L mm	B mm	kg
860.0889VR	3020	500.0	450.0	2.00
860.0890VR	3020	1000.0	450.0	5.00
860.0891VR	3020	1500.0	450.0	7.00
860.0892VR	3020	2000.0	450.0	9.00

Hole wall pure white

- Versitile and practical
- 1,25 mm thick steel sheet
- Beveled all around
- Impact and scratch resistant plastic coating
- Electrostatic powder coating

	RAL	L mm	B mm	kg
860.0889RW	9010	500.0	450.0	2.00
860.0890RW	9010	1000.0	450.0	5.00
860.0891RW	9010	1500.0	450.0	7.00
860.0892RW	9010	2000.0	450.0	9.00

Hole wall jet black

- Versitile and practical
- 1,25 mm thick steel sheet
- Beveled all around
- Impact and scratch resistant plastic coating
- Electrostatic powder coating

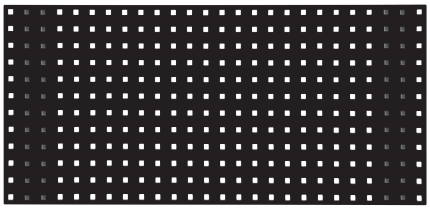

	RAL	L mm	B mm	kg
860.0889TS	9005	500.0	450.0	2.00
860.0890TS	9005	1000.0	450.0	5.00
860.0891TS	9005	1500.0	450.0	7.00
860.0892TS	9005	2000.0	450.0	9.00

Hole wall reseda green

- Versitile and practical
- 1,25 mm thick steel sheet
- Beveled all around
- Impact and scratch resistant plastic coating
- Electrostatic powder coating

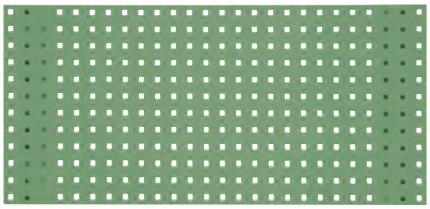

	RAL	L mm	B mm	kg
860.0889RG	6011	500.0	450.0	2.00
860.0890RG	6011	1000.0	450.0	5.00
860.0891RG	6011	1500.0	450.0	7.00
860.0892RG	6011	2000.0	450.0	9.00

Hole wall bright gold

- Versitile and practical
- 1,25 mm thick steel sheet
- Beveled all around
- Impact and scratch resistant plastic coating
- Electrostatic powder coating

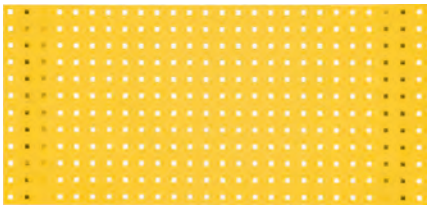

	RAL	L mm	B mm	kg
860.0889VG	1023	500.0	450.0	2.00
860.0890VG	1023	1000.0	450.0	5.00
860.0891VG	1023	1500.0	450.0	7.00
860.0892VG	1023	2000.0	450.0	9.00

SERVICE TROLLEYS

Workshop service trolley

- Made from robust sheet steel construction
- Non slip foam insert on the upper working surface
- Lower shelf with high retaining border
- 2 castor wheels 100 mm
- 2 castor wheels with brake 100 mm
- High level of stability

Technical data:
Total load capacity: 200 kg

	L mm	B mm	H mm	kg
890.0002	697.0	489.0	836.0	19.10

Workshop service trolley

- Extremely substaintial plastic construction
- Without screws easily costructed
- Distance between the ground 30 cm
- 2 castor wheels 100 mm
- 2 castor wheels with brake 100 mm
- High level of stability
- Light profile eight
- Columns made out of anodised aluminum

Technical data:
Total load capacity: 200 kg

	L mm	B mm	H mm	kg
800.0020	860.0	480.0	1010.0	12.10

Workshop service trolley with lining

- Extremely substaintial plastic construction
- Equipment lining
- Without screws easily costructed
- Distance between the ground 30 cm
- 2 castor wheels 100 mm
- 2 castor wheels with brake 100 mm
- High level of stability
- Light profile eight
- Columns made out of anodised aluminum

Technical data:

Total load capacity: 200 kg

	L mm	B mm	H mm	kg
800.0021	860.0	480.0	1010.0	12.10

Workshop service trolley with 2 drawers

- Extremely robust plastic construction
- Easily constructed without screws
- Two ball bearing drawer runner guides
- 2 castor wheels 100 mm
- 2 castor wheels with brake 100 mm
- High level of stability
- Light profile eight
- Columns made out of anodised aluminum

Technical data:

Drawer dimensions: H 85 x B 430 x T 520 mm

Total load capacity: 200 kg

Load capacity of each drawer: 35 kg

	L mm	B mm	H mm	kg
800.0030	860.0	480.0	1010.0	14.20

Workshop service trolley with 2 drawers and lining

- Extremely substaintial plastic construction
- Without screws easily costructed
- Two ball bearing drawer runner guides
- 2 castor wheels 100 mm
- 2 castor wheels with brake 100 mm
- High level of stability
- Light profile eight
- Columns made out of anodised aluminum

Technical data:

Drawer dimensions: H 85 x B 430 x T 520 mm

Total load capacity: 200 kg

Load capacity of each drawer: 35 kg

	L mm	B mm	H mm	kg
800.0031	860.0	480.0	1010.0	15.00

PLATFORM TROLLEY

Tyres platform trolley

- Solid construction of steel sheet
- Firmly fi ed grasping handle made from steel tube
- Grasping handle is hinged and locked with safety security catches without any tools
- In minimal time
- Rubbber surrounding edges protect the trolley and surrounds ings from damage
- With 4 ball baering rubber wheels, 2 with steering
- Load area has a plastic covering

Technical data:

Wheel diameter: 100 mm

Total load capacity: 150 kg

	L mm	B mm	H mm	kg
800.0015	740.0	480.0	810.0	9.20

PLATFORM

Aluminium work platform

- Skid proof profile on he platform stage
- Chequer plate profile on he steps
- Double sided usage
- Large platform for safe standing
- Safety clips for added security
- Beams and step made from aluminium
- Easy to store as the unit is fully collapsible
- The gripped plastic feet protect the surface and add stability
- Substaitial aluminium construction

Technical data:

Platform dimensions: 1000 x 300 mm

Total load capacity: 150 kg

	L mm	B mm	H mm	kg
800.0960	1345.0	405.0	480.0	7.30

Safety assembly step

- No tipping over through obliquely placed standing feet
- Anti slip, hot dip galvanised, with the frame riveted lattice rustproof
- Step to DIN 50976
- Massive and distortion stiff steel tube construction
- Base frame plastic coated
- The gripped plastic feet protect the surface and add stability
- Applicable e.g. panel assembly, engine compartment works, roof works truck pit working
- Universal suitable in very high vehicles e.g. motor homes, small vehicles, truck and buses, terrain vehicles

Technical data:

Height 2nd step: 450.0 mm

Surface area: 690 x 620

Steel grating: 590 x 290

Total load capacity: 300 kg

		kg
450.0960	Safety assembly step	14.00

SUPPORTS

Windscreen table with rubber protective pads

- Fully adjustably
- The four large rubber pads hold the windscreen safely in position
- For nearly all windscreen sizes
- Capacity up to 80 kg
- Made from zinc coated steel tube

	L mm	H mm	Suction cup Ø mm	kg
140.2225	1030.0	1040.0	125.0	8.40

Windscreen holder

- Fully adjustably
- For nearly all windscreen sizes
- Robust construction
- Capacity up to 80 kg
- Slip proof holding bar offer optimal hold
- Made from zinc coated steel tube

	L mm	H mm	kg
140.2226	1030.0	940.0	6.60

Universal telescopic multi purpose trolley

- Ideally for the car body restoration, panel spraying area or for windshields
- Universal application the all rounder both height and width adjustable
- After use space saving folding away
- Rubber underside to prevent damage to the paintwork and other panels
- 4 substaintial wheels, 2 with locking brakes
- Simple handling
- Capacity up to 100 kg
- Robust construction made from square tube

	B mm	H mm	kg
500.8100	257,0-1380,0	845,0-1320,0	23.50

TRANSPORT TROLLEY

Telescopic sack trolley with pneumatic wheels

- Steel tubular structure with deep welded joints
- Light and agile transportation for use in smallest space
- Effortless receiving and transporting of packages, carton and all other objects
- From round tubes welded together manufactured and solid
- Fold away shovel base
- High quality telescopic pole
- Equiped with 2 fi ed wheels with pneumatic tyres
- Safety handles and slip protection
- Perfectly suitable in industry and business

Technical data:

Tyre size:	Ø 260 x 80 mm
Shovel/base dimensions:	B 300 x T 350 mm
Min. dimensions:	810.0 mm
Max. dimensions:	1140.0 mm

	Max load kg	L mm	B mm	H mm	kg
160.0224	120.0 kg	630.0	480.0	1140.0	10.00

Transport sack trolley with pneumatic wheels

- Steel tubular structure with deep welded joints
- Light and agile transportation for use in smallest space
- Effortless receiving and transporting of packages, carton and all other objects
- From round tubes welded together manufactured and solid
- Very wide shovel base
- Equiped with 2 fi ed wheels with pneumatic tyres
- Safety handles and slip protection
- Perfectly suitable in industry and business

Technical data:

Tyre size:	Ø 260 x 85 mm
Shovel/base dimensions:	W 400 x D 170 mm

	Max load kg	L mm	B mm	H mm	kg
160.0225	250.0 kg	430.0	550.0	1100.0	10.00

Transport sack trolley with full rubber tyres

- Steel tubular structure with deep welded joints
- Light and agile transportation for use in smallest space
- Effortless receiving and transporting of packages, carton and all other objects
- From round tubes welded together manufactured and solid
- Equiped with 2 fi ed full rubber wheels
- Safety handles and slip protection
- Perfectly suitable in industry and business

Technical data:

Tyre size:	Ø 255 x 46 mm
Shovel/base dimensions:	W 400 x D 170 mm

	Max load kg	L mm	B mm	H mm	kg
160.0228	250.0 kg	430.0	560.0	1100.0	17.00

Transport sack trolley with pneumatic wheels

- Steel tubular structure with deep welded joints
- Light and agile transportation for use in smallest space
- Effortless receiving and transporting of packages, carton and all other objects
- From round tubes welded together manufactured and solid
- Fold away shovel base
- Equiped with 2 fi ed wheels with pneumatic tyres
- Safety handles and slip protection
- Perfectly suitable in industry and business

Technical data:

Tyre size:	Ø 260 x 85 mm
Shovel/base dimensions:	W 400 x D 170 mm
Platform:	W 330 x D 520 mm

	Max load kg	L mm	B mm	H mm	kg	
160.0226	250.0 kg	775.0	550.0	1100.0	10.00	

Transport trolley with full rubber tyres

- Steel tubular structure with deep welded joints
- Light and agile transportation for use in smallest space
- Effortless receiving and transporting of packages, carton and all other objects
- From round tubes welded together manufactured and solid
- Fold away shovel base
- Equiped with 2 fi ed full rubber wheels
- Safety handles and slip protection
- Perfectly suitable in industry and business

Technical data:

Tyre size:	Ø 255 x 46 mm
Shovel/base dimensions:	W 400 x D 170 mm
Platform:	W 330 x D 520 mm

	Max load kg	L mm	B mm	H mm	kg	
160.0229	250.0 kg	775.0	560.0	1100.0	19.00	

Sack trolley with full rubber three staged wheels

- Steel tubular structure with deep welded joints
- Light and agile transportation for use in smallest space
- Effortless receiving and transporting of packages, cartons and all other objects
- From round tubes welded together manufactured and solid
- Fold away shovel base
- Problem free overcoming of stairs
- Full rubber three staged wheels
- Perfectly suitable in industry and business

Technical data:

Tyre size:	Ø 160 x 30 mm
Shovel/base dimensions:	W 400 x D 170 mm
Platform:	W 330 x D 520 mm

	Max load kg	L mm	B mm	H mm	kg	
160.0227	250.0 kg	900.0	610.0	1285.0	15.00	

PROTECTIVE KNEELING MATS

Mechanics protection mat

- Helps the mechanic to work easier and safer whilst working in the lower area of vehicles on uneven surfaces
- Moisture and dirt resistant
- Work garments and knees stay dry, clean and protected
- 3 layered padded construction from soft material
- Integrated hand grip
- Petrol and oil resistant
- Universal use in workshops, service and breakdown service vehicles

	L mm	B mm	H mm	g	
500.8040	480.0	320.0	36.0	200	
500.8045	1150.0	550.0	36.0	760	

STOOLS

Mobile workshop stool

- Robust and mobile stool
- Storage area for the protection of tools and small parts
- Washable cushion
- Four ball bearing solid rubber wheels
- Maximum capacity up to 90 kg
- Construction from robust steel square tube

	L mm	B mm	H mm	kg	
500.8020	440.0	360.0	360.0	4.00	

Mobile and height adjustable workshop stool

- Robust and mobile stool
- Storage area for the protection of tools and small parts
- Washable cushion
- Hydraulic height adjustment
- Five ball bearing solid rubber wheels
- Maximum capacity up to 90 kg
- Durable metal construction

	B mm	H mm	kg	
500.8030	370.0	540.0	7.30	

AXLE STANDS

Aluminium axle stand set

- Especially light and stabile
- High level of stability due to the diameter of the base plate
- Safety locking bolt with chain
- Suits itself especially well in combination with jack for the safe bracing of a load
- Aluminium

	Max load t	Stroke way mm	Min total height mm	Max total height mm	kg	
160.0315	3,0	140.0	260.0	400.0	2.20	

Steel axle stands with quick adjustment

- 4 feet on each stand
- Solid construction
- For heavy vehicles weights
- High level of stability
- Lifting bar made from cast steel
- Quick adjustment
- Supplied in pairs
- Height adjustment has 13 stages
- Suits itself especially well in combination with jack for the safe bracing of a load
- Made from solid steel

	Max load t	Stroke way mm	Min total height mm	Max total height mm	kg	
160.0370	3,0	130.0	295.0	425.0	8.00	
160.0371	6,0	205.0	400.0	605.0	15.00	
160.0372	12,0	250.0	480.0	730.0	26.00	

LIFTING TOOLS

Hydraulic bottle jack 2 - 50 t

- Security valve against overload
- Telescopic piston pole
- Additional spindle for extension (not in 30 and 50 t executions)
- Two piece lever arms
- For heavy vehicles weights
- Especially suitable for narrow hard to access areas
- High level of stability
- Ideally suited in combination with jack for the neutralizing and bracing of a load
- Heavy steel construction

	Max load t	Min total height mm	Max total height mm	Hydraulic lift mm	Screw extension mm	Dimension of base plate mm	kg	
160.0350	2,0	181.0	345.0	116.0	48,0	88 x 92	2.90	
160.0351	3,0	194.0	372.0	118.0	60,0	92 x 100	3.80	
160.0352	5,0	216.0	413.0	127.0	70,0	96 x 112	5.10	
160.0354	10,0	230.0	460.0	150.0	80,0	110 x 127	7.10	
160.0356	15,0	230.0	460.0	150.0	80,0	113 x 136	9.30	
160.0358	20,0	242.0	452.0	150.0	60,0	144 x 155	11.90	
160.0359	30,0	285.0	465.0	180.0	-	190 x 155	21.70	
160.0360	50,0	300.0	480.0	180.0	-	218 x 176	30.70	

Jack for forklifts, hydraulic 4 - 5 t

- Specially developed for forklifts, agricultural and industrial vehicles
- Combination lifting jack with scissor action
- Scissor capacity of 4 tons and cylinder capacity of 5 tons
- Steal wheels

	Max capacity t	Stroke way mm	Min total height mm	Max total height mm	Total length mm	kg	
160.0716	5,0	365.0	75.0	440.0	700.0	44.00	

WORKSHOP EQUIPMENT

Mobile cleaning station for small parts

- Mounted metal reservoir with 60 lt tank capacity
- Includes compressed air operated drying pistol
- Cleaning brush with strong bristles
- Emptying of the collecting container by means of pneumatic air
- Includes level indicator display
- Safety valve for the vacuum production and pressure emptying
- High quality 2 m tube and compressed air pistol
- Good maneuverability due to the two solid rubber direct castors
- Storage compartment for small parts
- Includes stop handles
- Especially suitable for use in the car industry
- Ideally suited for removing of stubborn soiling
- Base unit made out of cast iron

Technical data:

Operating pressure:	6,3 bar (90 psi)
Collecting tank:	500 x 810 x 130 mm

	L mm	B mm	H mm	kg	
160.0040	490.0	580.0	1040.0	54.00	

TOOL CABINET / INSERT MODULE SYSTEM

KSTOOLS®

Innovation is our mission!

	PAGE
TOOL BAGS AND BOXES	436 - 437
TOOL BOXES	437
BASIC*line* TOOL CABINETS	438 - 439
BASICline ACCESSORIES	439
MASTER*line* TOOL CABINETS	439 - 441
MASTER*line* ACCESSORIES	442
ULTIMATE*line* TOOL CABINETS	442 - 443
ULTIMATE*line* ACCESSORIES	444 - 445
SCS SYSTEM INSERT SETS	448 - 451
1/3 SCS - SPANNER	453 - 454
1/3 SCS - SOCKET WRENCH 1/4“	455 - 457
1/3 SCS - SOCKET WRENCH 3/8“	457 - 459
1/3 SCS - SOCKET WRENCH 1/2“	459 - 463
1/3 SCS - SOCKET WRENCH 1/4“ + 1/2”	463 - 464
1/3 SCS - SOCKET WRENCH 1/4“ + 3/8” + 1/2”	464
1/3 SCS - IMPACT SOCKET WRENCH	465
1/3 SCS - SCREWDRIVER	465 - 466
1/3 SCS - PLIERS	466 - 467
1/3 SCS - VDE	467
1/3 SCS - MEASURING AND CHECKING TOOL	467
1/3 SCS - PULLER	468
1/3 SCS - WORKSHOP SUPPLIES	468
1/3 SCS - EMPTY INSERTS	468
2/3 SCS - SPANNER	469 - 470
2/3 SCS - SOCKET WRENCH 1/4“	470 - 471
2/3 SCS - SOCKET WRENCH 3/8“	471
2/3 SCS - SOCKET WRENCH 1/2“	472 - 474
2/3 SCS - SOCKET WRENCH 1/4“ + 1/2”	474
2/3 SCS - SOCKET WRENCH 1/4“ + 3/8” + 1/2”	475
2/3 SCS - SCREWDRIVER	475 - 476
2/3 SCS - WORKSHOP SUPPLIES	476
2/3 SCS - EMPTY INSERTS	476
1/1 SCS - SPANNER	476 - 480
1/1 SCS - SOCKET WRENCH 1/4“	480
1/1 SCS - SOCKET WRENCH 1/2“	481 - 482
1/1 SCS - SOCKET WRENCH 3/4“	482
1/1 SCS - SOCKET WRENCH 1/4“ + 3/8”	482 - 484
1/1 SCS - SOCKET WRENCH 1/4“ + 1/2”	484 - 485
1/1 SCS - SOCKET WRENCH 3/8” + 1/2”	485 - 486
1/1 SCS - SOCKET WRENCH 1/4“ + 3/8” + 1/2”	486 - 489
1/1 SCS - IMPACT SOCKET WRENCH	490
1/1 SCS - SCREWDRIVER	490 - 491
1/1 SCS - PLIERS	491 - 492
1/1 SCS - HAMMER & CHISEL	493
1/1 SCS - WORKSHOP SUPPLIES	493 - 495
1/1 SCS - EMPTY INSERTS	495

TOOL CABINETS

4 colours, 4 drawer configurations, 3 tool cabinet ranges
= 48 tool cabinet variants!

Tool cabinets BASIC*Line*

BASIC *Line*

- Robust and stable steel construction with 0.8 mm sheet steel - distortion resistant
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- With full width metal handle
- 2 fi ed wheels Ø 100 mm
- 2 castor wheels Ø 100 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating

1 stage locking mechanism:

- Central locking system on all drawers through the cylinder lock

Tool cabinets MASTER*Line*

MASTER *Line*

- Very stable steel construction with 0.9 mm sheet steel - distortion resistant
- High level of stability
- Recessed rear and side walls with metal peg board for mounting different accessories
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- With full width polyurethane coated metal handle
- 2 fi ed wheels Ø 125 mm
- 2 castor wheels Ø 125 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating

2 stage locking mechanism:

- Central locking system on all drawers through the cylinder lock
- Handle locking system prevents unintentional opening

Tool cabinets ULTIMATE*Line*

ULTIMATE *Line*

- Extremly robust and stable steel construction with 1.0 mm sheet steel - distortion resistant
- Due to resilient heavy secure steel plate construction
- Very high level of stabilbilty and safety - as a maximum one drawer can be opened at a time
- Robust corner protection due to the aluminium reinforcement
- Recessed rear and side walls with metal peg board for mounting different accessories
- Ball bearing drawer runners with automatic spring return
- Drawers are 100% extendable
- Drawers with non slip rubber mat
- Robust ABS work surface with tool holders and storage recesses
- With side mounted handle
- 2 fi ed wheels Ø 125 mm
- 2 castor wheels Ø 125 mm with rolling and turning brake
- Full width aluminium drawer handle
- Electrostatic powder coating

3 stage locking mechanism:

- Central locking system on all drawers through the cylinder lock
- Handle lockind system prevents unintentional opening
- Central locking system with individual drawer locking system independent locking mechanism if required where needed

	BASIC *Line*	MASTER *Line*	ULTIMATE *Line*
Optimal accessories	-	**	*****
Safety chamfered	-	-	✓
Aluminium edge structure	-	-	✓
Square punching in side drawers and back wall	-	✓	✓
Drawers with automatic entry	-	-	✓
Plate thickness	0,8 mm	0,9 mm	1,0 mm
Load capacity of each drawer	30 kg	40 kg	45 kg
Total load capacity	350 kg	450 kg	600 kg
Wheel diameter	100 mm	125 mm	125 mm

TOOL BAGS AND BOXES

Textile hammer holder with belt loop

- Ideal for claw hammer
- Unrestricted movement enables total freedom
- Made out of tear resistant polyester webbing
- With rust proof loop

		g
850.0304	Textile hammer holder with belt loop	130

Universal work waistcoat

- Multi functional with many storage possibilities
- Universal size with 2 adjustable belts
- Includes case for a mobile phone
- Made out of tear resistant polyester webbing

		g
850.0303	Universal work waistcoat	470

Professional tool belt

- Multi functional with many pockets and holders
- Universal size - stepless adjustable up to 120 cm size
- Includes case for a mobile phone
- 2 Hammer holders with rust free metal hooks
- Hook for a tape measure
- Strong belt upholstery for a high level of comfort
- Made out of tear resistant polyester webbing

		g
850.0302	Professional tool belt	920

SMARTBAG universal tool case

- Practical arrangement of compartments in the internal and external areas
- Ideal for accommodating of tools and accessories
- Padded carry handle
- Shoulder strap with strengthening in the shoulder area
- Through fl xible hood locking with hook and loop fastener
- Includes 2 small part component trays
- Numerous pockets
- Strong design due to the plastic reinforcement
- Made out of tear resistant polyester webbing

	L mm	B mm	H mm	kg
850.0300	420.0	230.0	260.0	2.25

SMARTBAG universal tool case XL

- Practical arrangement of compartments in the internal and external areas
- Ideal for accommodating of tools and accessories
- Padded carry handle
- Shoulder strap with strengthening in the shoulder area
- Through fl xible hood locking with hook and loop fastener
- Numerous pockets
- Strong design due to the plastic reinforcement
- Made out of tear resistant polyester webbing

	L mm	B mm	H mm	kg
850.0325	520.0	250.0	340.0	2.40

Toolcase with telescopic trolley, empty

- 8 practically arranged storage pockets on the outside area
- 15 practically arranged storage pockets in the internal area
- Ideal for accommodating of tools, accessories and documents
- Padded carry handle
- Robust zipper
- Strong design due to the plastic reinforcement
- With wide rollers and standing feet for firm tanding
- Telescopic carrying handle
- Made out of tear resistant polyester webbing

	L mm	B mm	H mm	kg
850.0305	500.0	280.0	400.0	3.25

ABS hard protective tool case

- Strong hard protective case made from impact resistant plastic
- 1 tool board for indvidual tool mounting
- Lower case shell is on divisible through internal dividers
- Lockable through two locks
- Capacity up to 30 kg

	L mm	B mm	H mm	kg
850.0520	465.0	335.0	150.0	6.00

ABS hard protective case with removable telescopic trolly

- Strong hard protective case made from impact resistant plastic
- Document compartment in upper lid
- 2 tool boards for indvidual tool mounting
- Lower case shell is on divisible through internal dividers
- Lockable through two locks
- Carrying handle with telescopic removable frame
- Capacity up to 30 kg

	L mm	B mm	H mm	kg
850.0530	435.0	310.0	160.0	6.00

ABS gard protective tool case with aluminium frame

- Strong hard protective case made from impact resistant plastic with aluminium frame
- Document compartment in upper lid
- 2 removable tool boards for indvidual tool mounting
- Lower case shell is on divisible through internal dividers
- Lockable through two locks
- Capacity up to 30 kg

	L mm	B mm	H mm	kg
850.0540	471.0	338.0	154.0	3.40

ABS hard protective tool case with hardened aluminium frame

- Strong hard protective case made from impact resistant plastic with hardened aluminium frame
- Document compartment in upper lid
- 2 removable tool boards for indvidual tool mounting
- Lower case shell is on divisible through internal dividers
- Lockable through two locking fastening catches
- Capacity up to 30 kg

	L mm	B mm	H mm	kg
850.0560	460.0	310.0	180.0	4.50

Leather tool case

- Strong tool case made from environment friendly quality leather
- Includes removable shoulder strap with shoulder protection
- Edges reinforced with aluminum capping
- Folding front wall enables easy access to the tools
- 18 practically arranged storage pockets in the internal area
- 2 Loops on the side walls
- Inner area completely reinforced
- Lockable through two fastening catches
- Standing feet for sensitive surfaces
- Capacity up to 30 kg

	L mm	B mm	H mm	kg	
850.0310	420.0	150.0	250.0	2.60	

TOOL BOXES

Sheet steel toolbox, 5 compartments

- with riveted hinges
- Compartments can be pulled all the way out
- Highly stable
- Double-seamed edges
- Lockable with padlock
- Red powder coating
- Made of electrolytically galvanised sheet steel

	L mm	B mm	H mm	kg	
999.0120	420.0	200.0	190.0	3.45	
999.0125	550.0	200.0	190.0	5.60	

Universal plastic tool box

- Multi functional for various storage possibilities
- Includes 2 removable trays for small parts
- Capacity up to 10 kg
- Made from robust plastic

	L mm	B mm	H mm	kg	
850.0505	475.0	240.0	240.0	1.70	

Mobile plastic sheet steel tool box

- Strong hard protective case made from impact resistant plastic and sheet steel
- Multi-functional for various storage possibilities
- Made of 3 interchangeable stackable parts
- Lockable with two fastening catches
- Telescopic carrying handle
- With wide rollers and standing feet for firm tanding
- Load capacity up to 75 kg

	L mm	B mm	H mm	kg	
850.0340	520.0	320.0	720.0	15.00	

Plastic sheet steel toolboxes

- Strong hard protective case made from impact resistant plastic and sheet steel
- Multi-functional for various storage possibilities
- Includes a removable tray for small parts
- Lockable with two fastening catches
- With retractable two component handle
- Lockable with padlock
- Load capacity up to 30 kg

	L mm	B mm	H mm	kg	
850.0345	582.0	298.0	255.0	3.25	
850.0350	470.0	238.0	203.0	2.00	
850.0355	395.0	180.0	170.0	1.40	

Plastic sheet steel toolbox set

- Sturdy hard protective case made from impact resistant plastic and sheet steel
- Multi-functional for various storage possibilities
- Includes a removable tray for small parts
- Lockable with two fastening catches
- With retractable two component handle
- Lockable with padlock
- Load capacity up to 30 kg

			kg	
850.0360	3 pcs	Plastic sheet steel toolbox set	6.70	

consists of:

		kg	
850.0345	Plastic sheet steel tool box, L582 x W298 x H255 mm	3.25	
850.0350	Plastic sheet steel tool box, L470 x W238 x H203 mm	2.00	
850.0355	Plastic sheet steel tool box, L395 x W180 x H170 mm	1.40	

Tool chest with 3 drawers - red

- Robust and stable steel construction with 0,8 mm sheet steel - distortion resistant
- High level of stability
- Central locking system on all drawers through the cylinder lock
- With integrated storage compartment in the lid
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Continuous handle with 2,5 mm contrasting chrome plated steel
- Good comprehensive view due to possibility of marking the individual drawers
- Includes interchangeable paper strip in the handle strip

Drawer internal dimensions: 489 x 222 mm
Total load capacity: 50 kg
Load capacity of each drawer: 10 kg

	L mm	B mm	H mm	kg	
891.0003	508.0	303.0	255.0	11.68	

Tool chest with 3 drawers - black

- Robust and stable steel construction with 0,8 mm sheet steel - distortion resistant
- High level of stability
- Central locking system on all drawers through the cylinder lock
- With integrated storage compartment in the lid
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Continuous handle with 2,5 mm contrasting chrome plated steel
- Good comprehensive view due to possibilty of marking the individual drawers
- Includes interchangeable paper strip in the handle strip

Drawer internal dimensions: 489 x 222 mm
Total load capacity: 50 kg
Load capacity of each drawer: 10 kg

	L mm	B mm	H mm	kg	
801.0003	508.0	303.0	255.0	12.27	

BASIC*line* TOOL CABINETS

BASIC*line* GRAY/SILVER tool cabinet with 1-stage locking concept

- Robust and stable steel construction with 0,8 mm sheet steel - distortion resistant
- High level of stability
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10mm durable foam insert mat
- Full width metal handle
- Two fi ed wheels Ø 100 mm
- Two castor wheels Ø 100 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating
- Combination with inserts

Total capacity:	B 678 x H 990 x T 459 mm
Drawer internal dimensions	565 x 395 mm
Total load capacity:	350,0 kg
Load capacity of each drawer:	30,0 kg

		no	75 mm	150 mm	kg	
835.0004		4	4	-	56.50	
835.0005		5	1	4	59.00	
835.0007		7	5	2	51.29	
835.0009		9	9	-	69.00	

BASIC*line* BLACK/RED tool cabinet with 1-stage locking concept

- Robust and stable steel construction with 0,8 mm sheet steel - distortion resistant
- High level of stability
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10mm durable foam insert mat
- Full width metal handle
- Two fi ed wheels Ø 100 mm
- Two castor wheels Ø 100 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating
- Combination with inserts

Total capacity:	B 678 x H 990 x T 459 mm
Drawer internal dimensions	565 x 395 mm
Total load capacity:	350,0 kg
Load capacity of each drawer:	30,0 kg

		no	75 mm	150 mm	kg	
836.0004		4	4	-	56.50	
836.0005		5	1	4	59.00	
836.0007		7	5	2	51.29	
836.0009		9	9	-	69.00	

BASIC*line* BLUE/SILVER tool cabinet with 1-stage locking concept

- Robust and stable steel construction with 0,8 mm sheet steel - distortion resistant
- High level of stability
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10mm durable foam insert mat
- Full width metal handle
- Two fi ed wheels Ø 100 mm
- Two castor wheels Ø 100 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating
- Combination with inserts

Total capacity:	B 678 x H 990 x T 459 mm
Drawer internal dimensions	565 x 395 mm
Total load capacity:	350,0 kg
Load capacity of each drawer:	30,0 kg

		no	75 mm	150 mm	kg	
837.0004		4	4	-	56.50	
837.0005		5	1	4	59.00	
837.0007		7	5	2	51.29	
837.0009		9	9	-	69.00	

BASIC*line* GRAY/SILVER tool cabinet top chest with 1-stage locking concept

- Robust and stable steel construction with 0,8 mm sheet steel - distortion resistant
- High level of stability
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10mm durable foam insert mat
- Side mounted carry handles
- Side mounted handle
- Combination with tool cabinet

Total capacity:	B 678 x H 451 x T 459 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	175,0 kg
Load capacity of each drawer:	30,0 kg

		no	75 mm	150 mm	kg	
835.0014		4	4	-	36.00	

BASIC*line* BLACK/RED tool cabinet top chest with 1-stage locking concept

- Robust and stable steel construction with 0,8 mm sheet steel - distortion resistant
- High level of stability
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Side mounted carry handles
- Side mounted handle
- Combination with tool cabinet

Total capacity:	B 678 x H 451 x T 459 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	175,0 kg
Load capacity of each drawer:	30,0 kg

		no	75 mm	150 mm	kg	
836.0014		4	4	-	36.00	

BASIC*line* BLUE/SILVER tool cabinet top chest with 1-stage locking concept

- Robust and stable steel construction with 0,8 mm sheet steel - distortion resistant
- High level of stability
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10mm durable foam insert mat
- Side mounted carry handles
- Side mounted handle
- Combination with tool cabinet

Total capacity:	B 678 x H 451 x T 459 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	175,0 kg
Load capacity of each drawer:	30,0 kg

		no	75 mm	150 mm	kg	
837.0014		4	4	-	36.00	

BASIC*line* BLACK/SILVER tool cabinet with 1-stage locking concept

- Robust and stable steel construction with 0,8 mm sheet steel - distortion resistant
- High level of stability
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10mm durable foam insert mat
- Full width metal handle
- Two fi ed wheels Ø 100 mm
- Two castor wheels Ø 100 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating
- Combination with inlays

Total capacity:	B 678 x H 990 x T 459 mm
Drawer internal dimensions	565 x 395 mm
Total load capacity:	350,0 kg
Load capacity of each drawer:	30,0 kg

		no	75 mm	150 mm	kg	
838.0004		4	4	-	56.50	
838.0005		5	1	4	59.00	
838.0007		7	5	2	51.29	
838.0009		9	9	-	69.00	

BASIC*line* BLACK/SILVER tool cabinet top chest with 1-stage locking concept

- Robust and stable steel construction with 0,8 mm sheet steel - distortion resistant
- High level of stability
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Side mounted carry handles
- Side mounted handle
- Combination with tool cabinet

Total capacity:	B 678 x H 451 x T 459 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	175,0 kg
Load capacity of each drawer:	30,0 kg

		no	75 mm	150 mm	kg	
838.0014		4	4	-	36.00	

BASICline ACCESSORIES

Drawer divider set

- For use only in drawers with inside dimensions 565 x 395 mm
- Partitioning possibilities for various utensils
- Individually adjustable
- Sheet steel

			kg	
875.9940	23 pcs	Drawer divider set	3.00	

consists of:

		kg
875.9941	Mounting for part system, slotted, 565x50x1.5 mm	0.53
875.9942	Coarse divider, slotted, 393x50x1.5 mm	1.20
875.9943	Fine divider, non slotted, 188x50x1.5 mm	0.45
875.9944	Fine divider, non slotted, 150x50x1.5 mm	0.35
875.9945	Fine divider, non slotted, 112x50x1.5 mm	0.27
875.9946	Fine divider, non slotted, 74x50x1.5 mm	0.18

MASTER*line* TOOL CABINETS

MASTER*line* GRAY/SILVER tool cabinet with 2-stage locking concept

- Very stable steel construction with 0,9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Full width polyurethane coated metal handle
- Two fi ed wheels Ø 125 mm
- Two castor wheels Ø 125 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating
- Combination with inserts

Total capacity:	B 727 x H 1005 x T 460 mm
Drawer internal dimensions	565 x 395 mm
Total load capacity:	450 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg	
875.0004		4	4	-	57.00	
875.0005		5	1	4	61.00	
875.0007		7	5	2	68.00	
875.0009		9	9	-	68.00	

MASTER*line* GRAY/SILVER tool cabinet top chest with 2-stage locking concept

- Very stable steel construction with 0.9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Side mounted handle
- Electrostatic powder coating
- Combination with tool cabinet

Total capacity:	B 727 x H 451 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	250 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg	
875.0014		4	4	-	38.00	

MASTER*line* BLACK/RED tool cabinet with 2-stage locking concept

- Very stable steel construction with 0,9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Full width polyurethane coated metal handle
- Two fi ed wheels Ø 125 mm
- Two castor wheels Ø 125 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating
- Combination with inserts

Total capacity:	B 727 x H 1005 x T 460 mm
Drawer internal dimensions	565 x 395 mm
Total load capacity:	450 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg
876.0004		4	4	-	57.00
876.0005		5	1	4	61.00
876.0007		7	5	2	68.00
876.0009		9	9	-	68.00

MASTER*line* BLUE/SILVER tool cabinet with 2-stage locking concept

- Very stable steel construction with 0,9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Full width polyurethane coated metal handle
- Two fi ed wheels Ø 125 mm
- Two castor wheels Ø 125 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating
- Combination with inserts

Total capacity:	B 727 x H 1005 x T 460 mm
Drawer internal dimensions	565 x 395 mm
Total load capacity:	450 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg
877.0004		4	4	-	57.00
877.0005		5	1	4	61.00
877.0007		7	5	2	68.00
877.0009		9	9	-	68.00

MASTER*line* BLACK/SILVER tool cabinet with 2-stage locking concept

- Very stable steel construction with 0,9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Full width polyurethane coated metal handle
- Two fi ed wheels Ø 125 mm
- Two castor wheels Ø 125 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating
- Combination with inserts

Total capacity:	B 727 x H 1005 x T 460 mm
Drawer internal dimensions	565 x 395 mm
Total load capacity:	450 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg
878.0004		4	4	-	57.00
878.0005		5	1	4	68.00
878.0007		7	5	2	68.00
878.0009		9	9	-	68.00

MASTER*line* BLACK/RED tool cabinet top chest with 2-stage locking concept

- Very stable steel construction with 0.9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Side mounted handle
- Electrostatic powder coating
- Combination with tool cabinet

Total capacity:	B 727 x H 451 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	250 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg
876.0014		4	4	-	38.00

MASTER*line* BLUE/SILVER tool cabinet top chest with 2-stage locking concept

- Very stable steel construction with 0.9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Side mounted handle
- Electrostatic powder coating
- Combination with tool cabinet

Total capacity:	B 727 x H 451 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	250 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg
877.0014		4	4	-	38.00

MASTER*line* BLACK/SILVER tool cabinet top chest with 2-stage locking concept

- Very stable steel construction with 0.9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Side mounted handle
- Electrostatic powder coating
- Combination with tool cabinet

Total capacity:	B 727 x H 451 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	250 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg
878.0014		4	4	-	38.00

MASTER*line* Tool cabinet with 2 shelf parts

- Very stable steel construction with 0.9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Handle lockind system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- With full width polyurethane coated metal handle
- With two fi ed wheels Ø 125 mm
- With two castor wheels Ø 125 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating

Total capacity:	B 993 x H 1000 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	800 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg
878.0006		6	3	3	88.00

MASTER*line* Tool cabinet XL

- Very stable steel construction with 0.9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Handle lockind system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- With full width polyurethane coated metal handle
- With two fi ed wheels Ø 125 mm
- With two castor wheels Ø 125 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating
- Combination with inserts

Total capacity:	W 910 x H 995 x D 460 mm
Drawer internal dimensions:	752 x 395 mm
Total load capacity:	800 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg
878.0008		8	7	1	80.00

MASTER*line* BLACK/SILVER tool cabinet top chest XL with 2-stage locking concept

- Very stable steel construction with 0.9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Side mounted handle
- Electrostatic powder coating
- Combination with tool cabinet

Total capacity:	W 910 x H 455 x D 460 mm
Drawer internal dimensions	752 x 395 mm
Total load capacity:	250 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg
878.1014		4	4	-	41.10

MASTER*line* Mobile worktop XXXL

- Very stable steel construction with 0.9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Handle lockind system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non slip rubber mat
- Wooden cabinet top 38 mm
- With full width polyurethane coated metal handle
- With two fi ed wheels Ø 125 mm
- With two castor wheels Ø 125 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coatin
- Combination with inserts

Total capacity:	B 1158 x H 1005 x T 720 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	1000 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg
878.0012		11	8	3	173.00

MASTER*line* large tool cabinet with 2 stage locking concept

- Very stable steel construction with 0.9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- With full width polyurethane coated metal handle
- With two fi ed wheels Ø 132 mm
- With two castor wheels Ø 132 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating
- Combination with inserts
- 2 stage locking mechanism
- Handle lockind system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock

Total capacity:	W 1157.5 x H 1000 x D 481 mm
Drawer internal dimensions	7 x 375 x 398 x 75 mm
	7 x 569 x 398 x 75 mm
	1 x 375 x 398 x 154 mm
	1 x 569 x 398 x 154 mm
Total load capacity:	800 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg
875.0016		16	14	2	124.00
876.0016		16	14	2	124.00
877.0016		16	14	2	124.00
878.0016		16	14	2	124.00

MASTER*line* large tool cabinet with 2 stage locking concept

- Very stable steel construction with 0.9 mm sheet steel - distortion resistant
- High level of stability
- Rear and side walls with metal peg board for mounting different accessories
- Ball bearing drawer runners
- Drawers are 100% extendable
- Drawers with non slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Side mounted handle
- Electrostatic powder coating
- Combination with tool cabinet
- two folding carrying handles each
- 2 stage locking mechanism
- Handle lockind system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock

Total capacity:	W 1157.5 x H 454.5 x D 481 mm
Drawer internal dimensions	4 x 375 x 398 x 75 mm
	4 x 569 x 398 x 75 mm
Total load capacity:	400 kg
Load capacity of each drawer:	40 kg

		no	75 mm	150 mm	kg
875.0018		8	8	-	61.00
876.0018		8	8	-	61.00
877.0018		8	8	-	61.00
878.0018		8	8	-	61.00

MASTER*line* ACCESSORIES

Rear wall system for tool cabinets

- For the accommodation of additional tools
- For organising and fastening tools
- Different system colour
- Consisting of 2 square peg board 70 x 45 cm
- Steel sheet construction



	Colour code	B mm	H mm	kg
885.9901	○	727.0	90.0	8.00
888.9902	●	727.0	90.0	8.00

MASTER*line* wooden worktop

- Can be used instead of the rubber mat
- Multiplex Beech Plywood
- Joint free
- Resistant to warping
- Glued plywood
- Protective coating
- Smooth work surface

	L mm	B mm	H mm	kg
875.9915	450.0	710.0	18.0	5.00

MASTER*line* alu grooved top

- Can be used instead of the rubber mat
- Easy to maintain
- Surface is lightly corrugated
- Ideal for use as a work surface

	L mm	B mm	H mm	kg
875.9920	460.0	727.0	2.0	2.50

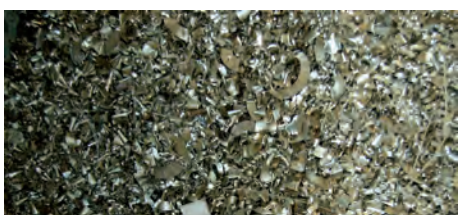

MASTER*line* storage tray insert

- Storage tray for small parts
- Suitable for use in the tool cabinet drawer
- Smooth surface

	Colour code	L mm	B mm	H mm	kg
875.9925	○	570.0	153.0	10.0	0.95
875.9926	●	570.0	153.0	10.0	0.95

220 V Cable reel

- Clamping device
- Ideal for heavy use on construction sites, in the workshop and industrial areas
- 10 Meter cable length
- Drum body out of special plastic
- 4 Protected socket outlets
- Overheating protection
- Control lamp for overheating and overload
- 4 x Safety plugs

	B mm	H mm	kg
875.9930	238.0	290.0	1.20

Drawer divider set

- For use only in drawers with inside dimensions 565 x 395 mm
- Partitioning possibilities for various utensils
- Individually adjustable
- Sheet steel

			kg
875.9940	23 pcs	Drawer divider set	3.00

consists of:

		kg
875.9941	Mounting for part system, slotted, 565x50x1.5 mm	0.53
875.9942	Coarse divider, slotted, 393x50x1.5 mm	1.20
875.9943	Fine divider, non slotted, 188x50x1.5 mm	0.45
875.9944	Fine divider, non slotted, 150x50x1.5 mm	0.35
875.9945	Fine divider, non slotted, 112x50x1.5 mm	0.27
875.9946	Fine divider, non slotted, 74x50x1.5 mm	0.18

ULTIMATE*line* TOOL CABINETS

ULTIMATE*line* GRAY/SILVER tool cabinet with 3-stage locking concept

- Extremly robust and stable steel construction with 1,0 mm sheet steel - distortion resistant
- Due to secure steel plate construction highly resilient
- Very high level of stabilbilty and safety - as a maximum one drawer can be opened at a time
- Robust corner protection due to the aluminium reinforcement
- Receased rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system with individual drawer locking system
- Independent central locking can be disabled if required
- Ball bearing drawer runners with automatic spring return
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Robust ABS work surface with tool holders and storage recesses
- Side mounted handle
- Two fi ed wheels Ø 125 mm
- Two castor wheels Ø 125 mm with rolling and turning brake
- Full width aluminium drawer handle
- Electrostatic powder coating
- Combination with inserts

Total capacity:	B 739 x H 1013 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	600 kg
Load capacity of each drawer:	45 kg

		no	75 mm	150 mm	kg
885.0004		4	4	-	54.00
885.0005		5	1	4	65.00
885.0007		7	5	2	70.70
885.0009		9	9	-	77.50

ULTIMATE*line* GRAY/SILVER tool cabinet top chest with 3-stage locking concept

- Extremly robust and stable steel construction with 1,0 mm sheet steel - distortion resistant
- Due to secure steel plate construction highly resilient
- Very high level of stabilbilty and safety - as a maximum one drawer can be opened at a time
- Robust corner protection due to the aluminium reinforcement
- Receased rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system with individual drawer locking system
- Independent central locking can be disabled if required
- Ball bearing drawer runners with automatic spring return
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Full width aluminium drawer handle
- Electrostatic powder coating
- Combination with tool cabinet

Total capacity:	B 727 x H 451 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	300 kg
Load capacity of each drawer:	45 kg

		no	75 mm	150 mm	kg
885.0014		4	4	-	38.20

ULTIMATE*line* RED/SILVER tool cabinet with 3-stage locking concept

- Extremly robust and stable steel construction with 1,0 mm sheet steel - distortion resistant
- Due to secure steel plate construction highly resilient
- Very high level of stabilbilty and safety - as a maximum one drawer can be opened at a time
- Robust corner protection due to the aluminium reinforcement
- Receased rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system with individual drawer locking system
- Independent central locking can be disabled if required
- Ball bearing drawer runners with automatic spring return
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Robust ABS work surface with tool holders and storage recesses
- Side mounted handle
- Two fi ed wheels Ø 125 mm
- Two castor wheels Ø 125 mm with rolling and turning brake
- Full width aluminium drawer handle
- Electrostatic powder coating
- Combination with inserts

Total capacity:	B 739 x H 1013 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	600 kg
Load capacity of each drawer:	45 kg

		no	75 mm	150 mm	kg
886.0004		4	4	-	54.00
886.0005		5	1	4	65.00
886.0007		7	5	2	70.70
886.0009		9	9	-	77.50

ULTIMATE*line* BLUE/SILVER tool cabinet with 3-stage locking concept

- Extremly robust and stable steel construction with 1,0 mm sheet steel - distortion resistant
- Due to secure steel plate construction highly resilient
- Very high level of stabilbilty and safety - as a maximum one drawer can be opened at a time
- Robust corner protection due to the aluminium reinforcement
- Receased rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system with individual drawer locking system
- Independent central locking can be disabled if required
- Ball bearing drawer runners with automatic spring return
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Robust ABS work surface with tool holders and storage recesses
- Side mounted handle
- Two fi ed wheels Ø 125 mm
- Two castor wheels Ø 125 mm with rolling and turning brake
- Full width aluminium drawer handle
- Electrostatic powder coating
- Combination with inserts

Total capacity:	B 739 x H 1013 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	600 kg
Load capacity of each drawer:	45 kg

		no	75 mm	150 mm	kg
887.0004		4	4	-	54.00
887.0005		5	1	4	65.00
887.0007		7	5	2	70.70
887.0009		9	9	-	77.50

ULTIMATE*line* BLACK/SILVER tool cabinet with 3-stage locking concept

- Extremly robust and stable steel construction with 1,0 mm sheet steel - distortion resistant
- Due to secure steel plate construction highly resilient
- Very high level of stabilbilty and safety - as a maximum one drawer can be opened at a time
- Robust corner protection due to the aluminium reinforcement
- Receased rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system with individual drawer locking system
- Independent central locking can be disabled if required
- Ball bearing drawer runners with automatic spring return
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Robust ABS work surface with tool holders and storage recesses
- Side mounted handle
- Two fi ed wheels Ø 125 mm
- Two castor wheels Ø 125 mm with rolling and turning brake
- Full width aluminium drawer handle
- Electrostatic powder coating
- Combination with inserts

Total capacity:	B 739 x H 1013 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	600 kg
Load capacity of each drawer:	45 kg

		no	75 mm	150 mm	kg
888.0004		4	4	-	54.00
888.0005		5	1	4	65.00
888.0007		7	5	2	70.70
888.0009		9	9	-	77.50

ULTIMATE*line* RED/SILVER tool cabinet top chest with 3-stage locking concept

- Extremly robust and stable steel construction with 1,0 mm sheet steel - distortion resistant
- Due to secure steel plate construction highly resilient
- Very high level of stabilbilty and safety - as a maximum one drawer can be opened at a time
- Robust corner protection due to the aluminium reinforcement
- Receased rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system with individual drawer locking system
- Independent central locking can be disabled if required
- Ball bearing drawer runners with automatic spring return
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Full width aluminium drawer handle
- Electrostatic powder coating
- Combination with tool cabinet

Total capacity:	B 727 x H 451 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	300 kg
Load capacity of each drawer:	45 kg

		no	75 mm	150 mm	kg
886.0014		4	4	-	38.20

ULTIMATE*line* BLUE/SILVER tool cabinet top chest with 3-stage locking concept

- Extremly robust and stable steel construction with 1,0 mm sheet steel - distortion resistant
- Due to secure steel plate construction highly resilient
- Very high level of stabilbilty and safety - as a maximum one drawer can be opened at a time
- Robust corner protection due to the aluminium reinforcement
- Receased rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system with individual drawer locking system
- Independent central locking can be disabled if required
- Ball bearing drawer runners with automatic spring return
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Full width aluminium drawer handle
- Electrostatic powder coating
- Combination with tool cabinet

Total capacity:	B 727 x H 451 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	300 kg
Load capacity of each drawer:	45 kg

		no	75 mm	150 mm	kg
887.0014		4	4	-	38.20

ULTIMATE*line* BLACK/SILVER tool cabinet top chest with 3-stage locking concept

- Extremly robust and stable steel construction with 1,0 mm sheet steel - distortion resistant
- Due to secure steel plate construction highly resilient
- Very high level of stabilbilty and safety - as a maximum one drawer can be opened at a time
- Robust corner protection due to the aluminium reinforcement
- Receased rear and side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system with individual drawer locking system
- Independent central locking can be disabled if required
- Ball bearing drawer runners with automatic spring return
- Drawers are 100% extendable
- Drawers with non-slip rubber mat
- Cabinet top has a 10 mm durable foam insert mat
- Full width aluminium drawer handle
- Electrostatic powder coating
- Combination with tool cabinet

Total capacity:	B 727 x H 451 x T 460 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	300 kg
Load capacity of each drawer:	45 kg

		no	75 mm	150 mm	kg
888.0014		4	4	-	38.20

ULTIMATE*line* ACCESSORIES

Rear wall system for tool cabinets

- For the accommodation of additional tools
- For organising and fastening tools
- Different system colour
- Consisting of 2 square peg board 70 x 45 cm
- Steel sheet construction

	Colour code	B mm	H mm	kg
885.9901	●	727.0	90.0	8.00
888.9902	●	727.0	90.0	8.00

ULTIMATE*line* wooden worktop

- Multiplex Beech Plywood
- Joint free
- Resistant to warping
- Glued plywood
- Protective coating
- Smooth work surface

	L mm	B mm	H mm	kg
885.9915	335.0	625.0	18.0	5.00

ULTIMATE*line* alu grooved top

- Can be used instead of the ABS plate
- Easy to maintain
- Surface is lightly corrugated
- Ideal for use as a work surface

	L mm	B mm	H mm	kg
885.9920	625.0	335.0	1.6	1.31

220 V Cable reel

- Clamping device
- Ideal for heavy use on construction sites, in the workshop and industrial areas
- 10 Meter cable length
- Drum body out of special plastic
- 4 Protected socket outlets
- Overheating protection
- Control lamp for overheating and overload
- 4 x Safety plugs

	B mm	H mm	kg
875.9930	238.0	290.0	1.20

Drawer divider set

- For use only in drawers with inside dimensions 565 x 395 mm
- Partitioning possibilities for various utensils
- Individually adjustable
- Sheet steel

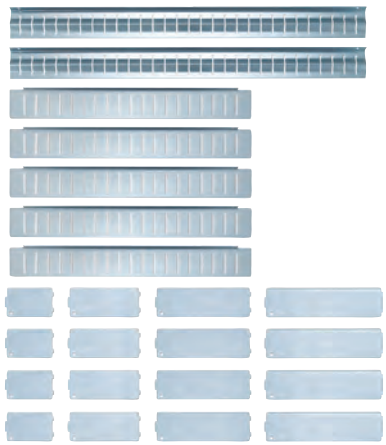

			kg
875.9940	23 pcs	Drawer divider set	3.00

consists of:

		kg
875.9941	Mounting for part system, slotted, 565x50x1.5 mm	0.53
875.9942	Coarse divider, slotted, 393x50x1.5 mm	1.20
875.9943	Fine divider, non slotted, 188x50x1.5 mm	0.45
875.9944	Fine divider, non slotted, 150x50x1.5 mm	0.35
875.9945	Fine divider, non slotted, 112x50x1.5 mm	0.27
875.9946	Fine divider, non slotted, 74x50x1.5 mm	0.18

ULTIMATE*line* storage tray

- Suitable for hole measurements 10 x 10 mm - hole distance 38 mm
- Enlarges the surface working area
- Working surface: 375 x 308 mm
- When not in use can fold away
- Ideal for documents, laptop, small parts, etc.

	Colour code	L mm	B mm	H mm	kg
885.9935	●	420.0	360.0	27.0	3.20
885.9936	●	420.0	360.0	27.0	3.20

ULTIMATE*line* paper roll holder

- Suitable for hole measurements 10 x 10 mm - hole distance 38 mm
- For paper rolls to a max. Ø 350 mm and max. 320 mm width

	Colour code	L mm	B mm	H mm	kg
885.9940	○	368.0	75.0	52.0	0.60
885.9941	●	368.0	75.0	52.0	0.60

ULTIMATE*line* universal tray

- Suitable for hole measurements 10 x 10 mm - hole distance 38 mm
- Internal measurements: 338 x 180 mm
- Ideal for documents

	Colour code	L mm	B mm	H mm	kg
885.9945	○	340.0	75.0	180.9	0.84
885.9946	●	340.0	75.0	180.9	0.84

ULTIMATE*line* small part storage tray

- Suitable for hole measurements 10 x 10 mm - hole distance 38 mm
- With fi ed dividers
- When not in use can fold away
- Ideal for small parts, screws, etc.

	Colour code	L mm	B mm	H mm	kg
885.9950	○	368.0	50.0	52.0	0.40
885.9951	●	368.0	50.0	52.0	0.40

ULTIMATE*line* universal can holder

- Suitable for hole measurements 10 x 10 mm - hole distance 38 mm
- Without separating strip
- When not in use can fold away
- Ideal for cans, bottles, etc.

	Colour code	L mm	B mm	H mm	kg
885.9955	○	368.0	80.8	52.0	0.50
885.9956	●	368.0	80.8	52.0	0.50

ULTIMATE*line* carrier truck

- Mobilizes tool cabinet sets
- Handle foam coated
- Extendable handle
- Two fi ed wheels Ø 75 mm
- Two castor wheels Ø 75 mm with brake
- Steel sheet construction

	Colour code	L mm	B mm	H mm	kg
885.9930	○	780.0	480.0	170.0	7.60
885.9931	●	780.0	480.0	170.0	7.60

ULTIMATE*line* storage tray insert

- Storage tray for small parts
- Suitable for use in the tool cabinet drawer
- Smooth surface

	Colour code	L mm	B mm	H mm	kg
885.9925	○	570.0	153.0	10.0	0.95
885.9926	●	570.0	153.0	10.0	0.95

ULTIMATE*line* suction pads

- Slide on
- With revolving suction cup with 80 kg of lifting force
- 2 dead centre heads
- With quick release lever
- With intake mechanics and fast change device
- Suitable for all smooth materials with gas density surfaces

	Colour code	Ø mm	L mm	kg
885.9960	○	120,0	330.0	1.75
885.9961	●	120,0	330.0	1.75

ULTIMATE*line* work tray

- Slide on
- Pivoting
- Ideal for documents, laptop, etc.

	Colour code	L mm	B mm	H mm	kg
885.9910	○	190.0	188.0	35.0	1.20
885.9911	●	190.0	188.0	35.0	1.20

SCS - SAFETY CONTROL SYSTEM

The benefits

- 3-coloured inserts create a clear structure and protect the quality tools from damage or loss.
- Safety foam inserts with high precision, 3D CNC parts.
- the red signal colour is for completeness checks - a visible red colour means a tool is missing.
- Completely fl xible thanks to individual combinations
- no tools confused with each other
- perfect tool organisation
- Tailored inserts in each workshop tool cabinet
- oil resistant
- easy to clean

MODULAR BUILDING BLOCK SYSTEM

Best flexibility and organisatio

create "your own" tool cabinet....

With our unique system inlay configu ation you can design your tool cabinet to your exact requirements.
Due to our user friendly foam inlays, you can simply configu e each drawer by category (tool type) with a neat and tidy presentation.
It is ideal when you want to work away from your tool cabinet as you can take each inlay individually, meaning you have the right tool for the job.

COMPLETLY FLEXIBLE

For each individual tool, the 3D CNC computer technology mills a tailored part.

The tailored parts mean a quick glance is all that's needed to know where the corresponding tool belongs. **This saves a lot of time.**

Three-layer three-colour system:
the top layer is black, the middle layer is white and the bottom layer is red.

Thanks to the fin ly detailed characters, the size of the tool can be seen before removing it.

The foam inserts are oil-resistant, extremely fl xible and easy to wash.

The right combination:

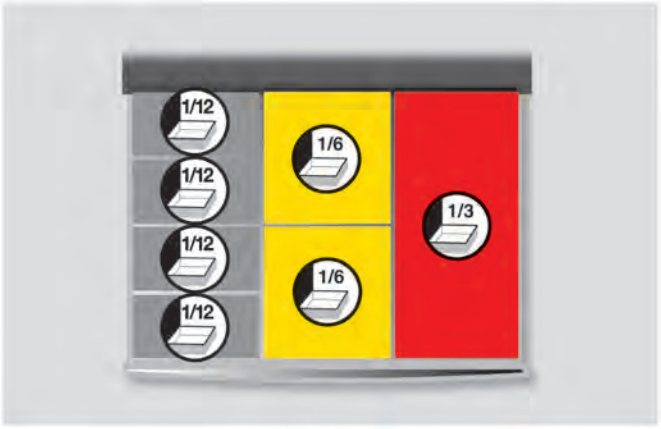

SCS SYSTEM INSERT SETS

SCS system insert set, construction machinery

- Ideal set for construction machinery
- Fits 5 tool cabinet drawers
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

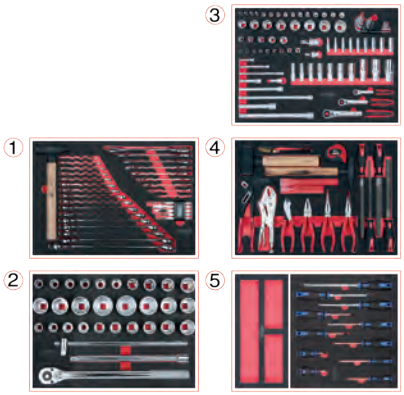

			kg
715.0171	171 pcs	SCS system insert set, construction machinery	37.02

781.4031		Spanner and hammer set, 31 pcs, 1/1 system insert
711.1031		3/4" socket set, 31 pcs, 1/1 system insert
711.0080		1/4"+3/8"+1/2" socket set, 80 pcs, 1/1 system inset
711.6017		Pliers, hammer and file set, 17 pcs, 1/1 system insert
712.0011		ERGO+ screwdriver set, 11 pcs, 2/3 system insert
713.0000		Uni inlay, empty, 1/3 system insert

SCS system insert set, mechatronics technicians

- Ideal set for mechatronics technicians
- Fits 7 tool cabinet drawers
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

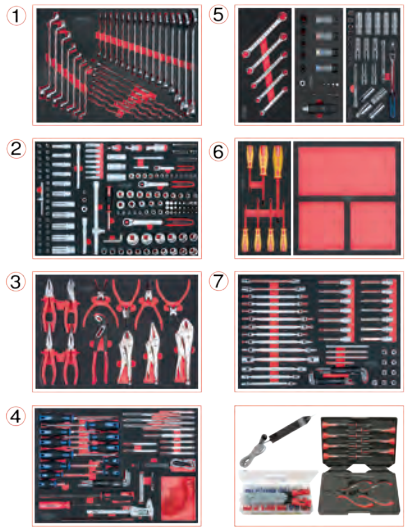

			kg
715.0665	665 pcs	SCS system insert set, mechatronics technicians	37.00

711.0035		Socket set, 35 pcs, 1/1 system insert
711.0180		1/4"+3/8"+1/2" socket set, 180 pcs, 1/1 system inset
711.1012		Pliers set, 12 pcs, 1/1 system insert
711.1041		Screwdriver and measuring instrument set, 41 pcs, 1/1 system insert
713.0005		Open double ring spanner set, offset, 5 pcs, 1/3 system insert
713.2023		1/2"+5/16" impact socket and bit set, 23 pcs, 1/3 system insert
783.0027		CHROME+ spark plug service set, 27 pcs, 1/3 system insert

713.2007		VDE screwdriver set, 7 pcs, 1/3 system insert
712.0001		Uni inlay, empty, 2/3 system insert
711.0053		1/2" socket set, 53 pcs, 1/1 system insert
500.7180		Precision tool set, 10 pcs
115.1230		Crimping tool set, 271 pcs
550.1503		Voltage tester, 3-48V

SCS system insert set, commercial vehicles

- Ideal set for commercial vehicles
- Fits 7 tool cabinet drawers
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

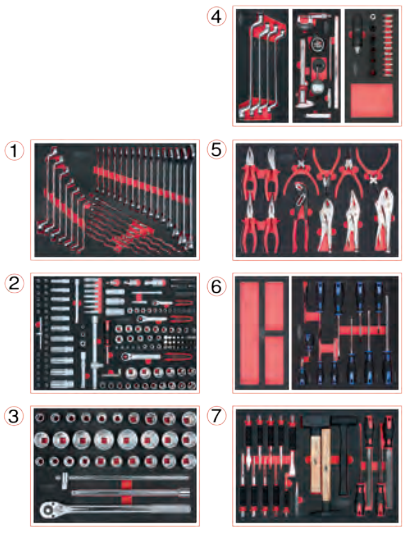

			kg
715.0316	316 pcs	SCS system insert set, commercial vehicles	46.00

711.0035		Socket set, 35 pcs, 1/1 system insert

711.0180		1/4"+3/8"+1/2" socket set, 180 pcs, 1/1 system inset
711.1031		3/4" socket set, 31 pcs, 1/1 system insert
713.2004		ULTIMATE+ ring spanner set, offset, 4 pcs, 1/3 system insert
713.2008		Measuring tool insert, 8 pcs, 1/3 system insert
713.0019		5/16"+1/2" impact socket wrench and bit set, 19 pcs, 1/3 system insert
711.1012		Pliers set, 12 pcs, 1/1 system insert
712.0012		ERGO+ screwdriver set, 12 pcs, 2/3 system insert
713.0000		Uni inlay, empty, 1/3 system insert
711.0018		File, chisel and hammer set, 18 pcs, 1/1 system insert

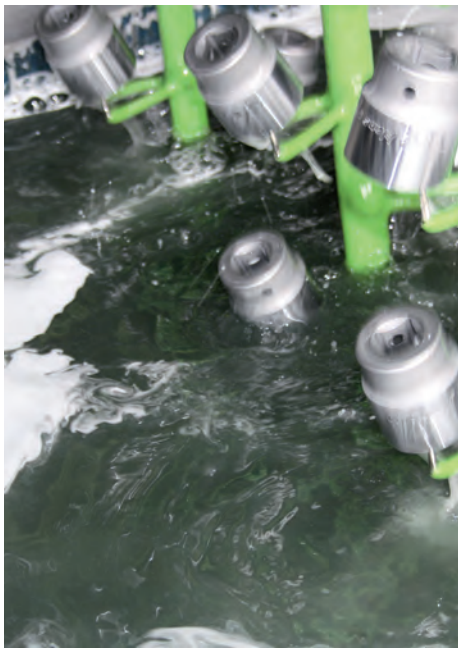

SCS system insert set, agricultural machinery

- Ideal set for agricultural machinery
- Fits 6 tool cabinet drawers
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

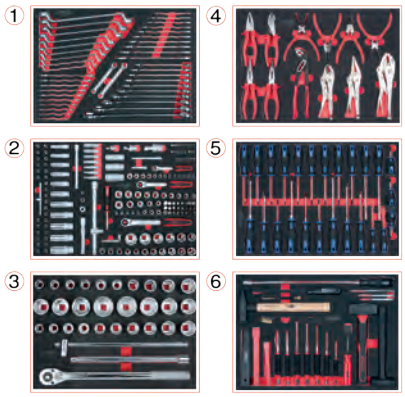

			kg
715.0310	310 pcs	SCS system insert set, agricultural machinery	43.00

711.0041		Socket set, 41 pcs, 1/1 system insert
711.0180		1/4"+3/8"+1/2" socket set, 180 pcs, 1/1 system inset
711.1031		3/4" socket set, 31 pcs, 1/1 system insert
711.1012		Pliers set, 12 pcs, 1/1 system insert
711.0025		ERGO+ screwdriver set, 25 pcs, 1/1 system insert
711.1021		Chisel and hammer set, 21 pcs, 1/1 system insert

SCS system insert set, service stations

- Ideal set for service stations
- Fits 4 tool cabinet drawers
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

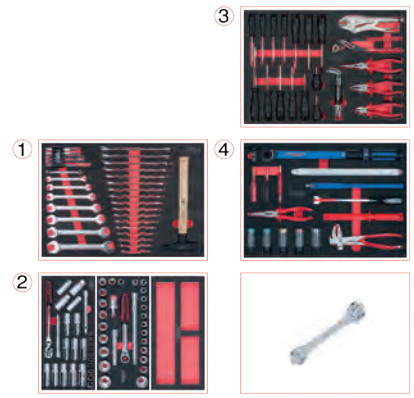

			kg
715.0131	131 pcs	SCS system insert set, service stations	20.00

711.3031		Spanner and hammer set, 31 pcs, 1/1 system insert
713.0027		CHROME+ spark plug service set, 27pcs, 1/3 system insert
713.0028		1/2" socket set, 28 pcs, 1/3 system insert
713.0000		Uni inlay, empty, 1/3 system insert
711.6027		Screwdriver and pliers set, 27 pcs, 1/1 system insert
711.0016		Wheel service inlay, 16pcs , 1/1 system insert
150.9302		Oil service wrench 8 in 1, 270 mm

SCS system insert set, mechanics

- Ideal set for mechanics
- Fits 6 tool cabinet drawers
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

			kg
715.0404	404 pcs	SCS system insert set, mechanics	32.00

711.0035		Socket set, 35 pcs, 1/1 system insert
711.0180		1/4"+3/8"+1/2" socket set, 180 pcs, 1/1 system inset
713.2004		ULTIMATE+ ring spanner set, offset, 4 pcs, 1/3 system insert
713.0101		1/4" bit set, 101 pcs, 1/3 system insert
713.0019		5/16"+1/2" impact socket wrench and bit set, 19 pcs, 1/3 system insert
711.1033		General purpose tool kit, 33 pcs, 1/1 system insert
711.0018		File, chisel and hammer set, 18 pcs, 1/1 system insert
713.5006		Circlip pliers set, 6 pcs, 1/3 system insert

713.1003		Grip pliers set, 3 pcs, 1/3 system insert
713.3005		Measuring tool insert, 5 pcs, 1/3 system insert

SCS system insert set, inch and SAE

- Ideal set for inch and SAE
- Fits 5 tool cabinet drawers
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

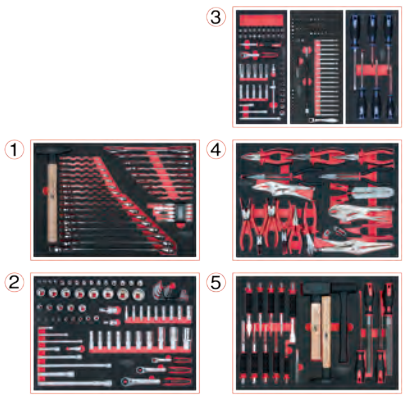

			kg
715.0299	299 pcs	SCS system insert set, inch and SAE	29.00

781.4031		Spanner and hammer set, 31 pcs, 1/1 system insert
711.0080		1/4"+3/8"+1/2" socket set, 80 pcs, 1/1 system inset
713.2047		1/4" socket set, 47 pcs, 1/3 system insert
713.0101		1/4" bit set, 101 pcs, 1/3 system insert
713.0006		ERGOTORQUEplus® screwdriver set, 6 pcs, 1/3 system insert
711.1016		Pliers set, 16 pcs, 1/1 system insert
711.0018		File, chisel and hammer set, 18 pcs, 1/1 system insert

SCS system insert set, universal

- Ideal set for universal use
- Fits 3 tool cabinet drawers
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

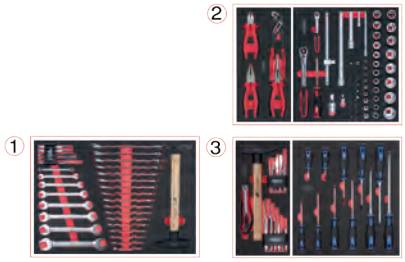

			kg
715.0116	116 pcs	SCS system insert set, universal	14.00

711.3031		Spanner and hammer set, 31 pcs, 1/1 system insert
712.0057		1/4"+1/2" socket set, 57 pcs, 2/3 system inset
713.6004		Pliers set, 4 pcs, 1/3 system insert
712.0011		ERGO+ screwdriver set, 11 pcs, 2/3 system insert
713.8013		Pin driving tools and hammer set, 13 pcs

SCS system insert set, universal

- Ideal set for universal use
- Fits 5 tool cabinet drawers
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

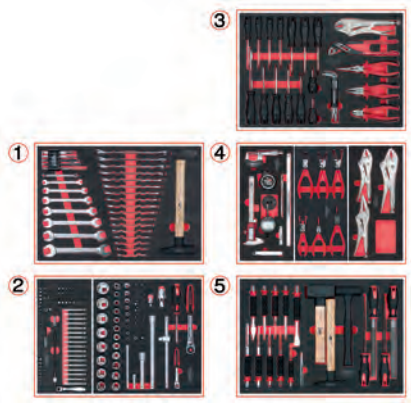

			kg
715.0251	251 pcs	SCS system insert set, universal	20.61

711.3031		Spanner and hammer set, 31 pcs, 1/1 system insert
712.0057		1/4"+1/2" socket set, 57 pcs, 2/3 system inset
713.0101		1/4" bit set, 101 pcs, 1/3 system insert
711.6027		Screwdriver and pliers set, 27 pcs, 1/1 system insert
713.2008		Measuring tool insert, 8 pcs, 1/3 system insert
713.5006		Circlip pliers set, 6 pcs, 1/3 system insert
713.1003		Grip pliers set, 3 pcs, 1/3 system insert
711.0018		File, chisel and hammer set, 18 pcs, 1/1 system insert

SCS system insert set, universal

- Ideal set for universal use
- Fits 7 tool cabinet drawers
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

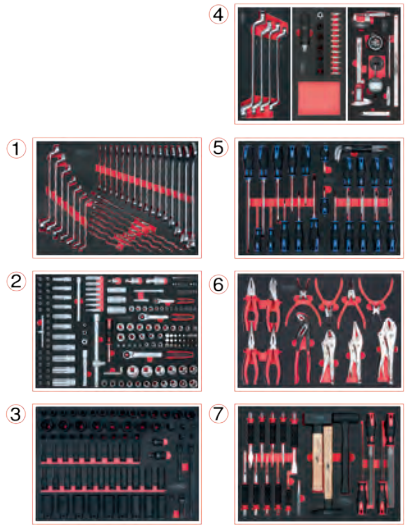

			kg
715.0378	378 pcs	SCS system insert set, universal	37.00

711.0035		Socket set, 35 pcs, 1/1 system insert
711.0180		1/4"+3/8"+1/2" socket set, 180 pcs, 1/1 system inset
711.0073		3/8"+1/2" impact socket wrench set, 73 pcs, 1/1 system inset
713.2004		ULTIMATE+ ring spanner set, offset, 4 pcs, 1/3 system insert
713.0019		5/16"+1/2" impact socket wrench and bit set, 19 pcs, 1/3 system insert
713.2008		Measuring tool insert, 8 pcs, 1/3 system insert
711.1029		Screwdriver set, 29 pcs, 1/1 system insert

711.1012		Pliers set, 12 pcs, 1/1 system insert
711.0018		File, chisel and hammer set, 18 pcs, 1/1 system insert

SCS - SAFETY CONTROL SYSTEM

The benefits

- 3-coloured inserts create a clear structure and protect the quality tools from damage or loss.
- Safety foam inserts with high precision, 3D CNC parts.
- the red signal colour is for completeness checks - a visible red colour means a tool is missing.
- Completely fl xible thanks to individual combinations
- no tools confused with each other
- perfect tool organisation
- Tailored inserts in each workshop tool cabinet
- oil resistant
- easy to clean

MODULAR BUILDING BLOCK SYSTEM

Best flexibility and organisatio

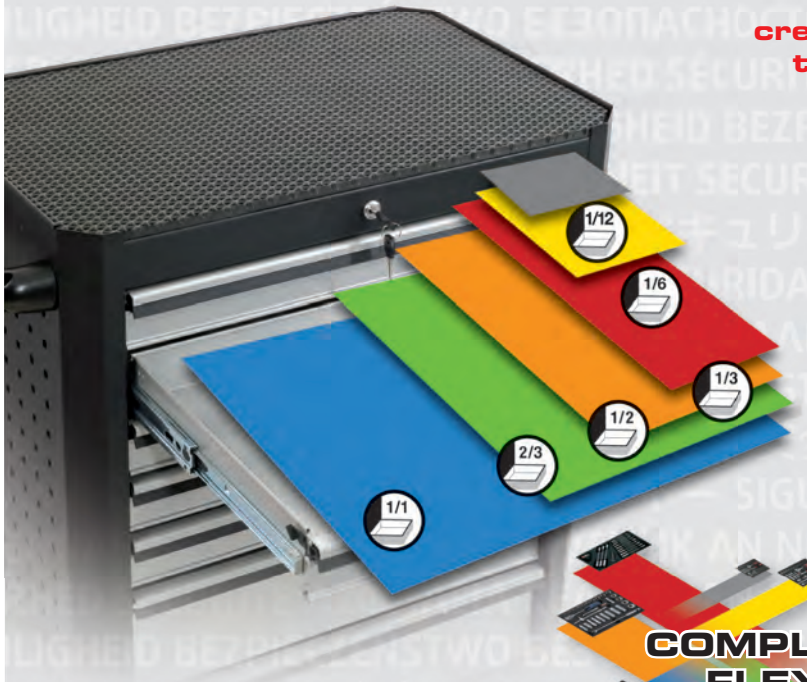

create "your own" tool cabinet....

With our unique system inlay configu ation you can design your tool cabinet to your exact requirements. Due to our user friendly foam inlays, you can simply configu e each drawer by category (tool type) with a neat and tidy presentation.
It is ideal when you want to work away from your tool cabinet as you can take each inlay individually, meaning you have the right tool for the job.



For each individual tool, the 3D CNC computer technologymills a tailored part.

The tailored parts mean a quick glance is all that's needed to know where the corresponding tool belongs. **This saves a lot of time.**

Three-layer three-colour system:
the top layer is black, the middle layer is white and the bottom layer is red.

Thanks to the fin ly detailed characters, the size of the tool can be seen before removing it.

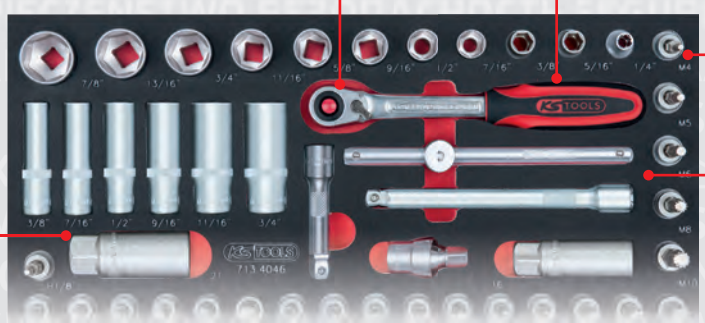

The foam inserts are oil-resistant, extremely fl xible and easy to wash.

1/3 SCS - SPANNER

SCS Combination spanner set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

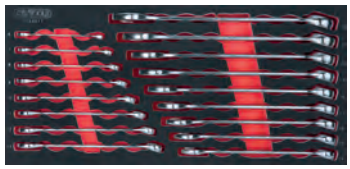

		L mm	B mm	H mm	kg
713.0017	17 pcs	390.0	188.0	35.0	1.80

17 x	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 mm

SCS CHROME*plus*® combination spanner set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

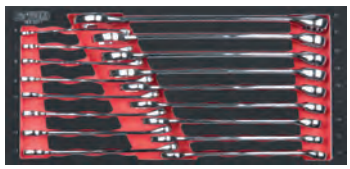

		L mm	B mm	H mm	kg
783.0017	17 pcs	390.0	188.0	35.0	2.40

17 x	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 mm

SCS Combination spanner set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.0004	4 pcs	390.0	188.0	35.0	1.65

4 x	24 - 27 - 30 - 32 mm

SCS CHROME*plus*® combination spanner set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
783.0004	4 pcs	390.0	188.0	35.0	1.78

4 x	24 - 27 - 30 - 32 mm

SCS GEAR*plus*® ratchet combination spanner set, including adaptors

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.0014	14 pcs	390.0	188.0	35.0	1.50

10 x	8 - 10 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
1 x	1/4"
3 x	1/4" - 3/8" - 1/2"

SCS GEAR*plus*® reversing ratchet combination spanner set, including adaptors

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.1014	14 pcs	390.0	188.0	35.0	1.56

10 x	8 - 10 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19
1 x	1/4"
3 x	1/4" - 3/8" - 1/2"

SCS Double open ended spanner set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.0011	11 pcs	390.0	188.0	35.0	1.75

11 x	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 21x23 - 24x27 - 30x32 mm

SCS CHROME*plus*® double open ended spanner set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
783.0011	11 pcs	390.0	188.0	35.0	1.75

11 x	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x18 - 17x19 - 20x22 - 21x23 - 24x27 - 30x32

SCS Open double ring spanner set, offset

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
713.0005	5 pcs	390.0	188.0	35.0	0.56

5 x	8x10 - 10x11 - 12x13 - 14x15 - 17x19 mm

SCS CHROME*plus*® Open double ring spanner set, offset

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
783.0005	5 pcs	390.0	188.0	35.0	0.56

5 x 8x10 - 10x11 - 12x13 - 14x15 - 17x19 mm

SCS double ring spanner set, 75° offset

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.0007	7 pcs	390.0	188.0	35.0	1.00

7 x 6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 18x19 mm

CHROME*plus*® double ring spanner set, 75° offset

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
783.0007	7 pcs	390.0	188.0	35.0	1.00

7 x 6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 18x19 mm

SCS Double ring spanner set, 75° offset

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

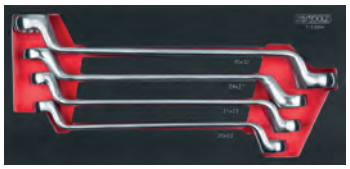

		L mm	B mm	H mm	kg
713.2004	4 pcs	390.0	188.0	35.0	1.74

4 x 20 x 22 - 21 x 23 - 24 x 27 - 30 x 32 mm

SCS CHROME*plus*® double ring spanner set, 75° offset

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
783.2004	4 pcs	390.0	188.0	35.0	1.74

4 x 20 x 22 - 21 x 23 - 24 x 27 - 30 x 32 mm

SCS Double swivel wrench set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	g
713.1005	5 pcs	390.0	188.0	35.0	920

5 x 8 x 9 - 10 x 11 - 12 x 13 - 14 x 15 16 x 17 mm

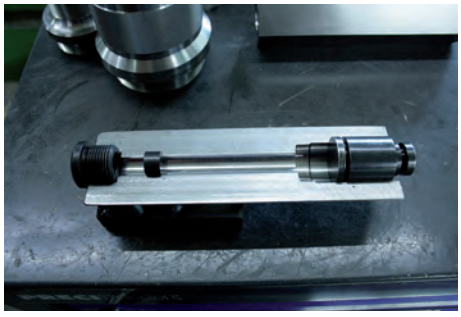

SCS Pipe head box wrench set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
713.2011	11 pcs	390.0	188.0	35.0	2.70

11 x 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19 mm

SCS pipe head box wrench set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
713.4004	4 pcs	390.0	188.0	35.0	3.00

4 x 21 - 22 - 24 - 27 mm

SCS CHROME*plus*® half moon- and manifold spanner set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
783.2005	5 pcs	390.0	188.0	35.0	0.90

5 x 10 x 12 - 11 x 13 - 14 x 17 - 16 x 18 19 x 22 mm

1/3 SCS - SOCKET WRENCH 1/4“

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4"

			L mm	B mm	H mm	kg
713.4030	30 pcs		390.0	188.0	35.0	0.90
12 x		4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 - 14 mm				
3 x		4 - 5,5 - 8 mm				
2 x		PH1 - PH2				
2 x		PZ1 - PZ2				
5 x		3 - 4 - 5 - 6 - 8 mm				
2 x		50 - 150 mm				
1 x		150 mm				
1 x		1/4“				
1 x		110 mm				
1 x		140 mm				

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4"

			L mm	B mm	H mm	kg
783.4030	30 pcs		390.0	188.0	35.0	0.95
12 x		4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 - 14 mm				
3 x		4 - 5,5 - 8 mm				
2 x		PH1 - PH2				
2 x		PZ1 - PZ2				
5 x		3 - 4 - 5 - 6 - 8 mm				
2 x		50 - 150 mm				
1 x		150 mm				
1 x		1/4“				
1 x		110 mm				
1 x		140 mm				

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/4"

			L mm	B mm	H mm	kg
713.4037	37 pcs		390.0	188.0	35.0	0.95
12 x		4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 - 14 mm				
6 x		E4 - E5 - E6 - E7 - E8 - E10				
5 x		3 - 4 - 5 - 6 - 8 mm				
9 x		T8 - T9 - T10 - T15 - T20 - T25 - T27 T30 - T40				
1 x		100 mm				
1 x		150 mm				
1 x		1/4“				
1 x		110 mm				
1 x		140 mm				

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/4"

			L mm	B mm	H mm	kg
783.4037	37 pcs		390.0	188.0	35.0	1.05
12 x		4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 - 14 mm				
6 x		E4 - E5 - E6 - E7 - E8 - E10				
5 x		3 - 4 - 5 - 6 - 8 mm				
9 x		T8 - T9 - T10 - T15 - T20 - T25 - T27 T30 - T40				
1 x		100 mm				
1 x		150 mm				
1 x		1/4“				
1 x		110 mm				
1 x		140 mm				

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4"

			L mm	B mm	H mm	kg
713.0040	40 pcs		390.0	188.0	35.0	0.94
10 x		1/4“: 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 - 14 mm				
3 x		1/4“: 8 - 10 - 13 mm				
3 x		1/4“: 4,5 - 6,5 - 8 mm				
3 x		1/4“: PH1 - PH2 - PH3				
3 x		1/4“: PZ1 - PZ2 - PZ3				
5 x		1/4“: 3 - 4 - 5 - 6 - 7 mm				
7 x		1/4“: TB10 - TB15 - TB20 TB25 TB27 - TB30 - TB40				
2 x		1/4“: 50 - 150 mm				
1 x		1/4“				
1 x		1/4“				
1 x		1/4“				
1 x		1/4“				

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/4"

			L mm	B mm	H mm	kg
783.0040	40 pcs		390.0	188.0	35.0	0.98
10 x		1/4“: 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 - 14 mm				
3 x		1/4“: 8 - 10 - 13 mm				
3 x		1/4“: 4,5 - 6,5 - 8 mm				
3 x		1/4“: PH1 - PH2 - PH3				
3 x		1/4“: PZ1 - PZ2 - PZ3				
5 x		1/4“: 3 - 4 - 5 - 6 - 7 mm				
7 x		1/4“: TB10 - TB15 - TB20 TB25 TB27 - TB30 - TB40				
2 x		1/4“: 50 - 150 mm				
1 x		1/4“				
1 x		1/4“				
1 x		1/4“				
1 x		1/4“				

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

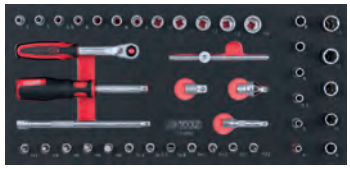

1/4"

		L mm	B mm	H mm	kg
713.0042	42 pcs	390.0	188.0	35.0	1.30

12 x	4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 - 14 mm
11 x	4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 mm
3 x	4 - 4,5 - 8 mm
5 x	3 - 4 - 5 - 6 - 8 mm
2 x	PH1 - PH2
2 x	PZ1 - PZ2
1 x	1/4"Fx3/8"M
2 x	50 - 100 mm
1 x	150 mm
1 x	1/4"
1 x	110 mm
1 x	140 mm

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4"

		L mm	B mm	H mm	kg
713.0045	45 pcs	390.0	188.0	35.0	1.01

12 x	1/4": 4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm
7 x	1/4": E4 - E5 - E6 - E7 - E8 - E10 E11
3 x	1/4": 4 - 5,5 - 8 mm
2 x	1/4": PH1 - PH2
2 x	1/4": PZ1 - PZ2
5 x	1/4": 3 - 4 - 5 - 6 - 8 mm
9 x	1/4": T8 - T9 - T10 - T15 - T20 - T25 T27 - T30 - T40
2 x	1/4": 50 - 150 mm
1 x	1/4"
1 x	1/4"
1 x	1/4"

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4"

		L mm	B mm	H mm	kg
713.2046	46 pcs	390.0	188.0	35.0	1.10

13 x	4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm
3 x	4 - 5,5 - 7 mm
3 x	PH1 - PH2 - PH3
2 x	PZ1 - PZ2
6 x	3 - 4 - 5 - 6 - 7 - 8 mm
7 x	T10 - T15 - T20 - T25 - T27 - T30 T40
2 x	50 - 100 mm
1 x	150 mm
1 x	1/4"
1 x	1/4"
1 x	1/4"
4 x	1 - 1,5 - 2 - 2,5 mm
1 x	1/4" x 1/4"
1 x	1/4"

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4"

		L mm	B mm	H mm	kg
783.0042	42 pcs	390.0	188.0	35.0	1.30

12 x	4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 - 14 mm
11 x	4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 mm
3 x	4 - 5 - 8 mm
5 x	3 - 4 - 5 - 6 - 8 mm
1 x	PH2
3 x	PZ1 - PZ2 - PZ4
1 x	1/4"Fx3/8"M
2 x	50 - 150 mm
1 x	150 mm
1 x	1/4"
1 x	110 mm
1 x	140 mm

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4"

		L mm	B mm	H mm	kg
783.0045	45 pcs	390.0	188.0	35.0	1.18

12 x	1/4": 4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm
7 x	1/4": E4 - E5 - E6 - E7 - E8 - E10 E11
3 x	1/4": 4 - 5,5 - 8 mm
2 x	1/4": PH1 - PH2
2 x	1/4": PZ1 - PZ2
5 x	1/4": 3 - 4 - 5 - 6 - 8 mm
9 x	1/4": T8 - T9 - T10 - T15 - T20 - T25 T27 - T30 - T40
2 x	1/4": 50 - 150 mm
1 x	1/4"
1 x	1/4"
1 x	1/4"

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4"

		L mm	B mm	H mm	kg
783.2046	46 pcs	390.0	188.0	35.0	1.13

13 x	4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm
3 x	4 - 5,5 - 7 mm
3 x	PH1 - PH2 - PH3
2 x	PZ1 - PZ2
6 x	3 - 4 - 5 - 6 - 7 - 8 mm
7 x	T10 - T15 - T20 - T25 - T27 - T30 T40
2 x	50 - 100 mm

1 x		150 mm
1 x		1/4“
1 x		1/4“
1 x		1/4“
4 x		1 - 1,5 - 2 - 2,5 mm
1 x		1/4“ x 1/4“
1 x		1/4“

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4“

		L mm	B mm	H mm	kg
713.2047	47 pcs	390.0	188.0	35.0	1.26
10 x		5/32“ - 3/16“ - 7/32“ - 1/4“ - 9/32“ 5/16“ - 11/32“ - 3/8“ - 7/16“ - 1/2“			
10 x		5/32“ - 3/16“ - 7/32“ - 1/4“ - 9/32“ 5/16“ - 11/32“ - 3/8“ - 7/16“ - 1/2“			
3 x		4 - 5 - 7 mm			
2 x		PH1 - PH2			
5 x		1/8“ - 5/32“ - 3/16“ - 7/32“ - 1/4“			
6 x		T10 - T15 - T20 - T25 - T30 - T40			
4 x		M4 - M5 - M6 - M8			
2 x		50 - 100 mm			
1 x		150 mm			
1 x		1/4“			
1 x		1/4“			
1 x		110 mm			
1 x		1/4“			

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4“

		L mm	B mm	H mm	kg
783.2047	47 pcs	390.0	188.0	35.0	1.26
10 x		5/32“ - 3/16“ - 7/32“ - 1/4“ - 9/32“ 5/16“ - 11/32“ - 3/8“ - 7/16“ - 1/2“			
10 x		5/32“ - 3/16“ - 7/32“ - 1/4“ - 9/32“ 5/16“ - 11/32“ - 3/8“ - 7/16“ - 1/2“			
3 x		4 - 5 - 7 mm			
2 x		PH1 - PH2			
5 x		1/8“ - 5/32“ - 3/16“ - 7/32“ - 1/4“			
6 x		T10 - T15 - T20 - T25 - T30 - T40			
4 x		M4 - M5 - M6 - M8			
2 x		50 - 100 mm			
1 x		150 mm			
1 x		1/4“			
1 x		1/4“			
1 x		110 mm			
1 x		1/4“			

SCS Universal bit set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

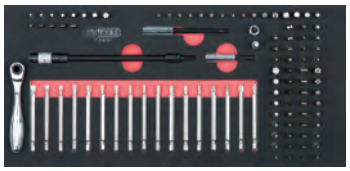

1/4“

		L mm	B mm	H mm	kg
713.0101	101 pcs	390.0	188.0	35.0	1.30
1 x		1/4“			
1 x		100 mm			
1 x		60 mm			
1 x		190 mm			
1 x		30 mm			
1 x		1/4“			
3 x		75 mm x (4 - 5 - 6 mm)			
3 x		75 mm x (TB15 - TB20 - TB30)			
4 x		75 mm x (#1 - #2 - #3 - #4)			
3 x		75 mm x (6 - 8 - 10 mm)			
4 x		75 mm x (4 - 6 - 8 - 10 mm)			
9 x		25 mm x (3 - 4 - 4,5 - 5 - 5,5 - 6 - 6,5 - 7 - 8 mm)			
9 x		25 mm x (1,5 - 2 - 2,5 - 3 - 4 - 5 - 5,5 - 6 - 8 mm)			
12 x		25 mm x (2 - 2,5 - 3 - 4 - 5 - 6 mm - 5/32“ - 9/64“ - 1/8“ - 7/64“ - 3/32“ 5/64“)			
4 x		25 mm x (#1 - #2 - #3 - #4)			
4 x		25 mm x (#0 - #1 - #2 - #3)			
4 x		25 mm x (4 - 6 - 8 - 10 mm)			
9 x		25 mm x (T8 - T10 - T15 - T20 - T25 - T27 - T30 - T40 - T45)			
3 x		25 mm x (T8 - T10 - T15 - T20 - T25 - T27 - T30 - T35 - T40)			
9 x		25 mm x (6 - 8 - 10 mm)			
3 x		25 mm x (M5 - M6 - M8)			
3 x		25 mm x (#1 - #2 - #3)			
5 x		25 mm x (PH0 - PH1 - 2 x PH2 - PH3)			
5 x		25 mm x (PZ0 - PZ1 - 2 x PZ2 - PZ3)			

1/3 SCS - SOCKET WRENCH 3/8“

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



3/8“

		L mm	B mm	H mm	kg
713.1017	17 pcs	390.0	188.0	35.0	1.38
12 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm			
3 x		75 - 150 - 250 mm			
1 x		3/8“			
1 x		190 mm			

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



3/8“

		L mm	B mm	H mm	kg
783.1017	17 pcs	390.0	188.0	35.0	1.60
12 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 mm			
3 x		75 - 150 - 250 mm			
1 x		3/8“			
1 x		190 mm			

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

3/8"

			L mm	B mm	H mm	kg
713.2024	24 pcs		390.0	188.0	35.0	1.54
14 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 mm				
5 x		4 - 5 - 6 - 8 - 10 mm				
1 x		3/8“				
1 x		160 mm				
2 x		150 - 250 mm				
1 x		3/8“				

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

3/8"

			L mm	B mm	H mm	kg
783.2024	24 pcs		390.0	188.0	35.0	1.62
14 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 mm				
5 x		4 - 5 - 6 - 8 - 10 mm				
1 x		3/8“				
1 x		160 mm				
2 x		150 - 250 mm				
1 x		3/8“				

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

3/8"

			L mm	B mm	H mm	kg
713.3025	25 pcs		390.0	188.0	35.0	2.06
1 x		1/2“ x 3/8“				
2 x		16 - 21 mm				
2 x		75 - 250 mm				
1 x		3/8“				
1 x		3/8“				
18 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 mm				

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



3/8"

			L mm	B mm	H mm	kg
783.3025	25 pcs		390.0	188.0	35.0	2.06
1 x		1/2“ x 3/8“				
2 x		16 - 21 mm				
2 x		75 - 250 mm				
1 x		3/8“				
1 x		3/8“				
18 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 mm				

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



3/8"

			L mm	B mm	H mm	kg
713.0036	36 pcs		390.0	188.0	35.0	1.67
13 x		3/8“: 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 21 - 22 mm				
6 x		3/8“: E6 - E7 - E8 - E10 - E12 - E14				
2 x		1/4“: PH1 - PH2				
4 x		1/4“: 5 - 6 - 7 - 8 mm				
6 x		1/4“: T10 - T15 - T20 - T25 - T30 - T40				
2 x		3/8“: 150 - 250 mm				
1 x		3/8“				
1 x		3/8“				
1 x		3/8“				

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

3/8"

			L mm	B mm	H mm	kg
783.0036	36 pcs		390.0	188.0	35.0	1.84
13 x		3/8“: 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 21 - 22 mm				
6 x		3/8“: E6 - E7 - E8 - E10 - E12 - E14				
2 x		1/4“: PH1 - PH2				
4 x		1/4“: 5 - 6 - 7 - 8 mm				
6 x		1/4“: T10 - T15 - T20 - T25 - T30 - T40				
2 x		3/8“: 150 - 250 mm				
1 x		3/8“				
1 x		3/8“				
1 x		3/8“				

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

3/8"

			L mm	B mm	H mm	kg
713.4046	46 pcs		390.0	188.0	35.0	2.74
11 x		1/4" - 5/16" - 3/8" - 7/16" - 1/2" - 9/16" 5/8" - 11/16" - 3/4" - 13/16" - 7/8"				
6 x		3/8" - 7/16" - 1/2" - 9/16" - 11/16" - 3/4"				
2 x		5/8" - 13/16"				
7 x		1/8" - 5/32" - 3/16" - 7/32" - 1/4" - 5/16" - 3/8"				
10 x		T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55				
5 x		M4 - M5 - M6 - M8 - M10				
2 x		75 - 150 mm				
1 x		3/8"				
1 x		160 mm				
1 x		3/8"				

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Firm arrangement due to precise embedding
- Oil and chemical resistant
- Made from high quality foam
- Chrome plated and mirror polished

3/8"

			L mm	B mm	H mm	kg
783.4046	46 pcs		390.0	188.0	35.0	3.00
11 x		1/4" - 5/16" - 3/8" - 7/16" - 1/2" - 9/16" 5/8" - 11/16" - 3/4" - 13/16" - 7/8"				
6 x		3/8" - 7/16" - 1/2" - 9/16" - 11/16" - 3/4"				
2 x		5/8" - 13/16"				
7 x		1/8" - 5/32" - 3/16" - 7/32" - 1/4" - 5/16" - 3/8"				
10 x		T10 - T15 - T20 - T25 - T27 - T30 T40 - T45 - T50 - T55				
5 x		M4 - M5 - M6 - M8 - M10				
2 x		75 - 150 mm				
1 x		3/8"				
1 x		160 mm				
1 x		3/8"				

SCS Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

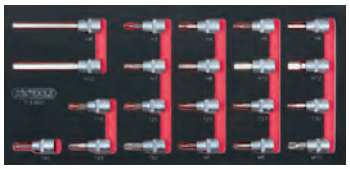

3/8"

			L mm	B mm	H mm	kg
713.0021	21 pcs		390.0	188.0	35.0	1.06
8 x		3 - 4 - 5 - 6 - 7 - 8 - 10 - 12 mm				
2 x		8 - 10 mm				
8 x		T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50				
3 x		M5 - M6 - M10				

SCS CHROME*plus*® bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

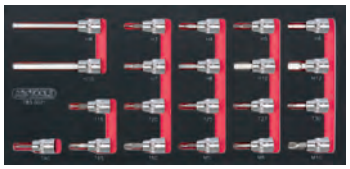

3/8"

			L mm	B mm	H mm	kg
783.0021	21 pcs		390.0	188.0	35.0	1.03
8 x		3 - 4 - 5 - 6 - 7 - 8 - 10 - 12 mm				
2 x		8 - 10 mm				
8 x		T15 - T20 - T25 - T27 - T30 - T40 - T45 - T50				
3 x		M5 - M6 - M10				

SCS Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



3/8"

			L mm	B mm	H mm	kg
713.0039	39 pcs		390.0	188.0	35.0	1.83
8 x		3/8": E5 - E6 - E7 - E8 - E10 - E11 E12 - E14				
5 x		3/8": 5,5 - 7 - 8 - 10 - 12 mm				
3 x		3/8": PH1 - PH2 - PH3				
3 x		3/8": PZ1 - PZ2 - PZ3				
7 x		3/8": T20 - T25 - T27 - T30 - T40 T45 - T50				
6 x		3/8": 4 - 5 - 6 - 7 - 8 - 10 mm				
7 x		3/8": T20 - T25 - T27 - T30 - T40 T45 - T50				

SCS CHROME*plus*® bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

3/8"

			L mm	B mm	H mm	kg
783.0039	39 pcs		390.0	188.0	35.0	1.84
8 x		3/8": E5 - E6 - E7 - E8 - E10 - E11 E12 - E14				
5 x		3/8": 5,5 - 7 - 8 - 10 - 12 mm				
3 x		3/8": PH1 - PH2 - PH3				
3 x		3/8": PZ1 - PZ2 - PZ3				
7 x		3/8": T20 - T25 - T27 - T30 - T40 T45 - T50				
6 x		3/8": 4 - 5 - 6 - 7 - 8 - 10 mm				
7 x		3/8": T20 - T25 - T27 - T30 - T40 T45 - T50				

1/3 SCS - SOCKET WRENCH 1/2"

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

			L mm	B mm	H mm	kg
713.5005	5 pcs		390.0	188.0	35.0	1.85
1 x		1/2"				
2 x		125 - 250 mm				
1 x		250 mm				
1 x		250 mm				

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
783.5005	5 pcs	390.0	188.0	35.0	1.60

2 x		125 - 250 mm
1 x		1/2“
1 x		250 mm
1 x		245 mm

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

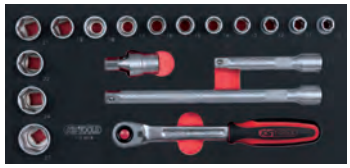

1/2"

		L mm	B mm	H mm	kg
713.3018	18 pcs	390.0	188.0	35.0	2.14

14 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 27 mm
1 x		1/2“
2 x		125 - 250 mm
1 x		1/2“

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

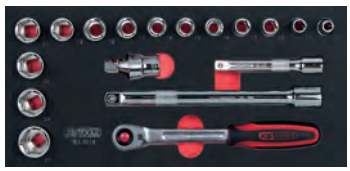

1/2"

		L mm	B mm	H mm	kg
783.3018	18 pcs	390.0	188.0	35.0	2.25

14 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 27 mm
1 x		1/2“
2 x		125 - 250 mm
1 x		1/2“

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
713.4024	24 pcs	390.0	188.0	35.0	3.60

17 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm
2 x		16 - 21 mm
2 x		125 - 250 mm
1 x		1/2“
1 x		3/8“ x 1/2“
1 x		1/2“

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
783.4024	24 pcs	390.0	188.0	35.0	3.16

17 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm
2 x		16 - 21 mm
2 x		125 - 250 mm
1 x		1/2“
1 x		3/8“ x 1/2“
1 x		1/2“

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
713.4025	25 pcs	390.0	375.0	35.0	2.87

16 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 27 - 30 - 32 mm
5 x		E10 - E12 - E14 - E16 - E18
2 x		125 - 250 mm
1 x		1/2“
1 x		245 mm

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
783.4025	25 pcs	390.0	375.0	35.0	2.95

16 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 27 - 30 - 32 mm
5 x		E10 - E12 - E14 - E16 - E18
2 x		125 - 250 mm
1 x		1/2“
1 x		245 mm

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/2"

		L mm	B mm	H mm	kg
713.0028	28 pcs	390.0	188.0	35.0	3.24

11 x		12 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm
13 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 30 mm
2 x		125 - 250 mm
1 x		1/2“
1 x		245 mm

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
783.0028	28 pcs	390.0	188.0	35.0	3.31

11 x		12 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm
13 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 30 mm
2 x		125 - 250 mm
1 x		1/2“
1 x		245 mm

SCS Hexagonal socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/2"

		L mm	B mm	H mm	kg
713.0026	26 pcs	390.0	188.0	35.0	2.59

19 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 23 - 24 - 26 - 27 - 28 - 30 - 32 mm
7 x		6 - 7 - 8 - 9 - 10 - 12 - 14 mm

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
783.0026	26 pcs	390.0	188.0	35.0	2.51

19 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 23 - 24 - 26 - 27 - 28 - 30 - 32 mm
7 x		6 - 7 - 8 - 9 - 10 - 12 - 14 mm

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
713.4026	26 pcs	390.0	375.0	35.0	2.61

19 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 23 - 24 - 26 - 27 - 28 - 30 - 32 mm
7 x		6 - 7 - 8 - 9 - 10 - 12 - 14 mm

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
783.4026	26 pcs	390.0	375.0	35.0	2.60

19 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 23 - 24 - 26 - 27 - 28 - 30 - 32 mm
7 x		6 - 7 - 8 - 9 - 10 - 12 - 14 mm

SCS Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

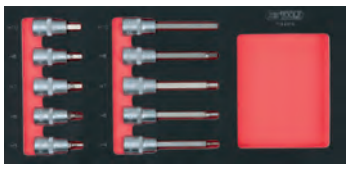

1/2"

		L mm	B mm	H mm	kg
713.2010	10 pcs	390.0	188.0	35.0	1.09

5 x		5 - 6 - 7 - 8 - 10 mm
5 x		4 - 6 - 7 - 8 - 10 mm

SCS CHROME*plus*® bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/2"

		L mm	B mm	H mm	kg
783.2010	10 pcs	390.0	188.0	35.0	1.01

5 x		5 - 6 - 7 - 8 - 10 mm
5 x		4 - 6 - 7 - 8 - 10 mm

SCS Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
713.0013	13 pcs	390.0	188.0	35.0	1.54

9 x		5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 - 19 mm
4 x		6 - 7 - 8 - 10 mm

SCS CHROME*plus*® bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
783.0013	13 pcs	390.0	188.0	35.0	1.50

9 x		5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 - 19 mm
4 x		6 - 7 - 8 - 10 mm

SCS Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/2"

		L mm	B mm	H mm	kg
713.0015	15 pcs	390.0	188.0	35.0	1.75
9 x		5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 mm			
6 x		5 - 6 - 8 - 10 - 12 - 14 mm			

SCS CHROME*plus*® Bit socket set for spline (XZN®) screws

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

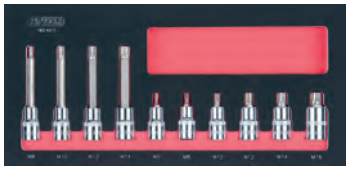

1/2"

		L mm	B mm	H mm	kg
783.4010	10 pcs	390.0	188.0	35.0	1.18
6 x		M5 - M8 - M10 - M12 - M14 - M16			
4 x		M8 - M10 - M12 - M14			

SCS Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
713.9011	11 pcs	390.0	188.0	35.0	1.40
5 x		5 - 6 - 7 - 8 - 10 mm			
1 x		T70 x 110 mm			
2 x		T45 - T55 x 140 mm			
3 x		M8 - M10 - M12			

SCS CHROME*plus*® bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
783.0015	15 pcs	390.0	188.0	35.0	1.61
9 x		5 - 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 mm			
6 x		5 - 6 - 8 - 10 - 12 - 14 mm			

SCS Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
713.4019	19 pcs	390.0	188.0	35.0	1.88
9 x		T20 - T25 - T27 - T30 - T40 - T45 T50 - T55 - T60			
9 x		T20 - T25 - T27 - T30 - T40 - T45 T50 - T55 - T60			
1 x		E1 x T5 - E30 x T70			

SCS CHROME*plus*® bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
783.9011	11 pcs	390.0	188.0	35.0	1.40
5 x		5 - 6 - 7 - 8 - 10 mm			
1 x		T70 x 110 mm			
2 x		T45 - T55 x 140 mm			
3 x		M8 - M10 - M14			

SCS Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
713.4010	10 pcs	390.0	188.0	35.0	1.24
6 x		M5 - M8 - M10 - M12 - M14 - M16			
4 x		M8 - M9 - M12 - M14			

SCS CHROME*plus*® Bit socket set for TX screws

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
783.4019	19 pcs	390.0	188.0	35.0	1.88
9 x		T20 - T25 - T27 - T30 - T40 - T45 T50 - T55 - T60			
9 x		T20 - T25 - T27 - T30 - T40 - T45 T50 - T55 - T60			
1 x		E1 x T5 - E30 x T70			

SCS Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
713.2013	13 pcs	390.0	188.0	35.0	1.36
4 x		5 - 6 - 7 - 8 mm			
1 x		10 mm			
5 x		M5 - M6 - M8 - M10 - M12			
3 x		M8 - M10 - M12			

SCS CHROME*plus*® bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
783.2013	13 pcs	390.0	188.0	35.0	1.23
4 x		5 - 6 - 7 - 8 mm			
1 x		10 mm			
5 x		M5 - M6 - M8 - M10 - M12			
3 x		M8 - M10 - M12			

SCS Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
713.4013	13 pcs	390.0	188.0	35.0	2.69
5 x		T30 - T40 - T45 - T50 - T55			
4 x		M6 - M8 - M9 - M12			
4 x		M6 - M8 - M10 - M12			

SCS CHROME*plus*® bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
783.4013	13 pcs	390.0	188.0	35.0	2.75
5 x		T30 - T40 - T45 - T50 - T55			
4 x		M6 - M8 - M9 - M12			
4 x		M6 - M8 - M10 - M12			

SCS Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
713.0032	32 pcs	390.0	188.0	35.0	3.50
8 x		5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 mm			
4 x		6 - 8 - 10 - 12 mm			
8 x		T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60			
4 x		T30 - T40 - T50 - T60			
4 x		M5 - M6 - M8 - M10			
4 x		M6 - M8 - M10 - M12			

SCS CHROME*plus*® Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

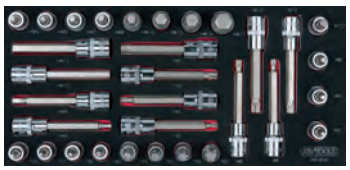

1/2"

		L mm	B mm	H mm	kg
783.0032	32 pcs	390.0	188.0	35.0	6.30
8 x		5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 mm			
4 x		6 - 8 - 10 - 12 mm			
8 x		T25 - T27 - T30 - T40 - T45 - T50 - T55 - T60			
4 x		T30 - T40 - T50 - T60			
4 x		M5 - M6 - M8 - M10			
4 x		M6 - M8 - M10 - M12			

1/3 SCS - SOCKET WRENCH 1/4“ + 1/2“

SCS TX E-Profile ool set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/4" 1/2"

		L mm	B mm	H mm	kg
713.2025	25 pcs	390.0	188.0	35.0	1.20
9 x		1/4“: E4 - E5 - E6 - E8, 1/2“: E10 - E12 - E14 - E18 - E20			
5 x		1/2“: T40 - T45 - T50 - T55 - T60			
7 x		1/4“: TB8 - TB10 - TB15 - TB20 TB25 - TB27 - TB30			
4 x		E6 x E8 - E10 x E12 - E14 x E18 E20 x E24			

SCS CHROME*plus*® TX-E-profile ool set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4" 1/2"

		L mm	B mm	H mm	kg
783.2025	25 pcs	390.0	188.0	35.0	1.20
9 x		1/4“: E4 - E5 - E6 - E8, 1/2“: E10 - E12 - E14 - E18 - E20			
5 x		1/2“: T40 - T45 - T50 - T55 - T60			
7 x		1/4“: TB8 - TB10 - TB15 - TB20 TB25 - TB27 - TB30			
4 x		E6 x E8 - E10 x E12 - E14 x E18 E20 x E24			

SCS Socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4" 1/2"

		L mm	B mm	H mm	kg
713.3047	47 pcs	390.0	188.0	35.0	2.14
8 x		1/4“: 5 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm			
3 x		1/4“: 4 - 4,5 - 5,5 mm			
5 x		1/4“: 2 - 3 - 4 - 5 - 6 mm			

2 x		1/4“: PH1 - PH2
2 x		1/4“: PZ1 - PZ2
5 x		1/4“: T10 - T15 - T20 - T25 - T30
1 x		1/4“
1 x		1/4“
1 x		1/4“: 100 mm
1 x		1/4“
1 x		1/4“
14 x		1/2“: 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 27 mm
2 x		1/2“: 125 - 250 mm
1 x		1/2“

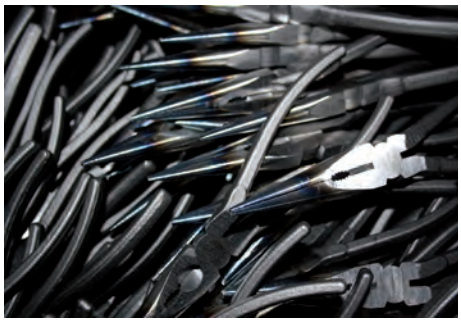

SCS CHROME*plus*® socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4" 1/2"

		L mm	B mm	H mm	kg
783.3047	47 pcs	390.0	188.0	35.0	2.60

8 x		1/4“: 5 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm
3 x		1/4“: 4 - 4,5 - 5,5 mm
5 x		1/4“: 2 - 3 - 4 - 5 - 6 mm
2 x		1/4“: PH1 - PH2
2 x		1/4“: PZ1 - PZ2
5 x		1/4“: T10 - T15 - T20 - T25 - T30
1 x		1/4“
1 x		1/4“
1 x		1/4“: 100 mm
1 x		1/4“
1 x		1/4“
14 x		1/2“: 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 - 27 mm
2 x		1/2“: 125 - 250 mm
1 x		1/2“

SCS Bit socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4" 1/2"

		L mm	B mm	H mm	kg
713.0031	31 pcs	390.0	188.0	35.0	1.20

7 x		1/4“: T10 - T15 - T20 - T25 - T27 T30 - T40
5 x		1/2“: T30 - T40 - T45 - T50 - T55
5 x		1/4“: E5 - E6 - E7 - E8 - E10
6 x		1/2“: E10 - E12 - E14 - E16 - E18 - E20
1 x		TB10 - TB15 - TB20 - TB25 - TB30 TB40 - TB45 - TB50

SCS CHROME*plus*® Bit socket set for TX screws

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4" 1/2"

		L mm	B mm	H mm	kg
783.0031	31 pcs	390.0	188.0	35.0	1.15

7 x		1/4“: T10 - T15 - T20 - T25 - T27 T30 - T40
5 x		1/2“: T30 - T40 - T45 - T50 - T55
5 x		1/4“: E5 - E6 - E7 - E8 - E10
6 x		1/2“: E10 - E12 - E14 - E16 - E18 - E20
1 x		TB10 - TB15 - TB20 - TB25 - TB30 TB40 - TB45 - TB50

1/3 SCS - SOCKET WRENCH 1/4“ + 3/8“ + 1/2“

SCS Spark plug service set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4" 3/8" 1/2"

		L mm	B mm	H mm	kg
713.0027	27 pcs	390.0	188.0	35.0	3.35

20 x		1/4“: 4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm 1/2“: 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
1 x		3/8“
1 x		3/8“ - 150 mm
1 x		3/8“ - 150 mm
4 x		14 - 16 - 18 - 21 mm

SCS CHROME*plus*® spark plug service set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/4" 3/8" 1/2"

		L mm	B mm	H mm	kg
783.0027	27 pcs	390.0	188.0	35.0	3.35

20 x		1/4“: 4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm 1/2“: 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
1 x		3/8“
1 x		3/8“ - 150 mm
1 x		3/8“ - 150 mm
4 x		14 - 16 - 18 - 21 mm

1/3 SCS - IMPACT SOCKET WRENCH

SCS Impact socket set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
713.0012	12 pcs	390.0	188.0	35.0	3.05
12 x		10 - 13 - 14 - 16 - 17 - 18 - 19 - 21 22 - 23 - 24 - 27 mm			

SCS impact socket wrench and bit set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

5/16" 1/2"

		L mm	B mm	H mm	kg
713.0019	19 pcs	390.0	188.0	35.0	2.11
5 x		1/2": 10 - 13 - 14 - 17 - 19 mm			
4 x		5/16": 4 - 5 - 6 - 7 mm			
4 x		5/16": PH1 - PH2 - PH3 - PH4			
4 x		5/16": 5 - 8 - 10 - 14 m			
1 x		1/2" x 5/16"			
1 x		1/2": 135 mm			

SCS impact socket and bit set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

5/16" 1/2"

		L mm	B mm	H mm	kg
713.2023	23 pcs	390.0	188.0	35.0	3.10
5 x		1/2": 10 - 13 - 14 - 17 - 19 mm			
4 x		1/2": 17 - 19 - 21 - 22 mm			
1 x		1/2": 38 mm			

1 x		1/2": 135 mm			
4 x		5/16": 5 - 8 - 10 - 14 mm			
4 x		5/16": PH1 - PH2 - PH3 - PH4			
4 x		5/16": 5 - 6 - 7 - 10 mm			

1/3 SCS - SCREWDRIVER

SCS ERGOTORQUE*plus*® screwdriver set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.0006	6 pcs	390.0	188.0	35.0	0.43
4 x		4 - 5,5 - 6,5 - 8 mm			
2 x		PH1 - PH2			

SCS ERGOTORQUE*plus*® screwdriver set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.1006	6 pcs	390.0	188.0	35.0	0.38
4 x		4,0 - 5,5 - 6,5 - 8,0 mm			
2 x		PZ1 - PZ2			

SCS T-handle TX-key wrench set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

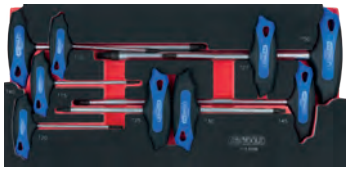

		L mm	B mm	H mm	kg
713.2009	9 pcs	390.0	188.0	35.0	1.35
9 x		(T10 - T15 - T20 - T25 - T27 - T30) x 100, T40 x 200 (T45 - T50) x 250 mm			

SCS ERGOTORQUE*plus*® screwdriver set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
713.9005	5 pcs	390.0	188.0	35.0	0.25
5 x		TB10 - TB15 - TB20 - TB25 - TB27			

SCS ERGOTORQUE*plus*® socket screwdriver set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
713.3006	6 pcs	390.0	188.0	35.0	0.65
6 x		5,5 - 6 - 7 - 8 - 9 - 10 mm			

SCS CHROME*plus*® T-handle hex key wrench set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.0008	8 pcs	390.0	188.0	35.0	1.10
8 x		2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm			

SCS TX T-handle key wrench-set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
713.3009	9 pcs	390.0	188.0	35.0	1.39

9 x	TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50

SCS T-handle hex key wrench set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.4006	6 pcs	390.0	188.0	35.0	0.41

6 x	2 - 2,5 - 3 - 4 - 5 - 6 mm

SCS ERGOTORQUE*plus*® T-handle key wrench set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
713.5004	4 pcs	390.0	188.0	35.0	0.64

4 x	7 - 8 - 10 - 13 mm

1/3 SCS - PLIERS

SCS Pliers set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.6004	4 pcs	390.0	188.0	35.0	1.18

1 x		160 mm
1 x		180 mm
1 x		200 mm
1 x		240 mm

SCS Circlip pliers set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.5006	6 pcs	390.0	188.0	35.0	0.80

2 x		10 - 25 mm, 19 - 60 mm
1 x		19 - 60 mm
2 x		12 - 25 mm, 19 - 60 mm
1 x		19 - 60 mm

SCS automatic grip pliers set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.1003	3 pcs	390.0	188.0	35.0	1.08

2 x		175 - 250 mm
1 x		150 mm

SCS grip pliers set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.8004	4 pcs	390.0	188.0	35.0	1.86

2 x		175 - 250 mm
1 x		150 mm
1 x		285 mm

SCS Pliers set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.9004	4 pcs	390.0	188.0	35.0	1.25

1 x		180 mm
1 x		160 mm
1 x		160 mm
1 x		250 mm

SCS pliers and scraper set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.1004	4 pcs	390.0	188.0	35.0	0.66

1 x		160 mm
1 x		160 mm
2 x		25x200 - 12,5x300 mm

SCS hammer and grip pliers set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
713.2003	3 pcs	390.0	188.0	35.0	1.11
2 x		175 - 250 mm			
1 x		200 g			

1/3 SCS - VDE

SCS VDE socket wrench set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.2018	18 pcs	390.0	188.0	35.0	1.47
15 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 16 17 - 18 - 19 - 20 - 22 mm			
2 x		125 - 250 mm			
1 x		205 mm			

SCS VDE screwdriver set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
713.2007	7 pcs	390.0	188.0	35.0	0.17
4 x		2,5 - 3,0 - 3,5 - 4,0 mm			
3 x		PH1 - PH2 - PH3			

SCS VDE screwdriver set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
713.2006	6 pcs	390.0	188.0	35.0	0.58
4 x		4,0 - 5,5 - 6,5 - 8,0 mm			
2 x		PZ1 - PZ2			

SCS Insulated pliers set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
713.0003	3 pcs	390.0	188.0	35.0	1.00
1 x		160 mm			
1 x		200 mm			
1 x		208 mm			

SCS VDE pliers set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
713.7004	4 pcs	390.0	188.0	35.0	1.11
1 x		156 mm			
1 x		175 mm			
1 x		165 mm			
1 x		240 mm			

1/3 SCS - MEASURING AND CHECKING TOOL

SCS Measuring tool set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.3005	5 pcs	390.0	188.0	35.0	0.58
1 x		230 mm			
1 x		190 mm			
1 x		E1 x T5 - E30 x T70			
1 x		0 - 150 mm			
1 x		5 m x 19 mm			

SCS Measuring tool set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.2008	8 pcs	390.0	188.0	35.0	1.19
1 x		0 - 10 mm			
1 x		0 - 150 mm			
1 x		300 x 13 x 0,5 mm			
1 x		3 m x 16 mm			
1 x					
1 x					
1 x		100 mm			
1 x					

1/3 SCS - PULLER

SCS Puller set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.2005	5 pcs	390.0	188.0	35.0	1.63
3 x					
1 x					
1 x					

1/3 SCS - WORKSHOP SUPPLIES

SCS Workshop file s t

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.3004	4 pcs	390.0	188.0	35.0	0.86
1 x		200 mm			
1 x		200 mm			
1 x		200 mm			
1 x		200 mm			

SCS chisel and hammer set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.0009	9 pcs	390.0	188.0	35.0	1.04
1 x		130 mm			
1 x		130 mm			
1 x		2 - 3 - 4 - 5 - 6 - 8 mm			
1 x		300 g			

SCS Universal tool set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.2014	14 pcs	390.0	188.0	35.0	0.75
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm			
1 x		200 g			
1 x		12,5 x 300 mm			
1 x		0,1 - 1,0 mm			
1 x		3 m x 16 mm			

SCS Drive punch and hammer set

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
713.8013	13 pcs	390.0	188.0	35.0	1.75
1 x					
1 x		2 - 3 - 4 - 5 - 6 - 8			
1 x		500 g			
1 x		160 mm			

1/3 SCS - EMPTY INSERTS

SCS Universal system insert for tools or small parts (empty)

- 1/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

	L mm	B mm	H mm	kg
713.0000	390.0	188.0	35.0	0.10

Anti slip mat

- Thickness 10 mm
- Uncut for self modelling

	L mm	B mm	kg
800.0920	10000.0	600.0	2.50

2/3 SCS - SPANNER

SCS Combination spanners set, offset

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
712.2017	17 pcs	390.0	375.0	35.0	1.90

17 x	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 21 - 22 - 24 mm

SCS Combination spanners set, offset

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
782.2017	17 pcs	390.0	375.0	35.0	2.40

17 x	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 21 - 22 - 24 mm

SCS Combination spanners set, offset

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
712.3005	5 pcs	390.0	375.0	35.0	2.19

5 x	23 - 24 - 27 - 30 - 32 mm

SCS CHROME*plus* Combination spanners set, offset

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
782.3005	5 pcs	390.0	375.0	35.0	2.95

5 x	23 - 24 - 27 - 30 - 32 mm

SCS Combination spanners set, offset

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
712.0027	27 pcs	390.0	375.0	35.0	2.37

1 x	1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm
17 x	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 mm

SCS CHROME*plus* Combination spanners set, offset

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
782.0027	27 pcs	390.0	375.0	35.0	2.85

1 x	1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm
17 x	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 mm

SCS GEAR*plus*® ratchet combination spanner set, including adaptors

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
712.1016	16 pcs	390.0	188.0	35.0	1.80

1 x	1/4" x 10 mm
3 x	1/4" x 10 mm - 3/8" x 13 mm 1/2" x 19 mm
12 x	8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm

SCS GEAR*plus*® reversing ratchet combination spanner set, including adaptors

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
712.0016	16 pcs	390.0	188.0	35.0	1.68

1 x	1/4" x 10 mm
3 x	1/4" x 10 mm - 3/8" x 13 mm 1/2" x 19 mm
12 x	8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm

SCS Double open ended spanner set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
712.3011	11 pcs	390.0	375.0	35.0	2.81

11 x	6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 24x27 - 30x32 - 36x41 mm

SCS CHROME*plus*® double open ended spanner set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
782.3011	11 pcs	390.0	375.0	35.0	4.40
11 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 24x27 - 30x32 - 36x41 mm			

SCS Double ring spanner set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
712.5011	11 pcs	390.0	375.0	35.0	1.30
11 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 22x24 - 24x27 - 30x32 mm			

SCS double ring spanner set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
712.0009	9 pcs	390.0	375.0	35.0	1.73
9 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 21x23 mm			

SCS CHROME*plus* double ring spanner set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
782.0009	9 pcs	390.0	375.0	35.0	1.95
9 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 21x23 mm			

SCS Double revolving head spanner set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
712.0014	14 pcs	390.0	375.0	35.0	2.45
2 x		10 x 11 - 12 x 13 mm			
5 x		T15 x T20 - T25 x T27 - T30 x T40 T45 x T50 - T55 x T60			
4 x		E6 x E8 - E10 x E12 - E14 x E16 E22 x E24			
3 x		3 x 4 - 5 x 6 - 8 x 10 mm			

SCS Pipe head box wrench set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
712.7011	11 pcs	390.0	375.0	35.0	5.26
11 x		8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm			

2/3 SCS - SOCKET WRENCH 1/4“

SCS Socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4“

		L mm	B mm	H mm	kg
712.0061	61 pcs	390.0	375.0	35.0	1.76
12 x		1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm			
12 x		1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm			
10 x		1/4“: 3/16“-7/32“-1/4“-9/32“-5/16“ 11/32“-3/8“-7/16“-1/2“-9/16“			
3 x		1/4“: 4,5 - 5,5 - 6,5 mm			
3 x		1/4“: PH1 - PH2 - PH3			
3 x		1/4“: PZ1 - PZ2 - PZ3			
3 x		1/4“: 4 - 5 - 6 mm			
7 x		1/4“: T10 - T15 - T20 - T25 - T27 - T30 - T40			
3 x		1/4“: 50 - 100 - 150 mm			
1 x		1/4“: 250			
1 x		1/4“			
1 x		1/4“			
1 x		1/4“			
1 x		1/4“			

SCS CHROMEplus® socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4"

			L mm	B mm	H mm	kg
782.0061	61 pcs		390.0	375.0	35.0	1.91
12 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm				
12 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm				
10 x		1/4": 3/16"-7/32"-1/4"-9/32"-5/16" 11/32"-3/8"-7/16"-1/2"-9/16"				
3 x		1/4": 4,5 - 5,5 - 6,5 mm				
3 x		1/4": PH1 - PH2 - PH3				
3 x		1/4": PZ1 - PZ2 - PZ3				
3 x		1/4": 4 - 5 - 6 mm				
7 x		1/4": T10 - T15 - T20 - T25 - T27 - T30 - T40				
3 x		1/4": 50 - 100 - 150 mm				
1 x		1/4": 250				
1 x		1/4"				
1 x		1/4"				
1 x		1/4"				
1 x		1/4"				

2/3 SCS - SOCKET WRENCH 3/8"

SCS Socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



3/8"

			L mm	B mm	H mm	kg
712.0034	34 pcs		390.0	375.0	35.0	3.00
13 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 mm				
7 x		1/2" - 9/16" - 19/32" - 5/8" - 11/16" - 3/4" - 7/8"				
5 x		10 - 13 - 17 - 19 - 22 mm				
3 x		16 - 18 - 21 mm				
3 x		75 - 150 - 250 mm				
1 x		3/8"				
1 x		260 mm				
1 x		3/8"				

SCS CHROMEplus® socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



3/8"

			L mm	B mm	H mm	kg
782.0034	34 pcs		390.0	375.0	35.0	3.00
13 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 mm				
7 x		1/2" - 9/16" - 19/32" - 5/8" - 11/16" - 3/4" - 7/8"				
5 x		10 - 13 - 17 - 19 - 22 mm				
3 x		16 - 18 - 21 mm				
3 x		75 - 150 - 250 mm				
1 x		3/8"				
1 x		260 mm				
1 x		3/8"				

SCS Socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



3/8"

			L mm	B mm	H mm	kg
712.1052	52 pcs		390.0	375.0	35.0	2.30
8 x		3/8": E5 - E6 - E7 - E8 - E10 - E11 E12 - E14				
6 x		3/8": 4 - 5 - 6 - 7 - 8 - 10 mm				
5 x		3/8": 4 - 5 - 6 - 8 - 10 mm				
7 x		3/8": T20 - T25 - T27 - T30 - T40 T45 - T50				
7 x		3/8": TB20 - TB25 - TB27 - TB30 TB40 TB45 - TB50				
3 x		3/8": M5 - M6 - M8				
6 x		3/8": 4 - 5 - 6 - 7 - 8 - 10 mm				
7 x		3/8": T20 - T25 - T27 - T30 - T40 T45 - T50				
3 x		3/8": M5 - M6 - M8				

SCS CHROMEplus® socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



3/8"

			L mm	B mm	H mm	kg
782.1052	52 pcs		390.0	375.0	35.0	2.45
8 x		3/8": E5 - E6 - E7 - E8 - E10 - E11 E12 - E14				
6 x		3/8": 4 - 5 - 6 - 7 - 8 - 10 mm				
5 x		3/8": 4 - 5 - 6 - 8 - 10 mm				
7 x		3/8": T20 - T25 - T27 - T30 - T40 T45 - T50				
7 x		3/8": TB20 - TB25 - TB27 - TB30 TB40 TB45 - TB50				
4 x		3/8": M5 - M6 - M8 - M10				
6 x		3/8": 4 - 5 - 6 - 7 - 8 - 10 mm				
7 x		3/8": T20 - T25 - T27 - T30 - T40 T45 - T50				

2/3 SCS - SOCKET WRENCH 1/2“

SCS Socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
712.0026	26 pcs	390.0	375.0	35.0	3.93
21 x		1/2“: 10-11-12-13-14-15-16-17-18-19-20-21 22-23-24-26-27-28-30-32-34 mm			
2 x		1/2“: 125 - 250 mm			
1 x		1/2“: 250 mm			
1 x		1/2“			
1 x		1/2“			

SCS CHROMEplus® socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
782.0026	26 pcs	390.0	375.0	35.0	3.92
21 x		1/2“: 10-11-12-13-14-15-16-17-18-19-20-21 22-23-24-26-27-28-30-32-34 mm			
2 x		1/2“: 125 - 250 mm			
1 x		1/2“: 250 mm			
1 x		1/2“			
1 x		1/2“			

SCS Socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
712.1029	29 pcs	390.0	375.0	35.0	6.18
24 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 23 - 24 - 25 - 26 - 27 - 28 - 29 - 30 - 32 - 34 - 36 mm			
1 x		1/2“			
2 x		150 - 250 mm			
1 x		380 mm			
1 x		1/2“			

CHROMEplus® socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
782.1029	29 pcs	390.0	375.0	35.0	4.80
24 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 23 - 24 - 25 - 26 - 27 - 28 - 29 - 30 - 32 - 34 - 36 mm			
1 x		1/2“			
2 x		150 - 250 mm			
1 x		380 mm			
1 x		1/2“			

SCS Socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
712.6030	30 pcs	390.0	375.0	35.0	5.30
15 x		3/8“ - 7/16“ - 1/2“ - 9/16“ - 19/32“ - 5/8“ - 11/16“ - 3/4“ 13/16“ - 7/8“ - 15/16“ - 1“ - 1.1/16“ - 1.1/8“ - 1.1/4			
7 x		1/2“ - 9/16“ - 11/16“ - 3/4“ - 7/8“ 15/16“ - 1“			
2 x		5/8“ - 13/16“			
2 x		125 - 250 mm			
1 x		1/2“			
1 x		3/8“F x 1/2“M			
1 x		380 mm			
1 x		1/2“			

SCS CHROMEplus® Socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
782.6030	30 pcs	390.0	375.0	35.0	5.30
15 x		3/8“ - 7/16“ - 1/2“ - 9/16“ - 19/32“ - 5/8“ - 11/16“ - 3/4“ 13/16“ - 7/8“ - 15/16“ - 1“ - 1.1/16“ - 1.1/8“ - 1.1/4			
7 x		1/2“ - 9/16“ - 11/16“ - 3/4“ - 7/8“ 15/16“ - 1“			
2 x		5/8“ - 13/16“			
2 x		125 - 250 mm			
1 x		1/2“			
1 x		3/8“F x 1/2“M			
1 x		380 mm			
1 x		1/2“			

SCS Bit socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/2"

			L mm	B mm	H mm	kg
712.0023	23 pcs		390.0	375.0	35.0	2.90
9 x		5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 - 19 mm				
6 x		M5 - M8 - M10 - M12 - M14 - M16				
4 x		M8 - M10 - M12 - M14				
4 x		6 - 7 - 8 - 9 mm				

SCS CHROMEplus® Bit socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/2"

			L mm	B mm	H mm	kg
782.0023	23 pcs		390.0	375.0	35.0	2.70
9 x		5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 - 19 mm				
6 x		M5 - M8 - M10 - M12 - M14 - M16				
4 x		M8 - M10 - M12 - M14				
4 x		6 - 7 - 8 - 9 mm				

SCS Bit socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/2"

			L mm	B mm	H mm	kg
712.0029	29 pcs		390.0	375.0	35.0	3.50
9 x		5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 - 19 mm				
8 x		M5 - M6 - M8 - M9 - M10 - M12 - M14 M16				
2 x		M8 - M12 x 110 mm				
1 x		M12 x 140 mm				
5 x		6 - 7 - 8 - 9 - 10 mm				
1 x		50 mm				
3 x		50 - 125 - 250 mm				

SCS CHROMEplus® socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

			L mm	B mm	H mm	kg
782.0029	29 pcs		390.0	375.0	35.0	3.53
9 x		5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 - 19 mm				
8 x		M5 - M6 - M8 - M9 - M10 - M12 - M14 M16				
2 x		M8 - M12 x 110 mm				
1 x		M12 x 140 mm				
5 x		6 - 7 - 8 - 9 - 10 mm				
1 x		50 mm				
3 x		50 - 125 - 250 mm				

SCS Socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/2"

			L mm	B mm	H mm	kg
712.0039	39 pcs		390.0	375.0	35.0	3.60
9 x		TB20 - TB25 - TB27 - TB30 - TB40 TB45 - TB50 - TB55 - TB60				
5 x		M6 - M8 - M9 - M12 - M14				
9 x		M5 - M6 - M7 - M8 - M9 - M10 - M12 M13 - M14				
1 x		2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10				
1 x		T10 - T15 - T20 - T25 - T30 - T40 T45 - T50				

SCS CHROMEplus® socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/2"

			L mm	B mm	H mm	kg
782.0039	39 pcs		390.0	375.0	35.0	3.50
9 x		TB20 - TB25 - TB27 - TB30 - TB40 TB45 - TB50 - TB55 - TB60				
5 x		M6 - M8 - M9 - M12 - M14				
9 x		M5 - M6 - M7 - M8 - M9 - M10 - M12 M13 - M14				
1 x		2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10				
1 x		T10 - T15 - T20 - T25 - T30 - T40 T45 - T50				

SCS Socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
712.4040	40 pcs	390.0	375.0	35.0	6.18

4 x		E16 - E18 - E20 - E24
16 x		10 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 21 - 22 - 24 - 27 - 30 - 32 - 34 mm
5 x		10 - 12 - 14 - 17 - 19 mm
2 x		12 - 14 mm
2 x		10 - 12 mm
2 x		T55 - T60
2 x		T55 - T60
3 x		TB50 - TB55 - TB60
2 x		M12 - M14
2 x		M12 - M14

SCS CHROMEplus® socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
782.4040	40 pcs	390.0	375.0	35.0	1.55

4 x		E16 - E18 - E20 - E24
16 x		10 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 21 - 22 - 24 - 27 - 30 - 32 - 34 mm
5 x		10 - 12 - 14 - 17 - 19 mm
2 x		12 - 14 mm
2 x		10 - 12 mm
2 x		T55 - T60
2 x		T55 - T60
3 x		TB50 - TB55 - TB60
2 x		M12 - M14
2 x		M12 - M14

2/3 SCS - SOCKET WRENCH 1/4“ + 1/2“

SCS Socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



1/4" 1/2"

		L mm	B mm	H mm	kg
712.0057	57 pcs	390.0	375.0	35.0	4.31

9 x		1/4“: 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm
20 x		1/2“: 10-11-12-13-14-15-16-17-18-19 20-21-22-23-24-26-27-28-30-32 mm
3 x		1/4“: 4,5 - 6 - 6,5 mm
2 x		1/4“: PH1 - PH3
2 x		1/4“: PZ1 - PZ2
5 x		1/4“: 3 - 4 - 5 - 6 - 8 mm
4 x		1/4“: T15 - T20 - T25 - T30
2 x		1/4“: 50 - 150 mm
2 x		1/2“: 125 - 250 mm
1 x		1/2“
1 x		1/4“
1 x		1/4“
1 x		1/4“
2 x		1/4“ - 1/2“
2 x		1/4“ - 1/2“

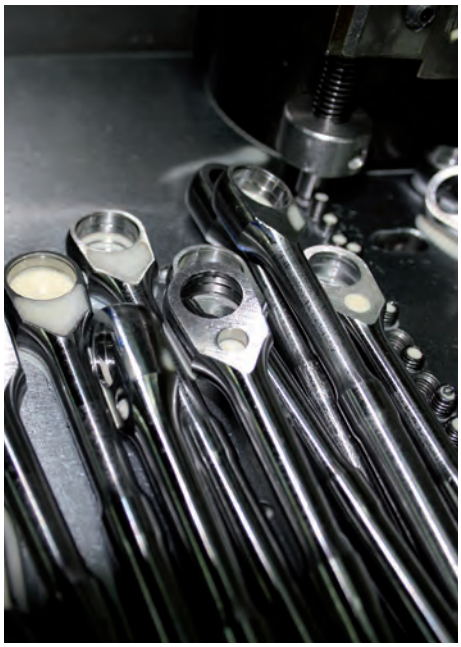

SCS CHROMEplus® socket set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4" 1/2"

		L mm	B mm	H mm	kg
782.0057	57 pcs	390.0	375.0	35.0	4.30

9 x		1/4“: 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm
20 x		1/2“: 10-11-12-13-14-15-16-17-18-19 20-21-22-23-24-26-27-28-30-32 mm
3 x		1/4“: 4,5 - 6 - 6,5 mm
2 x		1/4“: PH1 - PH3
2 x		1/4“: PZ1 - PZ2
5 x		1/4“: 3 - 4 - 5 - 6 - 8 mm
4 x		1/4“: T15 - T20 - T25 - T30
2 x		1/4“: 50 - 150 mm
2 x		1/2“: 125 - 250 mm
1 x		1/2“
1 x		1/4“
1 x		1/4“
1 x		1/4“
2 x		1/4“ - 1/2“
2 x		1/4“ - 1/2“

2/3 SCS - SOCKET WRENCH 1/4“ + 3/8“ + 1/2“

SCS TX socket wrench set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4" 3/8" 1/2"

		L mm	B mm	H mm	kg	
712.1057	57 pcs	390.0	375.0	35.0	2.31	
7 x						1/4“: E4 - E5 - E6 - E7 - E8 - E10 - E11
2 x						3/8“: E12 - E14
4 x						1/2“: E16 - E18 - E20 - E24
2 x						3/8“: T40 - T45
3 x						1/2“: T50 - T55 - T60
1 x						1/4“: T20
10 x						1/4“: TB7 - TB8 - TB9 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40
1 x						1/4“ x 1/4“
1 x						3/8“ x 10 mm
1 x						1/4“
8 x						T8 - T9 - T10 - T15 - T20 - T25 - T27 - T30
2 x						T6 - T7
11 x						T6 - T7 - T8 - T9 - T10 - T15 - T20 - T25 - T27 - T30 - T40
4 x						E6xE8 - E10xE12 - E14xE18 - E20xE24

2/3 SCS - SCREWDRIVER

SCS ERGOTORQUE*plus*® screwdriver set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg	
712.0011	11 pcs	390.0	375.0	35.0	1.00	
1 x						6 mm
6 x						3 - 4 - 5,5 - 6,5 - 8 - 10 mm
1 x						PH2
3 x						PH1 - PH2 - PH3

SCS ERGOTORQUE*plus*® screwdriver set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg	
712.0012	12 pcs	390.0	375.0	35.0	1.02	
5 x						3 - 4 - 6,5 - 8 - 10 mm
3 x						PH1 - PH2 - PH3
1 x						PZ1
1 x						6 mm
1 x						PH2
1 x						2,4 mm

SCS ERGOTORQUE*plus*® screwdriver set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg	
712.0020	20 pcs	390.0	375.0	35.0	1.30	
1 x						6 mm
3 x						3 - 5,5 - 8 mm
1 x						PH2
3 x						PH1 - PH2 - PH3
1 x						PZ2
3 x						PZ1 - PZ2 - PZ3
1 x						2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm

SCS ERGOTORQUE*plus*® T-handle TX tamperproof key wrench set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg	
712.3007	7 pcs	390.0	375.0	35.0	0.84	
7 x						TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40

SCS ERGOTORQUE*plus*® T-handle socket srewdriver set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam



		L mm	B mm	H mm	kg
712.1008	8 pcs	390.0	375.0	35.0	1.50

8 x	7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm

SCS ERGOTORQUE*plus*® T-handle hexagon socket key wrench set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
712.4009	9 pcs	390.0	375.0	35.0	1.55

9 x	2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm

2/3 SCS - WORKSHOP SUPPLIES

SCS chisel and measuring instrument set

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
712.0021	21 pcs	390.0	375.0	35.0	1.91

5 x	Ø 3 - 4 - 5 - 6 - 8 mm
3 x	Ø 4 - 5 - 6 mm
4 x	Ø 3 - 4 - 5 - 6 mm
1 x	Ø 5 mm
1 x	250 mm
1 x	150 mm
1 x	320 mm
1 x	0 - 150 mm
1 x	0,05 - 1,00 mm
1 x	E1xT5 - E30xT70
1 x	0,4 - 6,0 mm
1 x	3 - 48 V

2/3 SCS - EMPTY INSERTS

SCS Universal system insert for tool or small parts (empty)

- 2/3 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

	L mm	B mm	H mm	kg
712.0001	390.0	375.0	35.0	0.10

Anti slip mat

- Thickness 10 mm
- Uncut for self modelling

	L mm	B mm	kg
800.0920	10000.0	600.0	2.50

1/1 SCS - SPANNER

SCS combination wrench set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.3033	33 pcs	390.0	564.0	35.0	5.77

8 x	5/16" - 3/8" - 7/16" - 1/2" - 9/16" - 5/8" 11/16" - 3/4"
25 x	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 - 30 mm

SCS CHROME*plus*® combination spanner set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

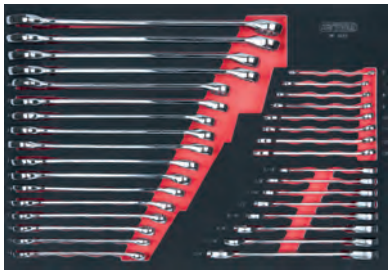

		L mm	B mm	H mm	kg
781.3033	33 pcs	390.0	564.0	35.0	7.24

8 x	5/16" - 3/8" - 7/16" - 1/2" - 9/16" - 5/8" 11/16" - 3/4"
25 x	6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 - 30 mm

SCS Spanner set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.0024	24 pcs	390.0	564.0	35.0	4.70

12 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 21x23 - 24x27 - 27x30 - 30x32 mm
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm

SCS CHROME*plus*® spanner set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

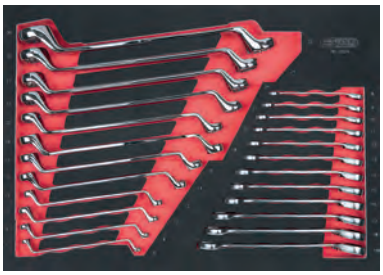

		L mm	B mm	H mm	kg
781.0024	24 pcs	390.0	564.0	35.0	4.67

12 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 17x19 - 18x19 - 20x22 - 21x23 - 24x27 - 30x32 mm
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm

SCS combination wrench set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

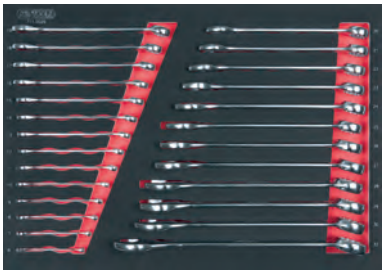

		L mm	B mm	H mm	kg
711.0026	26 pcs	390.0	564.0	35.0	5.50

26 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 - 30 - 32 mm

SCS CHROME*plus*® combination spanner set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
781.0026	26 pcs	390.0	564.0	35.0	5.50

26 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 - 30 - 32 mm

SCS spanner set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.2030	30 pcs	390.0	564.0	35.0	4.82

12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
7 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19
4 x		E6xE8 - E10xE12 - E14xE16 - E22xE24
7 x		8x10 - 12x13 - 13x14 - 14x15 - 17x19 - 19x22 - 24x27

SCS CHROMEplus® spanner set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
781.2030	30 pcs	390.0	564.0	35.0	5.20

12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
7 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19
4 x		E6xE8 - E10xE12 - E14xE16 - E22xE24
7 x		8x10 - 12x13 - 13x14 - 14x15 - 17x19 - 19x22 - 24x27

SCS CHROME*plus*® wrench set inch

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
781.0031	31 pcs	390.0	564.0	35.0	5.56

4 x		1/4“ x 5/16“ - 3/8“ x 7/16“ - 1/2“ x 9/16“ - 5/8“ x 11/16“
12 x		1/4“ - 5/16“ - 3/8“ - 7/16“ - 1/2“ - 9/16“ 5/8“ - 11/16“ - 3/4“ - 13/16“ - 7/8“ - 15/16“
7 x		1/4“x5/16“ - 3/8“x7/16“ - 1/2“x9/16“ - 9/16“x5/8“ 11/16“x3/4“ - 13/16“x7/8“ - 15/16“x1“
8 x		1/4“x5/16“ - 3/8“x7/16“ - 1/2“x9/16“ - 9/16“x5/8“ - 5/8“x11/16“ - 11/16“x3/4“ - 15/16“x1“ - 1.1/8“x1.1/4“

SCS spanner set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

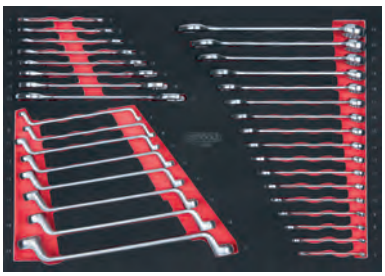

		L mm	B mm	H mm	kg
711.0033	33 pcs	390.0	564.0	35.0	4.05

17 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 21 - 22 - 24 mm
8 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 -18x19 - 21x23 mm
8 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 -18 x19 - 21x23 mm

SCS CHROMEplus® spanner set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

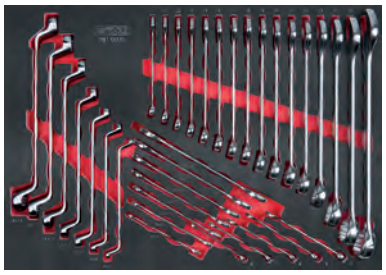

		L mm	B mm	H mm	kg
781.0035	35 pcs	390.0	564.0	35.0	6.34

21 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm
7 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 -18x19 mm
7 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 -18 x19 mm

SCS Wrench set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.0036	36 pcs	390.0	564.0	35.0	4.86

17 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 mm
10 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 18x19 - 20x22 - 24x27 - 30x32 mm
8 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 -18 x19 - 21x23 mm
1x		11 mm

SCS CHROMEplus® wrench set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
781.0036	36 pcs	390.0	564.0	35.0	5.80

17 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 mm

SCS CHROMEplus® spanner set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

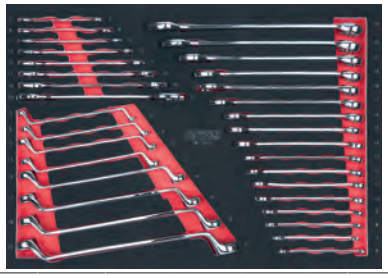

		L mm	B mm	H mm	kg
781.0033	33 pcs	390.0	564.0	35.0	4.72

17 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 21 - 22 - 24 mm
8 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 -18x19 - 21x23 mm
8 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 -18 x19 - 21x23 mm

SCS spanner set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

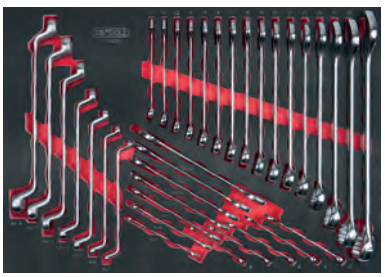

		L mm	B mm	H mm	kg
711.0035	35 pcs	390.0	564.0	35.0	4.05

21 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm
7 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 -18x19 mm
7 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 -18 x19 mm

10 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 18x19 - 20x22 - 24x27 - 30x32 mm
8 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 -18 x19 - 21x23 mm
1x		11 mm

SCS Wrench set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.0041	41 pcs	390.0	564.0	35.0	6.80

20 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 20 - 22 - 24 - 27 - 30 - 32 mm
10 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 18x19 - 20x22 - 21x23 - 24x27 mm
2 x		8x10 - 10x11 mm
9x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 - 18x19 - 20x22 - 21x23 mm

SCS CHROMEplus® wrench set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
781.0041	41 pcs	390.0	564.0	35.0	7.81

20 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 20 - 22 - 24 - 27 - 30 - 32 mm
10 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 18x19 - 20x22 - 21x23 - 24x27 mm
2 x		8x10 - 10x11 mm
9x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 - 18x19 - 20x22 - 21x23 mm

SCS spanner set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

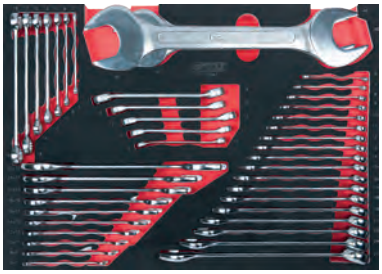

		L mm	B mm	H mm	kg
711.0042	42 pcs	390.0	564.0	35.0	8.50
18 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 21 - 22 - 24 - 27 mm			
12 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 21x23 - 24x27 - 30x32 - 36x41 - 46x50 mm			
5 x		8x10 - 10x11 - 12x13 - 14x15 - 17x19 mm			
7 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 - 18x19 mm			

SCS spanner set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.0047	47 pcs	390.0	564.0	35.0	8.53
7 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 - 18x19 mm			
12 x		8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 mm			
10 x		10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19 mm			
8 x		8x10 - 10x11 - 12x13 - 14x15 - 17x19 - 19x21 - 24x27 - 30x32 mm			
7 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 - 18x19 mm			
3 x		10x12 - 11x13 - 14x17 mm			

SCS Spanner and pliers set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

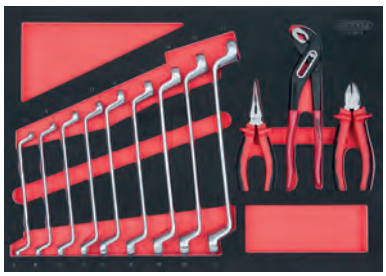

		L mm	B mm	H mm	kg
711.2012	12 pcs	390.0	564.0	35.0	2.33
9 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 16x17 - 18x19 - 20x22 - 21x23			
1 x		160 mm			
1 x		160 mm			
1 x		240 mm			

SCS double ring spanner and pliers set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

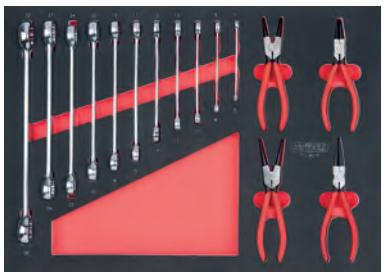

		L mm	B mm	H mm	kg
711.4015	15 pcs	390.0	564.0	35.0	2.22
11 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 - 21x23 - 24x27 - 30x32 mm			
1 x		160 mm			
1 x		160 mm			
1 x		160 mm			
1 x		160 mm			

SCS double spanner and file s t

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.3015	15 pcs	390.0	564.0	35.0	3.73
11 x		6 x 7 - 8 x 9 - 10 x 11 - 12 x 13 - 14 x 15 - 16 x 17 18 x 19 - 20 x 22 - 24 x 27 - 30 x 32 - 36 x 41			
1 x		200 mm			
1 x		200 mm			
1 x		200 mm			
1 x		200 mm			

SCS combination wrench and screwdriver set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

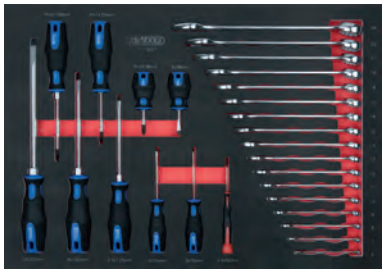

		L mm	B mm	H mm	kg
711.5027	27 pcs	390.0	564.0	35.0	2.66
17 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 mm			
5 x		3 - 4 - 6,5 - 8 - 10 mm			
2 x		PH1 - PH2			
1 x		6 mm			
1 x		PH2			
1 x		2,4 mm			

SCS CHROME*plus*® combination wrench and screwdriver set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
781.2029	29 pcs	390.0	564.0	35.0	4.11
21 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm			
6 x		3x155 - 4x155 - 4x180 - 5,5x230 6,5x230 - 8x265 mm			
2 x		PH1 - PH2			

SCS Spanner and hammer set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.3031	31 pcs	390.0	564.0	35.0	3.71
17 x		6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 mm			
8 x		6x7 - 8x9 - 10x11 - 12x13 - 14x15 - 16x17 - 18x19 - 20x22 mm			
1 x					
1 x		500 g			

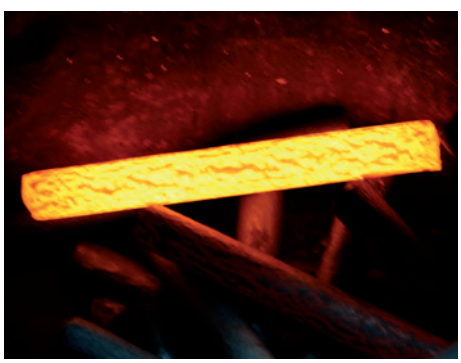

SCS spanner and hammer set, imperial

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
781.4031	31 pcs	390.0	564.0	35.0	7.40
16 x		1/4" - 5/16" - 3/8" - 7/16" - 1/2" - 9/16" - 5/8" - 11/16" 3/4" - 13/16" - 7/8" - 5/16" - 1" - 1.1/16" - 1.1/8" - 1.1/4"			
9 x		1/4"x5/16"-3/8"x7/16"-1/2"x9/16"-9/16"x5/8"-5/8"x 11/16"-11/16"x3/4"-3/4"x7/8"-15/16"x1"-1.1/8"x1.1/4"			
1 x					
1 x		500 g			

1/1 SCS - SOCKET WRENCH 1/4"

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

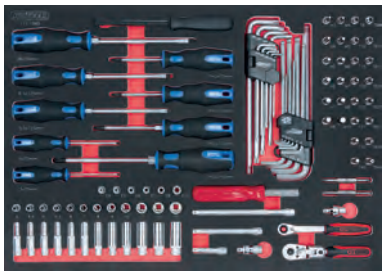

1/4"

		L mm	B mm	H mm	kg
711.1095	95 pcs	390.0	564.0	35.0	3.72
12 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm			
12 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm			
6 x		1/4": E4 - E5 - E6 - E7 - E8 - E10			
6 x		1/4": 3 - 4 - 5 - 6 - 7 - 8 mm			
8 x		1/4": T8 - T10 - T15 - T20 - T25 - T27 T30 - T40			
8 x		1/4": TB8 - TB10 - TB15 - TB20 TB25 - TB27 - TB30 - TB40			
6 x		1/4": M4 - M5 - M6 - M7 - M8 - M10			
3 x		1/4": 50 - 100 - 150 mm			
1 x		3,0 - 5,5 - PH1 - PH2			
1 x		1/4"			
1 x		1/4"			
1 x		1/4"			
1 x		1/4"			
5 x		3 - 4 - 5,5 - 6,5 - 8 mm			
4 x		PH0 - PH1 - PH2 - PH3			
1 x		TS10 - TS15 - TS20 - TS25 - TS27 TS30 - TS40 - TS45 - TS50			
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm			
1 x		11 x 115 mm			

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

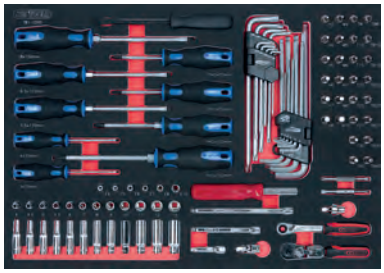

1/4"

		L mm	B mm	H mm	kg
781.1095	95 pcs	390.0	564.0	35.0	3.90
12 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm			
12 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm			
6 x		1/4": E4 - E5 - E6 - E7 - E8 - E10			
6 x		1/4": 3 - 4 - 5 - 6 - 7 - 8 mm			
8 x		1/4": T8 - T10 - T15 - T20 - T25 - T27 T30 - T40			
8 x		1/4": TB8 - TB10 - TB15 - TB20 TB25 - TB27 - TB30 - TB40			
6 x		1/4": M4 - M5 - M6 - M7 - M8 - M10			
3 x		1/4": 50 - 100 - 150 mm			
1 x		3,0 - 5,5 - PH1 - PH2			
1 x		1/4"			
1 x		1/4"			
1 x		1/4"			
1 x		1/4"			
5 x		3 - 4 - 5,5 - 6,5 - 8 mm			
4 x		PH0 - PH1 - PH2 - PH3			
1 x		TS10 - TS15 - TS20 - TS25 - TS27 TS30 - TS40 - TS45 - TS50			
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm			
1 x		11 x 115 mm			

1/1 SCS - SOCKET WRENCH 1/2“

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
711.0061	61 pcs	390.0	564.0	35.0	8.52

19 x		1/2“: 10-11-12-13-14-15-16-17-18-19 20-21-22-24-26-27-28-30-32 mm
1 x		3/4“: 32 mm
2 x		1/2“: 10 - 13 mm
2 x		1/2“: 17 - 19 mm
4 x		1/2“: 5 - 6 - 8 - 10 mm
6 x		1/2“: 5 - 6 - 7 - 8 - 9 - 10 mm
5 x		1/2“: T25 - T45 - T50 - T55 - T60
1 x		1/2“: T45
5 x		1/2“: M6 - M8 - M10 - M12 - M14
4 x		1/2“: M8 - M10 - M12 - M14
1 x		1/2“: M16
1 x		1/2“: M9
1 x		3/4“: M18
2 x		1/2“: 125 - 250 mm
3 x		1/2“: 50 - 125 - 250 mm
1 x		1/2“: 250 mm
1 x		3/8“F x 1/2“M
1 x		1/2“
1 x		1/2“

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
781.0061	61 pcs	390.0	564.0	35.0	8.40

19 x		1/2“: 10-11-12-13-14-15-16-17-18-19 20-21-22-24-26-27-28-30-32 mm
1 x		3/4“: 32 mm
2 x		1/2“: 10 - 13 mm
2 x		1/2“: 17 - 19 mm
4 x		1/2“: 5 - 6 - 8 - 10 mm
6 x		1/2“: 5 - 6 - 7 - 8 - 9 - 10 mm
5 x		1/2“: T25 - T45 - T50 - T55 - T60
1 x		1/2“: T45
5 x		1/2“: M6 - M8 - M10 - M12 - M14
4 x		1/2“: M8 - M10 - M12 - M14
1 x		1/2“: M16
1 x		1/2“: M9
1 x		3/4“: M18
2 x		1/2“: 125 - 250 mm
3 x		1/2“: 50 - 125 - 250 mm
1 x		1/2“: 250 mm
1 x		3/8“F x 1/2“M
1 x		1/2“
1 x		1/2“

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

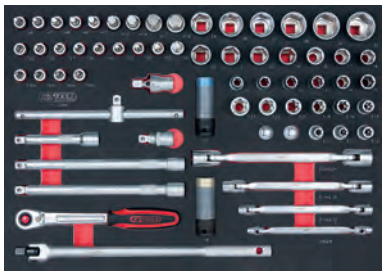

1/2"

		L mm	B mm	H mm	kg
711.0066	66 pcs	390.0	564.0	35.0	8.73

19 x		1/2“: 10-11-12-13-14-15-16-17-18-19 20-21-22-23-26-27-28-30-32 mm
9 x		1/2“: E10 - E11 - E12 - E14 - E16 - E18 - E20 - E22 - E24
2 x		1/2“: 17 - 19 mm
9 x		1/2“: 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 19 mm
9 x		1/2“: T20 - T25 - T27 - T30 - T40 - T45 T50 - T55 - T60
4 x		1/2“: TB30 - TB40 - TB45 - TB50
2 x		1/2“: 125 - 250 mm
2 x		1/2“: 50 - 250 mm
1 x		1/2“: 250 mm
2 x		3/8“F x 1/2“M - 1/2“F x 3/8“M
1 x		1/2“
1 x		1/2“
1 x		1/2“: 380 mm
4 x		E6xE8 - E10xE12 - E14xE16 E22xE24

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2"

		L mm	B mm	H mm	kg
781.0066	66 pcs	390.0	564.0	35.0	8.70

19 x		1/2“: 10-11-12-13-14-15-16-17-18-19 20-21-22-23-26-27-28-30-32 mm
9 x		1/2“: E10 - E11 - E12 - E14 - E16 - E18 - E20 - E22 - E24
2 x		1/2“: 17 - 19 mm

9 x		1/2“: 6 - 7 - 8 - 9 - 10 - 12 - 14 - 17 19 mm
9 x		1/2“: T20 - T25 - T27 - T30 - T40 - T45 T50 - T55 - T60
4 x		1/2“: TB30 - TB40 - TB45 - TB50
2 x		1/2“: 125 - 250 mm
2 x		1/2“: 50 - 250 mm
1 x		1/2“: 250 mm
2 x		3/8“F x 1/2“M - 1/2“F x 3/8“M
1 x		1/2“
1 x		1/2“
1 x		1/2“: 380 mm
4 x		E6xE8 - E10xE12 - E14xE16 E22xE24

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/2“

		L mm	B mm	H mm	kg
711.0053	53 pcs	390.0	564.0	35.0	6.75

1 x		2,0 - 2,5 - 3,0 - 4,0 - 5,0 - 6,0 - 8,0 - 10,0 mm
1 x		T10 - T15 - T20 - T25 - T30 - T40 - T45 - T50
2 x		10 x 11 - 12 x 13 mm
5 x		T15 x T20 - T25 x T27 - T30 x T40 - T45 x T50 - T55 x T60
4 x		E6 x E8 - E10 x E12 - E14 x E16 - E22 x E24
3 x		3 x 4 - 5 x 6 - 8 x 10 mm
5 x		M6 - M8 - M9 - M12 - M14
9 x		TB20 - TB25 - TB27 - TB30 - TB40 - TB45 - TB50 - TB55 - TB60
9 x		M5 - M6 - M7 - M8 - M9 - M10 - M12 M13 - M14

1/1 SCS - SOCKET WRENCH 3/4“

SCS socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

3/4“

		L mm	B mm	H mm	kg
711.1031	31 pcs	390.0	564.0	35.0	15.93

14 x		3/4“: 19 - 21 - 22 - 23 - 24 - 26 - 27 - 30 - 32 - 36 - 38 - 41 - 46 - 50 mm
14 x		3/4“: 3/4“ - 7/8“ - 15/16“ - 1“ - 1.1/16“ - 1.1/8“ - 1.3/16“ 1.1/4“ - 1.3/8“ - 1.7/16“ - 1.1/2“ - 1.5/8“ - 1.3/4“ - 2“
1 x		3/4“: 400 mm
1 x		3/4“: 450 mm
1 x		3/4“: 500 mm

SCS impact socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

3/4“

		L mm	B mm	H mm	kg
711.2033	33 pcs	390.0	564.0	35.0	18.95

15 x		19 - 21 - 22 - 23 - 24 - 27 - 28 - 30 - 32 33 - 34 - 36 - 38 - 41 - 46 mm
14 x		19 - 21 - 22 - 23 - 24 - 27 - 30 - 32 - 33 34 - 36 - 38 - 41 - 46 mm
2 x		3/4“F x 1/2“M - 3/4“F x 1“M
1 x		1/2“
1 x		150 mm

1/1 SCS - SOCKET WRENCH 1/4“ + 3/8“

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

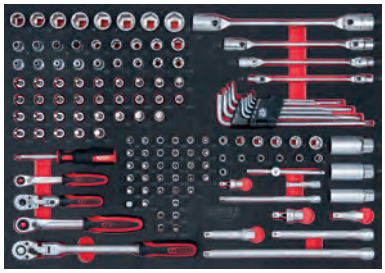

1/4“ 3/8“

		L mm	B mm	H mm	kg
711.0136	136 pcs	390.0	564.0	35.0	6.70

12 x		1/4“: 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm
17 x		3/8“: 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 mm
9 x		3/8“: E4 - E5 - E6 - E7 - E8 - E10 E11 - E12 - E14
3 x		3/8“: 16 - 18 - 21 mm
2 x		1/4“: 4 - 5,5 mm
5 x		1/4“: PH0 - PH1 - PH2 - PH3 - PH4
6 x		1/4“: 3 - 4 - 5 - 6 - 7 - 8 mm
9 x		1/4“: T7 - T8 - T10 - T15 - T20 - T25 T27 - T30 - T40
8 x		1/4“: TB9 - TB10 - TB15 - TB20 TB25 - TB27 - TB30 - TB40
6 x		1/4“: M4 - M5 - M6 - M7 - M8 - M10
8 x		3/8“: 3 - 4 - 5 - 6 - 7 - 8 - 10 - 12 mm
9 x		3/8“: T15 - T20 - T25 - T27 - T30 - T40 T45 - T50 - T55
9 x		3/8“: TB15 - TB20 - TB25 - TB27 TB30 - TB40 - TB45 - TB50 - TB55
5 x		3/8“: M4 - M5 - M6 - M8 - M10
2 x		1/4“: 50 - 150 mm
4 x		3/8“: 50 - 75 - 150 - 250 mm
1 x		1/4“
1 x		1/4“
1 x		1/4“
2 x		1/4“ - 3/8“
2 x		1/4“ - 3/8“
2 x		1/4“ - 3/8“
4 x		E6xE8 - E10xE12 - E14xE16 E22xE24
1 x		TS10 - TS15 - TS20 - TS25 - TS27 TS30 - TS40 - TS45 - TS50

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

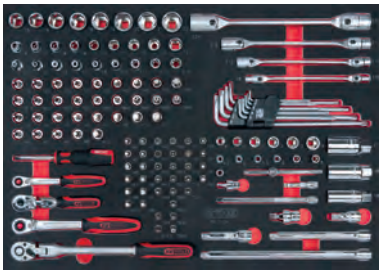

1/4" 3/8"

		L mm	B mm	H mm	kg
781.0136	136 pcs	390.0	564.0	35.0	6.58

12 x		1/4": 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm
17 x		3/8": 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 mm
9 x		3/8": E4 - E5 - E6 - E7 - E8 - E10 E11 - E12 - E14
3 x		3/8": 16 - 18 - 21 mm
2 x		1/4": 4 - 5,5 mm
5 x		1/4": PH0 - PH1 - PH2 - PH3 - PH4
6 x		1/4": 3 - 4 - 5 - 6 - 7 - 8 mm
9 x		1/4": T7 - T8 - T10 - T15 - T20 - T25 T27 - T30 - T40
8 x		1/4": TB9 - TB10 - TB15 - TB20 TB25 - TB27 - TB30 - TB40
6 x		1/4": M4 - M5 - M6 - M7 - M8 - M10
8 x		3/8": 3 - 4 - 5 - 6 - 7 - 8 - 10 - 12 mm
9 x		3/8": T15 - T20 - T25 - T27 - T30 - T40 T45 - T50 - T55
9 x		3/8": TB15 - TB20 - TB25 - TB27 TB30 - TB40 - TB45 - TB50 - TB55
5 x		3/8": M4 - M5 - M6 - M8 - M10
2 x		1/4": 50 - 150 mm
4 x		3/8": 50 - 75 - 150 - 250 mm
1 x		1/4"
1 x		1/4"
1 x		1/4"
2 x		1/4" - 3/8"
2 x		1/4" - 3/8"
2 x		1/4" - 3/8"
4 x		E6xE8 - E10xE12 - E14xE16 E22xE24
1 x		TS10 - TS15 - TS20 - TS25 - TS27 TS30 - TS40 - TS45 - TS50

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

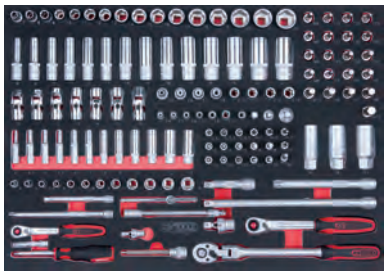

1/4" 3/8"

		L mm	B mm	H mm	kg
711.1136	136 pcs	390.0	564.0	35.0	7.60

12 x		1/4": 4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm
16 x		3/8": 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 mm
12 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm
14 x		3/8": 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 20 - 21 mm
6 x		1/4": E4 - E5 - E6 - E7 - E8 - E10
8 x		3/8": E5 - E6 - E7 - E8 - E10 - E11 E12 - E14
3 x		3/8": 16 - 18 - 21 mm
7 x		3/8": 10 - 11 - 12 - 13 - 14 - 15 - 16 mm
3 x		1/4": 4 - 5,5 - 6,5 mm
3 x		1/4": PH1 - PH2 - PH3
5 x		1/4": 3 - 4 - 5 - 6 - 8 mm
7 x		1/4": T10 - T15 - T20 - T25 - T27 - T30 - T40
7 x		3/8": 3 - 4 - 5 - 6 - 7 - 8 - 10 mm
9 x		3/8": T15 - T20 - T25 - T27 - T30 - T40 T45 - T50 - T55
1 x		3/8": T25
5 x		3/8": M4 - M5 - M6 - M8 - M10
3 x		1/4": 50 - 100 - 150 mm
3 x		3/8": 75 - 150 - 250 mm
1 x		1/4": 150 mm
1 x		1/4"
1 x		1/4"
1 x		1/4"
3 x		1/4"Fx3/8"M - 3/8"Fx1/4"M 1/2"Fx3/8"M
2 x		1/4" - 3/8"
2 x		1/4" - 3/8"
1 x		3/8"

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

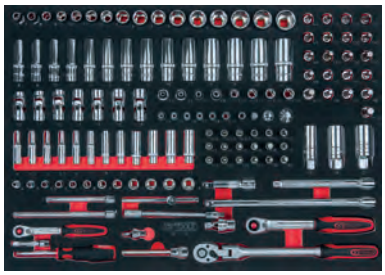

1/4" 3/8"

		L mm	B mm	H mm	kg
781.1136	136 pcs	390.0	564.0	35.0	7.63

12 x		1/4": 4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm
16 x		3/8": 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 - 20 - 21 - 22 mm
12 x		1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm
14 x		3/8": 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 17 - 18 - 19 - 20 - 21 mm
6 x		1/4": E4 - E5 - E6 - E7 - E8 - E10
8 x		3/8": E5 - E6 - E7 - E8 - E10 - E11 E12 - E14
3 x		3/8": 16 - 18 - 21 mm
7 x		3/8": 10 - 11 - 12 - 13 - 14 - 15 - 16 mm
3 x		1/4": 4 - 5,5 - 6,5 mm
3 x		1/4": PH1 - PH2 - PH3
5 x		1/4": 3 - 4 - 5 - 6 - 8 mm
7 x		1/4": T10 - T15 - T20 - T25 - T27 - T30 - T40
7 x		3/8": 3 - 4 - 5 - 6 - 7 - 8 - 10 mm
9 x		3/8": T15 - T20 - T25 - T27 - T30 - T40 T45 - T50 - T55
1 x		3/8": T25
5 x		3/8": M4 - M5 - M6 - M8 - M10
3 x		1/4": 50 - 100 - 150 mm
3 x		3/8": 75 - 150 - 250 mm
1 x		1/4": 150 mm
1 x		1/4"
1 x		1/4"
1 x		1/4"
3 x		1/4"Fx3/8"M - 3/8"Fx1/4"M 1/2"Fx3/8"M
2 x		1/4" - 3/8"
2 x		1/4" - 3/8"
1 x		3/8"

Visit our homepage:
www.kstools.com

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4" 3/8"

			L mm	B mm	H mm	kg
711.0144	144 pcs		390.0	564.0	35.0	5.82
12 x			1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm			
17 x			3/8": 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 mm			
12 x			1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm			
6 x			1/4": E4 - E5 - E6 - E7 - E8 - E10			
9 x			3/8": E4 - E5 - E6 - E7 - E8 - E10 E11 - E12 - E14			
3 x			3/8": 16 - 18 - 21 mm			
6 x			1/4": 3 - 4 - 5 - 6 - 7 - 8 mm			
7 x			1/4": T7 - T8 - T9 - T10 - T15 - T20 - T25			
8 x			1/4": TB8 - TB10 - TB15 - TB20 - TB25 TB27 - TB30 - TB40			
6 x			1/4": M4 - M5 - M6 - M7 - M8 - M10			
8 x			3/8": 3 - 4 - 5 - 6 - 7 - 8 - 10 - 12 mm			
9 x			3/8": T15 - T20 - T25 - T27 - T30 - T40 T45 - T50 - T55			
9 x			3/8": TB15 - TB20 - TB25 - TB27 TB30 - TB40 - TB45 - TB50 - TB55			
3 x			1/4": 50 - 100 - 150 mm			
3 x			3/8": 75 - 150 - 250 mm			
1 x			1/4"			
1 x			1/2"Fx3/8"M			
2 x			1/4" - 3/8"			
2 x			1/4" - 3/8"			
1 x			1/4"			
1 x			TS10 - TS15 - TS20 - TS25 - TS27 TS30 - TS40 - TS45 - TS50			
1 x			1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm			

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4" 3/8"

			L mm	B mm	H mm	kg
781.0144	144 pcs		390.0	564.0	35.0	6.50
12 x			1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm			
17 x			3/8": 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 mm			
12 x			1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 mm			
6 x			1/4": E4 - E5 - E6 - E7 - E8 - E10			
9 x			3/8": E4 - E5 - E6 - E7 - E8 - E10 E11 - E12 - E14			
3 x			3/8": 16 - 18 - 21 mm			
6 x			1/4": 3 - 4 - 5 - 6 - 7 - 8 mm			
7 x			1/4": T7 - T8 - T9 - T10 - T15 - T20 - T25			
8 x			1/4": TB8 - TB10 - TB15 - TB20 - TB25 TB27 - TB30 - TB40			
6 x			1/4": M4 - M5 - M6 - M7 - M8 - M10			
8 x			3/8": 3 - 4 - 5 - 6 - 7 - 8 - 10 - 12 mm			
9 x			3/8": T15 - T20 - T25 - T27 - T30 - T40 T45 - T50 - T55			
9 x			3/8": TB15 - TB20 - TB25 - TB27 TB30 - TB40 - TB45 - TB50 - TB55			
3 x			1/4": 50 - 100 - 150 mm			
3 x			3/8": 75 - 150 - 250 mm			
1 x			1/4"			
1 x			1/2"Fx3/8"M			
2 x			1/4" - 3/8"			
2 x			1/4" - 3/8"			
1 x			1/4"			
1 x			TS10 - TS15 - TS20 - TS25 - TS27 TS30 - TS40 - TS45 - TS50			
1 x			1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm			

1/1 SCS - SOCKET WRENCH 1/4" + 1/2"

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

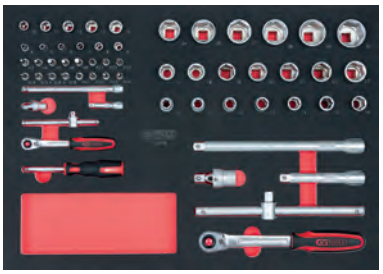

1/4" 1/2"

			L mm	B mm	H mm	kg
711.0058	58 pcs		390.0	564.0	35.0	4.45
11 x			1/4": 4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 - 14 mm			
20 x			1/2": 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17- 18 - 19 20 - 21 - 22 - 23 - 24 - 26 - 27 - 28 - 30 - 32 mm			
5 x			1/4": 3 - 4 - 5 - 6 - 8 mm			
4 x			1/4": 4 - 5,5 - 6,5 - 8 mm			
4 x			1/4": PH1 - PH2 - PH3 - PH4			
3 x			1/4": PZ1 - PZ2 - PZ3			
2 x			1/4" - 1/2"			
2 x			1/4": 50 - 150 mm			
2 x			1/2": 125 - 250 mm			
2 x			1/4" x 110 mm - 1/2" x 250 mm			
1 x			1/4" x 150 mm			
2 x			1/4" - 1/2"			

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

1/4" 1/2"

			L mm	B mm	H mm	kg
781.0058	58 pcs		390.0	564.0	35.0	4.41
11 x			1/4": 4 - 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 - 14 mm			
20 x			1/2": 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17- 18 - 19 20 - 21 - 22 - 23 - 24 - 26 - 27 - 28 - 30 - 32 mm			
5 x			1/4": 3 - 4 - 5 - 6 - 8 mm			
4 x			1/4": 4 - 5,5 - 6,5 - 8 mm			
4 x			1/4": PH1 - PH2 - PH3 - PH4			
3 x			1/4": PZ1 - PZ2 - PZ3			

2 x		1/4“ - 1/2“
2 x		1/4“: 50 - 150 mm
2 x		1/2“: 125 - 250 mm
2 x		1/4“ x 110 mm - 1/2“ x 250 mm
1 x		1/4“ x 150 mm
2 x		1/4“ - 1/2“

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

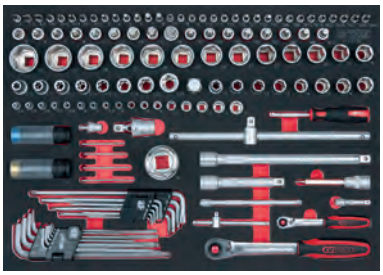

1/4“ 1/2“

	L mm	B mm	H mm	kg
711.0135	135 pcs	390.0	564.0	35.0	9.27

12 x		1/4“: 4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm
21 x		1/2“: 10-11-12-13-14-15-16-17-18-19 20-21-22-23-24-25-26-27-28-30-32 mm
5 x		1/4“: E4 - E5 - E6 - E7 - E8
8 x		1/2“: E10 - E11 - E12 - E14 - E16 - E18 - E20 - E24
2 x		1/2“: 17 - 19 mm
1 x		3/4“: 36 mm
3 x		1/4“: 4 - 5,5 - 6,5 mm
3 x		1/4“: PH1 - PH2 - PH3
2 x		1/4“: PZ1 - PZ2
6 x		1/4“: 3 - 4 - 5 - 6 - 7 - 8 mm
10 x		1/4“: T7 - T8 - T9 - T10 - T15 - T20 T25 - T27 - T30 - T40
9 x		1/4“: TB8 - TB9 - TB10 - TB15 - TB20 TB25 - TB27 - TB30 - TB40
9 x		1/2“: 5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 19 mm
5 x		1/2“: T40 - T45 - T50 - T55 - T60
3 x		1/2“: M6 - M8 - M10
1 x		1/2“: T25
2 x		1/4“: 50 - 150 mm
2 x		1/2“: 125 - 250 mm
2 x		1/4“ - 1/2“
1 x		1/4“
1 x		1/2“F x 3/4“M
2 x		1/4“ - 1/2“

2 x		1/4“ - 1/2“
4 x		T6 - T7 - T8 - T9
1 x		TS10 - TS15 - TS20 - TS25 - TS27 TS30 - TS40 - TS45 - TS50
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

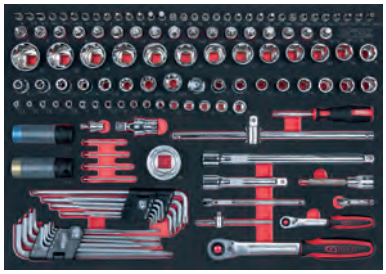

1/4“ 1/2“

	L mm	B mm	H mm	kg
781.0135	135 pcs	390.0	564.0	35.0	9.50

12 x		1/4“: 4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 - 14 mm
21 x		1/2“: 10-11-12-13-14-15-16-17-18-19 20-21-22-23-24-25-26-27-28-30-32 mm
5 x		1/4“: E4 - E5 - E6 - E7 - E8
8 x		1/2“: E10 - E11 - E12 - E14 - E16 - E18 - E20 - E24
2 x		1/2“: 17 - 19 mm
1 x		3/4“: 36 mm
3 x		1/4“: 4 - 5,5 - 6,5 mm
3 x		1/4“: PH1 - PH2 - PH3
2 x		1/4“: PZ1 - PZ2
6 x		1/4“: 3 - 4 - 5 - 6 - 7 - 8 mm
10 x		1/4“: T7 - T8 - T9 - T10 - T15 - T20 T25 - T27 - T30 - T40
9 x		1/4“: TB8 - TB9 - TB10 - TB15 - TB20 TB25 - TB27 - TB30 - TB40
9 x		1/2“: 5 - 6 - 7 - 8 - 10 - 12 - 14 - 17 19 mm
5 x		1/2“: T40 - T45 - T50 - T55 - T60
3 x		1/2“: M6 - M8 - M10
1 x		1/2“: T25
2 x		1/4“: 50 - 150 mm
2 x		1/2“: 125 - 250 mm
2 x		1/4“ - 1/2“
1 x		1/4“
1 x		1/2“F x 3/4“M
2 x		1/4“ - 1/2“
2 x		1/4“ - 1/2“
4 x		T6 - T7 - T8 - T9
1 x		TS10 - TS15 - TS20 - TS25 - TS27 TS30 - TS40 - TS45 - TS50
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm

1/1 SCS - SOCKET WRENCH 3/8“ + 1/2“

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

3/8“ 1/2“

	L mm	B mm	H mm	kg
711.0098	98 pcs	390.0	564.0	35.0	7.50

17 x		3/8“: 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22mm
24 x		1/2“: 8-9-10-11-12-13-14-15-16-17-18-19 20-21-22-23-24-25-26-27-28-29-30-32mm
9 x		3/8“: E4 - E5 - E6 - E7 - E8 - E10 - E11 E12 - E14
9 x		1/2“: E10 - E11 - E12 - E14 - E16 - E18 - E20 - E22 - E24
3 x		3/8“: 16 - 18 - 21 mm
7 x		3/8“: 3 - 4 - 5 - 6 - 7 - 8 - 10 mm
9 x		3/8“: T15 - T20 - T25 - T27 - T30 - T40 T45 - T50 - T55
9 x		3/8“: TB15 - TB20 - TB25 - TB27 TB30 - TB40 - TB45 - TB50 - TB55
3 x		3/8“: 75 - 150 - 250 mm
2 x		1/2“: 125 - 250 mm
2 x		1/2“Fx3/8“M - 3/8“Fx1/2“M
2 x		3/8“ - 1/2“
2 x		3/8“ - 1/2“

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

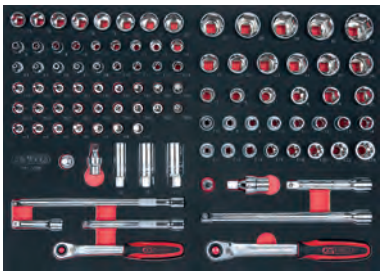

3/8" 1/2"

			L mm	B mm	H mm	kg
781.0098	98 pcs		390.0	564.0	35.0	7.25
17 x			3/8": 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22mm			
24 x			1/2": 8-9-10-11-12-13-14-15-16-17-18-19 20-21-22-23-24-25-26-27-28-29-30-32mm			
9 x			3/8": E4 - E5 - E6 - E7 - E8 - E10 - E11 E12 - E14			
9 x			1/2": E10 - E11 - E12 - E14 - E16 - E18 - E20 - E22 - E24			
3 x			3/8": 16 - 18 - 21 mm			
7 x			3/8": 3 - 4 - 5 - 6 - 7 - 8 - 10 mm			
9 x			3/8": T15 - T20 - T25 - T27 - T30 - T40 T45 - T50 - T55			
9 x			3/8": TB15 - TB20 - TB25 - TB27 TB30 - TB40 - TB45 - TB50 - TB55			
3 x			3/8": 75 - 150 - 250 mm			
2 x			1/2": 125 - 250 mm			
2 x			1/2"Fx3/8"M - 3/8"Fx1/2"M			
2 x			3/8" - 1/2"			
2 x			3/8" - 1/2"			

1/1 SCS - SOCKET WRENCH 1/4" + 3/8" + 1/2"

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

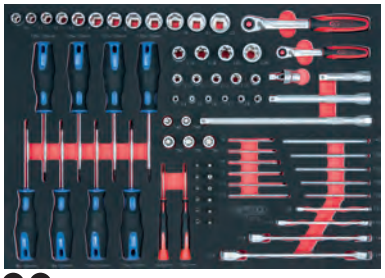

1/4" 3/8" 1/2"

			L mm	B mm	H mm	kg
711.0075	75 pcs		390.0	564.0	35.0	1.15
12 x			3/8": 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19 - 21 - 22 mm			
5 x			1/4": E4 - E5 - E6 - E7 - E8			
4 x			3/8": E10 - E11- E12 - E14			
4 x			1/2": E16 - E18 - E20 - E24			
2 x			3/8": T40 - T45			
3 x			1/2": T50 - T55 - T60			
2 x			1/4": T6 - T25			
10 x			1/4": TB7 - TB8 - TB9 - TB10 - TB15 TB20 - TB25 - TB27 - TB30 - TB40			
3 x			3/8": 75 - 150 - 250 mm			
2 x			3/8"x10mm - 1/4"x1/4"			
1 x			3/8"			
1 x			1/4"			
1 x			3/8"			
11 x			T6 - T7 - T8 - T9 - T10 - T15 - T20 - T25 - T27 - T30 - T40			
8 x			T8 - T9 - T10 - T15 - T20 - T25 - T27 - T30			
2 x			T6 - T7			
4 x			E6xE8 - E10xE12 - E14xE18 E20xE24			

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

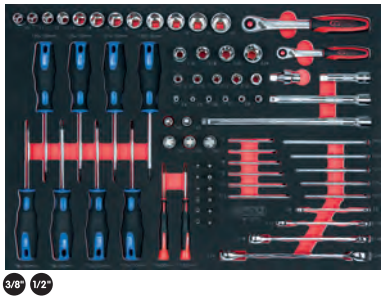

1/4" 3/8" 1/2"

			L mm	B mm	H mm	kg
781.0075	75 pcs		390.0	564.0	35.0	3.80
12 x			3/8": 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19 - 21 - 22 mm			
5 x			1/4": E4 - E5 - E6 - E7 - E8			
4 x			3/8": E10 - E11- E12 - E14			
4 x			1/2": E16 - E18 - E20 - E24			
2 x			3/8": T40 - T45			
3 x			1/2": T50 - T55 - T60			
2 x			1/4": T6 - T25			
10 x			1/4": TB7 - TB8 - TB9 - TB10 - TB15 TB20 - TB25 - TB27 - TB30 - TB40			
3 x			3/8": 75 - 150 - 250 mm			
2 x			3/8"x10mm - 1/4"x1/4"			
1 x			3/8"			
1 x			1/4"			
1 x			3/8"			
11 x			T6 - T7 - T8 - T9 - T10 - T15 - T20 - T25 - T27 - T30 - T40			
8 x			T8 - T9 - T10 - T15 - T20 - T25 - T27 - T30			
2 x			T6 - T7			
4 x			E6xE8 - E10xE12 - E14xE18 E20xE24			

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

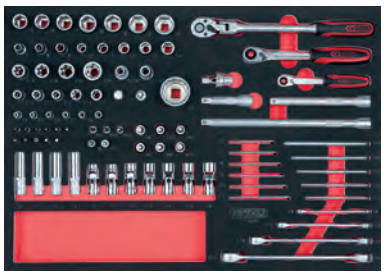

1/4" 3/8" 1/2"

			L mm	B mm	H mm	kg
711.0090	90 pcs		390.0	564.0	35.0	5.26
15 x			3/8": 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 15 - 16 - 17 - 18 - 19 - 21 - 22 mm			
4 x			3/8": 10 - 11 - 12 - 13 mm			
5 x			1/4": E4 - E5 - E6 - E7 - E8			
4 x			3/8": E10 - E11 - E12 - E14			
4 x			1/2": E16 - E18 - E20 - E24			
7 x			3/8": 10 - 11 - 12 - 13 - 14 - 15 - 16 mm			
3 x			1/2": 33 mm - 5/16" - 11/32"			
3 x			1/4": PH1 - PH2 - PH3			
2 x			1/4": T8 - T10			
1 x			3/8": 8 mm			
2 x			3/8": T40 - T45			
3 x			3/8": M6 - M8 - M10			
2 x			1/4": T6 - T25			
9 x			1/4": TB8 - TB9 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40			
3 x			3/8": 75 - 150 - 250 mm			

2 x		3/8“ - 1/4“
2 x		3/8“Fx1/4“M - 3/8“Fx1/2“M
1 x		3/8“
1 x		3/8“
2 x		1/4“ - 3/8“
11 x		T6 - T7 - T8 - T9 - T10 - T15 - T20 - T25 T27 - T30 - T40
4 x		E6xE8 - E10xE12 - E14xE18 E20xE24

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

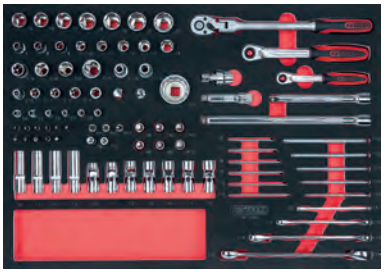

1/4“ 3/8“ 1/2“

		L mm	B mm	H mm	kg
781.0090	90 pcs	390.0	564.0	35.0	5.07

15 x		3/8“: 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 15 - 16 - 17 - 18 - 19 - 21 - 22 mm
4 x		3/8“: 10 - 11 - 12 - 13 mm
5 x		1/4“: E4 - E5 - E6 - E7 - E8
4 x		3/8“: E10 - E11 - E12 - E14
4 x		1/2“: E16 - E18 - E20 - E24
7 x		3/8“: 10 - 11 - 12 - 13 - 14 - 15 - 16 mm
3 x		1/2“: 33 mm - 5/16“ - 11/32“
3 x		1/4“: PH1 - PH2 - PH3
2 x		1/4“: T8 - T10
1 x		3/8“: 8 mm
2 x		3/8“: T40 - T45
3 x		3/8“: M6 - M8 - M10
2 x		1/4“: T6 - T25
9 x		1/4“: TB8 - TB9 - TB10 - TB15 - TB20 - TB25 - T27 - TB30 - TB40
3 x		3/8“: 75 - 150 - 250 mm
2 x		3/8“ - 1/4“
2 x		3/8“Fx1/4“M - 3/8“Fx1/2“M
1 x		3/8“
1 x		3/8“
2 x		1/4“ - 3/8“
11 x		T6 - T7 - T8 - T9 - T10 - T15 - T20 - T25 T27 - T30 - T40
4 x		E6xE8 - E10xE12 - E14xE18 E20xE24

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

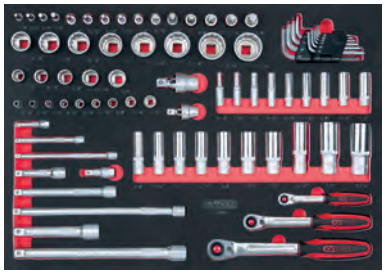

1/4“ 3/8“ 1/2“

		L mm	B mm	H mm	kg
711.0080	80 pcs	390.0	564.0	35.0	7.35

9 x		1/4“: 3/16“-7/32“-1/4“-9/32“-5/16“ 11/32“-3/8“-7/16“-1/2“
5 x		3/8“: 1/2“-9/16“-5/8“-11/16“-3/4“
8 x		1/2“: 13/16“-7/8“-15/16“-1“-1.1/16“ 1.1/8“-1.3/16“-1.1/4“
9 x		1/4“: 3/16“-7/32“-1/4“-9/32“-5/16“ 11/32“-3/8“-7/16“-1/2“
7 x		3/8“: 3/8“-7/16“-1/2“-9/16“-5/8“-11/16“ 3/4“
3 x		1/2“: 13/16“- 7/8“-15/16“
4 x		1/4“: 1/8“-5/32“-3/16“-7/32“
7 x		3/8“: 1/8“-5/32“-3/16“-7/32“-1/4“ 5/16“-3/8“
4 x		1/2“: 3/8“-1/2“ 9/16“-5/8“
3 x		1/4“: 50 - 100 - 150 mm
4 x		3/8“: 50 - 75 - 150 - 250 mm
2 x		1/2“: 125 - 250 mm
2 x		3/8“ - 1/2“
3 x		1/4“ - 3/8“ - 1/2“
1 x		5/64“ - 3/32“ - 1/8“ - 5/32“ - 3/16“ - 1/4“ - 5/16“ - 7/16“ - 1/2“ - 9/16“

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

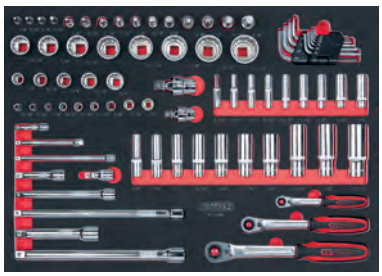

1/4“ 3/8“ 1/2“

		L mm	B mm	H mm	kg
781.0080	80 pcs	390.0	564.0	35.0	6.25

9 x		1/4“: 3/16“-7/32“-1/4“-9/32“-5/16“ 11/32“-3/8“-7/16“-1/2“
5 x		3/8“: 1/2“-9/16“-5/8“-11/16“-3/4“
8 x		1/2“: 13/16“-7/8“-15/16“-1“-1.1/16“ 1.1/8“-1.3/16“-1.1/4“

9 x		1/4“: 3/16“-7/32“-1/4“-9/32“-5/16“ 11/32“-3/8“-7/16“-1/2“
7 x		3/8“: 3/8“-7/16“-1/2“-9/16“-5/8“-11/16“ 3/4“
3 x		1/2“: 13/16“- 7/8“-15/16“
4 x		1/4“: 1/8“-5/32“-3/16“-7/32“
7 x		3/8“: 1/8“-5/32“-3/16“-7/32“-1/4“ 5/16“-3/8“
4 x		1/2“: 3/8“-1/2“ 9/16“-5/8“
3 x		1/4“: 50 - 100 - 150 mm
4 x		3/8“: 50 - 75 - 150 - 250 mm
2 x		1/2“: 125 - 250 mm
2 x		3/8“ - 1/2“
3 x		1/4“ - 3/8“ - 1/2“
1 x		5/64“ - 3/32“ - 1/8“ - 5/32“ - 3/16“ - 1/4“ - 5/16“ - 7/16“ - 1/2“ - 9/16“

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

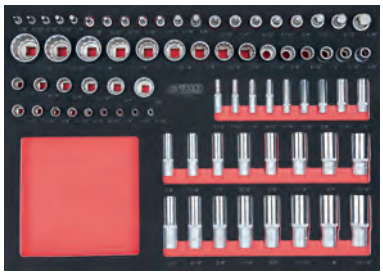

1/4“ 3/8“ 1/2“

		L mm	B mm	H mm	kg
711.1075	75 pcs	390.0	564.0	35.0	5.85

9 x		1/4“: 3/16“-7/32“-1/4“-9/32“-5/16“ 11/32“-3/8“-7/16“-1/2“
6 x		3/8“: 1/2“-9/16“-5/8“-11/16“-3/4“-7/8“
15 x		1/2“: 3/8“-7/16“-1/2“-9/16“-5/8“-11/16“-3/4“ 13/16“-7/8“-15/16“-1“-1.1/16“-1.1/8“-1.3/16“-1.1/4“
9 x		1/4“: 3/16“-7/32“-1/4“-9/32“-5/16“ 11/32“-3/8“-7/16“-1/2“
8 x		3/8“: 3/8“-7/16“-1/2“-9/16“-5/8“-11/16“ 3/4“-13/16“
8 x		1/2“: 1/2“-9/16“-5/8“-11/16“-3/4“-13/16“ 7/8“-15/16“
5 x		1/4“: 1/8“-5/32“-3/16“-7/32“-1/4“
7 x		3/8“: 1/8“-5/32“-3/16“-7/32“-1/4“ 5/16“-3/8“
8 x		1/2“: 3/16“-1/4“-9/32“-5/16“-3/8“-1/2“ 9/16“-5/8“

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

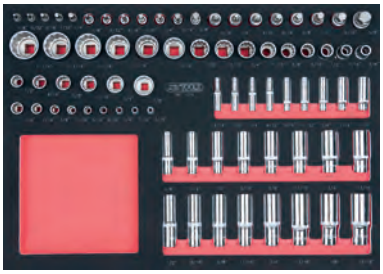

1/4" 3/8" 1/2"

			L mm	B mm	H mm	kg
781.1075	75 pcs		390.0	564.0	35.0	5.75
9 x			1/4": 3/16"-7/32"-1/4"-9/32"-5/16" 11/32"-3/8"-7/16"-1/2"			
6 x			3/8": 1/2"-9/16"-5/8"-11/16"-3/4"-7/8"			
15 x			1/2": 3/8"-7/16"-1/2"-9/16"-5/8"-11/16"-3/4" 13/16"-7/8"-15/16"-1"-1.1/16"-1.1/8"-1.3/16"-1.1/4"			
9 x			1/4": 3/16"-7/32"-1/4"-9/32"-5/16" 11/32"-3/8"-7/16"-1/2"			
8 x			3/8": 3/8"-7/16"-1/2"-9/16"-5/8"-11/16" 3/4"-13/16"			
8 x			1/2": 1/2"-9/16"-5/8"-11/16"-3/4"-13/16" 7/8"-15/16"			
5 x			1/4": 1/8"-5/32"-3/16"-7/32"-1/4"			
7 x			3/8": 1/8"-5/32"-3/16"-7/32"-1/4" 5/16"-3/8"			
8 x			1/2": 3/16"-1/4"-9/32"-5/16"-3/8"-1/2" 9/16"-5/8"			

SCS socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

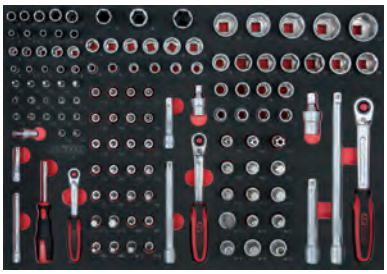

1/4" 3/8" 1/2"

			L mm	B mm	H mm	kg
711.0128	128 pcs		390.0	564.0	35.0	8.51
10 x			1/4": 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 mm			
10 x			1/4": 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 mm			
12 x			3/8": 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 mm			
20 x			1/2": 10-11-12-13-14-15-16-17-18-19 20-21-22-23-24-26-27-28-30-32 mm			
3 x			3/8": 16 - 18 - 21 mm			
5 x			1/4": 3 - 4 - 5 - 6 - 7 mm			
5 x			1/4": T7 - T8 - T9 - T10 - T15			
7 x			1/4": TB10 - TB15 - TB20 - TB25 TB27 - TB30 - TB40			
1 x			3/8": PH2			
6 x			3/8": 5 - 6 - 7 - 8 - 10 - 12 mm			
8 x			3/8": T15 - T20 - T25 - T27 - T30 - T40 T45 - T50			
8 x			3/8": TB15 - TB20 - TB25 - TB27 TB30 - TB40 - TB45 - TB50			
5 x			3/8": M4 - M5 - M6 - M8 - M10			
4 x			1/2": 10 - 12 - 14 - 17 mm			
3 x			1/2": T55 - T60 - T70			
3 x			1/2": TB55 - TB60 - TB70			
4 x			1/2": M10 - M12 - M14 - M16			
1 x			1/2": M16			
2 x			1/4": 50 - 150 mm			
2 x			3/8": 75 - 150 mm			
2 x			1/2": 125 - 250 mm			
1 x			1/4"			
3 x			1/4" - 3/8" - 1/2"			
3 x			1/4" - 3/8" - 1/2"			

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

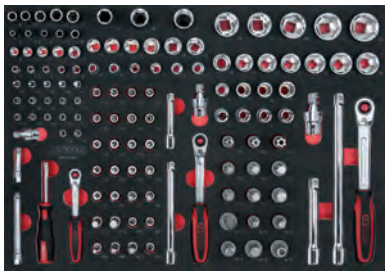

1/4" 3/8" 1/2"

			L mm	B mm	H mm	kg
781.0128	128 pcs		390.0	564.0	35.0	8.58
10 x			1/4": 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 mm			
10 x			1/4": 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 12 - 13 mm			
12 x			3/8": 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 18 - 19 mm			
20 x			1/2": 10-11-12-13-14-15-16-17-18-19 20-21-22-23-24-26-27-28-30-32 mm			
3 x			3/8": 16 - 18 - 21 mm			
5 x			1/4": 3 - 4 - 5 - 6 - 7 mm			
5 x			1/4": T7 - T8 - T9 - T10 - T15			
7 x			1/4": TB10 - TB15 - TB20 - TB25 TB27 - TB30 - TB40			
1 x			3/8": PH2			
6 x			3/8": 5 - 6 - 7 - 8 - 10 - 12 mm			
8 x			3/8": T15 - T20 - T25 - T27 - T30 - T40 T45 - T50			
8 x			3/8": TB15 - TB20 - TB25 - TB27 TB30 - TB40 - TB45 - TB50			
5 x			3/8": M4 - M5 - M6 - M8 - M10			
4 x			1/2": 10 - 12 - 14 - 17 mm			
3 x			1/2": T55 - T60 - T70			
3 x			1/2": TB55 - TB60 - TB70			
4 x			1/2": M10 - M12 - M14 - M16			
1 x			1/2": M16			
2 x			1/4": 50 - 150 mm			
2 x			3/8": 75 - 150 mm			
2 x			1/2": 125 - 250 mm			
1 x			1/4"			
3 x			1/4" - 3/8" - 1/2"			
3 x			1/4" - 3/8" - 1/2"			

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

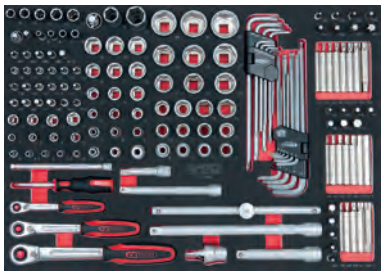

1/4" 3/8" 1/2"

			L mm	B mm	H mm	kg
711.0160	160 pcs		390.0	564.0	35.0	9.37
13 x			1/4": 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm			
9 x			1/4": 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm			
16 x			3/8": 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 mm			
21 x			1/2": 8-10-11-12-13-14-15-16-17-18-19 20-21-22-23-24-26-27-28-30-32 mm			
2 x			3/8": 16 - 21 mm			
2 x			1/4": PH1 - PH2			
8 x			1/4": 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 mm			
8 x			1/4": T8 - T10 - T15 - T20 - T25 - T27 T30 - T40			
5 x			1/4": M4 - M5 - M6 - M8 - M10			
7 x			10 mm: 4 - 5 - 6 - 7 - 8 - 10 - 12 mm			
8 x			10 mm: T20 - T25 - T30 - T40 - T45 T50 - T55 - T60			
5 x			10 mm: M5 - M6 - M8 - M10 - M12			
7 x			10 mm: 4 - 5 - 6 - 7 - 8 - 10 - 12 mm			
8 x			10 mm: T20 - T25 - T30 - T40 - T45 T50 - T55 - T60			
5 x			10 mm: M5 - M6 - M8 - M10 - M12			
2 x			1/4": 50 - 150 mm			
2 x			3/8": 75 - 150 mm			
2 x			1/2": 125 - 250 mm			
1 x			1/2"			
1 x			1/4"			

2 x		3/8“x10mm - 1/2“x10mm
3 x		1/4“ - 3/8“ - 1/2“
3 x		1/4“ - 3/8“ - 1/2“
1 x		TS10 - TS15 - TS20 - TS25 - TS27 TS30 - TS40 - TS45 - TS50
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

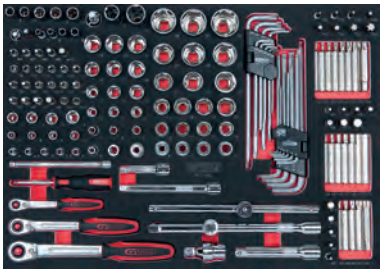

1/4“ 3/8“ 1/2“

			L mm	B mm	H mm	kg	
781.0160	160 pcs		390.0	564.0	35.0	8.95	
13 x			1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm
9 x			1/4“: 5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm
16 x			3/8“: 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 mm
21 x			1/2“: 8-10-11-12-13-14-15-16-17-18-19 20-21-22-23-24-26-27-28-30-32 mm
2 x			3/8“: 16 - 21 mm
2 x			1/4“: PH1 - PH2
8 x			1/4“: 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 mm
8 x			1/4“: T8 - T10 - T15 - T20 - T25 - T27 T30 - T40
5 x			1/4“: M4 - M5 - M6 - M8 - M10
7 x			10 mm: 4 - 5 - 6 - 7 - 8 - 10 - 12 mm
8 x			10 mm: T20 - T25 - T30 - T40 - T45 T50 - T55 - T60
5 x			10 mm: M5 - M6 - M8 - M10 - M12
7 x			10 mm: 4 - 5 - 6 - 7 - 8 - 10 - 12 mm
8 x			10 mm: T20 - T25 - T30 - T40 - T45 T50 - T55 - T60
5 x			10 mm: M5 - M6 - M8 - M10 - M12
2 x			1/4“: 50 - 150 mm
2 x			3/8“: 75 - 150 mm
2 x			1/2“: 125 - 250 mm
1 x			1/2“
1 x			1/4“
2 x			3/8“x10mm - 1/2“x10mm
3 x			1/4“ - 3/8“ - 1/2“
3 x			1/4“ - 3/8“ - 1/2“
1 x			TS10 - TS15 - TS20 - TS25 - TS27 TS30 - TS40 - TS45 - TS50
1 x			1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm

SCS Socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

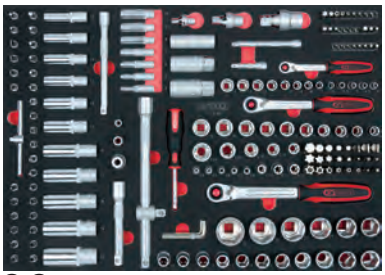

1/4“ 3/8“ 1/2“

			L mm	B mm	H mm	kg	
711.0180	180 pcs		390.0	564.0	35.0	8.24	
13 x			1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm
7 x			1/4“: 4 - 5 - 6 - 7 - 8 - 9 - 10 mm
5 x			1/4“: E4 - E5 - E6 - E7 - E8
10 x			3/8“: 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
6 x			3/8“: 10 - 11 - 12 - 13 - 14 - 15 mm
6 x			3/8“: E10 - E11 - E12 - E14 - E16 - E18
1 x			3/8“: 18 mm
17 x			1/2“: 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm
5 x			1/2“: 16 - 17 - 18 - 19 - 22 mm
2 x			1/2“: E20 - E24
2 x			1/2“: 16 - 21 mm
4 x			1/4“: 3 - 4 - 5 - 6 mm
3 x			1/4“: 4 - 5 - 6,5 mm
3 x			1/4“: PH0 - PH1 - PH2
3 x			1/4“: PZ0 - PZ1 - PZ2
8 x			1/4: T8 - T9 - T10 - T15 - T20 - T25 T27 - T30
8 x			1/4: TB8 - TB9 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30
11 x			1/4“: T5 - T6 - T7 - T8 - T9 - T10 - T15 - T20 - T25 - T27 - T30
1 x			1/4“: TB7
3 x			1/4“: M5 - M6 - M8
8 x			1/4“: TS10 - TS15 - TS20 - TS25 - TS27 - TS30 - TS40 - TS45
5 x			1/4“: M5 - M6 - M7 - M8 - M9
3 x			5/16“: 8 - 10 - 12 mm
5 x			5/16“: 7 - 8 - 10 - 12 - 14 mm
2 x			5/16“: PH3 - PH4
2 x			5/16“: PZ3 - PZ4
6 x			5/16“: T40 - T45 - T50 - T55 - T60 - T70
6 x			5/16“: TB40 - TB45 - TB50 - TB55 - TB60 - TB70
1 x			1/4“: T8
3 x			1/4“ - 3/8“ - 1/2“
2 x			1/2“: 125 - 250 mm
2 x			1/4“: 50 - 100 mm

SCS CHROMEplus® socket set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

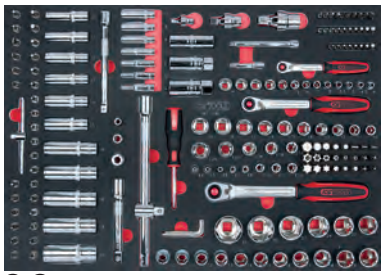

1/4“ 3/8“ 1/2“

			L mm	B mm	H mm	kg	
781.0180	180 pcs		390.0	564.0	35.0	8.24	
13 x			1/4“: 4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 11 - 12 - 13 - 14 mm
7 x			1/4“: 4 - 5 - 6 - 7 - 8 - 9 - 10 mm
5 x			1/4“: E4 - E5 - E6 - E7 - E8
10 x			3/8“: 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm
6 x			3/8“: 10 - 11 - 12 - 13 - 14 - 15 mm
6 x			3/8“: E10 - E11 - E12 - E14 - E16 - E18
1 x			3/8“: 18 mm
17 x			1/2“: 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm
5 x			1/2“: 16 - 17 - 18 - 19 - 22 mm
2 x			1/2“: E20 - E24
2 x			1/2“: 16 - 21 mm
4 x			1/4“: 3 - 4 - 5 - 6 mm
3 x			1/4“: 4 - 5 - 6,5 mm
3 x			1/4“: PH0 - PH1 - PH2
3 x			1/4“: PZ0 - PZ1 - PZ2
8 x			1/4: T8 - T9 - T10 - T15 - T20 - T25 T27 - T30
8 x			1/4: TB8 - TB9 - TB10 - TB15 - TB20 - TB25 - TB27 - TB30
11 x			1/4“: T5 - T6 - T7 - T8 - T9 - T10 - T15 - T20 - T25 - T27 - T30
1 x			1/4“: TB7
3 x			1/4“: M5 - M6 - M8
8 x			1/4“: TS10 - TS15 - TS20 - TS25 - TS27 - TS30 - TS40 - TS45
5 x			1/4“: M5 - M6 - M7 - M8 - M9
3 x			5/16“: 8 - 10 - 12 mm
5 x			5/16“: 7 - 8 - 10 - 12 - 14 mm
2 x			5/16“: PH3 - PH4
2 x			5/16“: PZ3 - PZ4
6 x			5/16“: T40 - T45 - T50 - T55 - T60 - T70
6 x			5/16“: TB40 - TB45 - TB50 - TB55 - TB60 - TB70
1 x			1/4“: T8
3 x			1/4“ - 3/8“ - 1/2“
2 x			1/2“: 125 - 250 mm
2 x			1/4“: 50 - 100 mm

1/1 SCS - IMPACT SOCKET WRENCH

SCS impact socket wrench set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

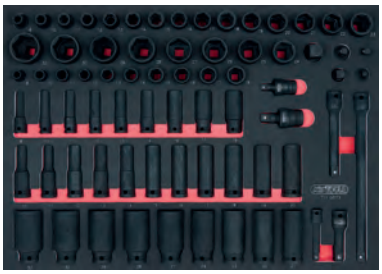

3/8" 1/2"

		L mm	B mm	H mm	kg
711.0073	73 pcs	390.0	564.0	35.0	14.74

10 x		3/8": 8 - 10 - 11 - 12 - 13 - 14 - 15 16 - 17 - 19 mm
9 x		3/8": 8 - 10 - 11 - 12 - 13 - 14 - 16 17 - 19 mm
1 x		1/4"F x 3/8"M
1 x		3/8"F x 1/4"M
1 x		3/8"F x 1/2"M
1 x		3/8"
1 x		3/8": 75 mm
23 x		1/2": 8 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 - 30 - 32 mm
20 x		1/2": 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 20 - 21 - 22 - 23 - 24 - 27 - 28 - 29 - 30 - 32 mm
1 x		1/2"
3 x		1/2": 75 - 125 - 250 mm
1 x		1/2"F x 3/8"M
1 x		1/2"F x 3/4"M

1/1 SCS - SCREWDRIVER

SCS ERGOTORQUE*plus*® screwdriver set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

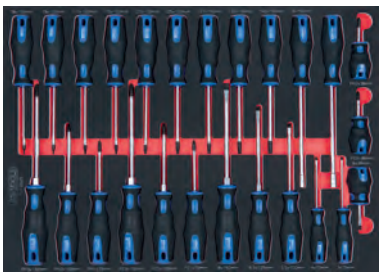

		L mm	B mm	H mm	kg
711.0025	25 pcs	390.0	375.0	35.0	1.85

1 x		PH2
3 x		PH1 - PH2 - PH3
1 x		PZ2
3 x		PZ1 - PZ2 - PZ3
1 x		6 mm
5 x		3 - 4 - 5,5 - 6,5 - 8 mm
9 x		T8 - T9 - T10 - T15 - T20 - T25 - T27 T30 - T40
2 x		6 - 7 mm

SCS ERGOTORQUE*plus*® screwdriver set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

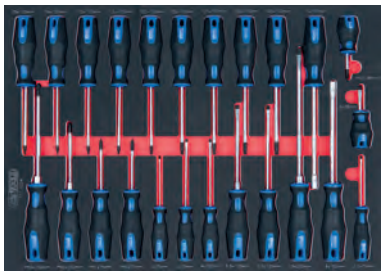

		L mm	B mm	H mm	kg
711.1024	24 pcs	390.0	375.0	35.0	2.80

1 x		6 mm
7 x		(2,5 - 3 - 4) x 155 mm, 4 x 180 mm, (5,5 - 6,5) x 230 mm, 8 x 265 mm
1 x		PH2
4 x		PH0 - PH1 - PH2 - PH3
9 x		T8 - T9 - T10 - T15 - T20 - T25 - T27 T30 - T40
2 x		7 - 8 mm

SCS Screwdriver set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

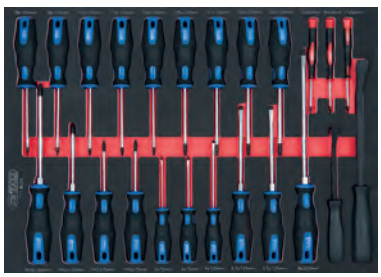

		L mm	B mm	H mm	kg
711.8024	24 pcs	390.0	564.0	35.0	1.83

6 x		3x155 - 4x155 - 4x180 - 5,5x230 - 6,5x230 - 8x315 mm
4 x		PH0 - PH1 - PH2 - PH3
9 x		T8 - T9 - T10 - T15 - T20 - T25 - T27 T30 - T40
3 x		T5 - T6 - T7
2 x		11x115 - 15x185 mm

SCS ERGOTORQUE*plus*® screwdriver and T-handle set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.0021	21 pcs	390.0	564.0	35.0	3.30

10 x		2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 - 12 mm
11 x		4 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 13 mm

SCS screwdriver and hook set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

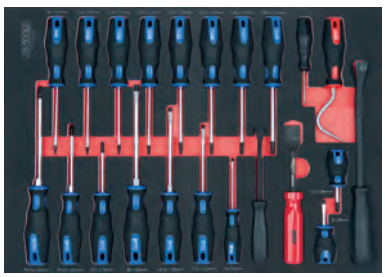

		L mm	B mm	H mm	kg
711.0022	22 pcs	390.0	564.0	35.0	1.65

1 x		6 mm
4 x		4 x 155 mm, 5,5 x 205 mm - 6,5 x 230 mm, 8 x 265 mm
1 x		PH2
3 x		PH1 - PH2 - PH3
8 x		T9 - T10 - T15 - T20 - T25 - T27 T30 - T40
1 x		90°
1 x		185 mm
2 x		11 x 115 - 15 x 185 mm
1 x		25 x 200 mm

SCS Screwdriver and pliers set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

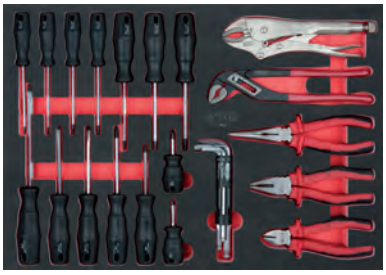

		L mm	B mm	H mm	kg
711.6027	27 pcs	390.0	564.0	35.0	3.85

1 x		160 mm
1 x		180 mm
1 x		200 mm
1 x		250 mm
1 x		240 mm
4 x		5,5 - 6,5 x 100 - 6 x 38 - 8 x 150 mm
3 x		PH1 x 75 - PH2 x 38 - PH2 x 100 mm
7 x		TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40
1 x		2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm

SCS screwdriver set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

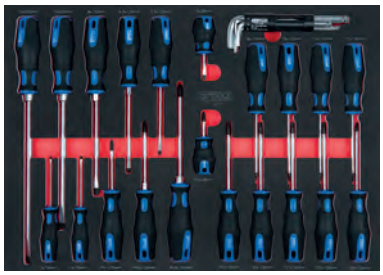

		L mm	B mm	H mm	kg
711.1029	29 pcs	390.0	564.0	35.0	2.81

1 x		2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm
1 x		6 mm
7 x		3 - 4 - 5,5 - 6,5 - 8 - 10 - 10
1 x		PH2
3 x		PH1 - PH2 - PH3
9 x		TB8 - TB9 - TB10 - TB15 - TB20 TB25 - TB27 - T30 - T40

1/1 SCS - PLIERS

SCS Pliers set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.5009	9 pcs	390.0	564.0	35.0	2.49

1 x		250 mm
1 x		240 mm
1 x		160 mm
1 x		180 mm
1 x		160 mm
1 x		160 mm
1 x		160 mm
1 x		160 mm
1 x		160 mm

SCS Screwdriver and pliers set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

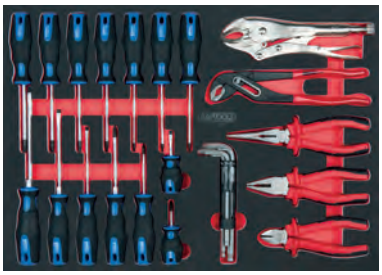

		L mm	B mm	H mm	kg
711.1027	27 pcs	390.0	564.0	35.0	3.85

1 x		160 mm
1 x		180 mm
1 x		200 mm
1 x		250 mm
1 x		240 mm
4 x		5,5 x 100 - 6 x 38 - 6,5 x 125 - 8 x 150 mm
3 x		PH1 x 75 - PH2 x 38 - PH2 x 100 mm
7 x		TB10 - TB15 - TB20 - TB25 - TB27 - TB30 - TB40
8 x		5/64" - 3/32" - 1/8" - 5/32" - 3/16" - 1/4" - 5/16" - 3/8"

SCS ERGOTORQUE*plus*® screwdriver set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

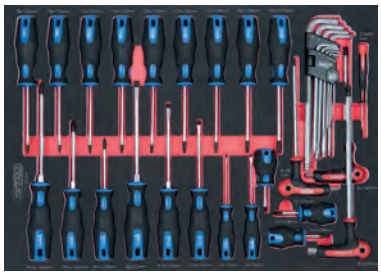

		L mm	B mm	H mm	kg
711.0034	34 pcs	390.0	375.0	35.0	2.20

1 x		1,5 - 2,0 - 2,5 - 3,0 - 4,0 - 5,0 - 6,0 - 7,0 - 8,0 - 10,0 mm
3 x		5 - 6 - 8 mm
1 x		6 mm
5 x		(3 - 4) x 155 mm, 5,5 x 205 mm, 6,5 x 230 mm, 8 x 265 mm
1 x		PH2
3 x		PH1 - PH2 - PH3
9 x		PZ2
2 x		T8 - T9 - T10 - T15 - T20 - T25 - T27 T30 - T40
1 x		2 mm

SCS Pliers set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.1012	12 pcs	390.0	564.0	35.0	3.39

1 x		180 mm
1 x		210 mm
1 x		180 mm
1 x		200 mm
2 x		125 - 250 mm
1 x		225 mm
1 x		240 mm

1 x		160 mm
1 x		160 mm
1 x		160 mm
1 x		160 mm

SCS pliers and hammer set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

	L mm	B mm	H mm	kg
711.9013 13 pcs	390.0	564.0	35.0	3.83

1 x		180 mm
1 x		165 mm
1 x		180 mm
1 x		240 mm
2 x		10 - 28 mm, 19 - 60 mm
1 x		19 - 60 mm
2 x		12 - 25 mm, 19 - 60 mm
1 x		19 - 60 mm
1 x		850 g
2 x		300 - 500 g

SCS Pliers and file set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

	L mm	B mm	H mm	kg
711.5018 18 pcs	390.0	564.0	35.0	4.04

1 x		125 mm
1 x		165 mm
1 x		180 mm
1 x		200 mm

1 x		250 mm
1 x		240 mm
1 x		160 mm
1 x		160 mm
1 x		160 mm
1 x		160 mm
1 x		200 mm
1 x		200 mm
1 x		200 mm
1 x		200 mm
1 x		0 - 150mm
1 x		0,01 - 1,0 mm
1 x		5 m
1 x		145 mm

SCS Pliers set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

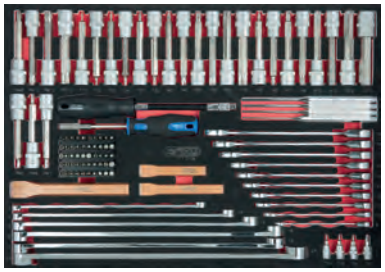

	L mm	B mm	H mm	kg
711.1016 16 pcs	390.0	564.0	35.0	4.78

1 x		180 mm
1 x		210 mm
1 x		180 mm
2 x		160 - 200 mm
1 x		250 mm
1 x		150 mm
1 x		220 mm
1 x		240 mm
1 x		160 mm
1 x		160 mm
1 x		160 mm
1 x		160 mm
1 x		270 mm
1 x		270 mm
1 x		280 mm

SCS pliers and wrench set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

	L mm	B mm	H mm	kg
711.2036 36 pcs	390.0	564.0	35.0	3.56

1 x		250 mm
1 x		240 mm
1 x		125 mm
1 x		180 mm
1 x		200 mm
1 x		160 mm
1 x		160 mm
1 x		160 mm
1 x		160 mm
4 x		T6 - T7 - T8 - T9
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm
1 x		TS10 - TS15 - TS20 - TS25 - TS27 - TS30 - TS40 - TS45 - TS50
1 x		130 - 630 mm
1 x		510 mm
1 x		140 mm
1 x		145 mm

1/1 SCS - HAMMER & CHISEL

SCS chisel and hammer set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.0014	14 pcs	390.0	564.0	35.0	3.56

1 x	5 mm
6 x	Ø 3 - (2 x 4) - 5 - 6 - 8 mm
1 x	5 mm
1 x	10 mm
1 x	20 mm
1 x	7 mm
1 x	300 g
1 x	1000 g
1 x	350 g

SCS fil , chisel and hammer set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.0018	18 pcs	390.0	564.0	35.0	4.80

1 x	350 g
1 x	300 g
1 x	1000 g
1 x	Ø 5 mm
6 x	Ø 3 - (2 x 4) - 5 - 6 - 8 mm
1 x	20 x 210 mm
1 x	7 x 190 mm
1 x	10 x 185 mm
1 x	5 x 185 mm
1 x	200 mm
1 x	200 mm
1 x	200 mm

SCS chisel and hammer set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.1021	21 pcs	390.0	564.0	35.0	4.50

3 x	2 - 3 - 4 mm
5 x	3 - 4 - 5 - 6 - 8 mm
1 x	7 mm
1 x	10 mm
2 x	150 - 200 mm
1 x	25 x 200 mm
1 x	15 x 185 mm
1 x	300 g
1 x	1000 g
1 x	350 g
1 x	30 x 195 mm
1 x	170 mm
1 x	130 - 630 mm
1 x	510 mm

1/1 SCS - WORKSHOP SUPPLIES

SCS Wheel service tool set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.0016	16 pcs	390.0	564.0	35.0	3.84

1 x	20 - 200 Nm
1 x	1/2“
1 x	370 mm
1 x	310 mm
1 x	0,30 Nm
1 x	0,45 Nm
1 x	130 mm
1 x	200 mm
1 x	300 mm
1 x	22 mm
1 x	250 mm
5 x	15 - 17 - 19 - 21 - 22 mm

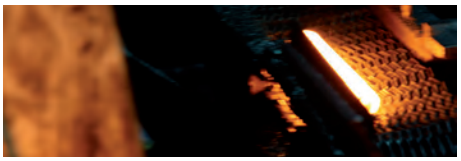

SCS pliers, hammer and file s t

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.6017	17 pcs	390.0	564.0	35.0	5.24

1 x	180 mm
1 x	180 mm
1 x	200 mm
1 x	210 mm
1 x	240 mm
1 x	250 mm
2 x	150 - 200 mm
1 x	300 g
1 x	1000 g
1 x	200 mm
1 x	200 mm
1 x	200 mm
1 x	200 mm
1 x	170 mm
1 x	130 - 630 mm
1 x	5 m x 19 mm

SCS Chisel and hammer set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.7017	17 pcs	390.0	564.0	35.0	4.00
5 x		3 x 4 x 5 x 6 x 8 mm			
1 x		5 mm			
1 x		10 mm			
1 x		20 mm			
1 x		7 mm			
1 x		300 g			
1 x		500 g			
1 x		25 x 200 mm			
1 x		15 x 185 mm			
1 x		30 mm			
1 x		170 mm			
1 x		5 m			
1 x		5 m x 19 mm			

SCS hammer and pin punch set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.0017	17 pcs	390.0	564.0	35.0	2.24
1 x		10 x 11 mm			
2 x		6 - 7 mm			
5 x		3 - 4 - 5 - 6 - 8 mm			
1 x		8 mm			
2 x		125 - 175 mm			
1 x		300 g			
1 x		200 g			
1 x		12,5 x 300 mm			
1 x		225 mm			
1 x		140 mm			
1 x		5 m x 19 mm			

SCS pliers, file and d ift punch set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.2022	22 pcs	390.0	564.0	35.0	6.07
1 x		180 mm			
1 x		180 mm			
1 x		200 mm			
1 x		210 mm			
1 x		240 mm			
1 x		250 mm			
4 x		4 x 5 x 6 x 8 mm			
1 x		5 mm			
1 x		10 mm			
1 x		20 mm			
1 x		7 mm			
1 x		300 g			
1 x		1000 g			
1 x		200 mm			
1 x		200 mm			
1 x		200 mm			
1 x		200 mm			
1 x		18 mm			
1 x		5 m x 19 mm			

SCS pliers and chisel set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.1022	22 pcs	390.0	564.0	35.0	5.20
1 x		125 mm			
1 x		160 mm			
1 x		180 mm			
1 x		200 mm			
1 x		240 mm			
1 x		250 mm			
1 x		180 mm			
1 x		AWG 20 - 18, 16 - 14, 12 - 10			
5 x		3 - 4 - 5 - 6 - 8 mm			
1 x		5 mm			
1 x		10 mm			
1 x		20 mm			
1 x		7 mm			
1 x		300 g			
1 x		350 g			
1 x		25 x 200 mm			
1 x		30 mm			
1 x		170 mm			

SCS ERGOTORQUE® VDE pliers and screwdriver set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.8027	27 pcs	390.0	564.0	35.0	3.65
1 x		180 mm			
4 x		3 - 4 - 5 - 6 mm			

1 x		Ø 8 mm
2 x		125 - 175 mm
1 x		6 mm
5 x		3 - 4 - 6,5 - 8 - 10 mm
1 x		PH2 mm
2 x		PH1 - PH2
5 x		T10 - T15 - T20 - T25 - T30
1 x		2,4 mm
1 x		160 mm
1 x		180 mm
1 x		200 mm
1 x		240 mm

SCS hammer and wrench set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.0023	23 pcs	390.0	564.0	35.0	3.71

9 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 10 - 18 mm
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm
4 x		3 - 4 - 5 - 6 mm
1 x		8 mm
2 x		125 - 175 mm
1 x		240 mm
1 x		300g
1 x		200g
1 x		0,05 - 1 mm
1 x		510 mm
1 x		3 m

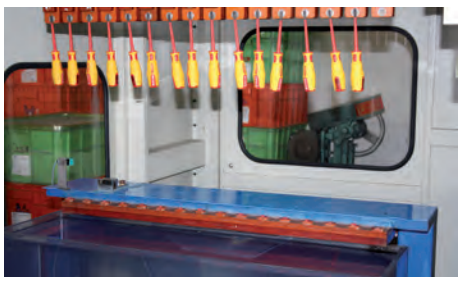

SCS ERGOTORQUE® VD E pliers and screwdriver set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

		L mm	B mm	H mm	kg
711.1033	33 pcs	390.0	564.0	35.0	6.00

1 x		160 mm
1 x		180 mm
1 x		200 mm
1 x		240 mm
1 x		6 mm
5 x		3 - 4 - 6,5 - 8 - 10 mm
1 x		2,4 mm
1 x		PH2
3 x		PH1 - PH2 - PH3
1 x		1,5 - 2 - 2,5 - 3 - 4 - 5 - 6 - 7 - 8 - 10 mm
4 x		3 - 4 - 5 - 6 mm
1 x		8 mm
2 x		125 - 175 mm
1 x		300 g

SCS screwdriver and measuring instrument set

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

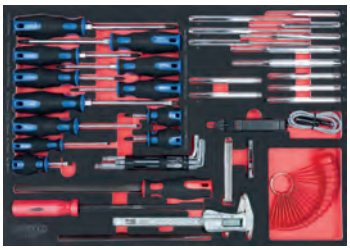

		L mm	B mm	H mm	kg
711.1041	41 pcs	390.0	564.0	35.0	3.70

1 x		6 mm
3 x		4 - 5,5 - 8 mm
1 x		PH2
3 x		PH1 - PH2 - PH3
1 x		PZ2
3 x		PZ1 - PZ2 - PZ3
1 x		230 mm

1 x		200 mm
1 x		12,5 x 300 mm
4 x		3 - 4 - 5 - 6 mm
5 x		3 - 4 - 5 - 6 - 8 mm
3 x		4 - 5 - 6 mm
1 x		5 mm
1 x		2 - 2,5 - 3 - 4 - 5 - 6 - 8 - 10 mm
1 x		
1 x		100 mm
1 x		E1xT5 - E30xT70
1 x		0 - 150 mm
1 x		3 - 48 V

1/1 SCS - EMPTY INSERTS

SCS Universal system insert for tool or small parts (empty)

- 1/1 System insert
- Suitable for tool cabinets and tool cases
- Fixed arrangement thanks to precise placement
- Oil and chemical resistant
- Insert made from high quality three-coloured foam

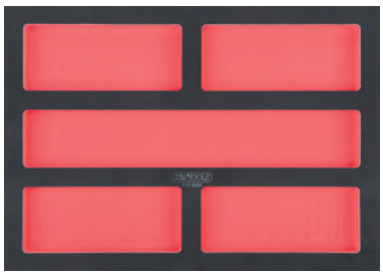

	L mm	B mm	H mm	kg
712.0000	390.0	564.0	35.0	0.40

PU-foam sheets for self cutting

- Thickness 10 mm
- Uncut for self modelling

	L mm	B mm	H mm	kg
711.0000	390.0	564.0	35.0	0.95

Anti slip mat

- Thickness 10 mm
- Uncut for self modelling

	L mm	B mm	kg
800.0920	10000.0	600.0	2.50

CUTTING TOOLS / BRUSHES AND FILES

Innovation is our mission!

	PAGE
COOLANT	500
HSS-R TWIST DRILLS	500 - 502
HSS-G TWIST DRILLS	502 - 504
HSS-G CO TWIST DRILLS	504 - 506
HSS TIN TWIST DRILLS	506 - 507
CENTRE DRILLS	507
SPOT WELD DRILLS	507 - 509
MILLING DRILLS	509
HSS CONE CUTTERS	509 - 510
HSS CO CONE CUTTERS	510
HSS TIN CONE CUTTERS	510 - 511
HSS STEPPED DRILLS	511
HSS CO STEPPED DRILLS	512
HSS TIN STEPPED DRILLS	512 - 513
CONE - AND DEBURRING 60°	513
CONE - AND DEBURRING 75°	513
CONE - AND DEBURRING 90°	514 - 515
CONE - AND DEBURRING 120°	516
HSS THREADED TAP	516 - 517
HSS CO THREADED TAP	517 - 518
DIE STOCKS	518 - 519
TAP WRENCHES AND DIE HOLDERS	519 - 520
THREAD GAUGES	520
ROTARY BURRS	520 - 523
SCREW HOLE PUNCHES	523
HOLESAWS	523 - 524
HANDSAWS	524 - 526
JIGSAW BLADES	526 - 528
SABRE SAW BLADES	528 - 530
HAND WIRE BRUSHES	530 - 532
MACHINE OPERATED WIRE BRUSHES	532 - 533
CUT OFF AND FLAP WHEELS	533
FILES	534 - 535
THREAD FILES	535

MACHINING TOOLS / BRUSHES AND FILES

Drills

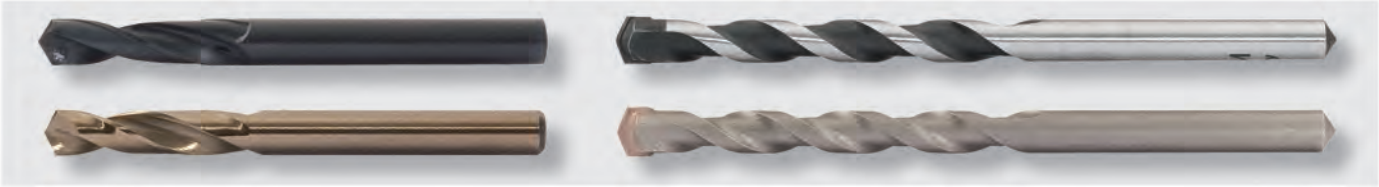

Drilling: Technical information: Guidelines for drilling speeds feed rate and cooling

The table provides approximate values. According to drilling depth and thickness of the material, an increase or reduction in the cutting speed feed rate or cutting fluid would be reccomended. The values for -v- and -s- indicated value apply to drilling depths until 5 x d (d = drilling diameter) In drilling depths over 5 x d until 8 x d then -v- and -s- should be reduced around 20% to 30%. In general in drilling depths over 5 x d the hole should be cleaned!

Material grade	Cooling	Drilling speed v0m/min	s= feed rate n= speed	Twist drill diameter D [mm]							
				1*	2	5	8	16	25	40	63
				Feed rate s		[mm/U] and medium speed n [U/mi]					
Non alloyed steel up to 500 N/m²	Oil and water emulsion	30-40	s n	Hand 11100	0,05 5600	0,12 2200	0,2 1400	0,3 700	0,4 450	0,4 280	0,5 180
Non alloyed steel 500-700 N/m²		25-30	s n	Hand 8800	0,05 4400	0,12 1750	0,2 1100	0,3 550	0,4 350	0,4 220	0,5 140
Non alloyed steel above 700 N/m²		20-25	s n	Hand 7200	0,04 3600	0,1 1400	0,15 900	0,25 445	0,3 285	0,3 180	0,4 114
Alloyed steel 700-900 N/m²		12-15	s n	Hand 4300	0,03 2150	0,08 860	0,12 540	0,2 270	0,25 170	0,32 110	0,36 68
Alloyed steel 900-1100 N/m²		8-15	s n	Hand 3650	Hand 1840	0,06 735	0,001 455	0,2 230	0,3 145	0,3 90	0,3 60
Alloyed steel above 1100 N/m²	Cutting oil	5-8	s n	Hand 2100	Hand 1050	0,04 415	0,06 260	0,1 130	0,12 83	0,16 52	0,18 33
Rust steady, acid steady steels (highly Cr, Ni-alloy)		5-10	s n	Hand 2400	Hand 1200	0,05 480	0,1 300	0,15 150	0,2 95	0,2 60	0,3 38
High tensile steel (high Co, Cr, Mo, Ni, W alloys)		4-8	s n	Hand 1900	0,02 950	0,06 380	0,09 240	0,15 120	0,2 76	0,24 48	0,27 30
Sprung steel band (high Si alloy)	Cutting oil	3-6	s n	Hand 1430	Hand 720	0,04 285	0,06 180	0,1 90	0,12 57	0,16 36	0,18 23
Manganese steel (Mn-10%, C- 05%)	without cooling the material must be heated to 300	2-5	s n	Hand 1300	Hand 650	0,05 255	0,08 160	0,1 80	0,15 50	0,2 32	0,2 20
Cast steel up to GS-52	Oil and water emulsion	20-25	s n	Hand 7200	0,03 3600	0,9 1400	0,14 900	0,24 445	0,3 285	0,38 180	0,43 114
Cast steel above GS-52		12-20	s n	Hand 5100	0,03 2550	0,08 1020	0,12 640	0,02 320	0,25 200	0,32 130	0,36 80
Cast iron up to GG-26	Compressed air	18-25	s n	Hand 6800	0,06 3400	0,16 1350	0,24 860	0,4 430	0,5 275	0,6 170	0,7 110
Cast iron above GG 26		5-15	s n	Hand 3200	0,05 1600	0,14 635	0,2 400	0,35 200	0,45 130	0,5 80	0,6 50
Cast iron (GTW/GTS)	Compressed air (Oil and water emulsion)	18-25	s n	Hand 6800	0,07 3400	0,12 1400	0,2 850	0,4 430	0,5 275	0,6 170	0,6 110
Refined copper	Oil and water emulsion (compressed air)	50-80	s n	Hand 2100	0,005 10500	0,15 4100	0,25 2600	0,4 1300	0,5 830	0,5 520	0,5 330
Brass, tough (MS 63)	Oil and water emulsion (Cutting oil)	40-30	s n	Hand 16000	0,05 8000	0,15 3200	0,25 2000	0,4 1000	0,5 640	0,6 400	0,7 250
Brass, alloy (MS 58) Bronze, soft (gun metal, Rg)	Cutting oil	20-30	s n	Hand 8000	0,04 4000	0,1 1600	0,15 1000	0,25 500	0,32 320	0,42 200	0,46 125
Bronze, hard (Bz; Äternabronze)		10-20	s n	Hand 4800	0,04 2400	0,1 960	0,15 600	0,25 300	0,32 190	0,42 120	0,46 75
Copper nickel alloy (e.g. nickel bronze approx. 67% Ni)	Cutting oil	5-15	s n	Hand 3200	0,02 1600	0,06 635	0,09 400	0,15 200	0,2 130	0,24 80	0,27 50
Aluminium	Oil and water emulsion	50-120	n	Hand 3200	0,02 1600	0,06 635	0,09 400	0,15 200	0,2 130	0,24 80	0,27 50
Nickel alloy aluminium (e.g. piston alloy)		20-44	s n	Hand 9600	0,04 4800	0,1 1900	0,15 1200	0,25 600	0,32 380	0,4 240	0,45 150

* When the diameter is below 1 mm the cutting speed should be reduced.

Stepped drills

Cutting recommendations for stepped drills

Material:		Non alloyed steel up to 700 N/mm²	Alloyed steel up to 700 N/mm²	Alloy steel 1000 N/mm²	Cast iron up to 250 N/mm²	Cast iron above 250 N/mm²	CuZn refractory alloy	CuZn-refractory tough	Al refaactory up to 11% Si
Metal gauge in mm		up to 4,0	up to 4,0	up to 4,0	up to 4,0	up to 4,0	up to 4,0	up to 4,0	up to 4,0
Vc = m/min		30	20	20	15	10	60	35	30
Cooling lubricant		Cutting edge spray	Cutting edge spray	Cutting edge spray	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Cutting edge spray
Ø mm	Dim.	U/min	U/min	U/min	U/min	U/min	U/min	U/min	U/min
3,0-14,0	Nr. 1	3185-682	2123-455	2123-455	1592-341	1062-227	6369-1365	3715-796	3185-682
5,0-20,0	Nr. 2	1911-478	1274-318	1274-318	955-239	637-159	3822-955	2229-557	1911-478
16,0-30,5	Nr. 3	597-313	398-209	398-209	299-157	199-104	1194- 627	697-365	597-313
24,0-40,0	Nr. 4	398-239	265-159	265-159	199-119	133-80	796-478	464-279	398-239
36,0-50,0	Nr. 5	265-191	177-127	177-127	133-96	88-64	531-382	310-223	265-191
40,0-61,0	Nr. 6	239-157	159-104	159-104	119-78	80-52	478-313	279-183	239-157
5,0-25,4	Nr. 7	1911-376	1274-251	1274-251	955-188	637-125	3822-752	2229-439	1911-376
5,0-31,0	Nr. 8	1911-308	1274-205	1274-205	955-154	637-103	3822-616	2229-360	1911-308
5,0-22,5	Nr. 9	1911-425	1274-283	1274-283	955-212	637-142	3822-849	2229-495	1911-425

Carbide milling cutters

Milling cutters up to and including head Ø 6 mm manufactured out of solid carbide steel beyond that the carbide is soldered on the head cutting edges.
The special dovetailed cutting edge design C (after DIN toothing MX) has following advantages:

- Smooth running
- High material removal
- No clogging
- Comfortable working
- Short swarf
- Obtains even and smooth surfaces

Applications: Universal applications, for iron metals and non ferrous metals, for plastics, for plaster working areas, and hard material working, cast iron and titanium.
Recommended cutting speed for hard metal milling machine burrs Vc 450 - 600 ms/min

Manual and machine wire brushes

Files

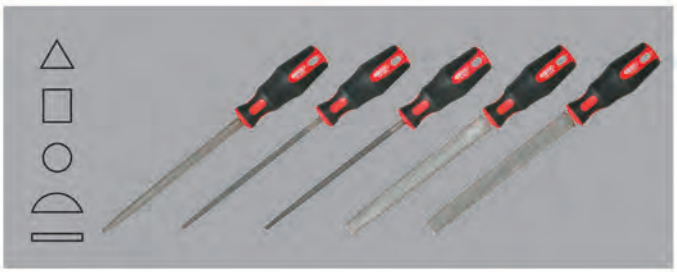

Handsaws

Saw blades

COOLANT

Cooling lubricant stick

- Suitable for working with centre bits, countersinks and stepped drills
- Contents 18g
- To prolong the service life

	Volume g	g	
390.0190	18	44	

HSS-R TWIST DRILLS

HSS-R Twist drill short

- DIN 1897 Typ N
- Right hand cutting
- Relieved cone has a ground point
- 118° pointed angle
- 20 - 30° spiral angle
- Ideally suited for thin walled working
- Black, tempered surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.



	D mm	L1 mm	L2 mm	Content	g	
330.5020	2.0	38.0	12.0	10	7	
330.5021	2.1	38.0	12.0	10	10	
330.5022	2.2	40.0	13.0	10	12	
330.5023	2.3	40.0	13.0	10	12	
330.5024	2.4	43.0	14.0	10	15	
330.5025	2.5	43.0	14.0	10	15	
330.5026	2.6	43.0	14.0	10	16	
330.5027	2.7	46.0	16.0	10	25	
330.5028	2.8	46.0	16.0	10	26	
330.5029	2.9	46.0	16.0	10	28	
330.5030	3.0	46.0	16.0	10	30	
330.5031	3.1	49.0	18.0	10	31	
330.5032	3.2	49.0	18.0	10	32	
330.5033	3.3	49.0	18.0	10	33	
330.5034	3.4	52.0	20.0	10	34	
330.5035	3.5	52.0	20.0	10	35	
330.5036	3.6	52.0	20.0	10	37	
330.5037	3.7	52.0	20.0	10	40	
330.5038	3.8	55.0	22.0	10	42	
330.5039	3.9	55.0	22.0	10	44	
330.5040	4.0	55.0	22.0	10	45	
330.5041	4.1	55.0	22.0	10	47	
330.5042	4.2	55.0	22.0	10	49	
330.5043	4.3	58.0	24.0	10	55	
330.5044	4.4	58.0	24.0	10	57	
330.5045	4.5	58.0	24.0	10	60	
330.5046	4.6	58.0	24.0	10	62	
330.5047	4.7	58.0	24.0	10	63	
330.5048	4.8	62.0	26.0	10	72	
330.5049	4.9	62.0	26.0	10	73	
330.5050	5.0	62.0	26.0	10	75	
330.5051	5.1	62.0	26.0	10	77	
330.5052	5.2	62.0	26.0	10	78	
330.5053	5.3	62.0	26.0	10	80	
330.5054	5.4	66.0	28.0	10	95	
330.5055	5.5	66.0	28.0	10	97	
330.5056	5.6	66.0	28.0	10	99	
330.5057	5.7	66.0	28.0	10	103	
330.5058	5.8	66.0	28.0	10	105	
330.5059	5.9	66.0	28.0	10	107	
330.5060	6.0	66.0	28.0	10	110	
330.5061	6.1	70.0	31.0	10	125	
330.5062	6.2	70.0	31.0	10	128	
330.5063	6.3	70.0	31.0	10	130	
330.5064	6.4	70.0	31.0	10	133	
330.5065	6.5	70.0	31.0	10	135	
330.5066	6.6	70.0	31.0	10	138	
330.5067	6.7	70.0	31.0	10	140	
330.5068	6.8	74.0	34.0	10	170	
330.5069	6.9	74.0	34.0	10	175	
330.5070	7.0	74.0	34.0	10	180	
330.5071	7.1	74.0	34.0	10	183	
330.5072	7.2	74.0	34.0	10	185	
330.5073	7.3	74.0	34.0	10	187	
330.5074	7.4	74.0	34.0	10	188	
330.5075	7.5	74.0	34.0	10	190	
330.5076	7.6	79.0	36.0	10	220	
330.5077	7.7	79.0	36.0	10	225	
330.5078	7.8	79.0	36.0	10	230	
330.5079	7.9	79.0	36.0	10	235	
330.5080	8.0	79.0	36.0	10	240	
330.5085	8.5	79.0	36.0	10	270	
330.5090	9.0	84.0	40.0	10	310	
330.5095	9.5	84.0	40.0	10	360	
330.5100	10.0	89.0	43.0	10	420	

HSS-R Twist drill

- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- 118° pointed angle
- 20 - 30° spiral angle
- Black, tempered surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron malleable tempered and cast iron.



	D mm	L1 mm	L2 mm	Content	g	
330.1003	0.3	19.0	3.0	10	1	
330.1004	0.4	20.0	5.0	10	1	
330.1005	0.5	22.0	6.0	10	1	
330.1006	0.6	24.0	7.0	10	1	
330.1007	0.7	28.0	9.0	10	1	
330.1008	0.8	30.0	10.0	10	1	
330.1009	0.9	32.0	11.0	10	1	
330.1010	1.0	34.0	12.0	10	5	
330.1011	1.1	36.0	14.0	10	5	
330.1012	1.2	38.0	16.0	10	5	
330.1013	1.3	38.0	16.0	10	5	
330.1014	1.4	40.0	18.0	10	5	
330.1015	1.5	40.0	18.0	10	5	
330.1016	1.6	43.0	20.0	10	10	
330.1017	1.7	43.0	20.0	10	10	
330.1018	1.8	46.0	22.0	10	10	
330.1019	1.9	46.0	22.0	10	10	
330.1020	2.0	49.0	24.0	10	10	
330.1021	2.1	49.0	24.0	10	20	
330.1022	2.2	53.0	27.0	10	20	
330.1023	2.3	53.0	27.0	10	20	
330.1024	2.4	57.0	30.0	10	20	
330.1025	2.5	57.0	30.0	10	20	
330.1026	2.6	57.0	30.0	10	40	
330.1027	2.7	61.0	33.0	10	40	
330.1028	2.8	61.0	33.0	10	40	
330.1029	2.9	61.0	33.0	10	40	
330.1030	3.0	65.0	33.0	10	40	
330.1031	3.1	65.0	36.0	10	40	
330.1032	3.2	65.0	36.0	10	40	
330.1033	3.3	70.0	36.0	10	40	
330.1034	3.4	70.0	39.0	10	40	
330.1035	3.5	70.0	39.0	10	40	
330.1036	3.6	70.0	39.0	10	50	
330.1037	3.7	70.0	39.0	10	50	
330.1038	3.8	75.0	43.0	10	50	
330.1039	3.9	75.0	43.0	10	50	
330.1040	4.0	75.0	43.0	10	50	
330.1041	4.1	75.0	43.0	10	80	
330.1042	4.2	75.0	43.0	10	80	
330.1043	4.3	80.0	47.0	10	80	
330.1044	4.4	80.0	47.0	10	80	
330.1045	4.5	80.0	47.0	10	80	
330.1046	4.6	80.0	47.0	10	100	
330.1047	4.7	80.0	47.0	10	100	
330.1048	4.8	86.0	52.0	10	100	
330.1049	4.9	86.0	52.0	10	100	
330.1050	5.0	86.0	52.0	10	100	
330.1051	5.1	86.0	52.0	10	130	
330.1052	5.2	86.0	52.0	10	130	
330.1053	5.3	86.0	52.0	10	130	
330.1054	5.4	93.0	57.0	10	130	
330.1055	5.5	93.0	57.0	10	130	
330.1056	5.6	93.0	57.0	10	150	
330.1057	5.7	93.0	57.0	10	150	
330.1058	5.8	93.0	57.0	10	150	
330.1059	5.9	93.0	57.0	10	150	
330.1060	6.0	93.0	57.0	10	150	
330.1061	6.1	101.0	63.0	10	180	
330.1062	6.2	101.0	63.0	10	180	
330.1063	6.3	101.0	63.0	10	180	
330.1064	6.4	101.0	63.0	10	180	
330.1065	6.5	101.0	63.0	10	180	
330.1066	6.6	101.0	63.0	10	250	
330.1067	6.7	101.0	63.0	10	250	
330.1068	6.8	109.0	69.0	10	250	
330.1069	6.9	109.0	69.0	10	250	
330.1070	7.0	109.0	69.0	10	250	
330.1071	7.1	109.0	69.0	10	260	
330.1072	7.2	109.0	69.0	10	260	
330.1073	7.3	109.0	69.0	10	260	
330.1074	7.4	109.0	69.0	10	260	
330.1075	7.5	109.0	69.0	10	260	
330.1076	7.6	117.0	75.0	10	330	
330.1077	7.7	117.0	75.0	10	330	
330.1078	7.8	117.0	75.0	10	330	
330.1079	7.9	117.0	75.0	10	330	
330.1080	8.0	117.0	75.0	10	330	
330.1081	8.1	117.0	75.0	10	350	
330.1082	8.2	117.0	75.0	10	350	
330.1083	8.3	117.0	75.0	10	350	
330.1084	8.4	117.0	75.0	10	350	
330.1085	8.5	117.0	75.0	10	350	
330.1086	8.6	125.0	81.0	10	430	
330.1087	8.7	125.0	81.0	10	430	
330.1088	8.8	125.0	81.0	10	430	
330.1089	8.9	125.0	81.0	10	430	
330.1090	9.0	125.0	81.0	10	430	
330.1091	9.1	125.0	81.0	10	480	
330.1092	9.2	125.0	81.0	10	480	
330.1093	9.3	125.0	81.0	10	480	
330.1094	9.4	125.0	81.0	10	480	
330.1095	9.5	125.0	81.0	10	480	
330.1096	9.6	133.0	87.0	10	275	
330.1097	9.7	133.0	87.0	10	275	
330.1098	9.8	133.0	87.0	10	275	
330.1099	9.9	133.0	87.0	10	275	
330.1100	10.0	133.0	87.0	5	275	
330.1101	10.1	133.0	87.0	5	300	
330.1102	10.2	133.0	87.0	5	300	
330.1103	10.3	133.0	87.0	5	300	
330.1104	10.4	133.0	87.0	5	300	
330.1105	10.5	133.0	87.0	5	300	
330.1106	10.6	142.0	94.0	5	350	
330.1107	10.7	142.0	94.0	5	350	
330.1108	10.8	142.0	94.0	5	350	
330.1109	10.9	142.0	94.0	5	350	
330.1110	11.0	142.0	94.0	5	350	

	D mm	L1 mm	L2 mm	Content	g	
330.1111	11.1	142.0	94.0	5	385	
330.1112	11.2	142.0	94.0	5	385	
330.1113	11.3	142.0	94.0	5	385	
330.1114	11.4	142.0	94.0	5	385	
330.1115	11.5	142.0	94.0	5	385	
330.1116	11.6	142.0	94.0	5	440	
330.1117	11.7	142.0	94.0	5	440	
330.1118	11.8	142.0	94.0	5	440	
330.1119	11.9	151.0	101.0	5	440	
330.1120	12.0	151.0	101.0	5	440	
330.1121	12.1	151.0	101.0	5	490	
330.1122	12.2	151.0	101.0	5	490	
330.1123	12.3	151.0	101.0	5	490	
330.1124	12.4	151.0	101.0	5	490	
330.1125	12.5	151.0	101.0	5	490	
330.1126	12.6	151.0	101.0	5	515	
330.1127	12.7	151.0	101.0	5	515	
330.1128	12.8	151.0	101.0	5	515	
330.1129	12.9	151.0	101.0	5	515	
330.1130	13.0	151.0	101.0	5	515	
330.1135	13.5	160.0	108.0	1	110	
330.1140	14.0	160.0	108.0	1	115	
330.1145	14.5	169.0	114.0	1	120	
330.1150	15.0	169.0	114.0	1	125	
330.1155	15.5	178.0	120.0	1	130	
330.1160	16.0	178.0	120.0	1	135	
330.1165	16.5	184.0	125.0	1	140	
330.1170	17.0	184.0	125.0	1	145	
330.1175	17.5	191.0	130.0	1	150	
330.1180	18.0	191.0	130.0	1	155	
330.1185	18.5	198.0	135.0	1	160	
330.1190	19.0	198.0	135.0	1	165	
330.1195	19.5	205.0	140.0	1	170	
330.1200	20.0	205.0	140.0	1	175	

HSS-R Twist drill set in metal case

- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- 118° pointed angle
- 20 - 30° spiral angle
- Black, tempered surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.1610	19 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 mm	0.60	

HSS-R Twist drill set in plastic case

- Stackable for storage
- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- 118° pointed angle
- 20 - 30° spiral angle
- Black, tempered surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.1620	19 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 mm	0.60	

HSS-R Twist drill set in metal case

- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- 118° pointed angle
- 20 - 30° spiral angle
- Black, tempered surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.1613	25 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 - 10,5 - 11,0 - 11,5 - 12,0 - 12,5 - 13,0 mm	1.30	

HSS-R Twist drill set in plastic case

- Stackable for storage
- With integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- 118° pointed angle
- 20 - 30° spiral angle
- Black, tempered surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.1623	25 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 - 10,5 - 11,0 - 11,5 - 12,0 - 12,5 - 13,0 mm	3.35	

HSS-R Twist drill set in metal case

- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- 118° pointed angle
- 20 - 30° spiral angle
- Black, tempered surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.1640	170 pcs	per 10 x: 1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 per 5 x: 8,5 - 9,0 - 9,5 - 10,0 mm	4.15	

HSS-R Twist drill set in metal case

- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- 118° pointed angle
- 20 - 30° spiral angle
- Black, tempered surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.1650	230 pcs	per 10 x: 1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,3 - 3,5 - 4,0 - 4,2 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 6,8 - 7,0 - 7,5 - 8,0 per 5 x: 8,5 - 9,0 - 9,5 - 10,0 - 10,5 - 11,0 11,5 - 12,0 - 12,5 - 13,0 mm	7.40	

HSS-G TWIST DRILLS

HSS-G Twist drill

- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 118° pointed angle
- 20 - 30° spiral angle
- High concentricity accuracy
- Surface without discolouration
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.



	D mm	L1 mm	L2 mm	Content	g	
330.2003	0.3	19.0	3.0	10	1	
330.2004	0.4	20.0	5.0	10	1	
330.2005	0.5	22.0	6.0	10	1	
330.2006	0.6	24.0	7.0	10	1	
330.2007	0.7	28.0	9.0	10	1	
330.2008	0.8	30.0	10.0	10	1	
330.2009	0.9	32.0	11.0	10	1	
330.2010	1.0	34.0	12.0	10	1	
330.2011	1.1	36.0	14.0	10	1	

	D mm	L1 mm	L2 mm	Content	g	
330.2012	1.2	38.0	16.0	10	1	
330.2013	1.3	38.0	16.0	10	1	
330.2014	1.4	40.0	18.0	10	1	
330.2015	1.5	40.0	18.0	10	20	
330.2016	1.6	43.0	20.0	10	10	
330.2017	1.7	43.0	20.0	10	10	
330.2018	1.8	46.0	22.0	10	10	
330.2019	1.9	46.0	22.0	10	10	
330.2020	2.0	49.0	24.0	10	10	
330.2021	2.1	49.0	24.0	10	20	
330.2022	2.2	53.0	27.0	10	20	
330.2023	2.3	53.0	27.0	10	20	
330.2024	2.4	57.0	30.0	10	20	
330.2025	2.5	57.0	30.0	10	20	
330.2026	2.6	61.0	30.0	10	40	
330.2027	2.7	61.0	33.0	10	40	
330.2028	2.8	61.0	33.0	10	40	
330.2029	2.9	61.0	33.0	10	40	
330.2030	3.0	61.0	33.0	10	40	
330.2031	3.1	65.0	36.0	10	40	
330.2032	3.2	65.0	36.0	10	40	
330.2033	3.3	65.0	36.0	10	40	
330.2034	3.4	70.0	39.0	10	40	
330.2035	3.5	70.0	39.0	10	40	
330.2036	3.6	70.0	39.0	10	50	
330.2037	3.7	70.0	39.0	10	50	
330.2038	3.8	75.0	43.0	10	50	
330.2039	3.9	75.0	43.0	10	50	
330.2040	4.0	75.0	43.0	10	50	
330.2041	4.1	75.0	43.0	10	80	
330.2042	4.2	75.0	43.0	10	80	
330.2043	4.3	80.0	47.0	10	80	
330.2044	4.4	80.0	47.0	10	80	
330.2045	4.5	80.0	47.0	10	80	
330.2046	4.6	80.0	47.0	10	100	
330.2047	4.7	80.0	47.0	10	100	
330.2048	4.8	86.0	52.0	10	100	
330.2049	4.9	86.0	52.0	10	100	
330.2050	5.0	86.0	52.0	10	100	
330.2051	5.1	86.0	52.0	10	130	
330.2052	5.2	86.0	52.0	10	130	
330.2053	5.3	86.0	52.0	10	130	
330.2054	5.4	93.0	57.0	10	130	
330.2055	5.5	93.0	57.0	10	130	
330.2056	5.6	93.0	57.0	10	150	
330.2057	5.7	93.0	57.0	10	150	
330.2058	5.8	93.0	57.0	10	150	
330.2059	5.9	93.0	57.0	10	150	
330.2060	6.0	93.0	57.0	10	150	
330.2061	6.1	101.0	63.0	10	180	
330.2062	6.2	101.0	63.0	10	180	
330.2063	6.3	101.0	63.0	10	180	
330.2064	6.4	101.0	63.0	10	180	
330.2065	6.5	101.0	63.0	10	180	
330.2066	6.6	101.0	63.0	10	250	
330.2067	6.7	101.0	63.0	10	250	
330.2068	6.8	109.0	69.0	10	250	
330.2069	6.9	109.0	69.0	10	250	
330.2070	7.0	109.0	69.0	10	250	
330.2071	7.1	109.0	69.0	10	260	
330.2072	7.2	109.0	69.0	10	260	
330.2073	7.3	109.0	69.0	10	260	
330.2074	7.4	109.0	69.0	10	260	
330.2075	7.5	109.0	69.0	10	260	
330.2076	7.6	117.0	75.0	10	330	
330.2077	7.7	117.0	75.0	10	330	
330.2078	7.8	117.0	75.0	10	330	
330.2079	7.9	117.0	75.0	10	330	
330.2080	8.0	117.0	75.0	10	330	
330.2081	8.1	117.0	75.0	10	350	
330.2082	8.2	117.0	75.0	10	350	
330.2083	8.3	117.0	75.0	10	350	
330.2084	8.4	117.0	75.0	10	350	
330.2085	8.5	117.0	75.0	10	350	
330.2086	8.6	125.0	81.0	10	430	
330.2087	8.7	125.0	81.0	10	403	
330.2088	8.8	125.0	81.0	10	430	
330.2089	8.9	125.0	81.0	10	430	
330.2090	9.0	125.0	81.0	10	430	
330.2091	9.1	125.0	81.0	10	480	
330.2092	9.2	125.0	81.0	10	480	
330.2093	9.3	125.0	81.0	10	480	
330.2094	9.4	125.0	81.0	10	480	
330.2095	9.5	125.0	81.0	10	480	
330.2096	9.6	133.0	87.0	10	275	
330.2097	9.7	133.0	87.0	10	275	
330.2098	9.8	133.0	87.0	10	275	

	D mm	L1 mm	L2 mm	Content	g	
330.2099	9.9	133.0	87.0	10	275	
330.2100	10.0	133.0	87.0	5	275	
330.2101	10.1	133.0	87.0	5	300	
330.2102	10.2	133.0	87.0	5	300	
330.2103	10.3	133.0	87.0	5	300	
330.2104	10.4	133.0	87.0	5	300	
330.2105	10.5	133.0	87.0	5	300	
330.2106	10.6	133.0	87.0	5	350	
330.2107	10.7	142.0	94.0	5	350	
330.2108	10.8	142.0	94.0	5	350	
330.2109	10.9	142.0	94.0	5	350	
330.2110	11.0	142.0	94.0	5	350	
330.2111	11.1	142.0	94.0	5	385	
330.2112	11.2	142.0	94.0	5	385	
330.2113	11.3	142.0	94.0	5	385	
330.2114	11.4	142.0	94.0	5	385	
330.2115	11.5	142.0	94.0	5	385	
330.2116	11.6	142.0	94.0	5	440	
330.2117	11.7	142.0	94.0	5	440	
330.2118	11.8	142.0	94.0	5	440	
330.2119	11.9	151.0	101.0	5	440	
330.2120	12.0	151.0	101.0	5	440	
330.2121	12.1	151.0	101.0	5	490	
330.2122	12.2	151.0	101.0	5	490	
330.2123	12.3	151.0	101.0	5	490	
330.2124	12.4	151.0	101.0	5	490	
330.2125	12.5	151.0	101.0	5	490	
330.2126	12.6	151.0	101.0	5	515	
330.2127	12.7	151.0	101.0	5	515	
330.2128	12.8	151.0	101.0	5	515	
330.2129	12.9	151.0	101.0	5	515	
330.2130	13.0	151.0	101.0	5	515	
330.2135	13.5	160.0	108.0	1	110	
330.2140	14.0	160.0	108.0	1	115	
330.2145	14.5	169.0	114.0	1	120	
330.2150	15.0	169.0	114.0	1	125	
330.2155	15.5	178.0	120.0	1	130	
330.2160	16.0	178.0	120.0	1	135	

HSS-G Twist drill, long

- DIN 340 Typ N
- Right hand cutting
- Relieved cone has a ground point
- 118° pointed angle
- 20 - 30° spiral angle
- High concentricity accuracy
- Surface without discolouration
- High performance steel

Ideally suitable in steel cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered tempered and cast iron.

	D mm	L1 mm	L2 mm	Content	g	
330.7025	2.5	95.0	62.0	10	40	
330.7030	3.0	100.0	66.0	10	50	
330.7031	3.1	106.0	69.0	10	50	
330.7032	3.2	106.0	69.0	10	60	
330.7033	3.3	106.0	69.0	10	65	
330.7034	3.4	112.0	73.0	10	65	
330.7035	3.5	112.0	73.0	10	70	
330.7036	3.6	112.0	73.0	10	75	
330.7037	3.7	112.0	73.0	10	75	
330.7038	3.8	119.0	78.0	10	80	
330.7039	3.9	119.0	78.0	10	80	
330.7040	4.0	119.0	78.0	10	85	
330.7041	4.1	119.0	78.0	10	90	
330.7042	4.2	119.0	78.0	10	95	
330.7043	4.3	126.0	82.0	10	110	
330.7044	4.4	126.0	82.0	10	115	
330.7045	4.5	126.0	82.0	10	120	
330.7046	4.6	126.0	82.0	10	130	
330.7047	4.7	126.0	82.0	10	135	
330.7048	4.8	132.0	87.0	10	140	
330.7049	4.9	132.0	87.0	10	145	

	D mm	L1 mm	L2 mm	Content	g	
330.7050	5.0	132.0	87.0	10	150	
330.7051	5.1	132.0	87.0	10	150	
330.7052	5.2	132.0	87.0	10	160	
330.7053	5.3	132.0	87.0	10	170	
330.7054	5.4	139.0	91.0	10	190	
330.7055	5.5	139.0	91.0	10	195	
330.7056	5.6	139.0	91.0	10	200	
330.7057	5.7	139.0	91.0	10	205	
330.7058	5.8	139.0	91.0	10	210	
330.7059	5.9	139.0	91.0	10	220	
330.7060	6.0	139.0	91.0	10	225	
330.7061	6.1	148.0	97.0	10	255	
330.7062	6.2	148.0	97.0	10	260	
330.7063	6.3	148.0	97.0	10	265	
330.7064	6.4	148.0	97.0	10	270	
330.7065	6.5	148.0	97.0	10	270	
330.7066	6.6	148.0	97.0	10	275	
330.7067	6.7	148.0	97.0	10	275	
330.7068	6.8	156.0	102.0	10	360	
330.7069	6.9	156.0	102.0	10	370	
330.7070	7.0	156.0	102.0	10	375	
330.7071	7.1	156.0	102.0	10	380	
330.7072	7.2	156.0	102.0	10	380	
330.7073	7.3	156.0	102.0	10	385	
330.7074	7.4	156.0	102.0	10	390	
330.7075	7.5	156.0	102.0	10	390	
330.7076	7.6	165.0	109.0	10	480	
330.7077	7.7	165.0	109.0	10	485	
330.7078	7.8	165.0	109.0	10	485	
330.7079	7.9	165.0	109.0	10	490	
330.7080	8.0	165.0	109.0	10	495	
330.7081	8.1	165.0	109.0	10	500	
330.7082	8.2	165.0	109.0	10	505	
330.7083	8.3	165.0	109.0	10	510	
330.7084	8.4	165.0	109.0	10	520	
330.7085	8.5	165.0	109.0	10	525	
330.7086	8.6	175.0	115.0	10	620	
330.7087	8.7	175.0	115.0	10	630	
330.7088	8.8	175.0	115.0	10	635	
330.7089	8.9	175.0	115.0	10	640	
330.7090	9.0	175.0	115.0	10	645	
330.7091	9.1	175.0	115.0	10	660	
330.7092	9.2	175.0	115.0	10	670	
330.7093	9.3	175.0	115.0	10	680	
330.7094	9.4	175.0	115.0	10	690	
330.7095	9.5	175.0	115.0	10	720	
330.7096	9.6	184.0	121.0	10	800	
330.7097	9.7	184.0	121.0	10	810	
330.7098	9.8	184.0	121.0	10	815	
330.7099	9.9	184.0	121.0	10	820	
330.7100	10.0	184.0	121.0	10	825	
330.7105	10.5	184.0	121.0	5	450	
330.7110	11.0	195.0	128.0	5	525	
330.7115	11.5	195.0	128.0	5	575	
330.7120	12.0	205.0	134.0	5	660	
330.7125	12.5	205.0	134.0	5	735	
330.7130	13.0	205.0	134.0	5	765	

HSS-G Twist drill set in metal case

- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 118° pointed angle
- 20 - 30° spiral angle
- High concentricity accuracy
- Surface without discolouration
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.2610	19 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 mm	0.60	

HSS-G Twist drill set in metal case

- High strength hinge
- DIN 338 Type N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 118° pointed angle
- 20 - 30° Spiral angle
- High concentricity accuracy
- Surface without discolouration
- High performance steel

Ideally suitable in steel cast steel and high and low alloyed steel up to 900 N/mm² tensile Bronze, brass, brushed aluminium alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.2613	25 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 - 10,5 - 11,0 - 11,5 - 12,0 - 12,5 - 13,0 mm	1.30	

HSS-G Twist drill set in plastic case

- Stackable for storage
- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 118° pointed angle
- 20 - 30° spiral angle
- High concentricity accuracy
- Surface without discolouration
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.2620	19 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 mm	0.60	

HSS-G Twist drill set in plastic case

- Stackable for storage
- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 118° pointed angle
- 20 - 30° spiral angle
- High concentricity accuracy
- Surface without discolouration
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.2623	25 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 - 10,5 - 11,0 - 11,5 - 12,0 - 12,5 - 13,0 mm	1.30	

HSS-G Twist drill set in metal case

- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 118° pointed angle
- 20 - 30° spiral angle
- High concentricity accuracy
- Surface without discolouration
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

330.2640	170 pcs	per 10 x: 1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 per 5 x: 8,5 - 9,0 - 9,5 - 10,0 mm	4.15

HSS-G Twist drill set in metal case

- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 118° pointed angle
- 20 - 30° spiral angle
- High concentricity accuracy
- Surface without discolouration
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

330.2650	230 pcs	per 10 x: 1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,2 - 3,5 4,0 - 4,2 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 6,8 - 7,0 - 7,5 - 8,0 per 5 x: 8,5 - 9,0 - 9,5 - 10,0 - 10,5 - 11,0 11,5 - 12,0 - 12,5 - 13,0 mm	7.40

HSS-G CO TWIST DRILLS

HSS-G Co 5 Twist drill short

- DIN 1897 Typ N
- Right hand cutting
- Relieved cone has a ground point
- From 3 mm split point according to DIN 1412 C
- 135 ° pointed angle
- 20 - 30° spiral angle
- Gold coated surface
- High performance steel

Ideally suitable in steel, cast steel l up to 1,100 N/mm² tensile, rust and acid steady steels, V2a, V4a, cast and tempered iron.

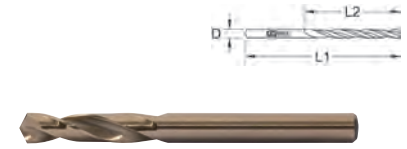

	D mm	L1 mm	L2 mm	Content	g
330.6020	2.0	38.0	12.0	10	7
330.6025	2.5	43.0	14.0	10	15
330.6030	3.0	46.0	16.0	10	30
330.6031	3.1	49.0	18.0	10	31
330.6032	3.2	49.0	18.0	10	32
330.6033	3.3	49.0	18.0	10	33
330.6034	3.4	52.0	20.0	10	34
330.6035	3.5	52.0	20.0	10	35
330.6036	3.6	52.0	20.0	10	37
330.6037	3.7	52.0	20.0	10	40
330.6038	3.8	55.0	22.0	10	42
330.6039	3.9	55.0	22.0	10	44
330.6040	4.0	55.0	22.0	10	45
330.6041	4.1	55.0	22.0	10	47
330.6042	4.2	55.0	22.0	10	49
330.6043	4.3	58.0	24.0	10	55
330.6044	4.4	58.0	24.0	10	57
330.6045	4.5	58.0	24.0	10	60
330.6046	4.6	58.0	24.0	10	62
330.6047	4.7	58.0	24.0	10	63
330.6048	4.8	62.0	26.0	10	72
330.6049	4.9	62.0	26.0	10	73
330.6050	5.0	62.0	26.0	10	75
330.6051	5.1	62.0	26.0	10	77
330.6052	5.2	62.0	26.0	10	78
330.6053	5.3	62.0	26.0	10	80
330.6054	5.4	66.0	28.0	10	95
330.6055	5.5	66.0	28.0	10	97
330.6056	5.6	66.0	28.0	10	99
330.6057	5.7	66.0	28.0	10	103
330.6058	5.8	66.0	28.0	10	105
330.6059	5.9	66.0	28.0	10	107
330.6060	6.0	66.0	28.0	10	110
330.6061	6.1	70.0	31.0	10	125
330.6062	6.2	70.0	31.0	10	128
330.6063	6.3	70.0	31.0	10	130
330.6064	6.4	70.0	31.0	10	133
330.6065	6.5	70.0	31.0	10	135
330.6066	6.6	70.0	31.0	10	138
330.6067	6.7	70.0	31.0	10	140
330.6068	6.8	74.0	34.0	10	170
330.6069	6.9	74.0	34.0	10	175
330.6070	7.0	74.0	34.0	10	180
330.6071	7.1	74.0	34.0	10	183
330.6072	7.2	74.0	34.0	10	185
330.6073	7.3	74.0	34.0	10	187
330.6074	7.4	74.0	34.0	10	188
330.6075	7.5	74.0	34.0	10	190
330.6076	7.6	79.0	36.0	10	220
330.6077	7.7	79.0	36.0	10	225
330.6078	7.8	79.0	36.0	10	230
330.6079	7.9	79.0	36.0	10	235
330.6080	8.0	79.0	36.0	10	240
330.6085	8.5	79.0	36.0	10	270
330.6090	9.0	84.0	40.0	10	310
330.6095	9.5	84.0	40.0	10	360
330.6100	10.0	89.0	43.0	10	420
330.6102	10.2	89.0	43.0	10	435
330.6105	10.5	89.0	43.0	5	210

	D mm	L1 mm	L2 mm	Content	g
330.6110	11.0	95.0	47.0	5	255
330.6115	11.5	95.0	47.0	5	260
330.6120	12.0	102.0	51.0	5	285
330.6125	12.5	102.0	51.0	5	290
330.6130	13.0	102.0	51.0	5	295

HSS-G Co 5 Twist drill

- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 130° pointed angle
- 20 - 30° spiral angle
- High heat hardness constancy
- For heavy loading
- Gold coated surface
- High performance cobalt steel

Ideally usably in high and low alloyed steel up to 1,100 N/mm² tensile, compensation steel and stainless steel, rustproof and acid steady steel and warm and cold forged steel.

	D mm	L1 mm	L2 mm	Content	g
330.3003	0.3	19.0	3.0	10	1
330.3004	0.4	20.0	5.0	10	1
330.3005	0.5	22.0	6.0	10	1
330.3006	0.6	24.0	7.0	10	1
330.3007	0.7	28.0	9.0	10	1
330.3008	0.8	30.0	10.0	10	1
330.3009	0.9	32.0	11.0	10	1
330.3010	1.0	34.0	12.0	10	1
330.3011	1.1	36.0	14.0	10	1
330.3012	1.2	38.0	16.0	10	1
330.3013	1.3	38.0	16.0	10	1
330.3014	1.4	40.0	18.0	10	1
330.3015	1.5	40.0	18.0	10	1
330.3016	1.6	43.0	20.0	10	1
330.3017	1.7	43.0	20.0	10	10
330.3018	1.8	46.0	22.0	10	10
330.3019	1.9	46.0	22.0	10	10
330.3020	2.0	49.0	24.0	10	10
330.3021	2.1	49.0	24.0	10	10
330.3022	2.2	53.0	27.0	10	10
330.3023	2.3	53.0	27.0	10	20
330.3024	2.4	57.0	30.0	10	20
330.3025	2.5	57.0	30.0	10	20
330.3026	2.6	57.0	30.0	10	40
330.3027	2.7	61.0	33.0	10	40
330.3028	2.8	61.0	33.0	10	40
330.3029	2.9	61.0	33.0	10	40
330.3030	3.0	61.0	33.0	10	40
330.3031	3.1	65.0	36.0	10	40
330.3032	3.2	65.0	36.0	10	40
330.3033	3.3	65.0	36.0	10	40
330.3034	3.4	70.0	39.0	10	40
330.3035	3.5	70.0	39.0	10	40
330.3036	3.6	70.0	39.0	10	50
330.3037	3.7	70.0	39.0	10	50
330.3038	3.8	75.0	43.0	10	50
330.3039	3.9	75.0	43.0	10	50
330.3040	4.0	75.0	43.0	10	50
330.3041	4.1	75.0	43.0	10	80
330.3042	4.2	75.0	43.0	10	80
330.3043	4.3	80.0	47.0	10	80
330.3044	4.4	80.0	47.0	10	80
330.3045	4.5	80.0	47.0	10	80
330.3046	4.6	80.0	47.0	10	100
330.3047	4.7	80.0	47.0	10	100
330.3048	4.8	86.0	52.0	10	100
330.3049	4.9	86.0	52.0	10	100

	D mm	L1 mm	L2 mm	Content	g	
330.3050	5.0	86.0	52.0	10	100	
330.3051	5.1	86.0	52.0	10	130	
330.3052	5.2	86.0	52.0	10	130	
330.3053	5.3	86.0	52.0	10	130	
330.3054	5.4	93.0	57.0	10	130	
330.3055	5.5	93.0	57.0	10	130	
330.3056	5.6	93.0	57.0	10	150	
330.3057	5.7	93.0	57.0	10	150	
330.3058	5.8	93.0	57.0	10	150	
330.3059	5.9	93.0	57.0	10	105	
330.3060	6.0	93.0	57.0	10	150	
330.3061	6.1	101.0	63.0	10	180	
330.3062	6.2	101.0	63.0	10	180	
330.3063	6.3	101.0	63.0	10	180	
330.3064	6.4	101.0	63.0	10	180	
330.3065	6.5	101.0	63.0	10	180	
330.3066	6.6	101.0	63.0	10	250	
330.3067	6.7	101.0	63.0	10	250	
330.3068	6.8	109.0	69.0	10	250	
330.3069	6.9	109.0	69.0	10	250	
330.3070	7.0	109.0	69.0	10	250	
330.3071	7.1	109.0	69.0	10	260	
330.3072	7.2	109.0	69.0	10	260	
330.3073	7.3	109.0	69.0	10	260	
330.3074	7.4	109.0	69.0	10	260	
330.3075	7.5	109.0	69.0	10	260	
330.3076	7.6	117.0	75.0	10	330	
330.3077	7.7	117.0	75.0	10	330	
330.3078	7.8	117.0	75.0	10	330	
330.3079	7.9	117.0	75.0	10	330	
330.3080	8.0	117.0	75.0	10	330	
330.3081	8.1	117.0	75.0	10	350	
330.3082	8.2	117.0	75.0	10	350	
330.3083	8.3	117.0	75.0	10	350	
330.3084	8.4	117.0	75.0	10	350	
330.3085	8.5	117.0	75.0	10	350	
330.3086	8.6	125.0	81.0	10	430	
330.3087	8.7	125.0	81.0	10	430	
330.3088	8.8	125.0	81.0	10	430	
330.3089	8.9	125.0	81.0	10	430	
330.3090	9.0	125.0	81.0	10	430	
330.3091	9.1	125.0	81.0	10	480	
330.3092	9.2	125.0	81.0	10	480	
330.3093	9.3	125.0	81.0	10	480	
330.3094	9.4	125.0	81.0	10	480	
330.3095	9.5	125.0	81.0	10	480	
330.3096	9.6	133.0	87.0	10	275	
330.3097	9.7	133.0	87.0	10	275	
330.3098	9.8	133.0	87.0	10	275	
330.3099	9.9	133.0	87.0	10	275	
330.3100	10.0	133.0	87.0	5	275	
330.3101	10.1	133.0	87.0	5	300	
330.3102	10.2	133.0	87.0	5	300	
330.3103	10.3	133.0	87.0	5	300	
330.3104	10.4	133.0	87.0	5	300	
330.3105	10.5	133.0	87.0	5	300	
330.3106	10.6	133.0	87.0	5	350	
330.3107	10.7	142.0	94.0	5	350	
330.3108	10.8	142.0	94.0	5	350	
330.3109	10.9	142.0	94.0	5	350	
330.3110	11.0	142.0	94.0	5	350	
330.3111	11.1	142.0	94.0	5	385	
330.3112	11.2	142.0	94.0	5	385	
330.3113	11.3	142.0	94.0	5	385	
330.3114	11.4	142.0	94.0	5	385	
330.3115	11.5	142.0	94.0	5	385	
330.3116	11.6	142.0	94.0	5	440	
330.3117	11.7	142.0	94.0	5	440	
330.3118	11.8	142.0	94.0	5	440	
330.3119	11.9	151.0	101.0	5	440	
330.3120	12.0	151.0	101.0	5	440	
330.3121	12.1	151.0	101.0	5	490	
330.3122	12.2	151.0	101.0	5	490	
330.3123	12.3	151.0	101.0	5	490	
330.3124	12.4	151.0	101.0	5	490	
330.3125	12.5	151.0	101.0	5	490	
330.3126	12.6	151.0	101.0	5	515	
330.3127	12.7	151.0	101.0	5	515	
330.3128	12.8	151.0	101.0	5	515	
330.3129	12.9	151.0	101.0	5	515	
330.3130	13.0	151.0	101.0	5	515	
330.3135	13.5	160.0	108.0	1	110	
330.3140	14.0	160.0	108.0	1	115	
330.3145	14.5	169.0	114.0	1	120	
330.3150	15.0	169.0	114.0	1	125	
330.3155	15.5	178.0	120.0	1	130	
330.3160	16.0	178.0	120.0	1	135	

HSS-G Co 5 Twist drill set in metal case

- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 130° pointed angle
- 20 - 30° spiral angle
- High heat hardness constancy
- For heavy loading
- Gold coated surface
- High performance cobalt steel

Ideally usably in high and low alloyed steel up to 1,100 N/mm² tensile, compensation steel and stainless steel, rustproof and acid steady steel and warm and cold forged steel

			kg	
330.3610	19 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 mm	0.60	

HSS-G Co 5 Twist drill set in metal case

- High strength hinge
- DIN 338 Type N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 130° pointed angle
- 20 - 30° Spiral angle
- High heat hardness constancy
- For heavy loading
- Gold coated surface
- High performance cobalt steel

ideally usable in high and low alloyed steel up to 1,100 N/mm² tensile Compensation steel and stainless steel, rustproof and acid steady steel and warm and cold forged steel

			kg	
330.3613	25 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 - 10,5 - 11,0 - 11,5 - 12,0 - 12,5 - 13,0 mm	1.30	

HSS-G Co 5 Twist drill set in plastic case

- Stackable for storage
- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 130° pointed angle
- 20 - 30° spiral angle
- High heat hardness constancy
- For heavy loading
- Gold coated surface
- High performance cobalt steel

Ideally usably in high and low alloyed steel up to 1,100 N/mm² tensile, compensation steel and stainless steel, rustproof and acid steady steel and warm and cold forged steel

			kg	
330.3620	19 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 mm	0.60	

HSS-G Co 5 Twist Drill Set in steel storage case

- Stackable for storage
- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 130° pointed angle
- 20 - 30° spiral angle
- High heat hardness constancy
- For heavy loading
- Gold coated surface
- High performance cobalt steel

Ideally usably in high and low alloyed steel up to 1,100 N/mm² tensile, compensation steel and stainless steel, rustproof and acid steady steel and warm and cold forged steel

			kg	
330.3623	25 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 - 10,5 - 11,0 - 11,5 - 12,0 - 12,5 - 13,0 mm	1.30	

HSS-G Co 5 Twist drill set in metal case

- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 130° pointed angle
- 20 - 30° spiral angle
- High heat hardness constancy
- For heavy loading
- Gold coated surface
- High performance cobalt steel

Ideally usably in high and low alloyed steel up to 1,100 N/mm² tensile, compensation steel and stainless steel, rustproof and acid steady steel and warm and cold forged steel.

			kg	
330.3640	170 pcs	per 10 x: 1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 per 5 x: 8,5 - 9,0 - 9,5 - 10,0 mm	4.15	

HSS-G Co 5 Twist drill set in metal case

- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 130° pointed angle
- 20 - 30° spiral angle
- High heat hardness constancy
- For heavy loading
- Gold coated surface
- High performance cobalt steel

Ideally usably in high and low alloyed steel up to 1,100 N/mm² tensile, compensation steel and stainless steel, rustproof and acid steady steel and warm and cold forged steel.

			kg	
330.3650	230 pcs	per 10 x: 1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,2 - 3,5 4,0 - 4,2 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 6,8 - 7,0 - 7,5 - 8,0 per 5 x: 8,5 - 9,0 - 9,5 - 10,0 - 10,5 - 11,0 11,5 - 12,0 - 12,5 - 13,0 mm	7.40	

HSS TIN TWIST DRILLS

HSS-TiN Twist drill

- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 130° pointed angle
- 20 - 30° spiral angle
- High heat hardness constancy
- For heavy loading
- With TiN coated surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 1,100 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron malleable tempered and cast iron.



	D mm	L1 mm	L2 mm	Content	g	
330.4003	0.3	19.0	3.0	10	1	
330.4004	0.4	20.0	5.0	10	1	
330.4005	0.5	22.0	6.0	10	1	
330.4006	0.6	24.0	7.0	10	1	
330.4007	0.7	28.0	9.0	10	1	
330.4008	0.8	30.0	10.0	10	1	
330.4009	0.9	32.0	11.0	10	1	
330.4010	1.0	34.0	12.0	10	1	
330.4011	1.1	36.0	14.0	10	1	
330.4012	1.2	38.0	16.0	10	1	
330.4013	1.3	38.0	16.0	10	1	
330.4014	1.4	40.0	18.0	10	1	
330.4015	1.5	40.0	18.0	10	1	
330.4016	1.6	43.0	20.0	10	10	
330.4017	1.7	43.0	20.0	10	10	
330.4018	1.8	46.0	22.0	10	10	
330.4019	1.9	46.0	22.0	10	10	
330.4020	2.0	49.0	24.0	10	10	
330.4021	2.1	49.0	24.0	10	20	
330.4022	2.2	53.0	27.0	10	20	
330.4023	2.3	53.0	27.0	10	20	
330.4024	2.4	57.0	30.0	10	20	
330.4025	2.5	57.0	30.0	10	20	
330.4026	2.6	57.0	30.0	10	40	
330.4027	2.7	61.0	33.0	10	40	
330.4028	2.8	61.0	33.0	10	40	
330.4029	2.9	61.0	33.0	10	40	
330.4030	3.0	61.0	33.0	10	40	
330.4031	3.1	65.0	36.0	10	40	
330.4032	3.2	65.0	36.0	10	40	
330.4033	3.3	65.0	36.0	10	40	
330.4034	3.4	70.0	39.0	10	40	
330.4035	3.5	70.0	39.0	10	40	
330.4036	3.6	70.0	39.0	10	50	
330.4037	3.7	70.0	39.0	10	50	
330.4038	3.8	75.0	43.0	10	50	
330.4039	3.9	75.0	43.0	10	50	
330.4040	4.0	75.0	43.0	10	50	
330.4041	4.1	75.0	43.0	10	80	
330.4042	4.2	75.0	43.0	10	80	
330.4043	4.3	80.0	47.0	10	80	
330.4044	4.4	80.0	47.0	10	80	
330.4045	4.5	80.0	47.0	10	80	
330.4046	4.6	80.0	47.0	10	100	
330.4047	4.7	80.0	47.0	10	100	
330.4048	4.8	86.0	52.0	10	100	
330.4049	4.9	86.0	52.0	10	100	
330.4050	5.0	86.0	52.0	10	100	
330.4051	5.1	86.0	52.0	10	130	
330.4052	5.2	86.0	52.0	10	130	
330.4053	5.3	86.0	52.0	10	130	
330.4054	5.4	93.0	57.0	10	130	
330.4055	5.5	93.0	57.0	10	130	
330.4056	5.6	93.0	57.0	10	150	
330.4057	5.7	93.0	57.0	10	150	
330.4058	5.8	93.0	57.0	10	150	
330.4059	5.9	93.0	57.0	10	150	
330.4060	6.0	93.0	57.0	10	150	
330.4061	6.1	101.0	63.0	10	180	
330.4062	6.2	101.0	63.0	10	180	
330.4063	6.3	101.0	63.0	10	180	
330.4064	6.4	101.0	63.0	10	180	
330.4065	6.5	101.0	63.0	10	180	
330.4066	6.6	101.0	63.0	10	250	
330.4067	6.7	101.0	63.0	10	250	
330.4068	6.8	109.0	69.0	10	250	
330.4069	6.9	109.0	69.0	10	250	
330.4070	7.0	109.0	69.0	10	250	
330.4071	7.1	109.0	69.0	10	260	
330.4072	7.2	109.0	69.0	10	260	
330.4073	7.3	109.0	69.0	10	260	
330.4074	7.4	109.0	69.0	10	260	
330.4075	7.5	109.0	69.0	10	260	
330.4076	7.6	117.0	75.0	10	330	
330.4077	7.7	117.0	75.0	10	330	
330.4078	7.8	117.0	75.0	10	330	
330.4079	7.9	117.0	75.0	10	330	
330.4080	8.0	117.0	75.0	10	330	
330.4081	8.1	117.0	75.0	10	350	
330.4082	8.2	117.0	75.0	10	350	
330.4083	8.3	117.0	75.0	10	350	
330.4084	8.4	117.0	75.0	10	350	
330.4085	8.5	117.0	75.0	10	350	
330.4086	8.6	125.0	81.0	10	430	
330.4087	8.7	125.0	81.0	10	430	
330.4088	8.8	125.0	81.0	10	430	
330.4089	8.9	125.0	81.0	10	430	
330.4090	9.0	125.0	81.0	10	430	
330.4091	9.1	125.0	81.0	10	480	
330.4092	9.2	125.0	81.0	10	480	
330.4093	9.3	125.0	81.0	10	480	
330.4094	9.4	125.0	81.0	10	480	
330.4095	9.5	125.0	81.0	10	480	
330.4096	9.6	133.0	87.0	10	275	
330.4097	9.7	133.0	87.0	10	275	
330.4098	9.8	133.0	87.0	10	275	
330.4099	9.9	133.0	87.0	10	275	
330.4100	10.0	133.0	87.0	5	275	
330.4101	10.1	133.0	87.0	5	300	
330.4102	10.2	133.0	87.0	5	300	
330.4103	10.3	133.0	87.0	5	300	
330.4104	10.4	133.0	87.0	5	300	
330.4105	10.5	133.0	87.0	5	300	
330.4106	10.6	133.0	87.0	5	350	
330.4107	10.7	142.0	94.0	5	350	
330.4108	10.8	142.0	94.0	5	350	
330.4109	10.9	142.0	94.0	5	350	
330.4110	11.0	142.0	94.0	5	350	
330.4111	11.1	142.0	94.0	5	385	
330.4112	11.2	142.0	94.0	5	385	
330.4113	11.3	142.0	94.0	5	385	
330.4114	11.4	142.0	94.0	5	385	
330.4115	11.5	142.0	94.0	5	385	
330.4116	11.6	142.0	94.0	5	440	
330.4117	11.7	142.0	94.0	5	440	
330.4118	11.8	142.0	94.0	5	440	
330.4119	11.9	151.0	101.0	5	440	
330.4120	12.0	151.0	101.0	5	440	
330.4121	12.1	151.0	101.0	5	490	
330.4122	12.2	151.0	101.0	5	490	
330.4123	12.3	151.0	101.0	5	490	
330.4124	12.4	151.0	101.0	5	490	
330.4125	12.5	151.0	101.0	5	490	
330.4126	12.6	151.0	101.0	5	515	
330.4127	12.7	151.0	101.0	5	515	
330.4128	12.8	151.0	101.0	5	515	
330.4129	12.9	151.0	101.0	5	515	
330.4130	13.0	151.0	101.0	5	515	
330.4135	13.5	160.0	108.0	1	110	
330.4140	14.0	160.0	108.0	1	115	
330.4145	14.5	169.0	114.0	1	120	
330.4150	15.0	169.0	114.0	1	125	
330.4155	15.5	178.0	120.0	1	130	
330.4160	16.0	178.0	120.0	1	135	

HSS-G Twist drill set in metal case

- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 130° pointed angle
- 20 - 30° spiral angle
- High heat hardness constancy
- For heavy loading
- TIN coated surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 1,100 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.4610	19 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 mm	0.66	

HSS-G Twist drill set in metal case

- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 130° pointed angle
- 20 - 30° spiral angle
- High heat hardness constancy
- For heavy loading
- TIN coated surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 1,100 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.4613	25 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 - 10,5 - 11,0 - 11,5 - 12,0 - 12,5 - 13,0 mm	1.36	

HSS-TiN Twist drill set in plastic case

- Stackable for storage
- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 130° pointed angle
- 20 - 30° spiral angle
- High heat hardness constancy
- For heavy loading
- TIN coated surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 1,100 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.4620	19 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 mm	0.66	

HSS-TiN Twist drill set in plastic case

- Stackable for storage
- Integral clasp
- High strength hinge
- DIN 338 Typ N
- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 130° pointed angle
- 20 - 30° spiral angle
- High heat hardness constancy
- For heavy loading
- TIN coated surface
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 1,100 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, malleable tempered and cast iron.

			kg	
330.4623	25 pcs	1,0 - 1,5 - 2,0 - 2,5 - 3,0 - 3,5 - 4,0 - 4,5 - 5,0 - 5,5 - 6,0 - 6,5 - 7,0 - 7,5 - 8,0 - 8,5 - 9,0 - 9,5 - 10,0 - 10,5 - 11,0 - 11,5 - 12,0 - 12,5 - 13,0 mm	1.36	

CENTRE DRILLS

HSS Centre drill

- DIN 333 form A
- Right hand cutting
- 60° centre angle
- 120° pointed angle
- For production of center borings
- Surface without discolouration
- High performance steel

Ideally suited for production of center borings according to DIN 332 form A.



	D1 mm	D2 mm	L1 mm	L2 mm	Content	g
330.1201	1.00	3.15	32.0	7.3	1	10
330.1202	1.50	4.00	36.0	9.3	1	10
330.1203	2.00	5.00	40.0	11.5	1	10
330.1204	2.50	6.30	46.0	15.4	1	20
330.1205	3.15	8.00	51.0	18.0	1	20
330.1206	4.00	10.00	56.0	20.0	1	22
330.1207	5.00	12.50	64.0	22.0	1	30
330.1208	6.30	15.00	72.0	30.0	1	30

HSS Centre drill

- DIN 333 form R
- Right hand cutting
- 60° centre angle
- 120° pointed angle
- For production of center borings
- Surface without discolouration
- High performance steel

Ideally suited for production of center borings according to DIN 332 form R.

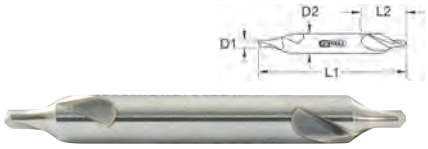

	D1 mm	D2 mm	L1 mm	L2 mm	Content	g
330.1211	1.00	3.15	32.0	7.3	1	10
330.1212	1.50	4.00	36.0	9.3	1	10
330.1213	2.00	5.00	40.0	11.5	1	10
330.1214	2.50	6.30	46.0	15.4	1	20
330.1215	3.15	8.00	51.0	18.0	1	20
330.1216	4.00	10.00	56.0	20.0	1	22
330.1217	5.00	12.50	64.0	22.0	1	30
330.1218	6.30	15.00	72.0	30.0	1	30

SPOT WELD DRILLS

HSS Spot weld cutter

- Right hand cutting
- Interchangeable crowns
- Milling machine depth adjustable
- For efficient and fast working
- For loosening of spot welds
- No deformation of the sheet metal
- Special high performance steel

Ideally suitable with pneumatic drill, electric drill and rechargeable battery drill.

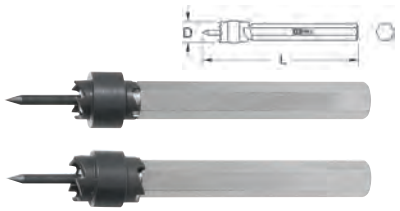

	D mm	D	L mm	Replacement crowns	Center point	Content	g
332.0951	8.0	5/16	72.0	332.0952	332.0955	1	30
332.0953	10.0	3/8	72.0	332.0954	332.0955	1	30

HSS Spot weld cutter set

- Right hand cutting
- Interchangeable crowns
- Milling machine depth adjustable
- For efficient and fast working
- For loosening of spot welds
- No deformation of the sheet metal
- Special high performance steel

Ideally suitable with pneumatic drill, electric drill and rechargeable battery drill.

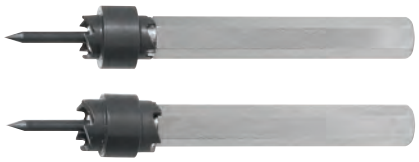

			g
332.0950	2 pcs	8 - 10 mm	100

HSSE Spot weld drill

- Right hand cutting
- Centre tip has a ground point
- Accurate polished
- For burr free drilling without using a centre punch
- For the drilling of welding points
- Surface without discolouration
- High performance steel

Ideally suited in a hand drilling machine.
For drilling of plastic sheet, copper, zinc, aluminum, brass and steel sheet.

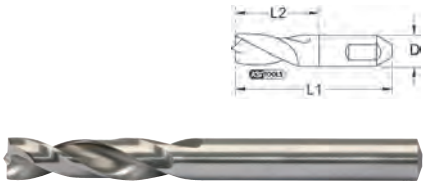

	D mm	L1 mm	L2 mm	Content	g
332.0106	6.0	70.0	25.0	1	10
332.0108	8.0	80.0	30.0	1	20
332.0110	10.0	90.0	35.0	1	40

HSSE TIN Spot weld drill

- Right hand cutting
- Centre tip has a ground point
- Accurate polished
- For burr free drilling without using a centre punch
- For the drilling of welding points
- TIN coated surface
- High performance steel

Ideally suited in a hand drilling machine.
For drilling of plastic sheet, copper, zinc, aluminum, brass and steel sheet.

	D mm	L1 mm	L2 mm	Content	g
332.0206	6.0	70.0	25.0	1	10
332.0208	8.0	80.0	30.0	1	20
332.0210	10.0	90.0	35.0	1	40

HSSE TICN Spot weld drill

- Right hand cutting
- Centre tip has a ground point
- Accurate polished
- For burr free drilling without using a centre punch
- For the drilling of welding points
- TICN coated surface
- High performance steel

Ideally suited in a hand drilling machine.
For drilling of plastic sheet, copper, zinc, aluminum, brass and steel sheet.

	D mm	L1 mm	L2 mm	Content	g
332.0308	8.0	80.0	30.0	1	20
332.0310	10.0	90.0	35.0	1	40

HSS Spot weld drill

- Right hand cutting
- Centre tip has a ground point
- Accurate polished
- For burr free drilling without using a centre punch
- For the drilling of welding points
- TICN coated surface
- High performance steel

Ideally suited in a pneumatic drill and vario milling machine.

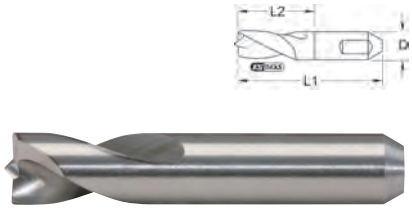

	D mm	L1 mm	L2 mm	Content	g
332.0408	6.5	44.0	15.0	1	10
332.0708	8.0	44.0	15.0	1	10

HSSE TiN Spot weld drill

- Right hand cutting
- Centre tip has a ground point
- Accurate polished
- For burr free drilling without using a centre punch
- For the drilling of welding points
- TIN coated surface
- High performance steel

Ideally suited in a pneumatic drill and vario milling machine.

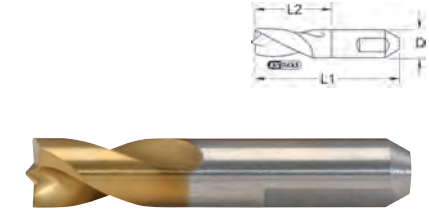

	D mm	L1 mm	L2 mm	Content	g
332.0508	6.5	44.0	15.0	1	10
332.0808	8.0	44.0	15.0	1	10

HSSE TiN Spot weld drill

- Right hand cutting
- Centre tip has a ground point
- Accurate polished
- For burr free drilling without using a centre punch
- For the drilling of welding points
- TIN coated surface
- High strength steel

Ideally suited in a pneumatic drill and vario milling machine

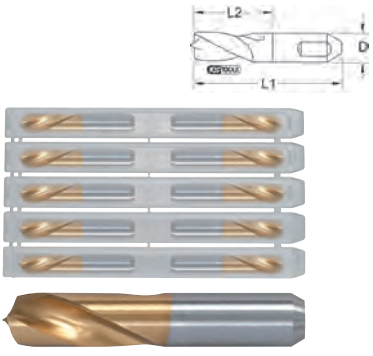

	D mm	L1 mm	L2 mm	Content	g
332.0809	8.0	44.0	23.0	10	134

HSSE TiCN Spot weld drill

- Right hand cutting
- Centre tip has a ground point
- Accurate polished
- For burr free drilling without using a centre punch
- For the drilling of welding points
- TICN coated surface
- High performance steel

Ideally suited in a pneumatic drill and vario milling machine.

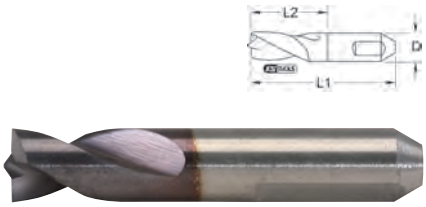

	D mm	L1 mm	L2 mm	Content	g
332.0608	8.0	44.0	15.0	1	10

HSSE Double ended spot weld drill

- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 135° pointed angle
- Double ended usage
- Extra short and durable
- For thin walled materials
- Surface without discolouration
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, pressure-, malleable- and cast iron

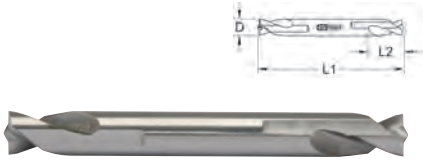

	D mm	L1 mm	L2 mm	Content	g
332.0908	8.0	70.0	16.3	1	20

HSS Double ended spot weld drill set

- Right hand cutting
- Relieved cone has a ground point
- Cutting edge has thinning point
- 135° pointed angle
- Double ended usage
- Extra short and durable
- For thin walled materials
- Surface without discolouration
- High performance steel

Ideally suitable in steel, cast steel and high and low alloyed steel up to 900 N/mm² tensile, bronze, brass, brushed aluminum alloy, graphite, nickel silver, sintered iron, pressure-, malleable- and cast iron

			g
332.0938	3 pcs	3 x 332.0908	70

Carbide spot weld drill

- Right hand cutting
- Highest stability under load
- Double edged
- Welded carbide head
- Especially temperature resistance up to max. 1100 °C
- High performance carbide
- Suitable for high strength car body panels

	D mm	L1 mm	L2 mm	Content	g
515.1305	8.0	44.0	11.0	1	22
515.1308	10.0	44.0	11.0	1	25

MILLING DRILLS

HSS Milling drill

- Right hand cutting
- Relieved cone has a ground point
- 118° pointed angle
- Suitable for thin walled material
- Surface without discolouration
- Special high performance steel

Ideally suitable for boring and milling machines thin walled materials, plastic, wood and sheet metal.



	D mm	L1 mm	L2 mm	Content	g
332.0330	6.0	90.0	35.0	1	25
332.0331	8.0	90.0	35.0	1	30

HSS TiN Milling drill

- Right hand cutting
- Relieved cone has a ground point
- 118° pointed angle
- Suitable for thin walled material
- With TiN coated surface
- Special high performance steel

Ideally suitable for boring and milling machines thin walled materials, plastic, wood and sheet metal.



	D mm	L1 mm	L2 mm	Content	g
332.0332	6.0	90.0	35.0	1	25
332.0333	8.0	90.0	35.0	1	30

HSS CONE CUTTERS

HSS Cone cutter bit

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- 118° pointed angle
- 20 - 30° cone angle
- With 1/4" external hexagon drive adaptor to DIN 3126 - C6,3
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance steel



	Ø mm	D1 mm	D2 mm	D3 mm	L1 mm	L2 mm	Content	g
336.0031	5,0 - 22,0	20.0	5.0	6.4	78.0	51.0	1	65

HSS Cone cutter spiral grooved

- Point thinning according to DIN 1412 C
- Right hand cutting
- 118° pointed angle
- 20° cone angle
- Spiral form flute
- Three sided clamping surface on the shaft
- Absolute smooth operation
- Surface without discolouration
- High performance steel

Is suitable for use in all current industrial metals. Such as alloyed and non alloyed sheet metals up to 4.0 mm, NE metal and plastic. The spiral chip groove formed means that drilling is absolutly quiet, whilst the forming ensures the best cut achievement.



	Ø mm	D1 mm	D2 mm	D3 mm	L1 mm	L2 mm	Content	g
336.0024	4,0 - 14,0	14.0	4.0	6.0	58.0	33.0	1	20
336.0025	5,0 - 20,0	20.0	5.0	8.0	71.0	47.0	1	56
336.0026	5,0 - 31,0	31.0	5.0	10.0	103.0	78.0	1	170

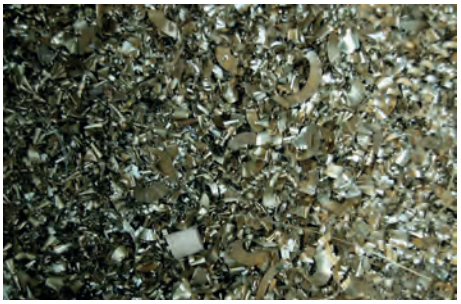

HSS Cone cutter

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- 118° pointed angle
- 20 - 30° cone angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance steel



	Ø mm	D1 mm	D2 mm	D3 mm	L1 mm	L2 mm	Content	g
336.0001	3,0 - 14,0	14.0	3.0	6.0	58.0	38.0	1	20
336.0002	5,0 - 20,0	20.0	5.0	8.0	71.0	51.0	1	50
336.0003	16,0 - 30,5	30.5	16.0	9.0	76.0	54.0	1	120
336.0004	24,0 - 40,0	40.0	24.0	10.0	89.0	65.0	1	270
336.0005	36,0 - 50,0	50.0	36.0	12.0	97.0	71.0	1	490
336.0006	40,0 - 61,0	61.0	40.0	13.0	103.0	73.0	1	510
336.0007	5,0 - 25,4	25.4	5.0	10.0	87.0	67.0	1	100
336.0008	4,0 - 30,0	30.0	4.0	9.0	103.0	83.0	1	150
336.0009	5,0 - 22,5	22.5	5.0	8.0	79.0	59.0	1	90

HSS Cone cutter set in metal case

- High strength hinge
- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- 118° pointed angle
- 20 - 30° cone angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance steel

336.0503	4 pcs	3 - 14 mm - 5 - 20 mm - 16 - 30,5 mm	590

HSS Cone cutter set in plastic case

- Stackable for storage
- With integral clasp
- High strength hinge
- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- 118° pointed angle
- 20 - 30° cone angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance steel

336.0533	4 pcs	3 - 14 mm - 5 - 20 mm - 16 - 30,5 mm	590

HSS CO CONE CUTTERS

HSS Co Cone cutter

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- 118° pointed angle
- 20 - 30° cone angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance cobalt steel

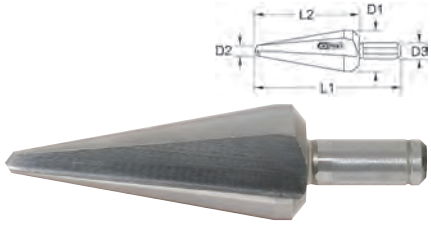

	Ø mm	D1 mm	D2 mm	D3 mm	L1 mm	L2 mm	Content	g
336.0011	3,0 - 20,0	14.0	3.0	6.0	58.0	38.0	1	20
336.0012	5,0 - 20,0	20.0	5.0	8.0	71.0	51.0	1	56
336.0013	16,0 - 30,5	30.5	16.0	9.0	76.0	54.0	1	120
336.0014	4,0 - 30,0	30.0	4.0	9.0	103.0	65.0	1	170

HSS Co Cone cutter set in metal case

- High strength hinge
- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- 118° pointed angle
- 20 - 30° cone angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance cobalt steel

336.0513	4 pcs	3 - 14 mm - 5 - 20 mm - 16 - 30,5 mm	590

HSS Co Cone cutter set in plastic case

- Stackable for storage
- With integral clasp
- High strength hinge
- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- 118° pointed angle
- 20 - 30° cone angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance cobalt steel

336.0543	4 pcs	3 - 14 mm - 5 - 20 mm - 16 - 30,5 mm	590

HSS TIN CONE CUTTERS

HSS TiN Cone cutter bit

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- 118° pointed angle
- 20 - 30° cone angle
- With 1/4" external hexagon drive adaptor to DIN 3126 - C 6,3
- Absolute smooth operation
- High cutting achievement
- With TiN coated surface
- High performance steel

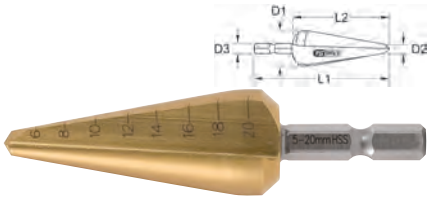

	Ø mm	D1 mm	D2 mm	D3 mm	L1 mm	L2 mm	Content	g
336.0033	5,0 - 20,0	20.0	5.0	6.4	78.0	51.0	1	65

HSS TiN Cone cutter

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- 118° pointed angle
- 20 - 30° cone angle
- Absolute smooth operation
- High cutting achievement
- With TiN coated surface
- High performance steel



	Ø mm	D1 mm	D2 mm	D3 mm	L1 mm	L2 mm	Content	g
336.0015	3,0 - 14,0	14.0	3.0	6.0	58.0	38.0	1	20
336.0016	5,0 - 20,0	20.0	5.0	8.0	71.0	51.0	1	56
336.0017	16,0 - 30,5	30.5	16.0	9.0	76.0	54.0	1	120
336.0018	24,0 - 40,0	40.0	24.0	10.0	89.0	65.0	1	259
336.0019	36,0 - 50,0	50.0	36.0	12.0	97.0	71.0	1	480
336.0020	40,0 - 61,0	61.0	40.0	13.0	103.0	73.0	1	605
336.0021	5,0 - 25,4	25.4	5.0	10.0	87.0	67.0	1	150
336.0022	4,0 - 30,0	30.0	4.0	9.0	103.0	83.0	1	170
336.0023	5,0 - 22,5	22.5	5.0	8.0	79.0	59.0	1	180

HSS TiN Cone cutter set in metal case

- High strength hinge
- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- 118° pointed angle
- 20 - 30° cone angle
- Absolute smooth operation
- High cutting achievement
- With TiN coated surface
- High performance steel

336.0523	4 pcs	3 - 14 mm - 5 - 20 mm - 16 - 30,5 mm	590

HSS TiN Cone cutter set in plastic case

- Stackable for storage
- With integral clasp
- High strength hinge
- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- 118° pointed angle
- 20 - 30° cone angle
- Absolute smooth operation
- High cutting achievement
- With TiN coated surface
- High performance steel

			g
336.0553	4 pcs	3 - 14 mm - 5 - 20 mm - 16 - 30,5 mm	590

HSS STEPPED DRILLS

HSS Stepped drill bit

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- With 1/4" external hexagon drive adaptor to DIN 3126 - C 6,3
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance steel

The cone simplifi s the retracting through bored sheet metals. Breaking chips and swarf are taken away.
The construction of the cutting edges and cold welded joint in the edges blunting is thereby prevented.



1/4"

	Ø mm	D1 mm	D2 mm	L1 mm	L2 mm	No. stages	Content	g
330.2381	4,0-12,0	12.0	4.0	72.0	45.0	9	1	25
330.2382	4,0-20,0	20.0	4.0	81.0	54.0	9	1	85
330.2383	4,0-30,0	30.0	4.0	105.0	78.0	14	1	165

HSS Stepped drill, extra short

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance steel

The cone simplifi s the retracting through bored sheet metals. Breaking chips and swarf are taken away.
The construction of the cutting edges and cold welded joint in the edges blunting is thereby prevented. Ideally suited for construction strength grade sheet metal up to 2.0 mm.



	Ø mm	D1 mm	D2 mm	D3 mm	L1 mm	L2 mm	No. stages	Content	g
330.2371	4 - 12	12.0	4.0	6.0	48.0	28.0	9	1	16
330.2372	4 - 20	20.0	4.0	8.0	58.0	38.0	9	1	42
330.2373	4 - 30	30.0	4.0	10.0	72.0	49.0	14	1	130

HSS Stepped drill

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance steel

The cone simplifi s the retracting through bored sheet metals. Higher feed especially in NE metals possible due to the slim cutting edge.



	Ø mm	D1 mm	D2 mm	D3 mm	L1 mm	L2 mm	No. stages	Content	g
330.2301	4 - 12	12.0	4.0	6.0	65.0	45.0	9	1	22
330.2302	4 - 20	20.0	4.0	8.0	75.0	55.0	9	1	60
330.2303	4 - 30	30.0	4.0	10.0	100.0	78.0	14	1	185
330.2304	6 - 30	30.0	6.0	10.0	95.0	73.0	13	1	205
330.2305	6 - 37	37.0	6.0	10.0	100.0	76.0	12	1	245
330.2306	6 - 38	38.0	6.0	10.0	100.0	76.0	12	1	260
330.2307	4 - 39	39.0	4.0	10.0	107.0	83.0	13	1	312
330.2308	6 - 40	40.0	6.0	13.0	105.0	81.0	19	1	455
330.2309	6 - 20	20.0	6.0	9.0	71.0	51.0	8	1	100
330.2310	4 - 22	22.0	4.0	10.0	76.0	56.0	10	1	85
330.2311	6 - 27,8	26.8	6.0	10.0	75.0	53.0	8	1	110
330.2312	6 - 32	32.0	6.0	10.0	75.0	53.0	8	1	102
330.2313	6 - 32	32.0	6.0	10.0	76.0	53.0	9	1	108
330.2314	5 - 28	28.0	5.0	9.0	69.0	53.0	7	1	86
330.2315	6 - 25	25.0	6.0	10.0	65.0	47.0	7	1	135
330.2316	6 - 30,5	30.5	6.0	10.0	80.0	57.0	9	1	150
330.2317	6,5 - 40,5	40.5	6.5	10.0	96.0	72.0	11	1	265
330.2318	6 - 36	36.0	6.0	10.0	82.0	57.0	11	1	255
330.2319	7 - 40,5	40.5	7.0	12.0	95.0	70.0	13	1	275
330.2320	4,8 - 10,7	10.7	4.8	6.0	54.0	34.0	5	1	27
330.2321	7 - 32,5	32.5	7.0	12.0	96.0	71.0	11	1	220

HSS Stepped drill set in metal case

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance steel

The cone simplifi s the retracting through bored sheet metals. Higher feed especially in NE metals possible due to the slim cutting edge.

			g
330.2403	3 pcs	4 - 12 mm - 4 - 20 mm - 6 - 30 mm	610

HSS Stepped drill set in plastic case

- Stackable for storage
- With integral clasp
- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance steel

The cone simplifi s the retracting through bored sheet metals. Higher feed especially in NE metals possible due to the slim cutting edge.

			g
330.2404	3 pcs	4 - 12 mm - 4 - 20 mm - 6 - 30 mm	610

HSS CO STEPPED DRILLS

HSS Co 5 Stepped drill

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance cobalt steell

The cone simplifies the retracting through bored sheet metals. Higher feed especially in NE metals possible due to the slim cutting edge.

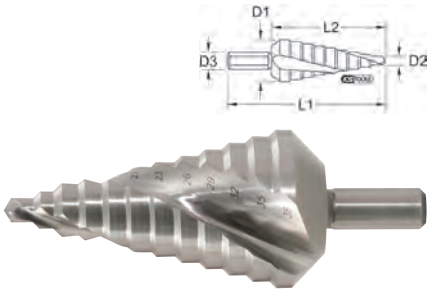

	Ø mm	D1 mm	D2 mm	D3 mm	L1 mm	L2 mm	No. stages	Content	g
330.2322	4 - 12	12.0	4.0	6.0	65.0	45.0	9	1	22
330.2323	4 - 20	20.0	4.0	8.0	75.0	55.0	9	1	60
330.2324	4 - 30	30.0	4.0	10.0	100.0	78.0	14	1	185
330.2325	6 - 30	30.0	6.0	10.0	95.0	73.0	13	1	205
330.2326	6 - 37	37.0	6.0	10.0	100.0	76.0	12	1	245
330.2327	6 - 38	38.0	6.0	10.0	100.0	76.0	12	1	260
330.2328	4 - 39	39.0	4.0	10.0	107.0	83.0	13	1	312
330.2329	6 - 40	40.0	6.0	13.0	105.0	81.0	16	1	455
330.2330	6 - 20	20.0	6.0	9.0	71.0	51.0	8	1	100
330.2331	4 - 22	22.0	4.0	10.0	76.0	56.0	10	1	85
330.2332	6 - 26,8	26.8	6.0	10.0	75.0	53.0	8	1	110
330.2333	6 - 32	32.0	6.0	10.0	75.0	53.0	8	1	102
330.2334	6 - 32	32.0	6.0	10.0	76.0	53.0	9	1	108
330.2335	5 - 28	28.0	5.0	9.0	69.0	47.0	7	1	86
330.2336	6 - 25	25.0	6.0	10.0	65.0	42.0	7	1	135
330.2337	6 - 30,5	30.5	6.0	10.0	80.0	57.0	9	1	150
330.2338	6,5 - 40,5	40.5	6.5	10.0	96.0	72.0	11	1	265
330.2339	6 - 36	36.0	6.0	10.0	82.0	57.0	11	1	255
330.2340	7 - 40,5	40.5	7.0	12.0	95.0	70.0	13	1	275
330.2341	4,8 - 10,7	10.7	4.8	6.0	54.0	34.0	5	1	27
330.2342	7 - 32,5	32.5	7.0	12.0	96.0	71.0	11	1	220

HSS Co 5 Stepped drill set in metal case

- High strength hinge
- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance cobalt steel

The cone simplifies the retracting through bored sheet metals. Higher feed especially in NE metals possible due to the slim cutting edge.

			g
330.2413	3 pcs	4 - 12 mm - 4 - 20 mm - 6 - 30 mm	600

HSS Co 5 Stepped drill set in plastic case

- Stackable for storage
- Integral clasp
- High strength hinge
- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- Absolute smooth operation
- High cutting achievement
- Surface without discolouration
- High performance cobalt steel

The cone simplifies the retracting through bored sheet metals. Higher feed especially in NE metals possible due to the slim cutting edge.

			g
330.2414	3 pcs	4 - 12 mm - 4 - 20 mm - 6 - 30 mm	600

HSS TIN STEPPED DRILLS

HSS TiN Stepped drill bit

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- With 1/4" external hexagon drive adaptor to DIN 3126 - C 6,3
- Absolute smooth operation
- High cutting achievement
- With TiN coated surface
- High performance steel

The cone simplifies the retracting through bored sheet metals. Breaking chips and swarf are taken away.
The construction of the cutting edges and cold welded joint in the edges blunting is thereby prevented.



1/4"

	Ø mm	D1 mm	D2 mm	L1 mm	L2 mm	No. stages	Content	g
330.2384	4,0-12,0	12.0	4.0	72.0	45.0	9	1	25
330.2385	4,0-20,0	20.0	4.0	81.0	54.0	9	1	85
330.2386	4,0-30,0	30.0	4.0	105.0	78.0	14	1	165

HSS TiN Stepped drill, extra short

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- Absolute smooth operation
- High cutting achievement
- With TiN coated surface
- High performance steel

The cone simplifies the retracting through bored sheet metals. Breaking chips and swarf are taken away.
The construction of the cutting edges and cold welded joint in the edges blunting is thereby prevented. Ideally suited for construction strength grade sheet metal up to 2.0 mm.



	Ø mm	D1 mm	D2 mm	D3 mm	L1 mm	L2 mm	No. stages	Content	g
330.2374	4 - 12	12.0	4.0	6.0	48.0	28.0	9	1	16
330.2375	4 - 20	20.0	4.0	8.0	58.0	38.0	9	1	42
330.2376	4 - 30	30.0	4.0	10.0	72.0	49.0	14	1	130

HSS TiN Stepped drill

- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- Absolute smooth operation
- High cutting achievement
- With TiN coated surface
- High performance steel

The cone simplifies the retracting through bored sheet metals. Higher feed especially in NE metals possible due to the slim cutting edge.



	Ø mm	D1 mm	D2 mm	D3 mm	L1 mm	L2 mm	No. stages	Content	g
330.2343	4 - 12	12.0	4.0	6.0	65.0	45.0	9	1	22
330.2344	4 - 20	20.0	4.0	8.0	75.0	55.0	9	1	60
330.2345	4 - 30	30.0	4.0	10.0	100.0	78.0	14	1	185
330.2346	6 - 30	30.0	6.0	10.0	95.0	73.0	13	1	205
330.2347	6 - 37	37.0	6.0	10.0	100.0	76.0	12	1	245
330.2348	6 - 38	38.0	6.0	10.0	100.0	76.0	12	1	260
330.2349	4 - 39	39.0	4.0	10.0	107.0	83.0	13	1	312
330.2350	6 - 40	40.0	6.0	13.0	105.0	81.0	16	1	455
330.2351	6 - 20	20.0	6.0	9.0	71.0	51.0	8	1	100
330.2352	4 - 22	22.0	4.0	10.0	76.0	56.0	10	1	85
330.2353	6 - 26,8	26.8	6.0	10.0	75.0	53.0	8	1	110
330.2354	6 - 32	32.0	6.0	10.0	75.0	53.0	8	1	102
330.2355	6 - 32	32.0	6.0	10.0	76.0	53.0	9	1	108
330.2356	5 - 28	28.0	5.0	9.0	69.0	47.0	7	1	86
330.2357	6 - 25	25.0	6.0	10.0	65.0	42.0	7	1	135
330.2358	6 - 30,5	30.5	6.0	10.0	80.0	57.0	9	1	150
330.2359	6,5 - 40,5	40.5	6.5	10.0	96.0	72.0	11	1	265
330.2360	6 - 36	36.0	6.0	10.0	82.0	57.0	11	1	255
330.2361	7 - 40,5	40.5	7.0	12.0	95.0	70.0	13	1	275
330.2362	4,8 - 10,7	10.7	4.8	6.0	54.0	34.0	5	1	27
330.2363	7 - 32,5	32.5	7.0	12.0	96.0	71.0	11	1	220

HSS TiN Stepped drill set in metal case

- High strength hinge
- Point thinning according to DIN 1412 C
- Cutting edge has thinning pointRight hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- Absolute smooth operation
- High cutting achievement
- With TiN coated surface
- High performance steel

The cone simplifies the retracting through bored sheet metals. Higher feed especially in NE metals possible due to the slim cutting edge.

330.2423	3 pcs	4 - 12 mm - 4 - 20 mm - 6 - 30 mm	610

HSS TiN Stepped drill set in plastic case

- Stackable for storage
- Integral clasp
- High strength hinge
- Point thinning according to DIN 1412 C
- Cutting edge has thinning point
- Right hand cutting
- Spiral grooved
- 118° pointed angle
- 90° stepped angle
- Absolute smooth operation
- High cutting achievement
- With TiN coated surface
- High performance steel

The cone simplifies the retracting through bored sheet metals. Higher feed especially in NE metals possible due to the slim cutting edge.

330.2424	3 pcs	4 - 12 mm - 4 - 20 mm - 6 - 30 mm	610

CONE - AND DEBURRING 60°

HSS Cone and deburrer 60°

- DIN 334 form C
- Right hand cutting
- 60° Countersink angle
- Cylindrical shaft
- Deep ground flutes
- Surface without discolouration
- High performance steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.



	D1 mm	D2 mm	D3 mm	L mm	Content	g
336.0034	6.3	1.6	5.0	45.0	1	10
336.0035	8.0	2.0	6.0	50.0	1	12
336.0036	10.0	2.5	6.0	53.0	1	12
336.0037	12.5	3.2	8.0	56.0	1	24
336.0038	16.0	4.0	10.0	63.0	1	42
336.0039	20.0	5.0	10.0	67.0	1	50
336.0040	25.0	6.3	10.0	71.0	1	66
336.0041	31.5	10.0	12.0	76.0	1	78

HSS Co Cone and deburrer 60°

- DIN 334 form C
- Right hand cutting
- 60° Countersink angle
- Cylindrical shaft
- Deep ground flutes
- Surface without discolouration
- High performance cobalt steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.



	D1 mm	D2 mm	D3 mm	L mm	Content	g
336.0102	6.3	1.6	5.0	45.0	1	10
336.0103	8.0	2.0	6.0	50.0	1	12
336.0104	10.0	2.5	6.0	53.0	1	14
336.0105	12.5	3.2	8.0	56.0	1	24
336.0106	16.0	4.0	10.0	63.0	1	44
336.0107	20.0	5.0	10.0	67.0	1	50
336.0108	25.0	6.3	10.0	71.0	1	64
336.0109	31.5	10.0	12.0	76.0	1	78

Visit our homepage:
www.kstools.com

CONE - AND DEBURRING 75°

HSS Cone and deburrer 75°

- Form C
- Right hand cutting
- 75° Countersink angle
- Cylindrical shaft
- Deep ground flutes
- Surface without discolouration
- High performance steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.



	D1 mm	D2 mm	D3 mm	L mm	Content	g
336.0042	6.3	1.6	5.0	45.0	1	10
336.0043	8.0	2.0	6.0	50.0	1	12
336.0044	10.0	2.5	6.0	53.0	1	14
336.0045	12.5	3.2	8.0	56.0	1	24
336.0046	16.0	4.0	10.0	63.0	1	44
336.0047	20.0	5.0	10.0	67.0	1	50
336.0048	25.0	6.3	10.0	71.0	1	64
336.0049	31.5	10.0	12.0	76.0	1	78

HSS Co Cone and deburrer 75°

- Form C
- Right hand cutting
- 75° Countersink angle
- Cylindrical shaft
- Deep ground flutes
- Surface without discolouration
- High performance cobalt steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.



	D1 mm	D2 mm	D3 mm	L mm	Content	g
336.0110	6.3	1.6	5.0	45.0	1	10
336.0111	8.0	2.0	6.0	50.0	1	12
336.0112	10.0	2.5	6.0	53.0	1	14
336.0113	12.5	3.2	8.0	56.0	1	24
336.0114	16.0	4.0	10.0	63.0	1	44
336.0115	20.0	5.0	10.0	67.0	1	50
336.0116	25.0	6.3	10.0	71.0	1	64
336.0117	31.5	10.0	12.0	76.0	1	78

CONE - AND DEBURRING 90°

HSS Cone and deburrer bit 90°

- Right hand cutting
- 90° Countersink angle
- 1/4" external hexagon drive adaptor to DIN 3126 - C 6,3
- Three cutting edges
- Surface without discolouration
- High performance steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.



1/4"

	D1 mm	D2 mm	D3 mm	L mm	Content	g
336.0274	6.3	1.0	6.4	45.0	1	10
336.0275	8.3	1.5	6.4	50.0	1	14
336.0276	10.4	2.0	6.4	50.0	1	15
336.0277	12.4	2.0	6.4	56.0	1	26
336.0278	16.5	2.5	6.4	60.0	1	36
336.0279	20.5	3.0	6.4	63.0	1	52

HSS Cone and deburrer 90°

- DIN 335 Form C
- Right hand cutting
- 90° Countersink angle
- Three cutting edges
- Cylindrical shaft
- Deep ground flu es
- Surface without discolouration
- High performance steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.



	D1 mm	D2 mm	D3 mm	L mm	Countersink DIN 74 AF	Countersink DIN 74 BF	Content	g
336.0050	4.3	1.3	4.0	40.0			1	9
336.0051	5.0	1.5	4.0	40.0	M2,5		1	9
336.0052	5.3	1.5	4.0	40.0			1	9
336.0053	5.8	1.5	5.0	45.0			1	10
336.0054	6.0	1.5	5.0	45.0	M3		1	10
336.0055	6.3	1.5	5.0	45.0		M3	1	10
336.0056	7.0	1.8	6.0	50.0	M3,5		1	13
336.0057	7.3	1.8	6.0	50.0			1	13
336.0058	8.0	2.0	6.0	50.0	M4		1	15
336.0059	8.3	2.0	6.0	50.0		M4	1	15
336.0060	9.4	2.2	6.0	50.0			1	18
336.0061	10.0	2.5	6.0	50.0	M5		1	20
336.0062	10.4	2.5	6.0	50.0		M5	1	20
336.0063	11.5	2.8	8.0	56.0	M6		1	26
336.0064	12.4	2.8	8.0	56.0		M6	1	26
336.0065	13.4	2.9	8.0	56.0			1	26
336.0066	15.0	3.2	10.0	60.0	M8		1	36
336.0067	16.5	3.2	10.0	60.0		M8	1	36
336.0068	19.0	3.5	10.0	63.0	M10		1	52
336.0069	20.5	3.5	10.0	63.0		M10	1	52
336.0070	23.0	3.8	10.0	67.0	M12		1	62
336.0071	25.0	3.8	10.0	67.0		M12	1	62
336.0072	26.0	3.9	12.0	71.0	M14		1	65
336.0073	28.0	4.0	12.0	71.0		M14	1	70
336.0074	30.0	4.1	12.0	71.0	M16		1	70
336.0075	31.0	4.2	12.0	71.0		M16	1	70

HSS Cone and deburrer set 90° in metal case

- High strength hinge
- DIN 335 form C
- Right hand cutting
- 90° Countersink angle
- Three cutting edges
- Cylindrical shaft
- Deep ground flu es
- Surface without discolouration
- High performance steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.

			g
336.0406	6 pcs	6,3 - 8,3 - 10,4 - 12,4 - 16,5 - 20,5 mm	530

HSS Cone and deburrer set 90° in plastic case

- Stackable for storage
- With integral clasp
- High strength hinge
- DIN 335 form C
- Right hand cutting
- 90° Countersink angle
- Three cutting edges
- Cylindrical shaft
- Deep ground flu es
- Surface without discolouration
- High performance steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.

			g
336.0446	6 pcs	6,3 - 8,3 - 10,4 - 12,4 - 16,5 - 20,5 mm	530

HSS Co Cone and deburrer bit 90°

- Right hand cutting
- 90° Countersink angle
- 1/4" external hexagon drive adaptor to DIN 3126 - C 6,3
- Three cutting edges
- Surface without discolouration
- High performance cobalt steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.

1/4"

	D1 mm	D2 mm	D3 mm	L mm	Content	g
336.0300	6.3	1.0	6.4	45.0	1	10
336.0301	8.3	1.5	6.4	50.0	1	14
336.0302	10.4	2.0	6.4	50.0	1	15
336.0303	12.4	2.0	6.4	56.0	1	26
336.0304	16.5	2.5	6.4	60.0	1	36
336.0305	20.5	3.0	6.4	63.0	1	52

HSS Co 5 Cone and deburrer 90°

- DIN 335 Form C
- Right hand cutting
- 90° Countersink angle
- Three cutting edges
- Cylindrical shaft
- Deep ground flu es
- Surface without discolouration
- High performance cobalt steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.



	D1 mm	D2 mm	D3 mm	L mm	Countersink DIN 74 AF	Countersink DIN 74 BF	Content	g
336.0118	4.3	1.3	4.0	40.0			1	9
336.0119	5.0	1.5	4.0	40.0	M2,5		1	9
336.0120	5.3	1.5	4.0	40.0			1	9
336.0121	5.8	1.5	5.0	45.0			1	10
336.0122	6.0	1.5	5.0	45.0	M3		1	10
336.0123	6.3	1.5	5.0	45.0		M3	1	10
336.0124	7.0	1.8	6.0	50.0	M3,5		1	13
336.0125	7.3	1.8	6.0	50.0			1	13
336.0126	8.0	2.0	6.0	50.0	M4		1	15
336.0127	8.3	2.0	6.0	50.0		M4	1	15
336.0128	9.4	2.2	6.0	50.0			1	18
336.0129	10.0	2.5	6.0	50.0	M5		1	20
336.0130	10.4	2.5	6.0	50.0		M5	1	20
336.0131	11.5	2.8	8.0	56.0	M6		1	26
336.0132	12.4	2.8	8.0	56.0		M6	1	26
336.0133	13.4	2.9	8.0	56.0			1	26
336.0134	15.0	3.2	10.0	60.0	M8		1	36
336.0135	16.5	3.2	10.0	60.0		M8	1	36
336.0136	19.0	3.5	10.0	63.0	M10		1	52
336.0137	20.5	3.5	10.0	63.0		M10	1	52
336.0138	23.0	3.8	10.0	67.0	M12		1	62
336.0139	25.0	3.8	10.0	67.0		M12	1	62
336.0140	26.0	3.9	12.0	71.0	M14		1	65
336.0141	28.0	4.0	12.0	71.0		M14	1	70
336.0142	30.0	4.1	12.0	71.0	M16		1	70
336.0143	31.0	4.2	12.0	71.0		M16	1	70

HSS Co 5 Cone and deburrer set 90° in metal case

- High strength hinge
- DIN 335 form C
- Right hand cutting
- 90° Countersink angle
- Three cutting edges
- Cylindrical shaft
- Deep ground flutes
- Surface without discolouration
- High performance cobalt steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.

336.0416	6 pcs	6.3 - 8.3 - 10.4 - 12.4 - 16.5 - 20.5 mm	530	

HSS Co 5 Cone and deburrer set 90° in plastic case

- Stackable for storage
- Integral clasp
- High strength hinge
- DIN 335 form C
- Right hand cutting
- 90° Countersink angle
- Three cutting edges
- Cylindrical shaft
- Deep ground flutes
- Surface without discolouration
- High performance cobalt steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.

336.0456	6 pcs	6.3 - 8.3 - 10.4 - 12.4 - 16.5 - 20.5 mm	530	

HSS TiN Cone and deburrer bit 90°

- Right hand cutting
- 90° Countersink angle
- Three cutting edges
- 1/4" external hexagon drive adaptor to DIN 3126 - C 6,3
- TiN coated surface
- High performance steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.



1/4"

	D1 mm	D2 mm	D3 mm	L mm	Content	
336.0326	6.3	1.0	6.4	45.0	1	10
336.0327	8.3	1.5	6.4	50.0	1	14
336.0328	10.4	2.0	6.4	50.0	1	15
336.0329	12.4	2.0	6.4	56.0	1	26
336.0330	16.5	2.5	6.4	60.0	1	36
336.0331	20.5	3.0	6.4	63.0	1	52

HSS TiN Cone and deburrer 90°

- DIN 335 form C
- Right hand cutting
- 90° Countersink angle
- Three cutting edges
- Cylindrical shaft
- Deep ground flutes
- TiN coated surface
- High performance steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.



	D1 mm	D2 mm	D3 mm	L mm	Countersink DIN 74 AF	Countersink DIN 74 BF	Content	
336.0170	4.3	1.3	4.0	40.0			1	9
336.0171	5.0	1.5	4.0	40.0	M2,5		1	9
336.0172	5.3	1.5	4.0	40.0			1	9
336.0173	5.8	1.5	5.0	45.0			1	10
336.0174	6.0	1.5	5.0	45.0	M3		1	10
336.0175	6.3	1.5	5.0	45.0		M3	1	10
336.0176	7.0	1.8	6.0	50.0	M3,5		1	13
336.0177	7.3	1.8	6.0	50.0			1	13
336.0178	8.0	2.0	6.0	50.0	M4		1	15
336.0179	8.3	2.0	6.0	50.0		M4	1	15
336.0180	9.4	2.0	6.0	50.0			1	18
336.0181	1.0	2.5	6.0	50.0	M5		1	20
336.0182	10.4	2.5	6.0	50.0		M5	1	20
336.0183	11.5	2.8	8.0	56.0	M6		1	26
336.0184	12.4	2.8	8.0	56.0		M6	1	26
336.0185	13.4	2.9	8.0	56.0			1	26
336.0186	15.0	3.2	10.0	60.0	M8		1	36
336.0187	16.5	3.2	10.0	60.0		M8	1	36
336.0188	19.0	3.5	10.0	63.0	M10		1	52
336.0189	20.5	3.5	10.0	63.0		M10	1	52
336.0190	23.0	3.8	10.0	67.0	M12		1	62
336.0191	25.0	3.8	10.0	67.0		M12	1	62
336.0192	26.0	3.9	12.0	71.0	M14		1	65
336.0193	28.0	4.0	12.0	71.0		M14	1	70
336.0194	30.0	4.1	12.0	71.0	M16		1	70
336.0195	31.0	4.2	12.0	71.0		M16	1	70

HSS TiN Cone and deburrer set 90° in metal case

- High strength hinge
- DIN 335 form C
- Right hand cutting
- 90° Countersink angle
- Three cutting edges
- Cylindrical shaft
- Deep ground flutes
- TiN coated surface
- High performance steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.

336.0426	6 pcs	6.3 - 8.3 - 10.4 - 12.4 - 16.5 - 20.5 mm	530	

HSS TiN Cone and deburrer set 90° in plastic case

- Stackable for storage
- Integral clasp
- High strength hinge
- DIN 335 form C
- Right hand cutting
- 90° Countersink angle
- Three cutting edges
- Cylindrical shaft
- Deep ground flutes
- TiN coated surface
- High performance steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.

336.0466	6 pcs	6.3 - 8.3 - 10.4 - 12.4 - 16.5 - 20.5 mm	530	

CONE - AND DEBURRING 120°

HSS Cone and deburrer 120°

- Form C
- Right hand cutting
- 120° Countersink angle
- Cylindrical shaft
- Deep ground flutes
- Surface without discolouration
- High performance steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.

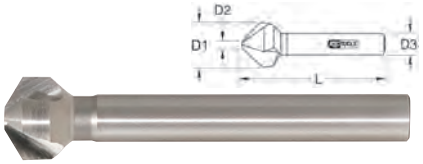

	D1 mm	D2 mm	D3 mm	L mm	Content	g
336.0076	6.3	1.5	5.0	45.0	1	14
336.0077	8.3	2.0	6.0	50.0	1	14
336.0078	10.4	2.5	6.0	50.0	1	20
336.0079	12.4	2.8	8.0	56.0	1	28
336.0080	16.5	3.2	10.0	60.0	1	46
336.0081	20.5	3.5	10.0	63.0	1	54
336.0082	25.0	3.8	10.0	67.0	1	62

HSS Co Cone and deburrer 120°

- Form C
- Right hand cutting
- 120° Countersink angle
- Cylindrical shaft
- Deep ground flutes
- Surface without discolouration
- High performance cobalt steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.

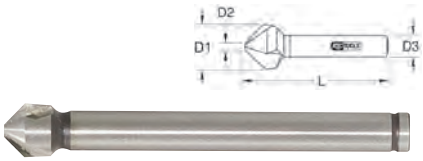

	D1 mm	D2 mm	D3 mm	L mm	Content	g
336.0144	6.3	1.5	5.0	45.0	1	10
336.0145	8.3	2.0	6.0	50.0	1	15
336.0146	10.4	2.5	6.0	50.0	1	20
336.0147	12.4	2.8	8.0	56.0	1	26
336.0148	16.5	3.2	10.0	60.0	1	36
336.0149	20.5	3.5	10.0	63.0	1	52
336.0150	25.0	3.8	10.0	67.0	1	62

HSS TiN Cone and deburrer 120°

- Form C
- Right hand cutting
- 120° Countersink angle
- Cylindrical shaft
- Deep ground flutes
- TiN coated surface
- High performance steel

Ideally suitable for deburring and countersinking in steel, non ferrous metals and light metals as well as chatter free countersinking.

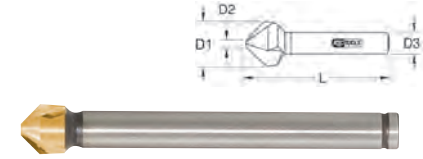

	D1 mm	D2 mm	D3 mm	L mm	Content	g
336.0201	6.3	1.5	5.0	45.0	1	14
336.0202	8.3	2.0	6.0	50.0	1	14
336.0203	10.4	2.5	6.0	50.0	1	20
336.0204	12.4	2.8	8.0	56.0	1	28
336.0205	16.5	3.2	10.0	60.0	1	46
336.0206	20.5	3.5	10.0	63.0	1	54
336.0207	25.0	3.8	10.0	67.0	1	62

HSS THREADED TAP

HSS hand drill tap set M

- DIN 352
- Tolerance according to ISO 2 / 6H
- Right hand cutting
- Includes second and bottom tap
- For running and blind hole threads
- With hard metal centre
- Surface without discolouration
- High performance high speed steel

Ideally usably in high and low alloyed steel up to 800 N/mm² stability, cast iron and NE metals.





Taper tap: ca. 5 - 6 cutting gears
Second tap: ca. 4 - 5 cutting gears
Bottom tap: ca. 2 - 3 cutting gears

	mm	mm	L1 mm	Individual taper tap	Individual second tap	Individual bottom tap	L2 mm	g
331.0020	M2 x 0,4	1.60	36.0	331.0301	331.0321	331.0341	8.0	8
331.0025	M2,5 x 0,45	2.10	40.0	331.0302	331.0322	331.0342	8.0	10
331.0030	M3 x 0,5	2.50	40.0	331.0303	331.0323	331.0343	10.0	10
331.0035	M3,5 x 0,6	2.90	45.0	331.0304	331.0324	331.0344	12.0	10
331.0040	M4 x 0,7	3.30	45.0	331.0305	331.0325	331.0345	12.0	10
331.0050	M5 x 0,8	4.20	50.0	331.0306	331.0326	331.0346	13.0	30
331.0060	M6 x 1,0	5.00	56.0	331.0307	331.0327	331.0347	15.0	30
331.0070	M7 x 1,0	6.00	56.0	331.0308	331.0328	331.0348	16.0	30
331.0080	M8 x 1,25	6.80	63.0	331.0309	331.0329	331.0349	18.0	40
331.0100	M10 x 1,5	8.50	70.0	331.0310	331.0330	331.0350	24.0	70
331.0110	M11 x 1,5	8.50	70.0	331.0311	331.0331	331.0351	24.0	90
331.0120	M12 x 1,75	10.20	75.0	331.0312	331.0332	331.0352	29.0	110
331.0140	M14 x 2,0	12.00	80.0	331.0313	331.0333	331.0353	30.0	150
331.0160	M16 x 2,0	14.00	80.0	331.0314	331.0334	331.0354	32.0	200
331.0180	M18 x 2,5	15.50	95.0	331.0315	331.0335	331.0355	40.0	260
331.0200	M20 x 2,5	17.50	95.0	331.0316	331.0336	331.0356	40.0	330
331.0220	M22 x 2,5	19.50	100.0	331.0317	331.0337	331.0357	40.0	400
331.0240	M24 x 3,0	21.00	110.0	331.0318	331.0338	331.0358	45.0	470
331.0270	M27 x 3,0	24.00	110.0	331.0319	331.0339	331.0359	50.0	530
331.0300	M30 x 3,5	26.50	125.0	331.0320	331.0340	331.0360	56.0	600

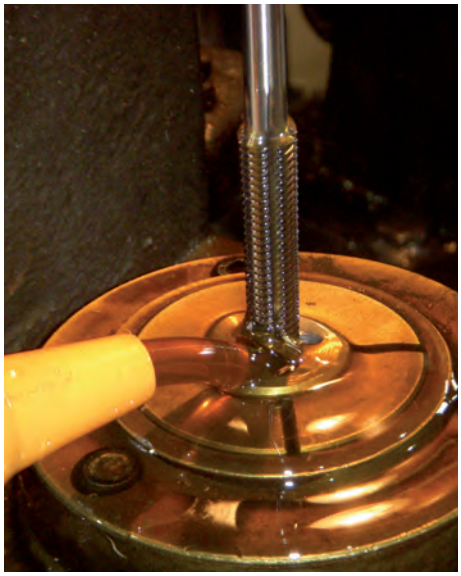

HSS hand drill tap set MF

- DIN 2181
- Tolerance according to ISO 2 / 6H
- Right hand cutting
- Includes for cutting and threading
- For running and blind hole threads
- With hard metal centre
- Surface without discolouration
- High performance high speed steel

Ideally usably in high and low alloyed steel up to 800 N/mm² stability, cast iron and NE metals.

Taper tap: ca. 5 - 6 cutting gears
Bottom tap: ca. 2 - 3 cutting gears

	mm	mm	L1 mm	Individual taper tap	Individual bottom tap	L2 mm	g
331.1101	MF3 x 0,35	2.60	40.0	331.1201	331.1301	10.0	10
331.1102	MF4 x 0,5	3.50	45.0	331.1202	331.1302	12.0	10
331.1103	MF5 x 0,5	4.50	50.0	331.1203	331.1303	13.0	20
331.1104	MF6 x 0,75	5.20	50.0	331.1204	331.1304	15.0	20
331.1105	MF7 x 0,76	6.20	50.0	331.1205	331.1305	14.0	20
331.1106	MF8 x 0,75	7.20	56.0	331.1206	331.1306	18.0	30
331.1107	MF8 x 1,0	7.00	56.0	331.1207	331.1307	18.0	30
331.1108	MF9 x 1,0	8.00	63.0	331.1208	331.1308	20.0	40
331.1109	MF10 x 9,0	9.00	63.0	331.1209	331.1309	18.0	50
331.1110	MF10 x 1,25	8.70	70.0	331.1210	331.1310	24.0	50
331.1111	MF11 x 1,0	9.20	63.0	331.1211	331.1311	22.0	60
331.1112	MF12 x 1,0	11.00	70.0	331.1212	331.1312	20.0	80
331.1113	MF12 x 1,25	10.70	70.0	331.1213	331.1313	20.0	80
331.1114	MF12 x 1,5	10.50	70.0	331.1214	331.1314	20.0	80
331.1115	MF14 x 1,0	13.00	70.0	331.1215	331.1315	20.0	100
331.1116	MF14 x 1,25	12.70	70.0	331.1216	331.1316	20.0	100
331.1117	MF14 x 1,5	12.50	70.0	331.1217	331.1317	20.0	100
331.1118	MF16 x 1,5	14.50	70.0	331.1218	331.1318	20.0	160
331.1119	MF18 x 1,0	17.00	80.0	331.1219	331.1319	22.0	190
331.1120	MF18 x 1,25	16.80	80.0	331.1220	331.1320	22.0	190
331.1121	MF18 x 1,5	16.50	80.0	331.1221	331.1321	22.0	190
331.1122	MF18 x 2,0	16.00	80.0	331.1222	331.1322	22.0	190
331.1123	MF20 x 1,0	19.00	80.0	331.1223	331.1323	22.0	250
331.1124	MF20 x 1,25	18.80	80.0	331.1224	331.1324	22.0	250
331.1125	MF20 x 1,5	18.50	80.0	331.1225	331.1325	22.0	250
331.1126	MF20 x 2,0	18.00	80.0	331.1226	331.1326	22.0	250

HSS hand drill tap set M in steel case

- High strength hinge
- DIN 352
- Tolerance according to ISO 2 / 6H
- Right hand cutting
- Includes second and bottom tap
- For running and blind hole threads
- With hard metal centre
- Surface without discolouration
- High performance high speed steel
- Each size includes 1x second and bottom tap

Ideally usably in high and low alloyed steel up to 800 N/mm² stability, cast iron and NE metals.

Taper tap: ca. 5 - 6 cutting gears
Second tap: ca. 4 - 5 cutting gears
Bottom tap: ca. 2 - 3 cutting gears

			g
336.0621	21 pcs	M3 - M4 - M5 - M6 - M8 - M10 - M12	620

HSS hand drill tap set M in plastic case

- Stackable for storage
- With integral clasp
- High strength hinge
- DIN 352
- Tolerance according to ISO 2 / 6H
- Right hand cutting
- Includes second and bottom tap
- For running and blind hole threads
- With hard metal centre
- Surface without discolouration
- High performance high speed steel
- Each size includes 1x second and bottom tap

Ideally usably in high and low alloyed steel up to 800 N/mm² stability, cast iron and NE metals.

Taper tap: ca. 5 - 6 cutting gears
Second tap: ca. 4 - 5 cutting gears
Bottom tap: ca. 2 - 3 cutting gears

			g
336.0641	21 pcs	M3 - M4 - M5 - M6 - M8 - M10 - M12	620

HSS tap and die set in metal case

- Universal set
- Straight forward hand thread cutting
- With adjustable tap wrench and die holder
- Includes tamperproof drill, thread gauge and screwdriver
- High performance steel

			kg
331.0644	44 pcs	HSS tap and die set in metal case	3.93
21 x		M3 - M4 - M5 - M6 - M8 - M10 - M12	
7 x		2,5 - 3,3 - 4,2 - 5 - 6,8 - 8,5 - 10,2 mm	
7 x		M3 - M4 - M5 - M6 - M8 - M10 - M12	
5 x		M3-M4 - M4,5-M6 - M7-M9 - M10-M11 - M12-M14	
2 x		M1-M10 - M3-M12	
1 x			
1 x			

HSS tap and die set in metal case

- Universal set
- Straight forward hand thread cutting
- With adjustable tap wrench and die holder
- Includes thread gauge and screwdriver
- High performance steel

			kg
331.0632	32 pcs	HSS tap and die set in metal case	1.32
21 x		M3 - M4 - M5 - M6 - M8 - M10 - M12	
7 x		M3 - M4 - M5 - M6 - M8 - M10 - M12	
1 x		M7 - M9	
1 x		M1 - M12	
1 x			
1 x			

HSS tap and die set in metal case

- Straight forward hand thread cutting
- With adjustable tap wrench and die holder
- Includes thread gauge and screwdriver
- High performance steel

			kg
331.0654	54 pcs	HSS tap and die set in metal case	8.30
33 x		M3 - M4 - M5 - M6 - M8 - M10 - M12 - M14 - M15 - M18 - M20	
11 x		M3 - M4 - M5 - M6 - M8 - M10 - M12 - M14 - M15 - M18 - M20	
6 x		M3-M4 - M4,5-M6 - M7-M9 - M10-M11 - M12-M14 - M16-M20	
2 x		M1-M10 - M5-M20	
1 x			
1 x			

HSS CO THREADED TAP

HSS Co slitting tap and die M

- DIN 352 form B
- Tolerance according to ISO 2 / 6 H
- Right hand cutting
- Hard metal centre
- Metric thread
- Thread process by slicing the cutting edge
- Surface without discolouration
- High performance cobalt steel

Ideally usably in high and low alloyed steel up to 900 N/mm² stability, cast iron and NE metals.

		mm	mm	L1 mm	L2 mm	Content	g
331.0223	M3 x 0,5	2.50	40.0	11.0	1	4	
331.0224	M4 x 0,7	3.30	45.0	13.0	1	7	
331.0225	M5 x 0,8	4.20	50.0	16.0	1	11	
331.0226	M6 x 1,0	5.00	50.0	19.0	1	13	
331.0228	M8 x 1,25	6.80	56.0	22.0	1	15	
331.0230	M10 x 1,5	8.50	70.0	24.0	1	30	
331.0232	M12 x 1,75	10.50	75.0	29.0	1	44	

HSS Co hand drill tap set M

- DIN 352
- Tolerance according to ISO 2 / 6H
- Right hand cutting
- Includes second and bottom tap
- For running and blind hole threads
- With hard metal centre
- Surface without discolouration
- High performance cobalt steel

Ideally usably in high and low alloyed steel up to 900 N/mm² stability, cast iron and NE metals.

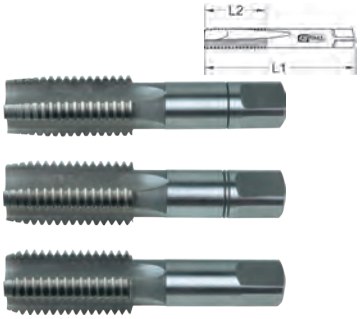

Taper tap: ca. 5 - 6 cutting gears
Second tap: ca. 4 - 5 cutting gears
Bottom tap: ca. 2 - 3 cutting gears

	mm	mm	L1 mm	Individual taper tap	Individual second tap	Individual bottom tap	L2 mm	g
331.2020	M2 x 0,4	1.60	36.0	331.2301	331.3321	331.3341	8.0	10
331.2025	M2,5 x 0,45	2.10	40.0	331.2302	331.3322	331.3342	9.0	12
331.2030	M3 x 0,5	2.50	40.0	331.2303	331.3323	331.3343	11.0	12
331.2035	M3,5 x 0,6	2.90	45.0	331.2304	331.3324	331.3344	13.0	18
331.2040	M4 x 0,7	3.30	45.0	331.2305	331.3325	331.3345	13.0	20
331.2050	M5 x 0,8	4.20	50.0	331.2306	331.3326	331.3346	16.0	34
331.2060	M6 x 1,0	5.00	50.0	331.2307	331.3327	331.3347	19.0	40
331.2070	M7 x 1,0	6.00	50.0	331.2308	331.3328	331.3348	19.0	44
331.2080	M8 x 1,25	6.80	56.0	331.2309	331.3329	331.3349	22.0	48
331.2100	M10 x 1,5	8.50	70.0	331.2310	331.3330	331.3350	24.0	92
331.2110	M11 x 1,5	8.50	70.0	331.2311	331.3331	331.3351	24.0	112
331.2120	M12 x 1,75	10.20	75.0	331.2312	331.3332	331.3352	29.0	134
331.2140	M14 x 2,0	12.00	80.0	331.2313	331.3333	331.3353	30.0	200
331.2160	M16 x 2,0	14.00	80.0	331.2314	331.3334	331.3354	32.0	230
331.2180	M18 x 2,5	15.50	95.0	331.2315	331.3335	331.3355	40.0	365
331.2200	M20 x 2,5	17.50	95.0	331.2316	331.3336	331.3356	40.0	445
331.2220	M22 x 2,5	19.50	100.0	331.2317	331.3337	331.3357	40.0	470
331.2240	M24 x 3,0	21.00	110.0	331.2318	331.3338	331.3358	50.0	530
331.2270	M27 x 3,0	24.00	110.0	331.2319	331.3339	331.3359	50.0	565
331.2300	M30 x 3,5	26.50	125.0	331.2320	331.3340	331.3360	56.0	606

HSS Co hand drill tap set M in metal case

- High strength hinge
- DIN 352
- Tolerance according to ISO 2 / 6H
- Right hand cutting
- Includes second and bottom tap
- For running and blind hole threads
- With hard metal centre
- Surface without discolouration
- High performance cobalt steel
- Each size includes 1x second and bottom tap

Ideally usably in high and low alloyed steel up to 900 N/mm² stability, cast iron and NE metals.

Taper tap:	ca. 5 - 6 cutting gears
Second tap:	ca. 4 - 5 cutting gears
Bottom tap:	ca. 2 - 3 cutting gears

			g
336.0631	21 pcs	M3 - M4 - M5 - M6 - M8 - M10 - M12	620

HSS Co hand drill tap set M in plastic case

- Stackable for storage
- With integral clasp
- High strength hinge
- DIN 352
- Tolerance according to ISO 2 / 6H
- Right hand cutting
- Includes second and bottom tap
- For running and blind hole threads
- With hard metal centre
- Surface without discolouration
- High performance cobalt steel
- Each size includes 1x second and bottom tap

Ideally usably in high and low alloyed steel up to 900 N/mm² stability, cast iron and NE metals.

Taper tap:	ca. 5 - 6 cutting gears
Second tap:	ca. 4 - 5 cutting gears
Bottom tap:	ca. 2 - 3 cutting gears

			g
336.0651	21 pcs	M3 - M4 - M5 - M6 - M8 - M10 - M12	620

HSS Co tap and die set in metal case

- Universal set
- Straight forward hand thread cutting
- With adjustable tap wrench and die holder
- Includes thread gauge and screwdriver
- High performance cobalt steel

			kg
331.0732	32 pcs	HSS Co tap and die set in metal case	1.32
21 x		M3 - M4 - M5 - M6 - M8 - M10 - M12	
7 x		M3 - M4 - M5 - M6 - M8 - M10 - M12	
1 x		M7 - M9	
1 x		M1 - M12	
1 x			
1 x			

HSS Co tap and die set in metal case

- Universal set
- Straight forward hand thread cutting
- With adjustable tap wrench and die holder
- Includes thread gauge and screwdriver
- High performance cobalt steel

			kg
331.0744	44 pcs	HSS Co tap and die set in metal case	3.93
21 x		M3 - M4 - M5 - M6 - M8 - M10 - M12	
7 x		2,5 - 3,3 - 4,2 - 5 - 6,8 - 8,5 - 10,2 mm	
7 x		M3 - M4 - M5 - M6 - M8 - M10 - M12	
5 x		M3-M4 - M4,5-M6 - M7-M9 - M10 M11 - M12-M14	
2 x		M1-M10 - M3-M12	
1 x			
1 x			

HSS Co tap and die set in metal case

- Universal set
- Straight forward hand thread cutting
- With adjustable tap wrench and die holderIncludes thread gauge and screwdriver
- High performance cobalt steel

			kg
331.0754	54 pcs	HSS Co tap and die set in metal case	8.30
33 x		M3 - M4 - M5 - M6 - M8 - M10 - M12 M14 - M15 - M18 - M20	
11 x		M3 - M4 - M5 - M6 - M8 - M10 - M12 M14 - M15 - M18 - M20	
6 x		M3-M4 - M4,5-M6 - M7-M9 - M10 M11 - M12-M14 - M16-M20	
2 x		M1-M10 - M5-M20	
1 x			
1 x			

DIE STOCKS

HSS die M

- DIN EN 22568 Form B
- Tolerance according to ISO - 6g
- Right hand cutting
- Specification, ground cutting edge
- Metric thread
- Surface without discolouration
- High performance steel

Ideally usably in high and low alloyed steel up to 800 N/mm² tensile



		A mm	D mm	Content	g
332.0030	M3 x 0,50	5.0	20.0	1	8
332.0040	M4 x 0,70	5.0	20.0	1	10
332.0050	M5 x 0,80	7.0	20.0	1	12
332.0060	M6 x 1,00	7.0	20.0	1	14
332.0070	M7 x 1,00	9.0	25.0	1	18
332.0080	M8 x 1,25	9.0	25.0	1	20
332.0090	M9 x 1,25	9.0	25.0	1	35
332.0100	M10 x 1,50	11.0	30.0	1	50
332.0120	M12 x 1,75	14.0	38.0	1	60
332.0140	M14 x 2,00	14.0	38.0	1	73
332.0160	M16 x 2,00	18.0	40.0	1	199
332.0180	M18 x 2,50	18.0	40.0	1	220
332.0200	M20 x 2,50	18.0	40.0	1	240

HSS die MF

- DIN EN 22568 form B
- Tolerance according to ISO - 6g
- Right hand cutting
- Specification, ground cutting edge
- Metric fine thread
- Surface without discolouration
- High performance steel

Ideally usably in high and low alloyed steel up to 800 N/mm² stability and NE metals.



	mm	A mm	D mm	Content		
332.1000	M3 x 0,35	5.0	20.0	1	10	
332.1001	M4 x 0,5	5.0	20.0	1	10	
332.1002	M5 x 0,5	5.0	20.0	1	10	
332.1003	M6 x 0,75	7.0	20.0	1	10	
332.1004	M7 x 0,75	9.0	25.0	1	20	
332.1005	M8 x 0,75	9.0	25.0	1	20	
332.1006	M8 x 1,0	9.0	25.0	1	20	
332.1007	M9 x 1,0	9.0	25.0	1	20	
332.1008	M10 x 1,0	11.0	30.0	1	30	
332.1009	M10 x 1,25	11.0	30.0	1	30	
332.1010	M11 x 1,0	11.0	30.0	1	60	
332.1011	M12 x 1,0	11.0	38.0	1	80	
332.1012	M12 x 1,25	11.0	38.0	1	80	
332.1013	M12 x 1,5	11.0	38.0	1	80	
332.1014	M14 x 1,0	10.0	38.0	1	80	
332.1015	M14 x 1,25	10.0	38.0	1	80	
332.1016	M14 x 1,5	10.0	38.0	1	80	
332.1017	M16 x 1,0	14.0	45.0	1	100	
332.1018	M16 x 1,25	14.0	45.0	1	100	
332.1019	M16 x 1,5	14.0	45.0	1	100	
332.1020	M18 x 1,0	14.0	45.0	1	100	
332.1021	M18 x 1,25	14.0	45.0	1	100	
332.1022	M18 x 1,5	14.0	45.0	1	100	
332.1023	M18 x 2,0	14.0	45.0	1	100	
332.1024	M20 x 1,0	14.0	45.0	1	100	
332.1025	M20 x 1,25	14.0	45.0	1	100	
332.1026	M20 x 1,5	14.0	45.0	1	100	
332.1027	M20 x 2,0	14.0	45.0	1	100	

HSS Co die M

- DIN EN 22568 Form B
- Tolerance according to ISO - 6g
- Right hand cutting
- Specification, ground cutting edge
- Metric thread
- Surface without discolouration
- High performance cobalt high speed steel

Ideally usably in high and low alloyed steel up to 900 N/mm² stability and NE metals.



	mm	A mm	D mm	Content		
332.0001	M3 x 0,50	5.0	20.0	1	8	
332.0002	M4 x 0,70	5.0	20.0	1	10	
332.0003	M5 x 0,80	7.0	20.0	1	12	
332.0004	M6 x 1,00	7.0	20.0	1	14	
332.0005	M7 x 1,00	9.0	25.0	1	18	
332.0006	M8 x 1,25	9.0	25.0	1	20	
332.0007	M 9 x 1,25	9.0	25.0	1	35	
332.0008	M10 x 1,50	11.0	30.0	1	50	
332.0009	M12 x 1,75	14.0	38.0	1	60	
332.0010	M14 x 2,00	14.0	38.0	1	73	
332.0011	M16 x 2,00	18.0	45.0	1	199	
332.0012	M18 x 2,50	18.0	45.0	1	220	
332.0013	M20 x 2,50	18.0	45.0	1	220	

HSS hexagon die M

- DIN 382
- Tolerance according to ISO - 6g
- Right hand cutting
- Ground execution
- Metric thread
- Surface without discolouration
- High performance steel

Ideally usably in high and low alloyed steel up to 800 N/mm² stability and NE metals.



	mm	A mm	D mm	Content		
330.0030	M3 x 0,5	5.0	19.0	1	10	
330.0040	M4 x 0,7	5.0	19.0	1	10	
330.0050	M5 x 0,8	7.0	19.0	1	10	
330.0060	M6 x 1,0	7.0	19.0	1	10	
330.0070	M7 x 1,0	9.0	22.0	1	20	
330.0080	M8 x 1,25	9.0	22.0	1	20	
330.0090	M9 x 1,25	9.0	22.0	1	20	
330.0100	M10 x 1,5	11.0	27.0	1	40	
330.0110	M11 x 1,5	11.0	27.0	1	40	
330.0120	M12 x 1,75	14.0	36.0	1	80	
330.0140	M14 x 2,0	14.0	36.0	1	80	
330.0160	M16 x 2,0	18.0	41.0	1	90	
330.0180	M18 x 2,5	18.0	41.0	1	90	
330.0200	M20 x 2,5	18.0	41.0	1	90	

HSS hexagon die MF

- DIN 382
- Tolerance according to ISO - 6g
- Right hand cutting
- Ground execution
- Metric fine thread
- Surface without discolouration
- High performance steel

Ideally usably in high and low alloyed steel up to 800 N/mm² stability and NE metals.



	mm	A mm	D mm	Content		
333.0017	M3 x 0,35	5.0	19.0	1	20	
333.0018	M4 x 0,35	5.0	19.0	1	23	
333.0019	M4 x 0,5	5.0	19.0	1	27	
333.0020	M5 x 0,5	5.0	19.0	1	31	
333.0021	M5 x 0,75	7.0	19.0	1	32	
333.0022	M6 x 0,5	5.0	19.0	1	33	
333.0023	M7 x 0,75	9.0	22.0	1	35	
333.0024	M8 x 0,5	9.0	22.0	1	38	
333.0025	M8 x 0,75	9.0	22.0	1	41	
333.0026	M8 x 1,0	9.0	22.0	1	42	
333.0027	M9 x 0,75	9.0	22.0	1	45	
333.0028	M9 x 1,0	9.0	22.0	1	47	
333.0029	M10 x 0,75	11.0	27.0	1	50	
333.0031	M10 x 1,0	11.0	27.0	1	52	
333.0032	M10 x 1,25	11.0	27.0	1	55	
333.0033	M11 x 1,0	11.0	27.0	1	58	
333.0034	M11 x 1,25	11.0	27.0	1	60	
333.0035	M12 x 0,75	10.0	36.0	1	61	
333.0036	M12 x 1,0	10.0	36.0	1	63	
333.0037	M12 x 1,25	10.0	36.0	1	64	
333.0038	M12 x 1,5	10.0	36.0	1	66	
333.0039	M13 x 1,0	10.0	36.0	1	70	
333.0041	M13 x 1,5	10.0	36.0	1	72	
333.0042	M14 x 0,75	10.0	36.0	1	75	
333.0043	M14 x 1,00	10.0	36.0	1	78	
333.0044	M14 x 1,25	10.0	36.0	1	79	
333.0045	M14 x 1,5	10.0	36.0	1	82	
333.0046	M16 x 1,0	14.0	41.0	1	85	
333.0047	M16 x1,25	14.0	41.0	1	87	
333.0048	M16 x 1,5	14.0	41.0	1	90	
333.0049	M18 x 1,0	14.0	41.0	1	92	
333.0051	M18 x 1,25	14.0	41.0	1	94	
333.0052	M18 x 1,5	14.0	41.0	1	95	
333.0053	M18 x 2,0	14.0	41.0	1	97	
333.0054	M20 x 1,0	14.0	41.0	1	101	
333.0055	M20 x 1,25	14.0	41.0	1	103	
333.0056	M20 x 1,5	14.0	41.0	1	104	
333.0057	M20 x 2,0	14.0	41.0	1	107	
333.0058	M21 x 1,5	14.0	41.0	1	112	

TAP WRENCHES AND DIE HOLDERS

Adjustable tap wrench

- DIN 1814
- With two jaw collet chuck
- With steel rail
- Hardened clamping jaws
- Ideal to the thread cutting edge
- To that separating from thin sheet metals
- For difficult to access areas
- Die cast zinc housing



		L mm	Content		
331.0011	M1 - M8	130.0	1	90	
331.0029	M1 - M10	180.0	1	96	
331.0021	M1 - M12	180.0	1	110	
331.0012	M3 - M10	180.0	1	120	
331.0013	M3 - M12	200.0	1	220	
331.0014	M4 - M12	280.0	1	280	
331.0015	M5 - M20	380.0	1	400	
331.0016	M11 - M27	500.0	1	850	
331.0017	M13 - M32	700.0	1	1230	
331.0018	M19 - M38	1000.0	1	640	
331.0019	M25 - M52	1200.0	1	720	

Ball tap holder

- For fast interchanging of the taps
- Square shaft according to DIN 10
- Die cast zinc housing

		L mm	Content		
331.0253	M1 - M4	200.0	1	82	
331.0254	M3,5 - M8	200.0	1	80	
331.0255	M4 - M10	240.0	1	175	
331.0256	M5 - M12	300.0	1	210	
331.0257	M9 - M16	340.0	1	350	
331.0258	M12 - M20	450.0	1	730	
331.0259	M18 - M27	650.0	1	950	

Die holder with exact gearing reversible ratchet head

- Clockwise and anticlockwise action with positive adjustment
- With two jaw collet chuck
- With movable drive handle
- Ideal to the thread cutting edge
- For difficult to access areas
- Chrome plated and mirror polished
- Special steel

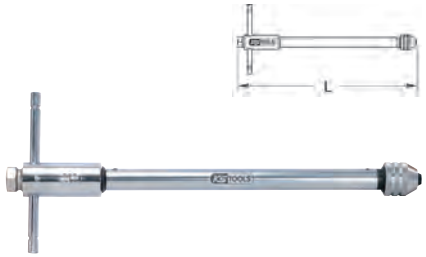

		L mm	Content	g	
331.0660	M3 - M10	85.0	1	190	
331.0665	M5 - M12	100.0	1	320	
331.0670	M3 - M10	250.0	1	250	
331.0675	M5 - M12	300.0	1	440	

Thread drilling extension

- DIN 377
- Hardened and ground execution
- Square shaft according to DIN 10
- For the extension of the hand threading tap
- High performance steel

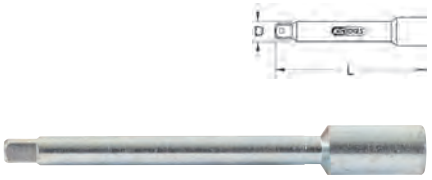

		■ mm	D mm	L mm	Content	g	
331.0241	M1 - M2,6	2.1	2.5	60.0	1	10	
331.0242	M3	2.7	3.7	80.0	1	15	
331.0243	M4	3.4	4.5	95.0	1	40	
331.0244	M5 - M8	4.9	6.5	110.0	1	44	
331.0245	M9 - M10	5.5	7.0	115.0	1	55	
331.0246	M12	7.0	9.0	125.0	1	120	
331.0247	M13 - M16	9.0	12.0	135.0	1	135	
331.0248	M18	11.0	14.0	150.0	1	150	
331.0249	M20	12.0	16.0	155.0	1	175	

Die holder

- DIN 225
- Reinforcement of the cutting edge through iron screws
- With steel rail
- Die cast zinc housing

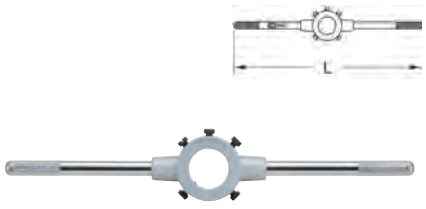

		L mm	Content	g	
331.0001	M1- M2,6	160.0	1	60	
331.0002	M3 - M4	195.0	1	60	
331.0003	M4,5 - M6	195.0	1	70	
331.0004	M7 - M9	215.0	1	100	
331.0005	M10 - M11	260.0	1	220	
331.0006	M12 - M14	315.0	1	280	
331.0007	MF12 - MF14	315.0	1	260	
331.0008	M16 - M20	445.0	1	480	
331.0009	MF16 - MF20	445.0	1	460	
331.0022	MF22 - MF24	160.0	1	860	
331.0023	M22 - M24	160.0	1	840	
331.0024	MF27 - MF36	160.0	1	1230	
331.0026	M27 - M36	160.0	1	1190	

Threading die adaptor set

- Universal use for round cutting dies according to DIN E 22568 form B
- Slim design
- Ideal for difficult to access areas
- Internal square drive to DIN 3120 / ISO 1174 with ball reception
- Includes extension and locking knob
- Special steel
- In durable plastic storage case

			kg	
331.0620	8 pcs	Threading die adaptor set	1.94	

consists of:

		g	
331.0621	Die adaptor, M3-M6, 24mm	60	
331.0622	Die adaptor, M7-M8, 24mm	50	
331.0623	Die adaptor, M9-M10, 24mm	90	
331.0624	Die adaptor, M11-M14, 41mm	230	
331.0625	Die adaptor, M18-M20, 41mm	360	
331.0626	Die adaptor, M22-M24, 41mm	430	
331.0627	Toggle f.extension f.die adaptor	120	
331.0628	1/2" extension f.die adaptor	250	

THREAD GAUGES

Thread gauge

- For controlling and increasing the interior thread and outside thread
- Imperial sizes
- Cylindrical tapered
- Leaves fan shaped arrangement
- Leaves individually marked with size
- Out of hardened spring steel

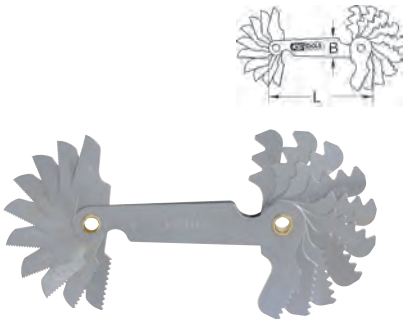

	Tooth pitch	Measuring range	B mm	L mm	g	
301.0090	22	4-4,5-5-6-7-8-9-10-11-12-13-14-16-18 20-22-24-32-40-48-56-64mm	12.2	66.5	40	
301.0095	20	0,40-0,45-0,50-0,60-0,70-0,75-0,80-1,00-1,25-1,50-1,75-2,00-2,50-3,00-3,50-4,00-4,50-5,00-5,50-6,00mm	12.2	66.5	40	

www.kstools.com

ROTARY BURRS

Round cone rotary burr form L for aluminium alloys, long

- Minimal material adhesion
- Long life time
- Big removal rates and high cutting performance
- For cutting speed up to max 1100 m/min (max. speed 16.000 - 30.000 r.p.m.)
- Smooth running

To that filleted, edges break, plasters, welded seams and area preparation

Suitable for Aluminum alloys, hard Aluminum alloys (high Si portion), brass, copper, zinc, bronze, titanium, fiber-reinforced plastics GFK/CFK, thermoplastics, hard rubber

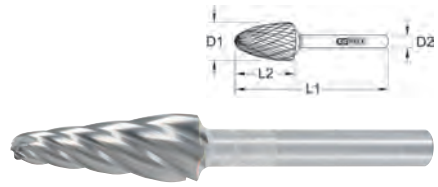

	D1 mm	D2 mm	L1 mm	L2 mm	Content	g	
515.3291	12.0	6.0	65.0	25.0	1	35	

Round milling rotary burr form C for aluminium alloys

- Minimal material adhesion
- Long life time
- Big removal rates and high cutting performance
- For cutting speed up to max 1100 m/min (max. speed 16.000 - 30.000 r.p.m.)
- Smooth running

To that filleted, edges break, plasters, welded seams and area preparation

Suitable for Aluminum alloys, hard Aluminum alloys (high Si portion), brass, copper, zinc, bronze, titanium, fiber-reinforced plastics GFK/CFK, thermoplastics, hard rubber

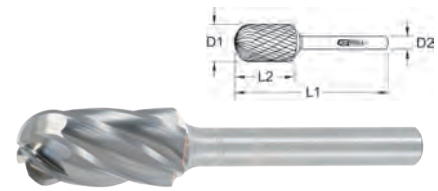

	D1 mm	D2 mm	L1 mm	L2 mm	Content	g	
515.3292	12.0	6.0	65.0	25.0	1	45	

Cylinder rotary burr form A with spur gearing for aluminium alloys

- Minimal material adhesion
- Long life time
- Big removal rates and high cutting performance
- For cutting speed up to max 1100 m/min (max. speed 16.000 - 30.000 r.p.m.)
- Smooth running

To that filleted, edges break, plasters, welded seams and area preparation

Suitable for Aluminum alloys, hard Aluminum alloys (high Si portion), brass, copper, zinc, bronze, titanium, fiber-reinforced plastics GFK/CFK, thermoplastics, hard rubber

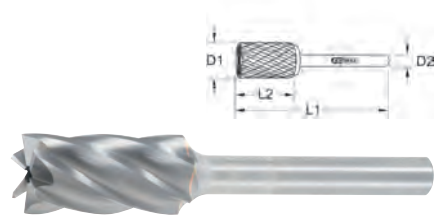

	D1 mm	D2 mm	L1 mm	L2 mm	Content	g	
515.3293	12.0	6.0	65.0	25.0	1	46	

Round milling rotary burr form D for aluminium alloys

- Minimal material adhesion
- Long life time
- Big removal rates and high cutting performance
- For cutting speed up to max 1100 m/min (max. speed 16.000 - 30.000 r.p.m.)
- Smooth running

To that filleted, edges break, plasters, welded seams and area preparation

Suitable for Aluminum alloys, hard Aluminum alloys (high SI portion), brass, copper, zinc, bronze, titanium, fiber-reinforced plastics GFK/CFK, thermoplastics, hard rubber

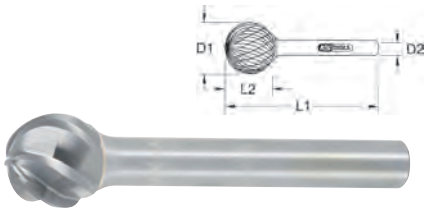

	D1 mm	D2 mm	L1 mm	L2 mm	Content	g
515.3294	12.0	6.0	50.0	10.0	1	27

Round cone rotary burr form L for aluminium alloys, short

- Minimal material adhesion
- Long life time
- Big removal rates and high cutting performance
- For cutting speed up to max 1100 m/min (max. speed 16.000 - 30.000 r.p.m.)
- Smooth running

To that filleted, edges break, plasters, welded seams and area preparation

Suitable for Aluminum alloys, hard Aluminum alloys (high SI portion), brass, copper, zinc, bronze, titanium, fiber-reinforced plastics GFK/CFK, thermoplastics, hard rubber

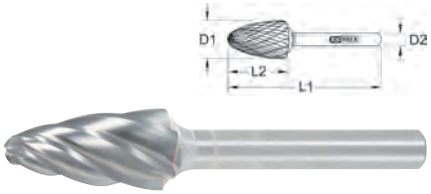

	D1 mm	D2 mm	L1 mm	L2 mm	Content	g
515.3295	12.0	6.0	65.0	25.0	1	37

Cylinder rotary burr form A without spur gearing

- Minimal material adhesion
- Long life time
- Big removal rates and high cutting performance
- For cutting speed up to max 1100 m/min (max. speed 16.000 - 30.000 r.p.m.)
- Smooth running

To that filleted, edges break, plasters, welded seams and area preparation

Suitable for Aluminum alloys, hard Aluminum alloys (high SI portion), brass, copper, zinc, bronze, titanium, fiber-reinforced plastics GFK/CFK, thermoplastics, hard rubber

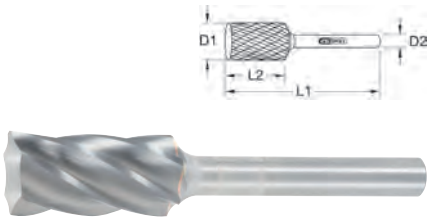

	D1 mm	D2 mm	L1 mm	L2 mm	Content	g
515.3296	12.0	6.0	65.0	25.0	1	47

Milling burr set for aluminum alloys in plastic case

- Minimal material adhesion
- Long life time
- Big removal rates and high cutting performance
- For cutting speed up to max 1100 m/min (max. speed 16.000 - 30.000 r.p.m.)
- Smooth running

To that filleted, edges break, plasters, welded seams and area preparation

Suitable for Aluminum alloys, hard Aluminum alloys (high SI portion), brass, copper, zinc, bronze, titanium, fiber-reinforced plastics GFK/CFK, thermoplastics, hard rubber

			g
515.3290	3 pcs	Milling burr set for aluminum alloys in plastic case	101

1 x		12 mm
1 x		12 mm
1 x		12 mm

Hard metal cylinder rotary burr form A without spur gearing

- Highest cutting edge stability
- Improved cutting performance due to staggered tooth system
- Without spur gearing
- Surface without discolouration
- High performances steel with hard metal

To that filleted, edges break, plasters, welded seams and area preparation.
Usably in high alloyed, steel rustproof, acid and heat resistant, cast and plastics.

	D1 mm	D2 mm	L1 mm	L2 mm	Content	g
515.3221	3.0	3.0	38.5	13.0	1	3
515.3222	6.0	6.0	61.0	16.0	1	16
515.3223	8.0	6.0	65.0	20.0	1	21
515.3224	10.0	6.0	65.0	20.0	1	30
515.3225	12.0	6.0	70.0	25.0	1	57
515.3226	16.0	6.0	70.0	25.0	1	81

Hard metal cylinder rotary burr form A with spur gearing

- Highest cutting edge stability
- Improved cutting performance due to staggered tooth system
- With face gearing
- Suitable for a wide range of applications
- Surface without discolouration
- High performances steel with hard metal

To that filleted, edges break, plasters, welded seams and area preparation.
Usably in high alloyed, steel rustproof, acid and heat resistant, cast and plastics.

	D1 mm	D2 mm	L1 mm	L2 mm	Content	g
515.3231	3.0	3.0	38.5	13.0	1	3
515.3232	6.0	6.0	61.0	16.0	1	16
515.3233	8.0	6.0	65.0	20.0	1	21
515.3234	10.0	6.0	65.0	20.0	1	30
515.3235	12.0	6.0	70.0	25.0	1	57
515.3236	16.0	6.0	70.0	25.0	1	81

Hard metal round milling rotary burr form C

- Highest cutting edge stability
- Improved cutting performance due to staggered tooth system
- Suitable for a wide range of applications
- Surface without discolouration
- High performances steel with hard metal

To that filleted, edges break, plasters, welded seams and area preparation.
Usably in high alloyed, steel rustproof, acid and heat resistant, cast and plastics.



	D1 mm	D2 mm	L1 mm	L2 mm	Content	g
515.3241	3.0	3.0	38.5	13.0	1	3
515.3242	6.0	6.0	61.0	16.0	1	16
515.3243	8.0	6.0	65.0	20.0	1	22
515.3244	10.0	6.0	70.0	20.0	1	28
515.3245	12.0	6.0	70.0	25.0	1	40
515.3246	16.0	6.0	70.0	25.0	1	60

Hard metal pointed arch rotary burr form G

- Highest cutting edge stability
- Improved cutting performance due to staggered tooth system
- Suitable for a wide range of applications
- Surface without discolouration
- High performances steel with hard metal

To that filleted, edges break, plasters, welded seams and area preparation.
Usably in high alloyed, steel rustproof, acid and heat resistant, cast and plastics.



	D1 mm	D2 mm	L1 mm	L2 mm	Content	g
515.3251	3.0	3.0	38.5	13.0	1	3
515.3252	6.0	6.0	63.0	18.0	1	13
515.3253	8.0	6.0	65.0	20.0	1	19
515.3254	10.0	6.0	65.0	20.0	1	22
515.3255	12.0	6.0	70.0	25.0	1	33
515.3256	16.0	6.0	70.0	25.0	1	47

Hard metal tip cone milling burr form M

- Highest cutting edge stability
- Improved cutting performance due to staggered tooth system
- Suitable for a wide range of applications
- Surface without discolouration
- High performances steel with hard metal

To that filleted, edges break, plasters, welded seams and area preparation.
Usably in high alloyed, steel rustproof, acid and heat resistant, cast and plastics.



	D1 mm	D2 mm	L1 mm	L2 mm	Content	g
515.3271	3.0	3.0	38.5	11.0	1	3
515.3272	6.0	6.0	63.0	18.0	1	12
515.3273	8.0	6.0	65.0	20.0	1	15
515.3274	10.0	6.0	65.0	20.0	1	18
515.3275	12.0	6.0	70.0	25.0	1	26
515.3276	16.0	6.0	70.0	25.0	1	37

Hard metal milling burr set in steel case

- High strength hinge
- 6 mm shank diameter
- Highest cutting edge stability
- Improved cutting performance due to staggered tooth system
- Surface without discolouration
- High performances steel with hard metal

To that filleted, edges break, plasters, welded seams and area preparation.
Usably in high alloyed, steel rustproof, acid and heat resistant, cast and plastics.

			g
515.3203	3 pcs	Hard metal milling burr set in steel case	590
1 x		10 mm	
1 x		10 mm	
1 x		10 mm	

Hard metal round arch rotary burr form F

- Highest cutting edge stability
- Improved cutting performance due to staggered tooth system
- Suitable for a wide range of applications
- Surface without discolouration
- High performances steel with hard metal

To that filleted, edges break, plasters, welded seams and area preparation.
Usably in high alloyed, steel rustproof, acid and heat resistant, cast and plastics.



	D1 mm	D2 mm	L1 mm	L2 mm	Content	g
515.3261	3.0	3.0	38.5	13.0	1	3
515.3262	6.0	6.0	61.0	16.0	1	15
515.3263	8.0	6.0	65.0	20.0	1	20
515.3264	10.0	6.0	65.0	20.0	1	24
515.3265	12.0	6.0	70.0	25.0	1	32
515.3266	16.0	6.0	70.0	25.0	1	52

Hard metal ball milling burr form D

- Highest cutting edge stability
- Improved cutting performance due to staggered tooth system
- Suitable for a wide range of applications
- Surface without discolouration
- High performances steel with hard metal

To that filleted, edges break, plasters, welded seams and area preparation.
Usably in high alloyed, steel rustproof, acid and heat resistant, cast and plastics.



	D1 mm	D2 mm	L1 mm	L2 mm	Content	g
515.3281	3.0	3.0	38.5	2.7	1	3
515.3282	6.0	6.0	51.0	5.0	1	11
515.3283	8.0	6.0	53.0	7.0	1	12
515.3284	10.0	6.0	54.0	9.0	1	16
515.3285	12.0	6.0	56.0	10.0	1	24
515.3286	16.0	6.0	60.0	14.0	1	59

Hard metal milling burr set in steel case

- High strength hinge
- 3 mm shank diameter
- Highest cutting edge stability
- Improved cutting performance due to staggered tooth system
- Surface without discolouration
- High performances steel with hard metal

To that filleted, edges break, plasters, welded seams and area preparation.
Usably in high alloyed, steel rustproof, acid and heat resistant, cast and plastics.

			g
515.3207	7 pcs	Hard metal milling burr set in steel case	590
1 x		3 mm	
1 x		3 mm	
1 x		3 mm	
1 x		3 mm	
1 x		3 mm	
1 x		3 mm	
1 x		3 mm	

Hard metal milling burr set in steel case

- High strength hinge
- 6 mm shank diameter
- Highest cutting edge stability
- Improved cutting performance due to staggered tooth system
- Surface without discolouration
- High performances steel with hard metal

To that fill ted, edges break, plasters, welded seams and area preparation.
Usably in high alloyed, steel rustproof, acid and heat resistant, cast and plastics.

			g
515.3210	10 pcs	Hard metal milling burr set in steel case	590

2 x		8 - 10 mm
2 x		8 - 10 mm
2 x		8 - 10 mm
1 x		10 mm
1 x		10 mm
1 x		10 mm
1 x		8 mm

Hard metal milling burr set in plastic case

- Stackable for storage
- With integral clasp
- High strength hinge
- 6 mm shank diameter
- Highest cutting edge stability
- Improved cutting performance due to staggered tooth system
- Surface without discolouration
- High performances steel with hard metal

To that fill ted, edges break, plasters, welded seams and area preparation.
Usably in high alloyed, steel rustproof, acid and heat resistant, cast and plastics.

			g
515.3220	10 pcs	Hard metal milling burr set in plastic case	590

2 x		8 - 10 mm
2 x		8 - 10 mm
2 x		8 - 10 mm
1 x		10 mm
1 x		10 mm
1 x		10 mm
1 x		8 mm

SCREW HOLE PUNCHES

Screw hole punch

- 3 point gate
- High strength bolt
- Positive cutting edge geometry
- To that separating from thin sheet metals
- For diffi ult to access areas
- Burnished surface
- Special tool steel

Ideally usably in V2A sheet to 1.5 mm, aluminum, copper, steel as well as stainless steel and plastics. The sheet metal thicknesses can be exceeded at the expense of screw. Especially suited for burr free, clean, effortless and fast punching.

	D mm	Standard	Replacement tension screw	Tension srew	Tapping hole	Content	g
129.0012	12.5	ISO 12	129.0001	MF 8 x 1 x 55,0	9	1	72
129.0013	12.7	PG7	129.0001	MF 8 x 1 x 55,0	9	1	73
129.0015	15.2	PG9	129.0001	MF 8 x 1 x 55,0	9	1	94
129.0016	16.0	ISO 16	129.0001	MF 8 x 1 x 55,0	9	1	96
129.0018	18.6	PG11	129.0001	MF 8 x 1 x 55,0	9	1	112
129.0020	20.4	PG13	129.0002	MF 12 X 1,5 X 55	13	1	160
129.0021	20.5	ISO 20	129.0002	MF 12 X 1,5 X 55	13	1	161
129.0022	22.5	PG16	129.0002	MF 12 X 1,5 X 65	13	1	164
129.0025	25.4	ISO 12	129.0002	MF 12 X 1,5 X 65	13	1	185
129.0026	25.5	ISO 25	129.0002	MF 12 X 1,5 X 65	13	1	186
129.0028	28.3	PG21	129.0002	MF 12 X 1,5 X 65	13	1	212
129.0030	30.5	ISO 12	129.0002	MF 12 X 1,5 X 65	13	1	250
129.0032	32.5	ISO 32	129.0002	MF 12 X 1,5 X 65	13	1	252
129.0035	35.0	ISO 12	129.0002	MF 12 X 1,5 X 65	13	1	378
129.0037	37.0	PG29	129.0002	MF 12 X 1,5 X 65	13	1	380
129.0038	38.0	ISO 12	129.0002	MF 12 X 1,5 X 65	13	1	394
129.0040	40.5	ISO 40	129.0002	MF 12 X 1,5 X 65	13	1	398
129.0047	47.0	PG36	129.0003	MF 16 x 1,5 x 75,0	18	1	834
129.0050	50.5	ISO 50	129.0003	MF 16 x 1,5 x 75,0	18	1	768
129.0054	54.0	PG42	129.0003	MF 16 x 1,5 x 75,0	18	1	964

Screw hole punch with ball bearing

- Ball bearing
- 3 point gate
- High strength bolt
- Positive cutting edge geometry
- To that separating from thin sheet metals
- For diffi ult to access areas
- Burnished surface
- Special tool steel

Ideal for use in V2A steel plates up to 1,5 mm, aluminum, copper, steel and iron to 2,0 mm and stainless steel and plastic sinks. The sheet metal thicknesses can be exceeded at the expense of screw. Especially suited for burr free, clean, effortless and fast punching.



	D mm	Standard	Replacement ball bearing screw #	Ball bearing screw	Tapping hole	Content	g
129.0312	12.5	ISO 12	129.0301	MF 8 x 1 x 55,0	9	1	74
129.0313	12.7	PG7	129.0301	MF 8 x 1 x 55,0	9	1	75
129.0315	15.2	PG9	129.0301	MF 8 x 1 x 55,0	9	1	96
129.0316	16.0	ISO 16	129.0301	MF 8 x 1 x 55,0	9	1	98
129.0318	18.6	PG11	129.0301	MF 8 x 1 x 55,0	9	1	114
129.0320	20.4	PG13	129.0302	MF 12 x 1,5 x 55,0	13	1	174
129.0321	20.5	ISO 20	129.0302	MF 12 x 1,5 x 55,0	13	1	175
129.0322	22.5	PG16	129.0302	MF 12 x 1,5 x 65,0	13	1	178
129.0325	25.4		129.0302	MF 12 x 1,5 x 65,0	13	1	200
129.0326	25.5	ISO 25	129.0302	MF 12 x 1,5 x 65,0	13	1	202
129.0328	28.3	PG21	129.0302	MF 12 x 1,5 x 65,0	13	1	226
129.0330	30.5		129.0302	MF 12 x 1,5 x 65,0	13	1	264
129.0332	32.5	ISO 32	129.0302	MF 12 x 1,5 x 65,0	13	1	266
129.0335	35.0		129.0302	MF 12 x 1,5 x 65,0	13	1	392
129.0337	37.0	PG29	129.0302	MF 12 x 1,5 x 65,0	13	1	408
129.0338	38.0		129.0302	MF 12 x 1,5 x 65,0	13	1	409
129.0340	40.5	ISO 40	129.0302	MF 12 x 1,5 x 65,0	13	1	412
129.0347	47.0	PG36	129.0303	MF 16 x 1,5 x 75,0	18	1	890
129.0350	50.5	ISO 50	129.0303	MF 16 x 1,5 x 75,0	18	1	780
129.0354	54.0	PG42	129.0303	MF 16 x 1,5 x 75,0	18	1	1020
129.0360	60.0	PG48	129.0304	MF 20 x 1,5 x 80,0	22	1	1084
129.0363	63.5	ISO 63	129.0304	MF 20 x 1,5 x 80,0	22	1	1162

HOLESAWS

HSS arbor accessories

- For HSS and HSS Co Bi metal hole saws
- Includes pilot drill
- High performance steel

	Ø mm	Shank mm	Profile	g
129.5501	14,0 - 30,0	6,4		60
129.5502	14,0 - 30,0	9,5		80
129.5503	14,0 - 30,0	11,0		80
129.5505	32,0 - 152,0	11,0		260
129.5504	32,0 - 210,0	16,0		250

Replacement pilot drills for HSS and HSS Co Bi metal hole saws

- For HSS and HSS Co Bi metal hole saws
- High performance steel

	Ø mm	L mm	Content	g
129.5525	6,3	105.0	1	20
129.5526	6,3	75.0	1	10

Extension for HSS and HSS Co Bi metal hole saws

- For HSS and HSS Co Bi metal hole saws
- High performance steel

	L mm	Content	g
129.5520	300.0	1	350

HSS Bi metal holesaws

- Variable tooth pitch
- Right hand cutting
- High concentricity accuracy
- Good chip removal
- HSS Bi metal

Suitable for low alloyed steel up to 700 N/mm² stability, plaster, light construction-, fibre and chipboard as well as wood processing, non ferrous metals and light alloys.

	D mm	Cutting depth mm	Passage Ø	Imperial tube Ø inch	Content	g
129.5014	14.0	38.0		9/16"	1	30
129.5016	16.0	38.0	PG9	5/8"	1	30
129.5017	17.0	38.0		11/16"	1	30
129.5019	19.0	38.0	PG11	3/4"	1	40
129.5020	20.0	38.0		25/32"	1	40
129.5021	21.0	38.0	PG13,5	13/16"	1	50
129.5022	22.0	38.0		7/8"	1	50
129.5024	24.0	38.0	PG16	15/16"	1	60
129.5025	25.0	38.0		1"	1	60
129.5027	27.0	36.0		1.1/16"	1	70
129.5029	29.0	36.0	PG21	1.1/8"	1	70
129.5030	30.0	36.0		1.3/16"	1	80
129.5032	32.0	36.0		1.1/4"	1	80
129.5033	33.0	36.0		1.5/16"	1	80
129.5035	35.0	36.0		1.3/8"	1	90
129.5037	37.0	36.0	PG29	1.7/16"	1	120
129.5038	38.0	36.0		1.1/2"	1	120
129.5040	40.0	36.0		1.9/16"	1	120
129.5041	41.0	36.0		1.5/8"	1	120
129.5043	43.0	36.0		1.11/16"	1	120
129.5044	44.0	36.0		1.3/4"	1	120
129.5045	45.0	36.0		1.25/32"	1	135
129.5046	46.0	36.0		1.13/16"	1	140
129.5048	48.0	36.0	PG36	1.7/8"	1	150
129.5050	50.0	32.0		1.31/32"	1	150
129.5051	51.0	32.0		2"	1	150
129.5052	52.0	32.0		2.1/16"	1	150
129.5054	54.0	32.0	PG42	2.1/8"	1	150
129.5055	55.0	32.0	PG9	2.3/16"	1	150
129.5057	57.0	32.0		2.1/4"	1	160
129.5059	59.0	32.0		2.5/16"	1	160
129.5060	60.0	32.0	PG48	2.3/8"	1	170
129.5064	64.0	32.0		2.1/2"	1	190
129.5065	65.0	32.0		2.9/16"	1	200
129.5067	67.0	32.0		2.5/8"	1	200
129.5068	68.0	32.0		2.22/32"	1	200
129.5070	70.0	32.0		2.3/4"	1	210
129.5073	73.0	32.0		2.7/8"	1	250
129.5075	75.0	32.0		2.31/32"	1	250
129.5076	76.0	32.0		3"	1	250
129.5079	79.0	32.0		3.1/8"	1	250
129.5083	83.0	32.0		3.1/4"	1	260
129.5086	86.0	32.0		3.3/8"	1	260
129.5089	89.0	32.0		3.1/2"	1	290
129.5092	92.0	32.0		3.5/8"	1	320
129.5095	95.0	32.0		3.3/4"	1	370
129.5098	98.0	32.0		3.7/8"	1	390
129.5100	100.0	32.0		3.31/32"	1	410
129.5102	102.0	32.0		4"	1	420
129.5105	105.0	32.0		4.1/8"	1	450
129.5108	108.0	32.0		4.1/4"	1	450
129.5111	111.0	32.0		4.3/8"	1	460
129.5114	114.0	32.0		4.1/2"	1	480
129.5121	121.0	32.0		4.3/4"	1	500
129.5127	127.0	32.0		5"	1	650
129.5140	140.0	32.0		5.1/2"	1	650
129.5146	146.0	32.0		5.3/4"	1	650
129.5152	152.0	32.0		6"	1	700

Electrians hole saw set in plastic box

- Includes hole saw arbor
- With integral clasp
- High strength hinge
- Variable tooth pitch
- Right hand cutting
- High concentricity accuracy
- Good chip removal
- HSS Bi metal

Suitable for high and low alloyed steel up to 700 N/mm² stability, plaster, light construction, MDF and chipboard as well as wood processing, non ferrous metal and light alloy.
For use within electrical trades.

			kg
129.5570	8 pcs	Electrians hole saw set in plastic box	1.35

6 x		22 - 29 - 35 - 44 - 51 - 68 mm
1 x		14 - 30 mm
1 x		32 - 152 mm

Plumbing hole saw set in plastic box

- Includes hole saw arbor
- With integral clasp
- High strength hinge
- Variable tooth pitch
- Right hand cutting
- High concentricity accuracy
- Good chip removal
- HSS Bi metal

Suitable for high and low alloyed steel up to 700 N/mm² stability, plaster, light construction, MDF and chipboard as well as wood processing, non ferrous metal and light alloy.
For use within plumbing trades.

			kg
129.5575	9 pcs	Plumbing hole saw set in plastic box	1.38

7 x		19 - 22 - 29 - 38 - 44 - 51 - 57 mm
1 x		14 - 30 mm
1 x		32 - 152 mm

Universal hole saw set in plastic box

- Inclusive hole saw arbor and extension
- With integral clasp
- High strength hinge
- Variable tooth pitch
- Right hand cutting
- High concentricity accuracy
- Good chip removal
- HSS Bi metal

Suitable for high and low alloyed steel up to 700 N/mm² stability, plaster, light construction, MDF and chipboard as well as wood processing, non ferrous metal and light alloy.
For the use in the areas electric, sanitary, plumbing building and heating.

			kg
129.5580	15 pcs	Universal hole saw set in plastic box	3.49

12 x		19 - 22 - 25 - 29 - 32 - 35 - 38 - 44 51 - 57 - 64 - 68 mm
1 x		14 - 30 mm
1 x		32 - 152 mm
1 x		300 mm

HANDSAWS

Small handsaw

- With 32 teeth
- For metal
- With wooden handle
- Includes saw blade

	L mm	H mm		g
997.1215	150.0	130.0	997.1214/16	100

Small handsaw with adjustable wooden handle

- With 32 teeth
- For metal
- With adjustable wooden handle
- Includes saw blade

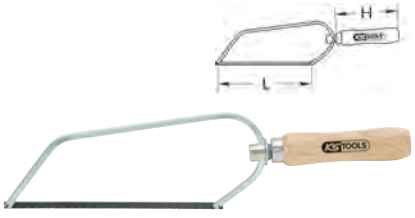

	L mm	H mm		g
997.1217	150.0	90.0	997.1214/16	100

Sawblade

- With 32 teeth

Suitable for: all metals

	L mm	Content	g
997.1214	150.0	12	36

Sawblade

- With 25 teeth

Suitable for: wood, aluminium, plastics and plaster

	L mm	Content	g
997.1216	150.0	12	40

Small handsaw frame

- With 24 teeth
- With red plastic handle cover
- Includes universal saw blade
- For wood, metal, aluminum, plastic and plaster
- Surface black powder coating

	L mm	H mm		g
997.1210	150.0	90.0	907.2131	130

Small hand saw frame

- With 24 teeth
- With black plastic handle cover
- Includes universal saw blade
- For plastic, metal and aluminium



	L mm	H mm		g
907.2130	150.0	90.0	907.2131	140

Universal sawblade for small handsaw frame

- With 24 teeth

For: plastic, metal and aluminium

	L mm	Content	g
907.2131	150.0	1	10

Metal handsaw frame

- Especially suitable for narrow hard to access areas
- Mode of operation such as key hole sawing
- With two component handle
- Includes universal saw blade
- For plastic, metal and aluminium

	L mm	H mm		g
907.2125	300.0	160.0	129.6620-24	110

Hack saw frame

- Easy usage
- With hand protection and thumb support
- Includes magazine for saw blades
- With jigsaw function
- Saw blade can be set at 45° or 90°
- Includes HSS Bi metal sawblade

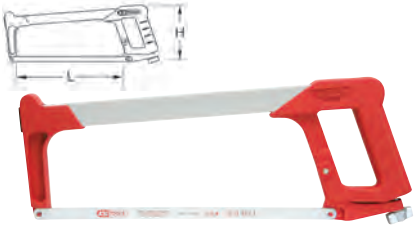

		H mm		g
907.2100	45 or 90	130.0	129.6620-24	270

Hack saw frame

- Easy usage
- With hand protection and thumb support
- Includes magazine for saw blades
- With jigsaw function
- Saw blade can be set at 45° or 90°
- With two component handle
- Includes HSS Bi metal sawblade

	L mm	H mm		g
907.2102	300.0	130.0	129.6620-24	270

Quick release hacksaw frame

- With fast blade clamping device
- Easy usage
- With hand protection and thumb support
- Includes magazine for saw blades
- With jigsaw function
- Saw blade can be set at 45° or 90°
- With ergonomic handle
- Includes HSS Bi metal sawblade

	L mm	H mm		g
907.2110	300.0	135.0	129.6620-24	750

Hack saw frame

- With hand protection
- Includes jigsaw function
- With ergonomic handle
- Includes saw blade

	L mm	H mm		g
907.2115	300.0	130.0	129.6620-24	270

Hack saw frame set in display

- Including safety universal blade
- With hand protection
- Includes jigsaw function
- With ergonomic handle
- Includes saw blade

			kg
907.2103	3 pcs	Hack saw frame set in display	1.03

PVC handsaw

- With hand protection
- With ergonomic handle
- Includes saw blade

	L mm	H mm	g
907.1105	300.0	130.0	200
907.1106	450.0	190.0	360

HSS Bi Co 8 metal high performance saw blades

- Variable tooth pitch
- Very flexible
- For cutting metal and steel
- Cobalt alloyed HSS Bi metal



	No. teeth	B mm	D mm	L2 mm	L3 mm	Content	g
129.6620V	288	13.0	0,6	300.0	1,0-1,3	1	20

HSS Bi Co 8 metal high performance saw blades

- Very flexible
- For cutting metal and steel
- Cobalt alloyed HSS Bi metal



	No. teeth	B mm	D mm	L2 mm	L3 mm	Content	g
129.6620-18	216	13.0	0,6	300.0	1,4	1	20
129.6620-24	288	13.0	0,6	300.0	1,0	1	20
129.6620-32	384	13.0	0,6	300.0	0,8	1	20

JIGSAW BLADES

Jigsaw blades

- Cleaner, fast and fine cut
- Chrome vanadium

In the style of: AEG® 274351, Bosch® T101D, Metabo® 23635, Lenox® CF456S, Milwaukee® 48-42-5500
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for:
- planned, hard and plywood 5 to 30 mm
- laminated wood composition board
- plastic

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3101	30	100.0	75.0	2,5	1,5	5	40

Jigsaw blades

- Cleaner, fast and fine cut
- Chrome vanadium

In the style of: AEG® 274351, Bosch® T101D, Metabo® 23635, Lenox® CF456S, Milwaukee® 48-42-5500
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for:
- planned, hard and plywood 8 to 60 mm
- plastic
- wooden types

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3103	18	100.0	75.0	4,0	1,5	5	30

Jigsaw blades

- Very clean and fast cut
- Chrome vanadium

In the style of: Bosch® T301D, Metabo® 23654
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for:
- soft and hardwood 8 to 75 mm
- wood fibre board 8 to 75 mm
- plastic

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.31035	21	115.0	95.0	4,0	1,5	5	30

Jig saw blades

- Clean and fast cut
- Extra strong blade
- Ideal for angled and parallel cutting

In the style of: Bosch® T101DP, Metabo® 23655
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for:
- soft, hard and plywood
- wooden composites
- wood fibre board 6 to 60 mm
- Plastic

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3103S	18	100.0	75.0	4,0	1,7	5	30

Jigsaw blades

- Faster, straight and clean cut
- Chrome vanadium

In the style of: AEG® 213116, Bosch® T144D, Metabo® 23633, Milwaukee® 48-42-5421
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for:
- planned, hard and plywood 8 to 60 mm
- MDF

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3104	18	100.0	75.0	4,0	1,3	5	40

Jigsaw blades curved cut

- Fast and clean cut
- Ideal for curved cutting
- Chrome vanadium

In the style of: Bosch® T244D, Metabo® 23649, Milwaukee® 48-42-5512

Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for:
- soft and hardwood 8 to 60 mm
- MDF

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3105	18	100.0	75.0	4,0	1,3	5	30

Jigsaw blade

- Fast coarse cut
- Chrome vanadium

In the style of: AEG 254071, Bosch T111C, Metabo 23632, Milwaukee 48-42-5200
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for:
- soft and hardwood 5 to 60 mm
- plastic

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3106	24	100.0	75.0	3,0	1,3	5	30

Bi metal jigsaw blades

- Variable tooth pitch
- Straight cut
- Extra long blade
- For different strength materials

Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for:
- soft and hardwood 3 to 95 mm
- wood with nails and kitchen worktops
- steel and stainless steel

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3150F	63	132.0	110.0	1,8 - 2,5	1,3	5	50

Jigsaw blade

- Straight cut
- Ideal for very thin material
- High performance steel

In the style of: AEG® 274652, Bosch® T118G, Metabo® 23636
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®

Technical data:

Suitable for: wood and aluminium 0.9 to 1.2 mm; thin sheet metals; non ferrous metal

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3110	56	75.0	50.0	0,9	1,0	5	40

Bi metal jigsaw blades

- Straight cut
- For thick material

In the style of: AEG® 254064, Bosch® T118B, Metabo® 23638, Milwaukee® 48-42-5101

Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®

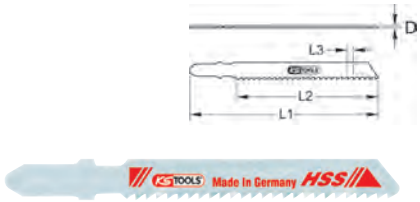

Technical data:

Suitable for: mild steel and aluminum from 3 to 6 mm; fabric-base plastics; non ferrous metal

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3113	24	75.0	50.0	2,0	1,0	5	30

Jigsaw blades

- Fast and exact cuts
- Ideal for aluminium

In the style of: AEG® 254315, Bosch® T127D, Metabo® 23639
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®

Technical data:

Suitable for: non ferrous metal and aluminium; plastic and eternit 2 to 20 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3118	24	100.0	75.0	3,0	1,15	5	40

Jigsaw blade

- Straight cut
- For thin material
- High performance steel

In the style of: AEG® 254063, Bosch® T118A, Metabo® 23637
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®

Technical data:

Suitable for: mild steel and aluminum; non ferrous metal 1.5 to 3.0 mm; stainless steel

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3111	56	75.0	50.0	0,9	1,0	5	40

Bi metal jigsaw blades

- Straight cut
- Stainless steel

In the style of: Bosch® T111HF, Lenox® 410S

Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®

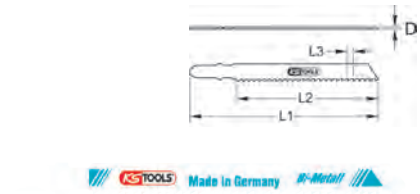

Technical data:

Suitable for: mild steel and aluminum; steel and non ferrous metal; stainless steel 3 to 12 mm; wooden with nails

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.31135F	36	100.0	75.0	2,0	1,0	5	40

Bi metal jigsaw blades

- Faster and straight cut
- Flexible and shatter proof
- Ideal for aluminium
- Stainless steel

In the style of: Bosch® T127DF, Metabo® 23974, Lenox® 406S, Milwaukee® 48-42-5300
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®

Technical data:

Suitable for: non ferrous metal and aluminium; plastic and eternit 3 to 15 mm; wooden with nails

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3118F	24	100.0	75.0	3,0	1,27	5	40

Bi metal jigsaw blades

- For thin material
- Straight cut
- Flexible and shatter proof
- Long service life

In the style of: Bosch® T118AF, Metabo® 23971, Lenox® 324S, Milwaukee® 48-42-5161
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®

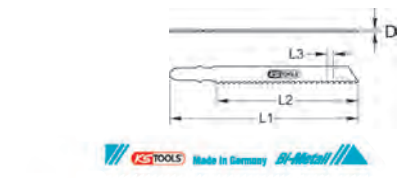

Technical data:

Suitable for: mild steel and aluminum; non ferrous metal and steel 1,5 to 3 mm; stainless steel

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3111F	42	75.0	50.0	1,2	1,0	5	40

Jigsaw blades

- Clean cut
- Ideal for perspex
- High performance steel

In the style of: AEG® 274651, Bosch® T101A, Metabo® 23640
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®

Technical data:

Suitable for: non ferrous metal and aluminium 2 to 20 mm; stainless steel 2 to 10 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.3116	36	100.0	75.0	2,0	1,27	5	40

Jigsaw blades

- Flexible and shatter proof
- Suitable for:
- Non ferrous metal and stainless steel
- Steel sheet and car body panels
- Compression moulded material and formica

Suitable for: Ober, KS, Pneutec, CP, KS 515.3000 und 515.3200

	No. teeth	TPI	D mm	L mm	Content	g
129.3740	80	32	1,0	100.0	5	30
129.3742	60	24	1,0	100.0	5	30
129.3744	45	18	1,0	100.0	5	30
129.3746	35	14	2,0	100.0	5	30

Jigsaw blades

- Flexible and shatter proof
- Suitable for:
- Non ferrous metal and stainless steel
- Steel sheet and car body panels
- Compression moulded material and formica

Suitable for: SIG und Flex

	No. teeth	TPI	D mm	L mm	Content	g
129.3750	80	32	0,7	100.0	5	20
129.3752	60	24	1,0	100.0	5	20
129.3754	45	18	1,4	100.0	5	20
129.3756	35	14	1,8	100.0	5	20

SABRE SAW BLADES

Sabre saw blades curved cut

- Fast cut
- With hardened teeth
- Ideal for aluminium

In the style of: AEG® 318-127, Bosch® S811H, Metabo® 31123, Flex® 200778
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for: non ferrous metal and aluminium
wood and chip chipboard 6 to 100 mm
plastic and eternit

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4010	66	300.0	280.0	4,2	1,3	5	240

Sabre saw blades curved cut

- Faster, cleaner, straighter and curve cut

In the style of: AEG® 318-126, Bosch® S644D, Black&Decker® 40109, Metabo® 31120, Dewalt® 40109, Milwaukee® 48-00-1031
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for: hardwood and softwood 6 to 100 mm
chipboard and plywood
plastic

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4011	30	150.0	130.0	4,2	1,3	5	100

Sabre saw blades

- Fast cut
- Two sided cutting

In the style of: AEG® 318-131, Bosch® S828D, Black&Decker® 40127, Metabo® 31136, Flex® 206016, Milwaukee® 48-00-1052
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for: wood and plastic 6 to 100 mm
plasterborad and aerated concrete

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4014	30	150.0	130.0	4,2	1,3	5	130

Bi metal sabre saw blades

- Fast cut
- Long service life
- Flexible and shatter proof
- Ideal for thick walled cast iron pipe

In the style of: Bosch® S611DF, Lenox® 656R, Milwaukee® 48-01-5035

Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for: wood with nails and hardwood
plasterborad and aerated concrete

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4016	30	150.0	130.0	4,2	1,3	5	90

Sabre saw blades

- Especially suitable for fast cutting
- Fast, exact, coarse and curve cuts

In the style of: Bosch® S1617K

Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for: wood and greenwood
hardwood and softwood 20 to 150 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4020	33	300.0	280.0	8,5	1,3	5	230

Sabre saw blades

- Coarse and fast cut
- Ideal for old building renovation
- Chrome vanadium

In the style of: Bosch® S1111K, Black&Decker® 40108

Suitable for: Bosch®, Black&Decker®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, DeWalt®, Hitachi®, Makita®, Rockwell®, Skil®, Flex®



Technical data:

Suitable for: wood and greenwood
hardwood and softwood 20 to 150 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4022	25	230.0	210.0	8,5	1,3	5	190

Sabre saw blades

- Coarse cut
- Especially suitable for fast cutting
- Ideal for old building renovation

In the style of: Flex® 200751

Suitable for: Bosch®, Black&Decker®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, DeWalt®, Hitachi®, Makita®, Rockwell®, Skil®, Flex®



Technical data:

Suitable for: wood and plastic 20 to 100 mm
plasterboard

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4031	20	150.0	130.0	6,3	1,3	5	120

Sabre saw blades

- Faster and straight cut
- For thin material
- Flexible and shatter proof
- Stainless steel

In the style of: AEG® 318-129, Bosch® S922EF, Black&Decker® 40116, Metabo® 31132, Flex® 200735, Lenox® 618R, Milwaukee® 48-00-5184

Suitable for: Bosch®, Black&Decker®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, DeWalt®, Hitachi®, Makita®, Rockwell®, Skil®, Flex®



Technical data:

Suitable for: steel and stainless steel
non-ferrous metal and steel tubes 1.5 to 12 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4401	90	150.0	130.0	1,4	0,9	5	100

Sabre saw blades

- Faster and straight cut
- For thin material
- Flexible and shatter proof
- Stainless steel

In the style of: Bosch® S1122EF, Lenox® 818R, Milwaukee® 48-00-5188

Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®

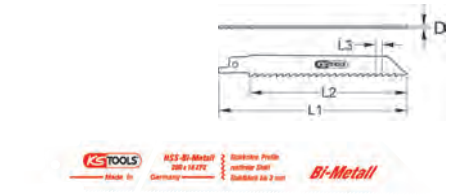

Technical data:

Suitable for:	non-ferrous metal 1.5 to 3 mm
	steel, profile and pip s

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4402	126	200.0	180.0	1,4	0,9	5	130

Sabre saw blades

- Faster and straight cut
- Flexible and shatter proof
- For thick material
- Stainless steel

In the style of: AEG® 318-130, Bosch® S644D, Black&Decker® 40113, Metabo® 31134, Flex® 200727, Lenox® 614R, Milwaukee® 48-00-5182

Suitable for: Bosch®, Black&Decker®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, DeWalt®, Hitachi®, Makita®, Rockwell®, Skil®, Flex®

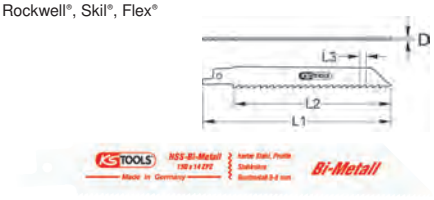

Technical data:

Suitable for:	non-ferrous metal
	steel and stainless steel
	steel shet and steel tubes 2 to 8 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4411	70	150.0	130.0	1,8	0,9	5	100

Sabre saw blades

- Flexible and shatter proof
- Ideal for wood with nails

In the style of: Bosch® S922HF, Metabo® 31131, Flex® 200778, Lenox®610R, Milwaukee® 48-00-5092

Suitable for: Bosch®, Black&Decker®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, DeWalt®, Hitachi®, Makita®, Rockwell®, Skil®, Flex®

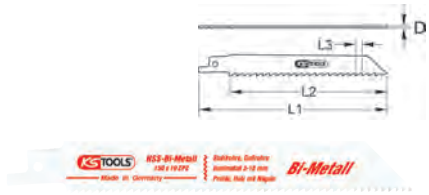

Technical data:

Suitable for:	non-ferrous metal
	steel, profile and teel tubes 3 to 12 mm
	wooden with nails
	casement frames 3 to 12 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4430	50	150.0	130.0	2,5	0,9	5	100

Sabre saw blades

- Faster and straight cut
- For thin materials
- Flexible and shatter proof
- Ideal for body constructions
- Stainless steel

In the style of: Bosch® S522GF, Black&Decker® 40127, Metabo® 31127, Flex® 200719

Suitable for: Bosch®, Black&Decker®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, DeWalt®, Hitachi®, Makita®, Rockwell®, Skil®, Flex®

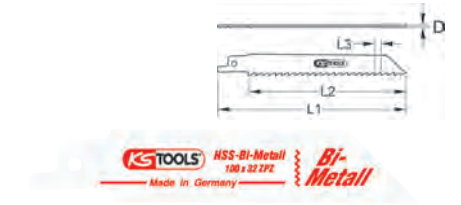

Technical data:

Suitable for:	sheet steel and profile o 1 mm
	car body panels

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4404	91	100.0	80.0	0,8	0,9	5	60

Sabre saw blades

- Faster and straight cut
- Flexible and shatter proof
- For thick material
- Stainless steel

In the style of: Metabo® 31135

Suitable for: Bosch®, Black&Decker®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, DeWalt®, Hitachi®, Makita®, Rockwell®, Skil®, Flex®

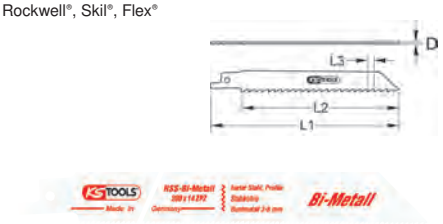

Technical data:

Suitable for:	non-ferrous metal
	steel and stainless steel
	steel shet and steel tubes 2 to 8 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4415	98	200.0	180.0	1,8	0,9	5	130

Sabre saw blades

- Flexible and shatter proof
- Ideal for wood with nails

In the style of: Flex® 217190, Lenox® S810R
Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®

Technical data:

Suitable for:	steel and steel tubes 3 to 12 mm
	Aluminum and metal
	profile and pall t constrction 3 to 150 mm
	wooden with nails

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4431	70	200.0	180.0	2,5	0,9	5	130

Sabre saw blades

- Faster and straight cut
- For thin materials
- Flexible and shatter proof
- Stainless steel

In the style of: AEG® 318-128, Bosch® S922AF, Black&Decker® 40125, Metabo® 31129, Flex® 200743, Lenox® 624R, Milwaukee® 48-00-5186

Suitable for: Bosch®, Black&Decker®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, DeWalt®, Hitachi®, Makita®, Rockwell®, Skil®, Flex®

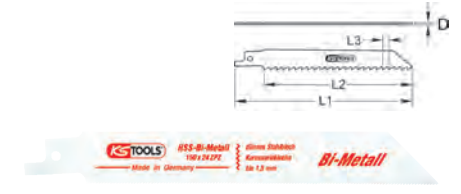

Technical data:

Suitable for:	sheet steel and profile
	non-ferrous metal up to 1 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4405	120	150.0	130.0	1,0	0,9	5	100

Sabre saw blades

- Clean cut
- Ideal for non ferrous metal

In the style of: Metabo® 31124

Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®,Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®

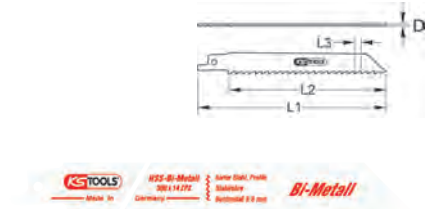

Technical data:

Suitable for:	steel and non ferrous metal
	steel tube 2 to 8 mm
	wooden with nails

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4422	154	300.0	280.0	1,8	0,9	5	200

Sabre saw blades

- Flexible and shatter proof
- Ideal for wood with nails

In the style of: Bosch® S1211H, Metabo® 31125, Flex® 201928

Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®

Technical data:

Suitable for:	steel and steel tubes 3 to 12 mm
	non ferrous metal and insulation material
	wood with nails 3 to 230 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4432	110	300.0	280.0	2,5	0,9	5	200

Sabre saw blades

- Variable tooth pitch
- Flexible and shatter proof
- For different materials

In the style of: Lenox® 650R

Suitable for: Bosch®, Black&Decker®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, DeWalt®, Hitachi®, Makita®, Rockwell®, Skil®, Flex®



Technical data:

Suitable for: tube and profile; non ferrous metal 3 to 12 mm; wood with nails from 3 to 100 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4440V	70	150.0	130.0	1,8 - 2,5	1,3	5	130

Sabre saw blades

- Straight cut
- Ideal for cutting pipes
- Stainless steel

In the style of: Rems® 561003

Suitable for: Pipe cutting machines Rems®



Technical data:

Suitable for: steel and non ferrous metal; tube and profile up to 100 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4454	98	200.0	180.0	1,8	0,9	5	180

Sabre saw blades

- Variable tooth pitch
- Straight cut
- Ideal for cutting pipes
- Stainless steel

Suitable for: Pipe cutting machines Rems®, Ridgid®, Rothenberger®, Virax®



Technical data:

Suitable for: thick walled cast and steel pipe up to 50 mm; non-ferrous metal and aluminium; steel

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4483	45	140.0	120.0	2,5	1,7	5	220

Sabre saw blades

- Variable tooth pitch
- Flexible and shatter proof
- For different materials
- Stainless steel

Suitable for: Bosch®, AEG® (Atlas Copco), Metabo®, Lenox®, Milwaukee®, Elu®, Hitachi®, Holz-Her®, Mafell®, Makita®, Flex®, Sparky®



Technical data:

Suitable for: metal from 3 to 12 mm; wood with nails from 3 to 190 mm; plastic

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4441V	98	200.0	180.0	1,8 - 2,5	1,3	5	40

Sabre saw blades

- Straight cut
- Ideal for cutting pipes
- Stainless steel

In the style of: Rems® 561004

Suitable for: Pipe cutting machines Rems®



Technical data:

Suitable for: steel and non ferrous metal 2 to 8 mm; tube and profile up to 150 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4457	154	300.0	280.0	1,8	0,9	5	270

Sabre saw blades

- Straight cut
- Ideal for cutting pipes
- Stainless steel

In the style of: Rems® 561002

Suitable for: Pipe cutting machines Rems®



Technical data:

Suitable for: steel and non ferrous metal; thick walled cast and steel pipe up l to 10 mm

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4486	56	200.0	180.0	3,2	1,6	5	300

Sabre saw blades

- Straight cut
- Ideal for cutting pipes
- Stainless steel

In the style of: Rems® 561005

Suitable for: Pipe cutting machines Rems®

Technical data:

Suitable for: steel and non ferrous metal to 50 mm; tube and profile

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4451	70	150.0	130.0	1,8	0,9	5	130

Sabre saw blades

- Straight cut
- Ideal for cutting pipes
- Stainless steel

In the style of: Rems® 561001

Suitable for: Pipe cutting machines Rems®



Technical data:

Suitable for: steel and non ferrous metal; cast and steel pipe from 4 mm; Aluminium

	No. teeth	L1 mm	L2 mm	L3 mm	D mm	Content	g
129.4482	36	140.0	120.0	3,2	1,6	5	220

HAND WIRE BRUSHES

Steel hand wire brush 3 rowed

- 3 rowed
- Universal use
- Handle made out of wood
- For surface preparation
- With steel bristles



	H mm	L1 mm	L2 mm	g
201.2305	32.0	290.0	138.0	120

Steel hand wire brush 4 rowed

- 4 rowed
- Universal use
- Handle made out of wood
- For surface preparation
- With steel bristles



	H mm	L1 mm	L2 mm	g
201.2311	32.0	290.0	138.0	120

Stainless steel hand wire hand brush 3 rowed

- 3 rowed
- Universal use
- Handle made out of wood
- For surface preparation
- With stainless steel bristles



	H mm	L1 mm	L2 mm	g
201.2310	32.0	290.0	138.0	120

Stainless steel hand wire hand brush 4 rowed

- 4 rowed
- Universal use
- Handle made out of wood
- For surface preparation
- With stainless steel bristles



	H mm	L1 mm	L2 mm	g
201.2306	32.0	290.0	138.0	100

Steel wire all purpose wire brush

- With plastic handle
- For surface preparation
- Crimped steel wire



	H mm	L1 mm	L2 mm	g
201.2300	28.0	250.0	145.0	90

Stainless steel wire all purpose wire brush

- With plastic handle
- For surface preparation
- Curled and rust free steel wire



	H mm	L1 mm	L2 mm	g
201.2301	28.0	250.0	145.0	90

Brass steel all purpose wire brush

- With plastic handle
- For surface preparation
- Curved brass wire



	H mm	L1 mm	L2 mm	g
201.2302	28.0	250.0	145.0	90

Brass wire hand brush 3 rowed

- 3 rowed
- Universal usage
- Plastic hand grip casing
- For surface preparation
- Straight brass wire



	H mm	L1 mm	L2 mm	g
201.2326	25.0	285.0	130.0	105

Steel wire hand brush 4 rowed

- 4 rowed
- Universal usage
- Plastic hand grip casing
- For surface preparation
- Straight steel wire



	H mm	L1 mm	L2 mm	g
201.2325	25.0	285.0	130.0	120

Steel wire brake saddle wire brush 2 rowed, straight

- 2 rowed
- Hanging hole
- Very narrow execution
- For narrow brake saddle shafts
- Robust stock
- Dual component handle
- For removing of stubborn brake dust
- For surface preparation
- Smooth steel wire



	B mm	H mm	L1 mm	L2 mm	g
201.2320	12.0	22.0	225.0	90.0	90

Steel wire brake saddle wire brush 2 rowed, straight and tapered point

- 2 rowed
- Hanging hole
- Tapered point
- Very narrow execution
- For narrow brake saddle shafts
- Robust stock
- Dual component handle
- For removing of stubborn brake dust
- For surface preparation
- Smooth steel wire

	B mm	H mm	L1 mm	L2 mm	g
201.2321	12.0	14,0 - 22,0	225.0	90.0	90

Brass wire brake saddle wire brush 2 rowed, straight

- 2 rowed
- Very narrow execution
- For narrow brake saddle shafts
- Robust stock
- Hanging hole
- Dual component handle
- For removing of stubborn brake dust
- For surface preparation
- Curved brass wire

	B mm	H mm	L1 mm	L2 mm	g
201.2322	12.0	22.0	225.0	90.0	90

Brass wire spark plug wire brush 2 rowed

- 2 rowed
- For use with sparks plugs
- For surface preparation
- Brass wire

	H mm	L1 mm	L2 mm	g	
201.2316	14.8	170.0	24.5	20	

Steel wire spark plug wire brush 2 rowed

- 2 rowed
- For use with sparks plugs
- For surface preparation
- Steel wire

	H mm	L1 mm	L2 mm	g	
201.2315	14.8	170.0	24.5	20	

MACHINE OPERATED WIRE BRUSHES

Steel wire jar brush 0,3 mm

- With 6 mm mandril
- To enable with high rotary speed
- Long durability through compact border
- For use with drill machine
- For surface preparation
- Crimped steel wire

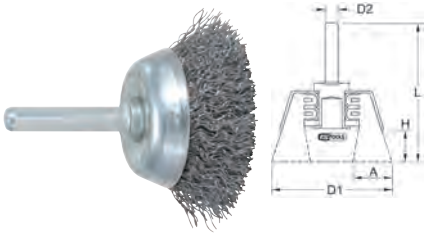

	RPM max	A mm	D1 mm	D2 mm	H mm	L mm	g	
340.0001	8000	10.0	38.0	6.0	20.0	55.0	50	
340.0002	10500	10.0	50.0	6.0	20.0	70.0	60	
340.0003	4500	10.0	63.0	6.0	20.0	88.0	70	
340.0004	4500	15.0	75.0	6.0	25.0	105.0	80	
340.0005	4500	15.0	80.0	6.0	25.0	112.0	90	

Rust free steel jar brush 0,3 mm

- With 6 mm mandril
- To enable with high rotary speed
- Long durability through compact border
- For use with drill machine
- For surface preparation
- Curled and rust free steel wire

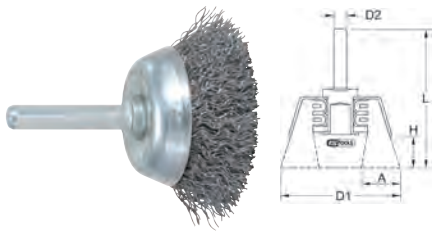

	RPM max	A mm	D1 mm	D2 mm	H mm	L mm	g	
340.0011	8000	10.0	38.0	6.0	20.0	55.0	50	
340.0012	10500	10.0	50.0	6.0	20.0	70.0	60	
340.0013	4500	10.0	63.0	6.0	20.0	88.0	70	
340.0014	4500	15.0	75.0	6.0	25.0	105.0	80	
340.0015	4500	15.0	80.0	6.0	25.0	112.0	90	

Steel wire brush 0,3 mm

- With 6 mm mandril
- For use with drill machine
- For difficult to access areas
- For surface preparation
- Crimped steel wire

	RPM max	D1 mm	D2 mm	H mm	L mm	g	
340.0016	20000	17.0	6.0	22.0	65.0	30	
340.0017	18000	23.0	6.0	25.0	68.0	40	
340.0018	18000	30.0	6.0	25.0	68.0	50	

Paint brush steel wire brush 0,5 mm

- With 6 mm mandril
- For use with drill machine
- For difficult to access areas
- For surface preparation
- Crimped steel wire

	RPM max	D1 mm	D2 mm	H mm	L mm	g	
340.0019	20000	17.0	6.0	22.0	65.0	30	
340.0020	18000	23.0	6.0	25.0	68.0	40	
340.0021	18000	30.0	6.0	25.0	68.0	40	

Steel wire jar brush 0,5 mm

- Braided design
- With thread arbor
- For use in one hand angle grinder
- Ideal for heavy brush works
- For surface preparation
- Crimped steel wire

	RPM max	mm	D mm	H mm	L mm	No. pairs	g	
340.0022	12500	M14 x 2,0	65.0	20.0	55.0	18	160	
340.0023	11500	M14 x 2,0	80.0	22.0	68.0	20	200	
340.0024	11500	M14 x 2,0	90.0	22.0	77.0	20	240	

Rust free stainless steel wire jar brush 0,5 mm

- Braided design
- With thread arbor
- For use in one hand angle grinder
- Ideal for heavy brush works
- For surface preparation
- Curled and rust free steel wire

	RPM max	mm	D mm	H mm	L mm	No. pairs	g	
340.0025	12500	M14 x 2,0	65.0	20.0	55.0	18	160	
340.0026	11500	M14 x 2,0	80.0	22.0	68.0	20	200	
340.0027	11500	M14 x 2,0	90.0	22.0	77.0	20	240	

Steel wire brush disc 0,3 mm

- With 6 mm mandril
- Especially longlife industry version
- For use with drill machine
- For surface preparation
- Curled steel wire



	RPM max	A mm	D1 mm	D2 mm	H mm	L mm	g	
340.0028	20000	9.0	30.0	6.0	6.0	45.0	40	
340.0029	15000	14.0	50.0	6.0	12.0	45.0	40	
340.0030	15000	14.0	60.0	6.0	17.0	45.0	60	
340.0031	15000	16.0	70.0	6.0	19.0	45.0	80	
340.0032	15000	18.0	80.0	6.0	20.0	45.0	100	

Rust free steel wire brush disc 0,3 mm

- With 6 mm mandril
- Especially longlife industry version
- For use with drill machine
- For surface preparation
- Curled and rust free steel wire



	RPM max	A mm	D1 mm	D2 mm	H mm	L mm	g	
340.0033	20000	9.0	30.0	6.0	6.0	45.0	40	
340.0034	15000	14.0	50.0	6.0	12.0	45.0	40	
340.0035	15000	14.0	60.0	6.0	17.0	45.0	60	
340.0036	15000	16.0	70.0	6.0	19.0	45.0	80	
340.0037	15000	18.0	80.0	6.0	20.0	45.0	100	

Steel wire circular brush 0,3 mm

- Braided design
- With 6 mm mandril
- Especially longlife industry version
- For use in with drill machine
- For removing of underbody coating
- For surface preparation
- Flat steel wire

	RPM max	A mm	D1 mm	D2 mm	H mm	L mm	g
340.0038	15000	12.0	75.0	6.0	15.0	43.0	100

Steel wire circular brush 0,5 mm

- Braided design
- With 6 mm mandril
- Especially longlife industry version
- For use in with drill machine
- For removing of underbody coating
- For surface preparation
- Flat steel wire

	RPM max	A mm	D1 mm	D2 mm	H mm	L mm	g
340.0039	15000	12.0	75.0	6.0	15.0	43.0	100

Steel wire circular brush 0,5 mm

- Braided design
- With 22,2 mm bore reception
- Longlife industry version
- For use in one hand angle grinder
- For removing of rubber, grate and lacquer residue
- For surface preparation
- Flat steel wire

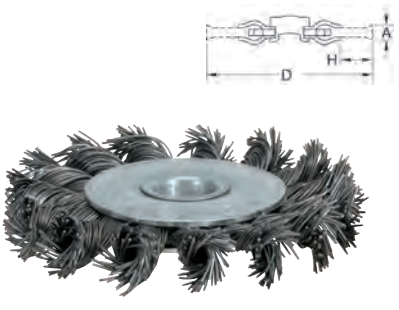

	RPM max	A mm	D mm	H mm	No. plaits	g
340.0040	12500	11.0	75.0	16.0	15	90
340.0041	12500	11.0	100.0	20.5	18	120
340.0042	12500	11.0	115.0	23.5	20	140
340.0043	12500	11.0	125.0	24.5	22	150

Stainless steel and brushed steel 0,5 mm

- Braided design
- With 22,2 mm bore reception
- Longlife industry version
- For use in one hand angle grinder
- For removing of rubber, grate and lacquer residue
- For surface preparation
- Flat and grate free steel wire



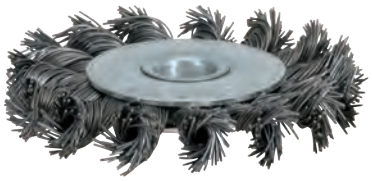

	RPM max	A mm	D mm	H mm	No. plaits	g
340.0044	12500	11.0	75.0	16.0	15	90
340.0045	12500	11.0	100.0	20.5	18	120
340.0046	12500	11.0	115.0	23.5	20	140
340.0047	12500	11.0	125.0	24.5	22	150

Cone design steel wire circular brush 0,5 mm

- Braided design
- With thread arbor
- Especially longlife industry version
- For use in one hand angle grinder
- For hard to reach places
- For surface preparation
- Flat steel wire



	RPM max	mm	A mm	D mm	H mm	No. plaits	g
340.0048	12500	M 14 x 2,0	12.0	100.0	20.0	18	190
340.0049	15000	M 14 x 2,0	12.0	115.0	24.0	20	210

Rust free cone design steel wire circular brush 0,5 mm

- Braided design
- With thread arbor
- Especially longlife industry version
- For use in one hand angle grinder
- For hard to reach places
- For surface preparation
- Flat and grate free steel wire



	RPM max	mm	A mm	D mm	H mm	No. plaits	g
340.0050	12500	M 14 x 2,0	12.0	100.0	20.0	18	190
340.0051	15000	M 14 x 2,0	12.0	115.0	24.0	20	210

CUT OFF AND FLAP WHEELS

Clamping mandrel

- High performances thin disks
- Special steel

	Shank mm	Profile	g
515.3017	6,0	round	72

High performances thin cutting disk

- Exact and clean cut
- No deburring necessary
- Very short cutting times
- Machine load reduced
- Inox stainless steel

Ideal for use in very thin materials until 2.5 mm, tool steel, sheet metal, thin walled pipes and profil s all type suited for locksmiths, car body building, sanitary and heating fi ting, plumbing, sheet metal processing, carpentry, joinery, roofi g, metal processing and all motor vehicles businesses.



	RPM max	D1 mm	D2 mm	H mm	Content	g
337.2005	13300	50,0	6.0	1.0	25	100
337.2010	15250	100,0	16.0	1.6	25	1200
337.2015	13300	115,0	22.2	1.0	25	730
337.2025	12200	125,0	22.2	1.0	25	800

Allround flap whe l, curved

- For universal usage
- Zirconium aluminum oxide on a glassfib e plate
- Fan like and radial arrangement of the multi purpose disc
- High level of fl xibilty
- Consistent high cutting power

Ideal for use in metal, stainless steel, wood and plastic.



	RPM max	D1 mm	D2 mm	Grain	H mm	Content	g
337.2050	13300	115,0	22.2	40	7.2	10	730
337.2055	13300	115,0	22.2	60	7.2	10	730
337.2060	13300	115,0	22.2	80	7.2	10	730
337.2065	12200	125,0	22.2	40	7.2	10	800
337.2070	12200	125,0	22.2	60	7.2	10	800
337.2075	12200	125,0	22.2	80	7.2	10	800

FILES

Flat needle fil

- High cutting rate
- With solid plastic handle
- For working in the area of the fine mechanics
- Special steel



	B mm	H mm	L mm	g	
140.3051	5.0	1.0	145.0	10	

Half round needle fil

- High cutting rate
- With solid plastic handle
- For working in the area of the fine mechanics
- Special steel



	D mm	L mm	g	
140.3058	5.0	145.0	10	

Round needle fil

- High cutting rate
- With solid plastic handle
- For working in the area of the fine mechanics
- Special steel

	D mm	L mm	g	
140.3052	3.0	145.0	10	

Square needle fil

- High cutting rate
- With solid plastic handle
- For working in the area of the fine mechanics
- Special steel

	B mm	L mm	g	
140.3056	2.0	145.0	10	

Three square needle fil

- High cutting rate
- With solid plastic handle
- For working in the area of the fine mechanics
- Special steel

	B mm	L mm	g	
140.3054	3.0	145.0	10	

Square needle fil , extra slim

- High cutting rate
- Extra slim execution
- With solid plastic handle
- For working in the area of the fine mechanics
- Special steel

	B mm	L mm	g	
140.3055	2.0	90.0	10	

Oval needle fil

- High cutting rate
- With solid plastic handle
- For working in the area of the fine mechanics
- Special steel

	B mm	L mm	g	
140.3059	5.0	145.0	10	

Insert needle fil s

- High cutting rate
- With solid plastic handle
- For working in the area of the fine mechanics
- Special steel

	B mm	L mm	g	
140.3057	5.0	145.0	10	

Tapered needle fil

- High cutting rate
- With solid plastic handle
- For working in the area of the fine mechanics
- Special steel

	D mm	L mm	g	
140.3053	5.0	145.0	10	

Needle file s t in soft plastic storage case, 12 pcs

- High cutting rate
- With solid plastic handle
- For working in the area of the fine mechanics
- Special steel

			g	
140.3050	12 pcs	Needle file set in soft plastic storage case, 12 pcs	900	

Flat fil

- DIN 7261 form B
- With two component handle
- With hanging hole
- Special steel

		L1 mm	L2 mm	B mm	File blade	g	
157.0025	1	315.0	200.0	20.0	161.0025	230	
157.0026	1	380.0	250.0	25.0	161.0026	350	
157.0027	1	420.0	300.0	30.0	161.0027	510	
157.0028	1	470.0	350.0	35.0	161.0028	690	
157.0004	2	230.0	150.0	15.0	161.0004	160	
157.0005	2	315.0	200.0	20.0	161.0005	200	
157.0006	2	380.0	250.0	25.0	161.0006	350	
157.0007	2	420.0	300.0	30.0	161.0007	510	
157.0008	2	470.0	350.0	35.0	161.0008	690	
157.0014	3	230.0	150.0	15.0	161.0014	160	
157.0015	3	315.0	200.0	20.0	161.0015	230	
157.0016	3	380.0	250.0	25.0	161.0016	350	

Flat file inse t

- DIN 7261 form B
- Special steel

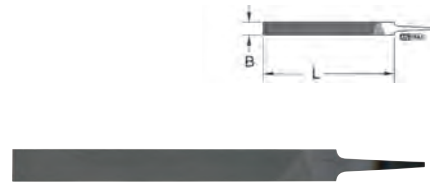

		L mm	B mm		g	
161.0025	1	200.0	20.0	161.0013	130	
161.0026	1	250.0	25.0	161.0010	250	
161.0027	1	300.0	30.0	161.0010	410	
161.0004	2	150.0	15.0	161.0012	60	
161.0005	2	200.0	20.0	161.0013	100	
161.0006	2	250.0	25.0	161.0010	250	
161.0007	2	300.0	30.0	161.0010	410	
161.0008	2	350.0	35.0	161.0010	590	
161.0014	3	150.0	15.0	161.0012	60	
161.0015	3	200.0	20.0	161.0013	130	
161.0016	3	250.0	25.0	161.0010	250	

Half round file

- DIN 7261 form E
- With two component handle
- With hanging hole
- Special steel

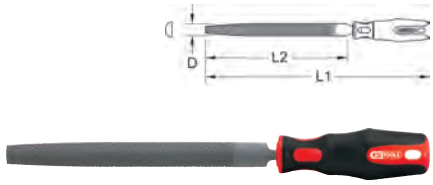

		L1 mm	L2 mm	D mm	File blade	g	
157.0125	1	315.0	200.0	20.0	161.0125	230	
157.0126	1	380.0	250.0	25.0	161.0126	340	
157.0127	1	420.0	300.0	30.0	161.0127	510	
157.0128	1	470.0	350.0	35.0	161.0128	750	
157.0104	2	260.0	150.0	15.0	161.0104	160	
157.0105	2	315.0	200.0	20.0	161.0105	230	
157.0106	2	380.0	250.0	25.0	161.0106	340	
157.0107	2	420.0	300.0	30.0	161.0107	510	
157.0114	3	260.0	150.0	15.0	161.0114	160	
157.0115	3	315.0	200.0	20.0	161.0115	230	
157.0116	3	380.0	250.0	25.0	161.0116	340	

Half round file inse t

- DIN 7261 form E
- Special steel

		L mm	B mm		g
161.0125	1	200.0	20.0	161.0013	130
161.0126	1	250.0	25.0	161.0010	240
161.0127	1	300.0	30.0	161.0010	410
161.0128	1	350.0	35.0	161.0010	650
161.0104	2	150.0	15.0	161.0012	60
161.0105	2	200.0	20.0	161.0013	130
161.0106	2	250.0	25.0	161.0010	240
161.0107	2	300.0	30.0	161.0010	410
161.0114	3	150.0	15.0	161.0012	60
161.0115	3	200.0	20.0	161.0013	130
161.0116	3	250.0	25.0	161.0010	240

Round file

- DIN 7261 form F
- With two component handle
- With hanging hole
- Special steel

		L1 mm	L2 mm	D mm	File blade	g
157.0224	1	230.0	150.0	6.0	161.0224	130
157.0225	1	315.0	200.0	7.5	161.0225	150
157.0226	1	370.0	250.0	9.5	161.0226	200
157.0204	2	230.0	150.0	6.0	161.0204	60
157.0205	2	315.0	200.0	7.5	161.0205	150
157.0206	2	370.0	250.0	9.5	161.0206	200
157.0214	3	230.0	150.0	6.0	161.0214	130
157.0215	3	315.0	200.0	7.5	161.0215	150

Round file inse t

- DIN 7261 form F
- Special steel



		L mm	D mm		g
161.0224	1	150.0	6.0	161.0012	30
161.0225	1	200.0	7.5	161.0013	50
161.0226	1	250.0	9.5	161.0011	100
161.0204	2	150.0	6.0	161.0012	30
161.0205	2	200.0	7.5	161.0013	50
161.0206	2	250.0	9.5	161.0011	100
161.0214	3	150.0	6.0	161.0012	30
161.0215	3	200.0	7.5	161.0013	50

Square file

- DIN 7261 form D
- With two component handle
- With hanging hole
- Special steel

		L1 mm	L2 mm	B mm	File blade	g
157.0324	1	230.0	150.0	6.0	161.0324	130
157.0325	1	320.0	200.0	8.0	161.0325	170
157.0326	1	370.0	250.0	10.0	161.0326	250
157.0304	2	230.0	150.0	6.0	161.0304	130
157.0305	2	320.0	200.0	8.0	161.0305	170
157.0306	2	370.0	250.0	10.0	161.0306	250
157.0314	3	230.0	150.0	6.0	161.0314	130
157.0315	3	320.0	200.0	8.0	161.0315	170

Square file inse t

- DIN 7261 form D
- Special steel

		L mm	B mm		g
161.0324	1	150.0	6.0	161.0012	30
161.0325	1	200.0	8.0	161.0013	70
161.0326	1	250.0	10.0	161.0011	150
161.0304	2	150.0	6.0	161.0012	30
161.0305	2	200.0	8.0	161.0013	70
161.0306	2	250.0	10.0	161.0011	150
161.0314	3	150.0	6.0	161.0012	30
161.0315	3	200.0	8.0	161.0013	70

Three square file

- DIN 7261 form C
- With two component handle
- With hanging hole
- Special steel

		L1 mm	L2 mm	B mm	File blade	g
157.0424	1	230.0	150.0	11.0	161.0424	170
157.0425	1	320.0	200.0	15.0	161.0425	240
157.0426	1	370.0	250.0	17.5	161.0426	380
157.0427	1	420.0	300.0	20.0	161.0427	520
157.0404	2	230.0	150.0	11.0	161.0404	170
157.0405	2	320.0	200.0	15.0	161.0405	240
157.0406	2	370.0	250.0	17.5	161.0406	380
157.0407	2	420.0	300.0	20.0	161.0407	520
157.0414	3	230.0	150.0	11.0	161.0414	170
157.0415	3	320.0	200.0	15.0	161.0415	240
157.0416	3	370.0	250.0	17.5	161.0416	200

Three square file inse t

- DIN 7261 form C
- Special steel



		L mm	B mm		g
161.0424	1	150.0	11.0	161.0012	70
161.0425	1	200.0	15.0	161.0013	140
161.0426	1	250.0	17.5	161.0011	280
161.0427	1	300.0	20.0	161.0011	420
161.0405	2	200.0	15.0	161.0013	140
161.0406	2	250.0	17.5	161.0010	300
161.0407	2	300.0	20.0	161.0011	420
161.0414	3	150.0	11.0	161.0012	70
161.0415	3	200.0	15.0	161.0013	140
161.0416	3	250.0	17.5	161.0010	300

File handle

- For rectangle and round reception
- With two component handle
- With hanging hole

		D mm	L mm	g
161.0010	▭	39.0	120.0	80
161.0011	◯	39.0	120.0	80
161.0012	◯	28.0	80.0	40
161.0013	◯	35.0	106.0	65

Workshop file s t, 5 pcs

- DIN 7261 form B, C, D, E, F
- Second cut
- 200 mm long
- With two component handle
- With hanging hole
- Special steel

Includes one flat, halfround, round, square and triangular file with a length of 200 mm and second cut

			g
140.3000	5 pcs	Workshop file set, 5 pcs	900
1 x		200 mm	
1 x		200 mm	
1 x		200 mm	
1 x		200 mm	
1 x		200 mm	

THREAD FILES

Thread fil , metric

- For the restoration of defective internal and external threads
- Suitable for right and left handed threads
- Two sided serviceable
- Special steel

Suitable for thread pitch: 0.8 - 3.0 mm

	L mm	g
150.1340	230.0	130

Thread fil , imperial

- For the restoration of defective internal and external threads
- Suitable for right and left handed threads
- Two sided serviceable
- Special steel

Suitable for thread pitch: 24 - 10 pitch imperial

	L mm	g
150.1345	230.0	130

CUTTING- AND SCRAPING TOOLS

Innovation is our mission!

	PAGE
SNAP OFF KNIVES	540 - 541
PEN KNIFE	541
HAND KNIFE WITH TRAPEZOIDAL BLADE	541 - 542
REPLACEMENT KNIFE BLADE	542
SHEARS	543 - 544
METAL SHEARS	544 - 546
SCRAPERS	546 - 547

CUTTING AND SCRAPING TOOLS

Universal snap off blade knife

- For right handed use
- Reinforcement eyelet
- Blade 9 x 80 mm
- 0.4 mm strong snap off blades
- Blade guide out of metal
- Housing made out of plastic
- Two component handle

- For right handed use
- With reinforcement eyelet
- Blade 18 x 100 mm
- With 0.5 mm strong snap off blades
- Blade guide out of metal
- Housing made out of plastic
- With two component handle

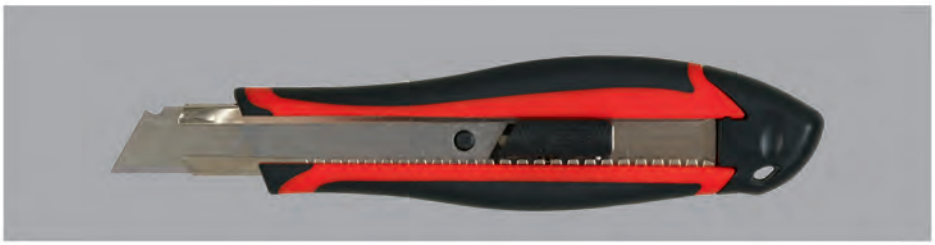

- For right handed use
- Blade 25 x 125 mm
- With 0.5 mm strong snap off blades
- Blade guide out of metal
- Housing made out of plastic
- With two component handle

- For right handed use
- With reinforcement eyelet
- Blade 18 x 100 mm
- With 6 snap off blades 0.5 mm thick
- Blade guide out of metal
- With integrated blade magazine
- Housing made out of plastic
- With two component handle

Blade types

Snap off blades
9 x 80 mm

Snap off blades
18 x 100 mm

Trapezoid blades

Snap off blades
25 x 100 mm

Snap off blades
25 x 125 mm

Hook blade

Cutting and scraping tool lines

Snap off knives

Pen knife

Hand knife with trapezoidal blade

Shears

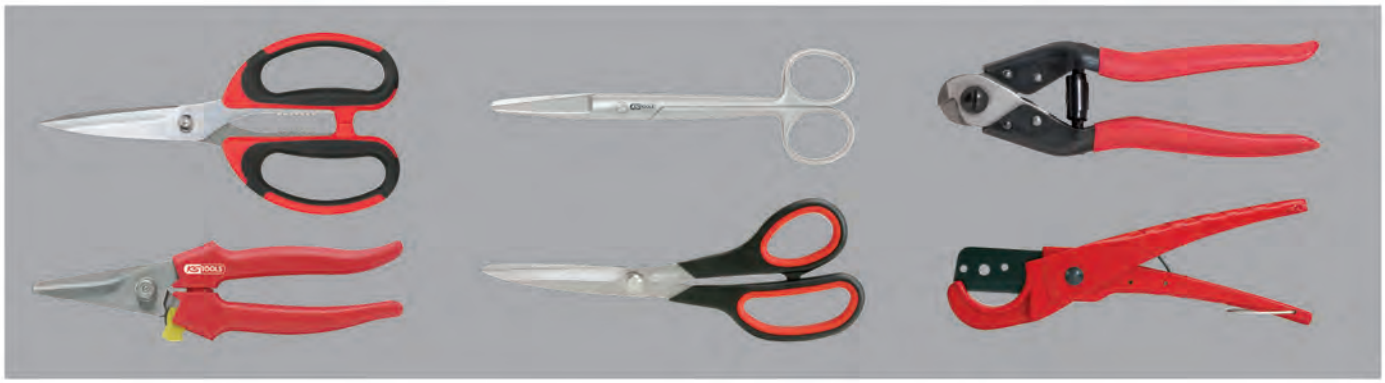

Metal shears

Scrapers

SNAP OFF KNIVES

Universal snap off blade knife

- For right handed use
- With pocket clip
- Blade 9 x 80 mm
- With 0,4 mm strong snap off blades
- Housing made from metal

	L mm		g
907.2167	130.0	907.2168	30

Universal snap off blade knife

- For right handed use
- Reinforcement eyelet
- Blade 9 x 80 mm
- 0.4 mm strong snap off blades
- Blade guide out of metal
- Housing made out of plastic
- Two component handle

	L mm		g
907.2152	140.0	907.2168	50

Standard universal snap off blade knife

- For right handed use
- With reinforcement eyelet
- Blade 18 x 100 mm
- With 0,5 mm strong snap off blades
- Blade guide out of metal
- Housing made out of plastic

	L mm		g
907.2157	140.0	907.2166	70

Universal snap off blade knife

- For right handed use
- Blade 18 x 100 mm
- With 0,5 mm strong snap off blades
- Blade guide out of metal
- Housing made out of plastic
- With two component handle

	L mm		g
907.2165	140.0	907.2166	90

Universal snap off blade knife

- For right handed use
- With reinforcement eyelet
- Blade 9 x 80 mm
- With 0.4 mm strong snap off blades
- Blade guide out of metal
- Housing made out of plastic
- With two component handle

	L mm		g
907.2120	140.0	907.2168	50

Universal snap off blade knife

- For right handed use
- With reinforcement eyelet
- Blade 18 x 100 mm
- With 0.5 mm strong snap off blades
- Blade guide out of metal
- Housing made out of plastic
- With two component handle

	L mm		g
907.2135	170.0	907.2166	81

Universal snap off blade knife

- For right handed use
- Blade 25 x 125 mm
- With 0.5 mm strong snap off blades
- Blade guide out of metal
- Housing made out of plastic
- With two component handle

	L mm		g
907.2180	220.0	907.2159	137

Comfort snap off blade knife

- For right handed use
- With reinforcement eyelet
- Blade 18 x 100 mm
- With 6 snap off blades 0.5 mm thick
- Blade guide out of metal
- With integrated blade magazine
- Housing made out of plastic
- With two component handle

	L mm		g
907.2175	180.0	907.2176	150

Comfort snap off blade knife display

- For right handed use
- With reinforcement eyelet
- Blade 18 x 100 mm
- With 6 snap off blades 0.5 mm thick
- Blade guide out of metal
- With integrated blade magazine
- Housing made out of plastic
- With two component handle
- Supplied in counter sales display

			kg
907.2175D	12 pcs	12 x 907.2175	1.91

Universal comfort snap off blade knife display

- For right handed use
- With reinforcement eyelet
- Blade guide out of metal
- Housing made out of plastic
- With two component handle
- Delivery in display stand

			kg
907.2104D	28 pcs	12 x 907.2120 - 12 x 907.3135 - 4 x 907.2180	2.11

Comfort snap off blade knife

- For right handed use
- Blade 25 x 125 mm
- With 0,5 mm strong snap off blades
- Blade guide out of metal
- Knife adjustment using the rotary mechanism
- Housing made out of plastic
- With two component handle

	L mm		g
907.2158	180.0	907.2159	90

Comfort snap off blade knife

- For right handed use
- With reinforcement eyelet
- Blade 18 x 100 mm
- With 0,5 mm strong snap off blades
- Blade guide out of metal
- Knife adjustment using the rotary mechanism
- Housing made from metal
- With two component handle

	L mm		g
907.2141	180.0	907.2166	220

Comfort snap off blade knife

- For right handed use
- With reinforcement eyelet
- Blade 18 x 100 mm
- With 6 snap off blades 0,5 mm thick
- Blade guide out of metal
- With integrated blade magazine
- Knife adjustment using the rotary mechanism on the cutter head
- Housing made out of plastic
- With two component handle

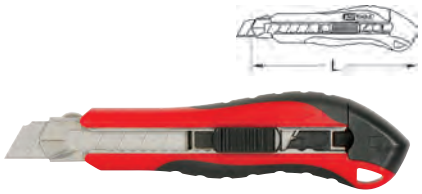

	L mm		g
907.2195	160.0	907.2196	250

Comfort snap off blade knife display

- For right handed use
- With reinforcement eyelet
- Blade 18 x 100 mm
- With 6 snap off blades 0,5 mm thick
- Blade guide out of metal
- With integrated blade magazine
- Knife adjustment using the rotary mechanism on the cutter head
- Housing made out of plastic
- With two component handle
- Delivery in display stand

			kg
907.2195D	24 pcs	24 x 907.2195	6.20

PEN KNIFE

Pen knife set

- For right and left handed use
- Includes 5 trapezoid blades
- With 0,5 mm strong trapezoid blades
- With rapid fastening
- Metal execution

			g
907.2172	2 pcs	Pen knife set	120

consists of:

		g
907.2173	Pen knife 97 mm	60
907.2174	Pen knife 155 mm	60

Folding knife with locking mechanism

- Teflon oated blade
- Blade fi ator folded out
- Non slip handle with fi ger recesses
- Ideal for mechanics

	B mm	L1 mm	L2 mm	g
907.2105	25.0	193.0	78.0	100

Folding knife display with detent

- Teflon oated blade
- Blade fi ator folded out
- Non slip handle with fi ger recesses
- Ideal for mechanics
- Supplied in counter sales display

			kg
907.2105D	24 x 907.2105		1.50

HAND KNIFE WITH TRAPEZOIDAL BLADE

Professional universal knife

- For right and left handed use
- With reinforcement eyelet
- Trapezoid blade
- With 0,5 mm strong trapezoid blades
- With integrated foil and paper cutter
- Housing made from aluminium
- With two component handle

	L mm		g
907.2145	145.0	907.2206	100

Professional universal knife display

- For right and left handed use
- With reinforcement eyelet
- Trapezoid blade
- With 0,5 mm strong trapezoid blades
- With integrated foil and paper cutter
- Housing made from aluminium
- With two component handle
- Delivery in display stand

			kg
907.2145D	24 pcs	24 x 907.2145	2.60

Professional universal knife

- For right and left handed use
- With reinforcement eyelet
- Trapezoid blade
- With 0,5 mm strong trapezoid blade
- With integrated blade magazine
- Blade changed in seconds by the side mounted locking knob
- Housing made from Aluminium

	L mm		g
907.2170	145.0	907.2206	90

Professional safety universal knife

- For right and left handed use
- With reinforcement eyelet
- Trapezoid blade
- With 0,5 mm strong trapezoid blades
- Automatic knife retraction
- Housing made from metal

	L mm		g
907.2140	145.0	907.2206	100

Two direction professional universal knife

- For right and left handed use
- With reinforcement eyelet
- Double sided insertable
- With 0,5 mm strong trapezoid blade
- With 0,5 mm strong hook blade
- With integrated blade magazine
- Blade changed in seconds by the side mounted locking knob
- Housing made from metal

	L mm			g
907.2155	165.0	907.2163	907.2206	220

Professional universal knife with proctective sheat

- For right and left handed use
- Trapezoid blade
- With 0,5 mm strong trapezoid blades
- Housing made from metal

	L mm		g
907.2160	165.0	907.2206	220

Professional universal knife display

- For right and left handed use
- Trapezoid blade
- With 0,5 mm strong trapezoid blades
- Housing made from metal

			kg
907.2150	12 pcs	12 x 907.2160	2.75

REPLACEMENT KNIFE BLADE

Snap off blades

- For all standard cutter knives
- SK steel
- In the storage dispenser

	L mm	B mm	S mm	Content	g
907.2168	80.0	9,0	0.4	10	35

Snap off blades

- For all standard cutter knives
- SK steel
- In the storage dispenser

	L mm	B mm	S mm	Content	g
907.2166	100.0	18,0	0.5	10	90

Snap off blades

- For all standard cutter knives
- SK steel
- In the storage dispenser

	L mm	B mm	S mm	Content	g
907.2159	100.0	25,0	0.5	10	20

Snap off blade magazine

- For all standard cutter knives
- SK steel
- In an aluminium magazine

	L mm	B mm	S mm	Content	g
907.2176	100.0	18,0	0.5	6	70
907.2196	100.0	18,0	0.5	6	65

Trapezoid blades

- For all standard cutter knives
- SK steel
- In the storage dispenser

	L mm	B mm	S mm	Content	g
907.2164	29.0	9,4	0.45	5	20
907.2206	53.0	19,0	0.45	10	60

Hook blades

- For all standard cutter knives
- SK steel
- In the storage dispenser

	L mm	B mm	S mm	Content	g
907.2163	54.0	19,0	0.63	10	35

Electric knives and insulated knives can be found in the VDE and general electrician tool kits section.

SHEARS

Universal workshop shear

- Robust short shears
- Various applications
- With cable cutter
- Includes belt pouch



	L mm	S mm	g	
118.0060	140.0	42,0	170	

Universal workshop shear

- Robust short shears
- With screw on blade
- Various applications
- Special tool steel
- Stainless steel blade

	L mm	S mm	g	
118.0010	140.0	43,0	100	

Universal Kevlar workshop shear

- Robust short shears
- Adjustable screw joint
- Ergonomic plastic handle
- Universal applications
- With one component handle

	L mm	S mm	g	
118.0065	140.0	45,0	130	

Universal shear

- Long cutting edge
- Adjustable screw joint
- With screw on blade
- With intergrated interlocking
- Stainless steel blade
- With two component handle

	L mm	S mm	g	
118.0066	190.0	75,0	120	

Universal shear

- Long cutting edge
- Adjustable screw joint
- Round gripping handle
- Nickel plated
- Stainless steel blade

	L mm	S mm	g	
118.0078	200.0	105,0	110	
118.0079	250.0	140,0	150	

Shears

- Robust execution
- Adjustable screw joint
- Handle black lacquer
- Polished cutting edges
- Stainless steel blade

	L mm	S mm	g	
118.0076	200.0	100,0	200	
118.0077	250.0	120,0	370	

Textile shear

- Adjustable screw joint
- Stainless steel blade
- With one component handle

	L mm	S mm	g	
118.0011	205.0	65,0	80	

Carpet shear

- Long cutting edge
- Adjustable screw joint
- Stainless steel blade
- With one component handle

	L mm	S mm	g	
118.0012	230.0	135,0	120	

Universal workshop shear

- Long, robust cutting edge
- With screw on blade
- Stainless steel blade
- With two component handle

	L mm	S mm	g	
118.0067	220.0	90,0	130	

Universal shear, serrated

- Self opening
- Safety locking device
- Ergonomic moulded plastic handle
- Ideal for gaskets

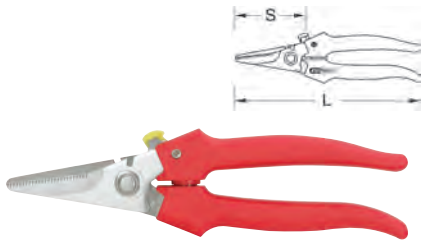

	Ø mm	L mm	S mm	g	
118.0075	24,0	145.0	32,0	130	

Universal shear

- Self opening
- With safety locking device
- With ergonomic moulded plastic handle
- Ideal for gaskets

	Ø mm	L mm	S mm	g	
118.0071	35,0	190.0	42,0	148	

Universal shear, angled

- Self opening
- With safety locking device
- With ergonomic moulded plastic handle
- Ideal for gaskets



	Ø mm	L mm	S mm	g
118.0072	35,0	185.0	42,0	190

Universal cable shear

- Self opening
- Safety locking device
- Ergonomic moulded plastic handle
- For soft cable



	Ø mm	L mm	S mm	g
118.0073	10,0	165.0	50,0	180

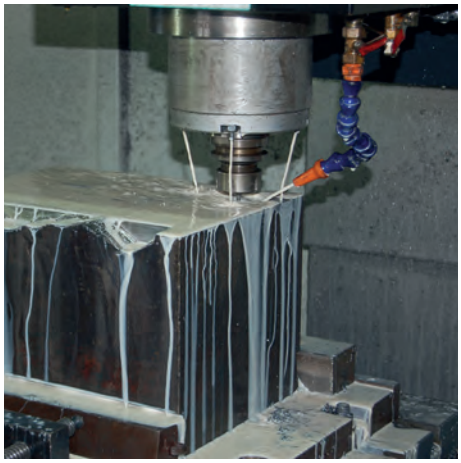

Steel wire shear

- For medium steel wire up to 4,7 mm
- With opening spring and safety catch
- Induction hardened cutting
- No splaying out of the wire
- With PVC dipped handle
- Special tool steel



	Ø mm	A mm	D mm	L mm	S mm	g
118.0092	4,7	11.0	27.0	190.0	9,0	270

Cable cutter

- Precision ground cutting edges
- Smooth cut
- For lead cable up to max. Ø 60 mm²
- With before and after cut
- For bruise free cutting of single and multi strand wire copper and aluminium cable
- Not suited for steel wire and hard drawn Copper cables
- Requires light expenditure of energy
- With PVC dipped handle
- Special tool steel



	Ø mm	A mm	D mm	L mm	S mm	g
118.0090	10,0	12.0	25.0	160.0	15,0	180
118.0091	15,0	13.0	29.0	210.0	20,0	320

Hose cutter

- Aluminium die cast body



	Ø mm	H mm	L mm		g
222.2060	6,0 - 25,0	50.0	185.0	222.2061	300
222.2062	6,0 - 35,0	52.0	250.0	222.2061	452

Hose cutter

- Teflon oated blade
- Aluminium die cast body



	Ø mm	H mm	L mm		g
222.2051	0 - 37,0	95.0	210.0	222.2052	80

METAL SHEARS

Sheet steel nibbler

- Burr free cutting
- No deformation of the sheet metal
- Clean cut on the edges
- Easy locking action
- PVC dipped handle
- Cuts sheet metal up to 1.2 mmIdeal also for aluminum, copper and plastic
- Special tool steel

	Ø mm	B mm	L mm	S mm	Replacement blades	g
140.2175	1,2	14.0	265.0	3,0	140.2175-1	460

Ideal shears

- Straight cut
- With spring
- Induction-hardened precision cutting
- With PVC dipped handle
- Cuts steel sheet up to 1.2 mm, stainless steel up to 0.7 mm
- Special tool steel



	Ø mm	L mm	S mm	g
118.0145	1,2 (0,7)	280.0	38,0	630

Tin snips, left handed cut

- Left handed cut
- With spring
- Induction-hardened precision cutting
- With PVC dipped handle
- Cuts steel sheet up to 1,2 mm, stainless steel up to 0,7 mm
- Special tool steel



	Ø mm	L mm	S mm	g
118.0146	1,2 (0,7)	280.0	38,0	540

Punching shears

- Induction-hardened precision cutting
- With PVC dipped handle
- Cuts steel sheet up to 1.2 mm, stainless steel up to 0.7 mm
- Special tool steel



	Ø mm	L mm	S mm	g
118.0147	1,2 (0,7)	250.0	42	455

Punching scissors, left handed cut

- Left handed cut
- Induction-hardened precision cutting
- With PVC dipped handle
- Cuts steel sheet up to 1,2 mm, stainless steel up to 0,7 mm
- Special tool steel



	Ø mm	L mm	S mm	g
118.0148	1,2 (0,7)	250.0	42	455

Pelican straight cut shears

- Right hand cutting
- Straight cut
- With spring
- Induction-hardened precision cutting
- With PVC dipped handle
- Cuts steel sheet up to 1.2 mm, stainless steel up to 0.7 mm
- Special tool steel



	Ø mm	L mm	S mm	g
118.0149	1,2 (0,7)	305.0	73,5	465

Mini metal shears, straight cut

- Straight cut
- Optimal for fine orking
- Self opening handle
- With internal spring
- With easy locking action
- Induction-hardened precision cutting
- With two component handle
- Cuts sheet metal up to 1.2 mm
- Special tool steel



	Ø mm	A mm	D mm	L mm	S mm	g
118.0152	1,2	10.0	20.0	180.0	20,0	300

Mini metal shears, right handed cut

- Right handed cut
- Optimal for fine orking
- Self opening handle
- With internal spring
- With easy locking action
- Induction-hardened precision cutting
- With two component handle
- Cuts sheet metal up to 1.2 mm
- Special tool steel



	Ø mm	A mm	D mm	L mm	S mm	g
118.0151	1,2	17.0	33.0	180.0	20,0	300

Mini metal shears, left handed cut

- Left handed cut
- Optimal for fine orking
- Self opening handle
- With internal spring
- With easy locking action
- Induction-hardened precision cutting
- With two component handle
- Cuts sheet metal up to 1.2 mm
- Special tool steel



	Ø mm	A mm	D mm	L mm	S mm	g
118.0153	1,2	20.0	25.0	180.0	20,0	300

Mini straight and shape cutting snip set

- Self opening handle
- With internal spring
- With easy locking action
- With two component handle
- 25% power savings
- Left, right hand cutting & straight
- Smooth blades
- Induction-hardened precision cutting
- Cuts sheet metal up to 1.2 mm
- Chrome molybdenum

			g
118.0150	3 pcs	Mini straight and shape cutting snip set	800

Tin snips sheet metal shear, self opening, straight cut

- Straight cut
- Self opening handle
- Serrated blades
- Internal spring
- Easy locking action
- Includes hanging loop
- Induction hardened precision cutting
- Two component handle
- Cuts steel sheet up to 1,2 mm, stainless steel up to 0,7 mm
- Special tool steel



	Ø mm	A mm	D mm	L mm	S mm	g
118.0051	1,2 (0,7)	20.0	19.0	250.0	45,0	400

Tin snips sheet metal shear, self opening, right handed cut

- Right handed cut
- Self opening handle
- Serrated blades
- Internal spring
- Easy locking action
- Includes hanging loop
- Induction hardened precision cutting
- Two component handle
- Cuts steel sheet up to 1,2 mm, stainless steel up to 0,7 mm
- Special tool steel



	Ø mm	A mm	D mm	L mm	S mm	g
118.0052	1,2 (0,7)	18.0	21.0	240.0	42,0	400

Tin snips sheet metal shear, self opening, left handed cut

- Left handed cut
- Self opening handle
- Serrated blades
- Internal spring
- Easy locking action
- Includes hanging loop
- Induction hardened precision cutting
- Two component handle
- Cuts steel sheet up to 1,2 mm, stainless steel up to 0,7 mm
- Special tool steel



	Ø mm	A mm	D mm	L mm	S mm	g
118.0053	1,2 (0,7)	17.0	26.0	240.0	44,0	400

Tin snips sheet metal shear set

- Self opening handle
- Serrated blades
- Internal spring
- Easy locking action
- Includes hanging loop
- Induction hardened precision cutting
- Two component handle
- Cuts steel sheet up to 1,2 mm, stainless steel up to 0,7 mm
- Special tool steel

			kg
118.0050	3 pcs	Tin snips sheet metal shear set	1.20

Template cutting shear with lever gearing, right handed cut

- Right handed cut
- Self opening handle
- Serrated blades
- With internal spring
- With easy locking action
- Includes hanging loop
- Induction hardened precision cutting
- With two component handle
- Cuts steel sheet up to 1.5 mm, stainless steel up to 1.0 mm
- Special tool steel



		Ø mm	A mm	D mm	L mm	S mm	g
118.0045	right	1,5 (1,0)	30.0	50.0	260.0	40,0	380

Template cutting shear with lever gearing, left handed cut

- Left handed cut
- Self opening handle
- Serrated blades
- With internal spring
- With easy locking action
- Includes hanging loop
- Induction hardened precision cutting
- With two component handle
- Cuts steel sheet up to 1.5 mm, stainless steel up to 1.0 mm
- Special tool steel



		Ø mm	A mm	D mm	L mm	S mm	g
118.0046	left	1,5 (1,0)	30.0	50.0	260.0	40,0	380

Insulated cable shears can be found in the VDE and general electrician tool kits section.

SCRAPERS

Scraper

- With easily interchangeable blades
- With reinforcement eyelet
- Soft grip handle



	B mm	L mm		g
911.8126	38.0	160.0	911.8127	90

Scraper

- With easily interchangeable and retractable blades
- With reinforcement eyelet
- With metal housing

	B mm	L mm		g
907.2240	39.0	110.0	911.8127	90

Replacement scraper blades

- For all standard scrapers
- SK steel
- In a carton

	Content	L mm	B mm	S mm	g
911.8127	5	40.0	19,5	0.29	40

Pinch weld scraper set

- Ideal for removing of stickers, seal and glue residues
- Simple blade change by loosening the knurled thumb screw on the chuck
- With 10 straight scraper blades 16 mm
- Scraper with two component handle

			g
907.2215	11 pcs	Pinch weld scraper set	100
1 x		907.2201	
10 x		16 mm	

Knife scraper set

- Ideal for removing of stickers, seal and glue residues
- Simple blade change by loosening the knurled thumb screw on the chuck
- Practical storage system for changeable blades
- Suitable for many different application due to the wide range of blades
- Scraper with two component handle
- Professional universal knife with aluminium housing
- In durable plastic case

			kg
907.2200	27 pcs	Knife scraper set	0.60

1 x	
1 x	
5 x	
5 x	12 mm
5 x	16 mm
5 x	20 mm
5 x	16 mm

Replacement blades:

	Width mm	Form	Content	g	
907.2202	12.0	straight	10	20	
907.2204	16.0	53° angled	10	20	
907.2203	16.0	straight	10	20	
907.2205	20.0	straight	10	40	

Glassfib e chisel set

- For paint preserving removal of ornament and window strips
- Flexible chisel blade
- Impact cap for light impacts
- Ergonomic handle
- Special plastic

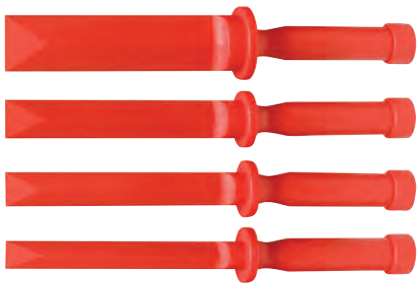

			g
911.8130	4 pcs	19 - 22 - 26 - 38 mm	570

consists of:

		g
911.8131	Glassfib e chisel, 19 mm	130
911.8132	Glassfib e chisel, 22 mm	140
911.8133	Glassfib e chisel, 26 mm	150
911.8134	Glassfib e chisel, 38 mm	180

STAINLESS STEEL Chisel scraper

- Continuous stainless steel blade that can be re sharpened
- With reinforcement eyelet
- With hammer cap on the handle
- With ergonomic moulded two component handle
- Suitable for use at extremely low temperatures
- Extreme resistance to intergranular corrosion and oxidation
- Extremely long service life
- Autoclavable (heating of the tools to over 100 °C to kill germs)
- Rust-proof and acid resistant
- Stainless steel

	B mm	D mm	L mm	g
907.2211	32.0	1,2	190.0	160
907.2213	25.0	1,2	165.0	100
907.2212	32.0	2,5	190.0	160
907.2214	25.0	2,5	165.0	110

STAINLESS STEEL Chisel scraper set

- Continuous stainless steel blade that can be re sharpened
- With reinforcement eyelet
- With hammer cap on the handle
- With ergonomic moulded two component handle
- Suitable for use at extremely low temperatures
- Extreme resistance to intergranular corrosion and oxidation
- Extremely long service life
- Autoclavable (heating of the tools to over 100 °C to kill germs)
- Rust-proof and acid resistant
- Stainless steel

			kg
907.2210	4 pcs	32 x 1,2; 32 x 2,5; 25 x 1,2; 25 x 2,5 mm	0.58

Pinch weld scraper

- With interchangeable spring steel blade
- Working length max. 115 mm
- Aluminium handle

	B mm	L mm		g
140.2282	13.0	240.0	140.2283	200
140.2286	16.0	240.0	140.2287	200
140.2288	19.0	240.0	140.2289	200

Gasket scraper

- Blades can be re sharpened
- Blade 10° angled
- Extra long execution for reaching inaccessible areas
- For removing extremely stubborn gaskets and seals
- With ergonomic moulded one component handle

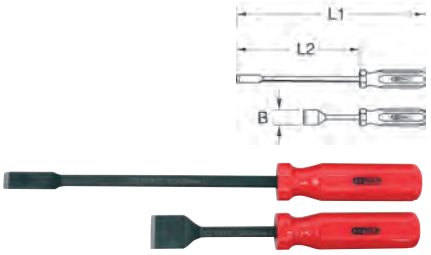

	B mm	L1 mm	L2 mm	g
907.2231	12.5	200.0	100,0	120
907.2232	25.0	200.0	100,0	140
907.2233	12.5	300.0	200,0	180
907.2234	25.0	300.0	200,0	200

Gasket scraper set

- Blades can be resharpened
- Blade 10° angled
- Extra long execution for reaching inaccessible areas
- For removing extremely stubborn gaskets and seals
- With ergonomic moulded one component handle

				kg
907.2230	4 pcs	12,5 x 200; 25 x 200; 12,5 x 300; 25 x 300 mm	1.28	

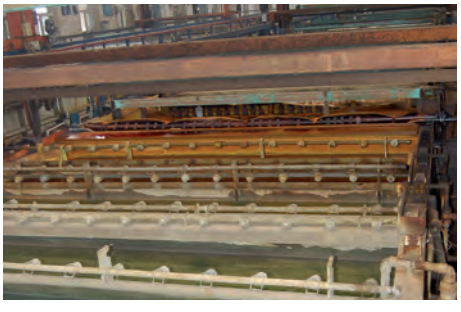

HAMMER

KSTOOLS®

Innovation is our mission!

	PAGE
RECOIL FREE SOFT FACED HAMMER	552
SOFT HEAD HAMMER	552 - 553
FITTERS HAMMER	553 - 554
CLAW HAMMERS	554
ELECTRICIANS HAMMER	554
CLUB HAMMER	554 - 555
SLEDGE HAMMER	555
PANEL BEATING HAMMERS	555 - 556
SCABBLING PICK	556 - 557
CLAW HAMMER	557
BRICK HAMMER	557
BOLSTER CHISEL	558
CHIPPING HAMMERS	558
WELDING CHIPPING HAMMER	558
PICKS & AXES	558
BRICKLAYER'S HAMMER AND AXES	558
AXES	559
REPLACEMENT HANDLES	559
ROUND KEY, LOCKING DEVICE	559

HAMMER

Technical data

RUBBER HAMMER

- For sensitive blow surfaces and edges
- Head made from a hard rubber mix
- Ergonomically formed and comfortable in the hand wooden handle
- Ring wedge for a safe connection of handle and hammer head

DEAD BLOW HAMMER

- Hundreds of metal balls reduce the impact of the blow force
- The coarse metal shot follows the impact, they support the blow and prevent the recoil impact
- Steel tube handle, polyurethane coated, with ergonomical formed rubber handle
- Extremely tough synthetic material coated from a cast, no damaging from sharp edges

FITTERSHAMMER WITH WOODEN HANDLE

- Annealing forged hammer head acc. to DIN standard
- Ergonomically formed and comfortable wooden handle
- Ring wedge for a safe connection of handle and hammer head

Safety

unprotected hammer handle

• Clear damage of the handle, thereby danger of fracture!

protected hammer handle

• No distortion, with slight traces in the lacquer surface!

Hammer lines

Recoil free soft headed hammers

Soft headed hammers

Fitters hammers

Joiner's hammers

Electrician's hammers

Club hammers

Sledge hammers

Panel beating hammers

Scabbling picks

Claw hammers

Brick hammers

Bolster chisels

Chipping hammers

Welding-chipping hammers

Picks

Bricklayer's hammers and axes

Axes

Replacement handles

RECOIL FREE SOFT FACED HAMMER

Recoil free soft faced hammer

- With hickory handle
- Shock absorbing effect through steel shot in the head
- Up to 100% higher impact effect than normal Soft head hammers
- Shatterproof and wear resistant
- Polyamid heads interchangeable
- For safer working with less recoil

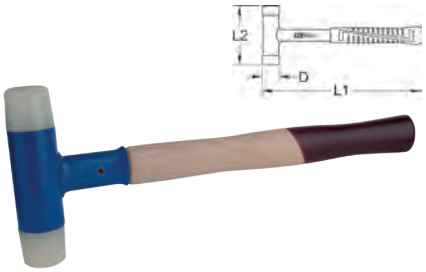

	g	D mm	L1 mm	L2 mm	
140.1215	350	32.0	330.0	120.0	480

Recoil free soft faced hammer

- With steel tube handle and plastic handle
- Shock absorbing effect through steel shot in the head
- Up to 100% higher impact effect than normal Soft head hammers
- Shatterproof and wear resistant
- Polyamid heads interchangeable
- For safer working with less recoil

	g	D mm	L1 mm	L2 mm	handle,spare	head,spare		
140.5270	360	25.0	270.0	105.0	-	140.5280	-	360
140.5271	480	30.0	290.0	105.0	-	140.5281	-	480
140.5272	590	35.0	295.0	110.0	-	140.5282	-	590
140.5273	850	40.0	300.0	120.0	-	140.5283	-	850
140.5274	990	45.0	305.0	120.0	-	140.5284	-	990
140.5275	1110	50.0	310.0	125.0	-	140.5285	-	1110
140.5276	1290	55.0	325.0	135.0	-	140.5286	-	1290
140.5277	1670	60.0	335.0	140.0	-	140.5287	-	1670

Recoil free soft faced hammer

- With polyurethane glassfiber omposite handle
- Shock absorbing effect through steel shot in the hammer head
- Substantially higher impact effect than standard conventional hammers
- For safer working with less recoil

	g	D mm	L1 mm	L2 mm	handle,spare		
140.5252	400	40.0	270.0	81.0	-	-	480
140.5254	560	40.0	305.0	100.0	-	-	640
140.5255	645	42.0	325.0	100.0	-	-	725
140.5256	860	50.0	342.0	118.0	-	-	940
140.5257	1270	56.0	355.0	118.0	-	-	1350
140.5258	1720	65.0	370.0	135.0	-	-	1800

Recoil free soft faced hammer, extra large

- Fiberglass handle
- Special absorbing effect through steel shot in the hammer head
- Substantially higher impact effect than standard conventional hammers
- Polyurethane glassfiber omposite
- For safer working with less recoil

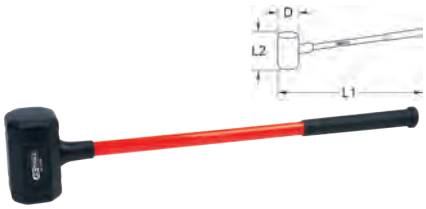

	g	D mm	L1 mm	L2 mm	handle,spare		
140.5259	4500	105.0	890.0	180.0	-	-	4.76
140.5260	5000	105.0	900.0	200.0	-	-	5.26

SOFT HEAD HAMMER

Plastic hammer

- With ash handle
- With transparent head made from impact resistant cellulose acetate

	g	D mm	L1 mm	L2 mm	handle,spare		
140.5201	200	28.0	260.0	82.0	140.5301	140.5401	210
140.5202	340	35.0	300.0	95.0	140.5304	140.5404	350

Nylon hammer

- With ash handle
- With head made out of impact resistant nylon

	g	D mm	L1 mm	L2 mm	handle,spare		
140.5211	200	28.0	260.0	82.0	140.5301	140.5401	230
140.5212	340	35.0	300.0	95.0	140.5304	140.5404	450

Rubber hammer

- DIN 5128
- With ash handle
- Hammer head made out of hard rubber

	g	D mm	L1 mm	L2 mm	handle,spare		
140.5221	300	45.0	300.0	80.0	140.5304	140.5404	340
140.5222	500	58.0	310.0	95.0	140.5305	140.5405	560
140.5223	700	63.0	345.0	112.0	140.5306	140.5405	780

Rubber hammer

- DIN 5128
- With tapered ash inserted handle
- Hammer head made out of hard rubber

	g	D mm	L1 mm	L2 mm	
140.1230	425	60.0	340.0	110.0	525

Rubber hammer

- DIN 5128
- With fiber lass handle
- Hammer head made out of hard rubber

	g	D mm	L1 mm	L2 mm	
140.1237	500	56.0	325.0	100.0	520

Rubber hammer

- DIN 5128
- With tapered ash inserted handle
- Hammer head made out of hard rubber
- With white rubber head

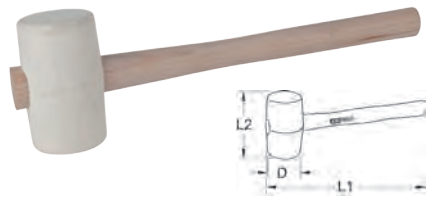

	g	D mm	L1 mm	L2 mm	
140.1234	270	55.0	300.0	115.0	300
140.1235	500	60.0	340.0	115.0	595
140.1236	735	65.0	380.0	130.0	855

Insulated soft face hammer

- Insulated to IEC 60900
- Made from plastic
- Without metal parts

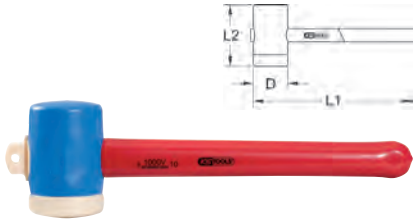

	D mm	L1 mm	L2 mm		
117.1131	55.0	300.0	82.0	1000V	325

Insulated dead blow hammer

- Insulated to IEC 60900
- Shock absorbing effect through steel shot in the head
- Shatterproof and wear resistant
- Polyamid heads interchangeable
- For safer working with less recoil

	D mm	L1 mm	L2 mm	head,spare		
117.1126	25.0	300.0	105.0	117.1128	1000V	560
117.1127	35.0	310.0	115.0	117.1129	1000V	790

Brass hammer

- Full brass execution
- Protective material

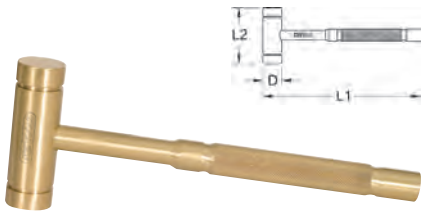

	g	D mm	L1 mm	L2 mm	handle,spare		
140.2081	800	26.0	230.0	83.0	-	-	800
140.2082	1400	31.0	260.0	100.0	-	-	1400

Wooden hammer

- DIN 7462
- With ash handle
- Made completely from ash

	D mm	L1 mm	L2 mm	
140.5231	40.0	240.0	90.0	160
140.5232	60.0	300.0	125.0	360
140.5233	80.0	360.0	145.0	560

FITTERS HAMMER

Fitters hammer

- DIN 1041
- With hickory handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Head coating made from structured powder baked laquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		
142.1310	100	15.0	260.0	82.0	142.5305	140.5405	180
142.1320	200	19.0	280.0	95.0	142.5306	140.5405	283
142.1330	300	23.0	300.0	105.0	142.5307	140.5405	350
142.1350	500	27.0	320.0	118.0	142.5308	140.5406	590
142.1380	800	33.0	350.0	130.0	142.5309	140.5406	920
142.1400	1000	36.0	360.0	135.0	142.5310	140.5406	1268

Fitters hammer

- DIN 1041
- With fiber lass handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Head coating made from structured powder baked laquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		
142.1311	100	15.0	260.0	82.0	-	-	180
142.1321	200	19.0	280.0	95.0	-	-	280
142.1331	300	23.0	300.0	105.0	-	-	500
142.1351	500	27.0	320.0	118.0	-	-	590
142.1381	800	33.0	350.0	130.0	-	-	920
142.1401	1000	36.0	360.0	135.0	-	-	1325

Fitters hammer

- DIN 1041
- With steel tube handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Head coating made from structured powder baked laquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	
142.1221	350	20.0	300.0	100.0	580

Fitters hammer, French form

- With ash handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Head coating made from structured powder baked laquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		
142.1030	250	25.0	300.0	81.5	142.5301	140.5401	365
142.1050	400	32.0	320.0	92.0	142.5302	140.5402	525
142.1080	800	40.0	350.0	110.0	142.5303	140.5403	1055
142.1100	1000	42.0	360.0	120.0	142.5303	140.5403	1140
142.1150	1500	50.0	380.0	138.0	142.5304	140.5404	1957
142.1250	2500	60.0	380.0	150.0	142.5304	140.5404	2730

Fitters hammer, French form

- With fiber lass handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Head coating made from structured powder baked laquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		g
142.1031	250	25.0	290.0	81.5	-	-	415
142.1051	400	32.0	310.0	92.0	-	-	575
142.1081	800	40.0	338.0	110.0	-	-	1160
142.1101	1000	42.0	340.0	117.0	-	-	1270
142.1151	1500	50.0	405.0	138.0	-	-	2140

Pin hammer

- With hickory handle
- Additional head security
- Extremely durable

	g	D1 mm	D2 mm	L1 mm	L2 mm	Handle		g
142.1508	225	20.0	20.0	290.0	80.0	142.1510	140.5403	300
142.1512	340	28.0	25.0	310.0	91.0	142.1520	140.5403	420
142.1516	450	30.0	27.0	350.0	102.0	142.1530	140.5405	550
142.1524	680	38.0	32.0	365.0	116.0	142.1540	140.5405	800
142.1532	900	40.0	35.0	380.0	130.0	142.1550	140.5405	1100

CLAW HAMMERS

Claw hammer, French form

- With lacquered ash handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Head coating made from structured powder baked laquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		g
142.2020	200	20.0	270.0	92.0	142.5311	140.5401	300
142.2045	500	30.0	310.0	121.0	142.5313	140.5402	600

Claw hammer, French form

- With fiber lass handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		g
142.2021	200	20.0	285.0	92.0	-	-	270
142.2033	250	22.0	290.0	107.0	-	-	320
142.2046	500	30.0	328.0	121.0	-	-	600

ELECTRICIANS HAMMER

Electricians hammer, French form

- With lacquered ash handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Head coating made from structured powder baked laquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		g
142.4020	200	18.0	260.0	128.0	142.5314	140.5401	260

Electricians hammer, French form

- With fiber lass handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Head coating made from structured powder baked laquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		g
142.4030	200	18.0	285.0	126.0	-	-	250

CLUB HAMMER

Club hammer

- DIN 6475
- With lacquered ash handle
- Forged execution
- Impact area surfaces inductively hardened
- Surfaces polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		kg
142.5100	1000	40.0	260.0	95.0	142.5316	140.5405	1.10
142.5125	1250	43.0	260.0	100.0	142.5317	140.5405	1.36
142.5150	1500	45.0	280.0	110.0	142.5318	140.5406	1.60

Club hammer

- DIN 6475
- With fiber lass handle
- Forged execution
- Impact area surfaces inductively hardened
- Surfaces polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		kg
142.5101	1000	40.0	260.0	95.0	-	-	1.13
142.5126	1250	43.0	260.0	100.0	-	-	1.36
142.5151	1500	45.0	280.0	110.0	-	-	1.65

Club hammer

- DIN 6475
- With steel tube handle and plastic handle
- Forged execution
- Impact area surfaces inductively hardened
- Surfaces polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

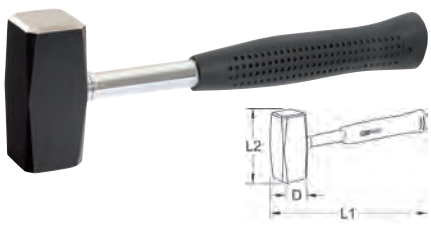

	g	D mm	L1 mm	L2 mm	handle,spare		kg
142.5165	1000	40.0	260.0	95.0	-	-	1.18
142.5166	1250	43.0	260.0	100.0	-	-	1.43

Club hammer

- DIN 6475
- With tapered ash inserted handle
- Forged execution
- Impact area surfaces inductively hardened
- Surfaces polished ground
- Rounded edges
- Head coating made from structured powder baked laquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare	⌀	kg
142.5102	1000	42.0	260.0	95.0	140.5320	-	1.13
142.5127	1250	44.0	260.0	100.0	140.5321	-	1.31
142.5152	1500	45.0	280.0	110.0	140.5322	-	1.63
142.5162	2000	48.0	300.0	120.0	140.5323	-	2.13

Club hammer

- DIN 6475
- With tapered fiber lass handle
- Forged execution
- Impact area surfaces inductively hardened
- Surfaces polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare	⌀	kg
142.5103	1000	42.0	280.0	95.0	142.5319	-	1.15
142.5128	1250	44.0	260.0	100.0	142.5319	-	1.32
142.5153	1500	45.0	280.0	110.0	142.5319	-	1.65

Rubber cap for club hammer

- Rubber cap for club hammer to DIN 6475

	H1 mm	H2 mm	L1 mm	L2 mm	g
140.2075	55.0	27.0	72.0	40.0	400
140.2076	55.0	29.0	72.0	42.0	400
140.2077	55.0	33.0	72.0	44.0	400

SLEDGE HAMMER

Sledge hammer

- Forged execution
- With tapered inserted ash handle
- Impact area surfaces inductively hardened
- Surfaces polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare	⌀	kg
142.6300	3000	58.0	900.0	138.0	140.5330	-	3.50
142.6400	4000	64.0	900.0	148.0	140.5330	-	4.44
142.6500	5000	70.0	900.0	158.0	140.5330	-	5.44

Sledge hammer

- With tapered fiber lass handle
- Forged execution
- Impact area surfaces inductively hardened
- Surfaces polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

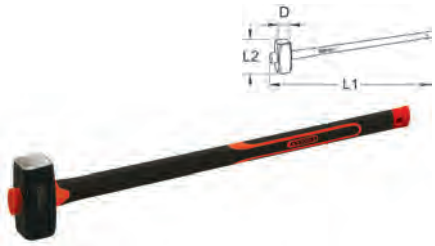

	g	D mm	L1 mm	L2 mm	handle,spare	⌀	kg
142.6301	3000	58.0	900.0	138.0	142.5323	-	3.80
142.6401	4000	64.0	900.0	148.0	142.5323	-	4.80
142.6501	5000	70.0	900.0	158.0	142.5332	-	5.80

Chipping hammer

- With tapered inserted beech handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare	⌀	kg
140.6510	3000	55.0	900.0	148.0	140.5330	-	4.00

Sledge hammer

- DIN 1042
- With ash handle
- Forged execution
- Impact area surfaces inductively hardened
- Surfaces polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

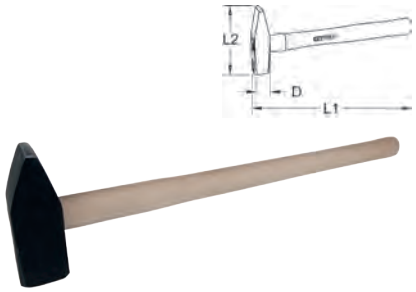

	g	D mm	L1 mm	L2 mm	kg
142.1223	3000	54.0	600.0	162.0	3.30

Sledge hammer

- With fiber lass handle
- Forged execution
- Impact area surfaces inductively hardened
- Surfaces polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

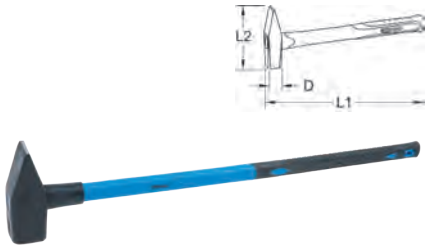

	g	D mm	L1 mm	L2 mm	kg
142.1210	4000	70.0	880.0	180.0	6.00

PANEL BEATING HAMMERS

Panel beaters hammer

- With ash handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare	⌀	g
140.4003	400	30.0	310.0	118.0	140.5304	140.5404	560

Panel beaters hammer, round/square

- Bumping hammer with strong arched faces
- Work areas ground
- Special steel

	L mm	head,length mm	Ø round side mm	square dim,mm	g
140.2130	325.0	105.0	30.0	26 x 26 mm	390

Panel beaters hammer, small round/square

- Simple hammer with a fl t, angular face and a round, slightly arched face
- Work areas ground
- Special steel

	L mm	head,length mm	Ø round side mm	square dim,mm	g
140.2138	325.0	100.0	30.0	28 x 28 mm	390

Panel beaters serrated hammer, round/square

- For forming with an square, fin ly serrated face
- For streching with a round, slightly domed face
- Round work surfaces ground
- Special steel

	L mm	head,length mm	Ø round side mm	square dim,mm	g
140.2132	325.0	100.0	40.0	38 x 38 mm	490

Panel beaters hammer rounded head, small round/square

- Simple hammer with a fl t, angular face and a round, slightly arched face
- Work areas ground
- Special steel

	L mm	head,length mm	Ø round side mm	square dim,mm	g
140.2135	325.0	100.0	30.0	27 x 27 mm	390

Panel beaters standard hammer, large round/square

- Planishing hammer with a square and round, fl t face
- Work areas ground
- Special steel

	L mm	head,length mm	Ø round side mm	square dim,mm	g
140.2133	325.0	100.0	40.0	39 x 39 mm	420

Panel beaters standard hammer curved head, large round/square

- Simple hammer with a fl t, angular face and a round, slightly arched face
- Work areas ground
- Special steel

	L mm	head,length mm	Ø round side mm	square dim,mm	g
140.2134	325.0	100.0	40.0	38 x 38 mm	490

Panel beaters pick hammer straigh head, round/fl t point

- Planishing hammer with a round, slightly domed face
- Fine face for accurate hammering out
- Work areas ground
- Special steel

	L mm	head,length mm	Ø round side mm	Tip width mm	g
140.2136	325.0	140.0	40.0	19.0	460

Panel beaters pick hammer straight head, round/pointed

- Planishing hammer with a round, slightly domed face
- Fine conical face for accurate hammering out
- Work areas ground
- Special steel

	L mm	head,length mm	Ø round side mm	g
140.2137	325.0	140.0	40.0	460

Panel beaters pick hammer straight head, fl t/pointed

- Planishing hammer with a round, slightly domed face
- Fine face curved for accurate hammering out
- Work areas ground
- Special steel

	L mm	head,length mm	Ø round side mm	Tip width mm	g
140.2131	325.0	140.0	40.0	19.0	460

Panel beaters serrated hammer fin , round/square

- For forming with an square, rough serrated face
- For streching with a round, slightly domed face
- Round work surfaces ground
- Special steel

	L mm	head,length mm	Ø round side mm	square dim,mm	g
140.2139	325.0	100.0	40.0	38 x 38 mm	490

SCABBLING PICK

Scabbling pick

- With steel tube handle and plastic handle
- Forged execution
- Impact area surfaces inductively hardened
- Hammer head made out of high quality special steel
- Head coating made from structured powder baked lacquer
- Pane with nail puller
- With nail holder

	g	D mm	L1 mm	L2 mm	handle,spare		g
140.2001	600	28.0	370.0	29.0	-	-	835

Scabbling pick, magnetic

- With steel tube handle and plastic handle
- Forged execution
- Impact area surfaces inductively hardened
- Hammer head made out of high quality special steel
- Head coating made from structured powder baked lacquer
- Pane with nail puller
- With nail holder

	g	D mm	L1 mm	L2 mm	handle,spare		
140.2002	600	28.0	370.0	29.0	-	-	900

CLAW HAMMER

Claw hammer, French form

- With lacquered ash handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Hammer head made out of high quality special steel
- Head coating made from structured powder baked lacquer
- Pane with nail puller
- With nail holder

	g	D mm	L1 mm	L2 mm	L3 mm	handle,spare		
140.3030	300	24.5	300.0	105.0	33.0	140.5303	140.5404	360
140.3040	400	26.0	300.0	115.0	35.0	140.5304	140.5404	460

Claw hammer

- With tapered ash inserted handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Hammer head made out of high quality special steel
- Head coating made from structured powder baked lacquer
- Pane with nail puller
- With nail holder

	g	D mm	L1 mm	L2 mm	L3 mm	handle,spare		
142.2008	700	30.0	370.0	172.0	48.0	140.5315	-	860

Claw hammer

- With tapered fiber lass handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Hammer head made out of high quality special steel
- Head coating made from structured powder baked lacquer
- Pane with nail puller
- With nail holder

	g	D mm	L1 mm	L2 mm	L3 mm	handle,spare		
142.2010	700	28.0	370.0	172.0	48.0	142.5315	-	920

Claw hammer with steel tube handle

- Steel tube handle and plastic handle
- Forged execution
- Impact area surfaces inductively hardened
- Rounded edges
- Hammer head made out of high quality special steel
- Head coating made from structured powder baked lacquer
- Pane with nail channel
- With nail holder

	g	D mm	L1 mm	L2 mm	L3 mm	handle,spare		
140.2005	600	28.0	370.0	144.0	44.0	-	-	900

Claw hammer American form

- Steel tube handle and plastic handle
- Forged execution
- Impact area surfaces inductively hardened
- Head and edge areas polished ground
- Rounded edges
- Hammer head made out of high quality special steel
- Head coating made from structured powder baked lacquer
- Pane with nail puller

	g	D mm	L1 mm	L2 mm	handle,spare		
140.2006	600	30.0	320.0	133.0	-	-	850

BRICK HAMMER

Brick hammer, Geneva form

- With tapered ash inserted handle
- Forged execution
- Impact area surfaces inductively hardened
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		
140.2015	750	24.0	370.0	250.0	140.5336	-	900

Brick hammer, Rhenish form

- With steel tube handle and plastic handle
- Forged execution
- Impact area surfaces inductively hardened
- Hammer head made out of high quality special steel
- Head coating made from structured powder baked lacquer
- Extremely strong and robust

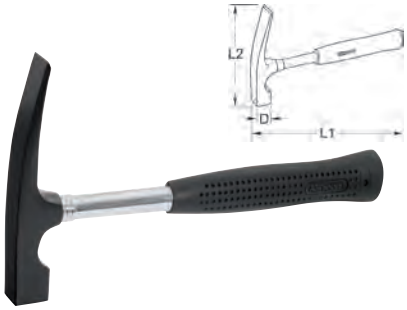

	g	D mm	L1 mm	L2 mm	handle,spare		
140.2030	500	25.0	270.0	178.0	-	-	800

Brick hammer, Berlin form

- With steel tube handle and plastic handle
- Forged execution
- Impact area surfaces inductively hardened
- Hammer head with nail puller
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		
140.2003	600	27.0	270.0	203.0	-	-	940

BOLSTER CHISEL

Bolster chisel

- Flat oval form
- Quenched and tempered
- Blade can be resharpened
- Shaft gold lacquer
- Carbon manganese silicon steel

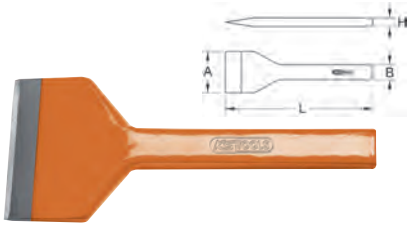

	L mm	A mm	H mm	B mm		g
162.0431	200.0	60.0	15.0	18.0	-	500
162.0432	200.0	80.0	15.0	20.0	-	600
162.0433	220.0	100.0	18.0	22.0	-	750
162.0434	220.0	120.0	18.0	22.0	-	900

CHIPPING HAMMERS

Chipping hammer

- DIN 5133
- With steel tube handle

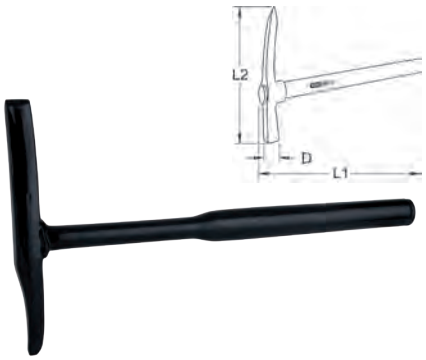

	D mm	L1 mm	L2 mm	g
140.1220	15.0	295.0	155.0	360

WELDING CHIPPING HAMMER

Welders hammer with vertical cutting edge

- With ash handle
- Forged execution
- Impact area surfaces inductively hardened
- Pane polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		g
140.2171	330	20.0	300.0	165.0	140.5404	140.5304	380

Welding chipping hammer

- With ash handle
- Forged execution
- Impact area surfaces inductively hardened
- Pane polished ground
- Rounded edges
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		g
140.2170	300	20.0	300.0	165.0	140.5303	140.5404	320

PICKS & AXES

Pick axe

- With tapered ash inserted handle
- Forged execution
- Impact area surfaces inductively hardened
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		g
140.2019	750	35.0	370.0	350.0	140.5336	-	950

Pick axe

- With tapered ash inserted handle
- Forged execution
- Impact area surfaces inductively hardened
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	handle,spare		g
140.2017	700	10.0	370.0	350.0	140.5336	-	930

BRICKLAYER'S HAMMER AND AXES

Wood axe

- DIN 5131
- With cambered hickory handle
- Handle with round double fi ed wedges
- Forged execution
- Blade polished ground
- Head coating made from structured powder baked lacquer
- Axe head made out of high quality special steel

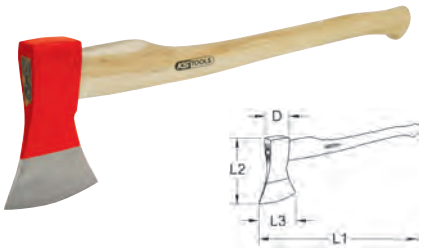

	g	D mm	L1 mm	L2 mm	L3 mm	handle,spare		kg
140.2066	1250	60.0	700.0	185.0	130.0	140.2069	140.5405	1.80

Axe

- DIN 7287
- Forged execution
- Blade polished ground
- Head coating made from structured powder baked lacquer
- Axe head made out of high quality special steel
- With fib eglass handle

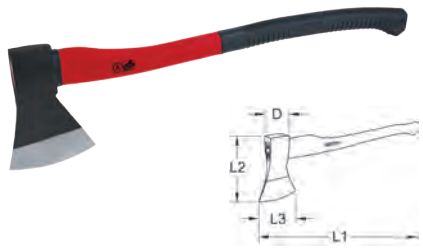

	g	D mm	L1 mm	L2 mm	kg
140.1213	1800	60.0	690.0	185.0	2.71

Bricklayer's hammer

- DIN 7287
- With tapered ash inserted handle
- Forged execution
- Blade polished ground
- Cambered hickory handle with round double fi ed wedges
- Head coating made from structured powder baked lacquer
- Axe head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	L3 mm	handle,spare		kg
140.2070	3000	50.0	890.0	230.0	120.0	140.5331	-	3.20

AXES

Hand axe

- DIN 5131
- With cambered hickory handle
- Handle with round double fi ed wedges
- Forged execution
- Blade polished ground
- Head coating made from structured powder baked lacquer
- Axe head made out of high quality special steel

	g	D mm	L1 mm	L2 mm	L3 mm	handle,spare		
140.2062	600	40.0	350.0	15.0	105.0	140.2067	140.5403	800
140.2063	800	45.0	380.0	17.0	115.0	140.2068	140.5405	1040

Plasterers axe

- With steel tube handle and plastic handle
- Forged execution
- Impact area surfaces inductively hardened
- Blade polished ground, serrated hammer head
- Hammer head with nail puller
- Head coating made from structured powder baked lacquer
- Hammer head made out of high quality special steel



	g	D mm	L1 mm	L2 mm	L3 mm	handle,spare		
140.2004	600	27.0	330.0	180.0	70.0	-	-	900

Hand axe

- DIN 5131
- With fiber lass handle
- Forged execution
- Blade polished ground
- Head coating made from structured powder baked lacquer
- Axe head made out of high quality special steel



	g	D mm	L1 mm	L2 mm	
140.1239	800	40.0	350.0	150.0	1232

REPLACEMENT HANDLES

Replacement handle, ash and hickory

- Without wedge

	L mm	Handle form	Handle style		
140.5301	260.0	round key	ash	10	
140.5303	300.0	round key	ash	60	
140.5304	300.0	round key	ash	160	
140.5305	310.0	round key	ash	60	
140.5306	330.0	round key	ash	60	
140.5315	370.0	beveled	ash	160	
140.5320	260.0	beveled	ash	130	
140.5321	260.0	beveled	ash	60	
140.5322	280.0	beveled	ash	130	
140.5323	300.0	beveled	ash	130	
140.5330	800.0	beveled	ash	440	
140.5331	890.0	beveled	ash	200	
140.5336	370.0	beveled	ash	200	
142.5301	300.0	round key	ash	10	
142.5302	320.0	round key	ash	160	
142.5303	350.0	round key	ash	120	
142.5304	380.0	round key	ash	160	
142.5311	270.0	round key	ash	100	
142.5312	290.0	round key	ash	100	
142.5313	310.0	round key	ash	100	
142.5314	260.0	round key	ash	60	
142.5316	260.0	round key	ash	100	
142.5317	260.0	round key	ash	110	
142.5318	280.0	round key	ash	100	
140.2067	350.0	round key	hickory	200	
140.2068	380.0	round key	hickory	240	
140.2069	700.0	round key	hickory	550	
142.5305	260.0	round key	hickory	80	
142.5306	280.0	round key	hickory	83	
142.5307	300.0	round key	hickory	50	
142.5308	320.0	round key	hickory	90	
142.5309	350.0	round key	hickory	120	
142.5310	360.0	round key	hickory	268	

Replacement handles fibe glass

- Without wedge
- Tapered style form

	L mm	Handle form	Handle style		
142.5315	370.0	beveled	fiber las	220	
142.5319	280.0	beveled	fiber las	150	
142.5332	900.0	beveled	fiber las	800	

ROUND KEY, LOCKING DEVICE

Round key, locking device

	D1 mm	D2 mm		
140.5401	7.0	8.0	10	
140.5402	8.0	9.0	10	
140.5403	9.0	10.0	10	
140.5404	10.0	12.0	10	
140.5405	12.0	14.0	10	
140.5406	14.0	16.0	10	

You can find mo e hammers in our K15 Industry catalogue in the Non-sparking Tools section.

CHISELS / PUNCHES

KSTOOLS®

Innovation is our mission!

	PAGE
FLAT CHISELS	564
TILER'S FLAT CHISELS	565
SLITTING CHISEL	565
JOINTING CHISELS	565
BRICKLAYERS CHISEL	566
POINTED CHISELS	566
ELECTRICIANS CHISEL	566 - 567
CROSS CHISEL	567
TILERS POINTED CHISELS	567
BODYWORK CHISELS	567
BOLSTER CHISEL	568
GLASS FIBRE CHISELS	568
HAND GRIPS	568
PIN PUNCHES	568 - 569
COTTER PIN DRIVES	569 - 572
CENTRE PUNCH	572
CENTRE PUNCHES	572 - 573
SCRIBER	573
PUNCHES	573
AWLE	573
STAMP SETS	574
GASKET RING DISMANTLING TOOL	574
HANDLE PUNCH	574 - 575
ROUND HOLE PUNCH	575
HOLE PUNCHES	575
RIVET PROCESSING TOOL	575 - 576
RIVET SETS	576
FLATTENERS	576
TAPER PUNCHES	576
BENDING IRONS AND PRY BARS	576 - 577

STRIKING TOOLS

Manufacturing and fabrication steps

Section

Impact head grinding



Embossing

Forging

Hardening

Head tempering

Tempering

Sand blasting

Powder baking and lacquering

Our chisels are forged professionally, are polished and are sealed with transparent rust protection lacquer. Carefully rounded head forms without sharp corners and edges are similar to the blow radius of the hammer - with big impact surfaces for safe striking.

The special head compensation fi hts against chipping and burring where the striking and the impact connects with it.
Our chisels can be reground without additional remachining up to the blade end.

Impact head formats

Flat oval

Flat oval extra thin



4-point



8-point

PUNCHES AND PIN PUNCHES

All split punches and pin punches are manufactured with minus tolerance to avoid getting stuck in holes while driving out pins and bolts.

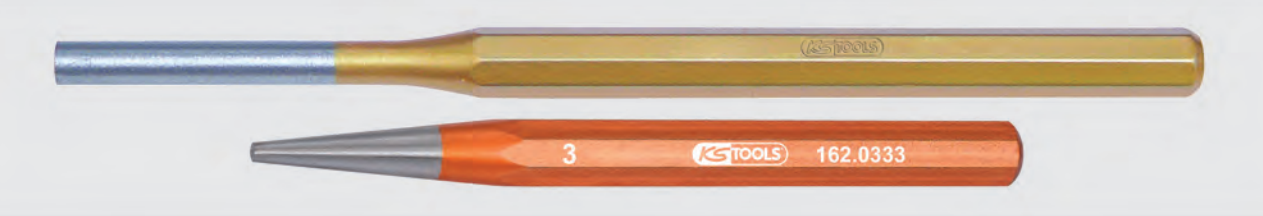

Chisel and punch lines

Flat chisel

Tilers flat chise

Slitting chisel

Jointing chisel

Bricklayers chisel

Pointed chisel

Electrians chisel

Cross chisel

Tilers pointed chisel

Bodywork slitting chisel

Bolster chisel

Glassfibre chise

Hand grips

Pin punch

Pin punch

Centre punch

Centre punch

Scriber

Punches

Awle

Stamp sets

Gasket ring dismantling tool

Handle punch

Hole punches

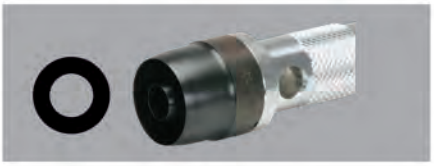

Rivet processing tool

Flattener

Drawbore pins

Bending and pry bars

FLAT CHISELS

Flat chisel

- DIN 6453
- Flat oval form
- Blade can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum



	L mm	A mm	B mm	H mm		g
162.0101	100.0	18.0	14.0	9.0	-	80
162.0102	125.0	18.0	14.0	9.0	-	100
162.0103	150.0	21.0	17.0	11.0	-	180
162.0104	175.0	24.0	20.0	12.0	-	280
162.0105	200.0	28.0	23.0	13.0	162.0442	380
162.0106	250.0	28.0	23.0	13.0	162.0442	500
162.0107	300.0	31.0	23.0	13.0	162.0442	600

Flat chisel with hand grip

- DIN 6453
- Flat oval form
- Ground point
- Quenched and tempered
- Shaft with gold coated lacquer
- Tip can be resharpened
- Chrome molybdenum



	L mm	A mm	B mm	H mm	g
162.0113	250.0	28.0	23.0	13.0	500
162.0114	300.0	31.0	23.0	13.0	600

Flat chisel

- 8 point
- Quenched and tempered
- Blade can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum



	L mm	A mm	S mm		g
162.0211	125.0	13.0	10.0	-	80
162.0212	150.0	15.0	12.0	-	120

Flat chisel

- 8 point
- Quenched and tempered
- Blade can be resharpened
- Shaft with powder coated lacquer
- Carbon manganese silicon steel

	L mm	A mm	S mm		g
156.0555	150.0	14.0	10.0	-	90
156.0556	200.0	14.0	10.0	-	110
156.0557	250.0	14.0	10.0	-	150

Flat chisel

- 8 point
- Quenched and tempered
- Blade can be resharpened
- Shaft with powder coated lacquer
- Carbon manganese silicon steel

	L mm	A mm	S mm		g
156.0531	250.0	24.0	16.0	162.0445	380
156.0532	300.0	24.0	16.0	162.0445	440
156.0533	350.0	24.0	16.0	162.0445	520
156.0534	400.0	27.0	18.0	162.0446	820

Flat chisel with hand grip

- 8 point
- Quenched and tempered
- Blade can be resharpened
- Shaft with powder coated lacquer
- Carbon manganese silicon steel



	L mm	A mm	S mm	g
156.0535	250.0	24.0	16.0	520
156.0536	300.0	24.0	16.0	650
156.0537	350.0	24.0	16.0	710

Flat chisel

- Flat oval form
- Quenched and tempered
- Blade can be resharpened
- Shaft with powder coated lacquer
- Chrome molybdenum



	L mm	A mm	B mm	H mm		g
156.0585	150.0	15.0	15.0	9.0	-	180
156.0586	200.0	25.0	23.0	13.0	162.0442	320
156.0587	250.0	25.0	23.0	13.0	162.0442	500
156.0588	300.0	25.0	23.0	13.0	162.0442	600

Flat chisel

- Flat oval form
- Blade can be resharpened
- Quenched and tempered
- Highly polished
- Chrome molybdenum



	L mm	A mm	B mm	H mm		g
156.0691	125.0	19.0	13.0	8.0	-	81
156.0692	150.0	21.0	14.0	9.0	-	136
156.0693	200.0	27.0	17.0	11.0	-	244
156.0694	250.0	31.0	19.0	12.0	-	411

Flat chisel set

- Flat oval form
- Blade can be resharpened
- Quenched and tempered
- Highly polished
- Chrome molybdenum

			g
156.0690	4 pcs	125x19 - 150x21 - 200x27 - 250x31 mm	970

Flat chisel

- 8 point
- Quenched and tempered
- Chrome plated and mirror polished
- Highly polished
- Chrome vanadium



	L mm	A mm	S mm		g
156.0162	130.0	12.0	9.0	-	70

Flat chisel with hand grip

- 8 point
- Quenched and tempered
- Tip can be resharpened
- Highly polished
- Chrome molybdenum

	L mm	A mm	S mm	g
156.0241	210.0	20.0	14.0	273

TILER'S FLAT CHISELS

Tilers fl t chisel

- 4 point
- Quenched and tempered
- Blade can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

	L mm	A mm	S mm		
162.0311	100.0	10.0	8.0	-	40

SLITTING CHISEL

Slitting chisel

- Flat oval form
- Quenched and tempered
- Blade can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

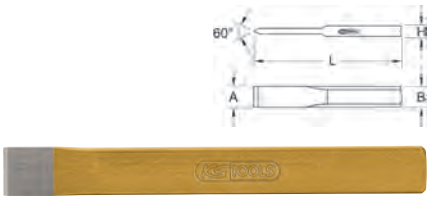

	L mm	A mm	B mm	H mm		
162.0131	230.0	26.0	26.0	7.0	162.0441	285

Slitting chisel with hand grip

- Flat oval form
- Quenched and tempered
- Blade can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

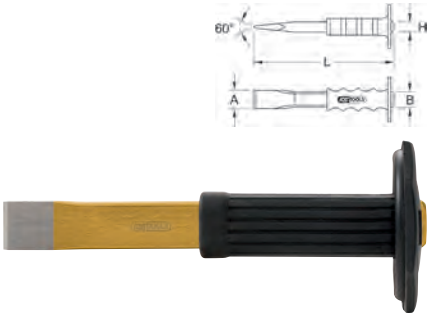

	L mm	A mm	B mm	H mm	
162.0141	230.0	26.0	26.0	7.0	285

Panel beaters slitting chisel, extra thin

- Flat oval form
- Extra thin
- Blade can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

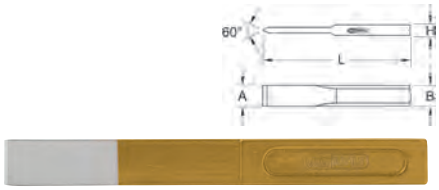

	L mm	A mm	B mm	H mm		
162.0421	240.0	26.0	26.0	7.0	162.0443	260

Slitting chisel with hand grip

- Flat oval form
- Extra thin
- Blade can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

	L mm	A mm	B mm	H mm	
162.0471	240.0	26.0	26.0	7.0	370

JOINTING CHISELS

Jointing chisel

- 8 point
- Quenched and tempered
- Blade can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

	L mm	A mm	S mm		
162.0151	250.0	25.0	18.0	162.0446	420
162.0152	250.0	100.0	20.0	162.0447	685

Jointing chisel with hand grip

- 8 point
- Quenched and tempered
- Blade can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

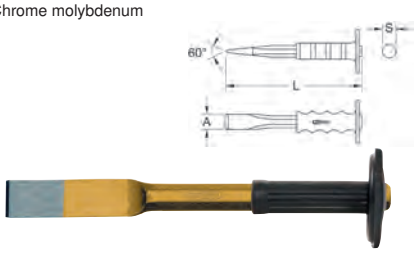

	L mm	A mm	S mm	
162.0161	250.0	25.0	18.0	420
162.0162	250.0	100.0	20.0	685

Jointing chisel

- Flat oval form
- Quenched and tempered
- Blade can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

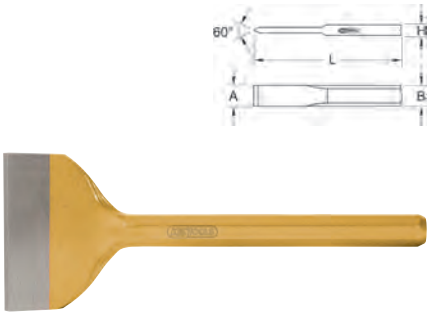

	L mm	A mm	B mm	H mm		
162.0171	250.0	50.0	23.0	13.0	162.0442	500
162.0172	250.0	60.0	26.0	13.0	162.0444	550
162.0173	250.0	70.0	26.0	13.0	162.0444	580

Jointing chisel with hand grip

- Flat oval form
- Quenched and tempered
- Blade can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

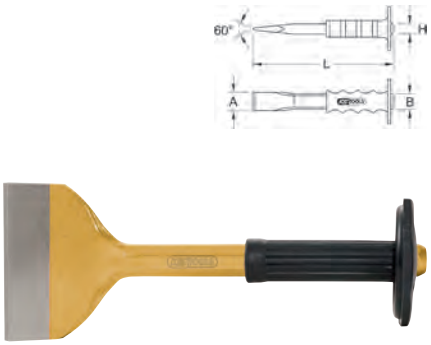

	L mm	A mm	B mm	H mm	
162.0181	250.0	50.0	23.0	13.0	500
162.0182	250.0	60.0	26.0	13.0	550
162.0183	250.0	70.0	26.0	13.0	580

Jointing chisel

- Flat oval form
- Quenched and tempered
- Blade can be resharpened
- Shaft powder coated lacquer
- Carbon manganese silicon steel

	L mm	A mm	B mm	H mm		
156.0570	205.0	50.0	24.0	12.0	-	300
156.0571	215.0	70.0	24.0	12.0	-	400

BRICKLAYERS CHISEL

Bricklayers chisel

- DIN 7254 form A
- Flat oval form
- Blade can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

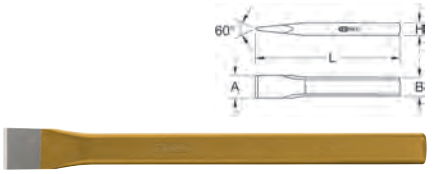

	L mm	A mm	B mm	H mm		g	
162.0191	200.0	27.0	20.0	12.0	162.0441	310	
162.0192	250.0	27.0	20.0	12.0	162.0441	400	
162.0193	300.0	31.0	23.0	13.0	162.0442	580	
162.0194	350.0	31.0	23.0	13.0	162.0442	720	
162.0195	400.0	31.0	23.0	13.0	162.0442	780	
162.0196	500.0	33.0	26.0	13.0	162.0444	1160	
162.0197	600.0	33.0	26.0	13.0	162.0444	1400	
162.0198	800.0	33.0	26.0	13.0	162.0444	1860	
162.0199	1000.0	33.0	26.0	13.0	162.0444	2360	

Bricklayers chisel with hand grip

- DIN 7254 form A
- Flat oval form
- Blade can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

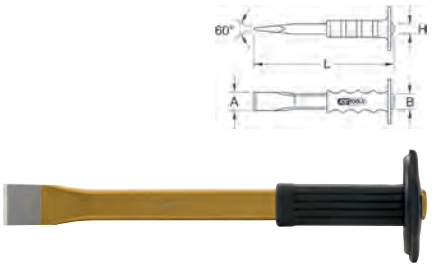

	L mm	A mm	B mm	H mm	g	
162.0202	250.0	27.0	20.0	12.0	400	
162.0203	300.0	31.0	23.0	13.0	580	
162.0204	350.0	31.0	23.0	13.0	720	
162.0205	400.0	31.0	23.0	13.0	800	
162.0206	500.0	33.0	26.0	13.0	1160	
162.0207	600.0	33.0	26.0	13.0	1400	
162.0208	800.0	33.0	26.0	13.0	1860	
162.0209	1000.0	33.0	26.0	13.0	2360	

Bricklayers chisel

- DIN 7254 form B
- 8 point
- Blade can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

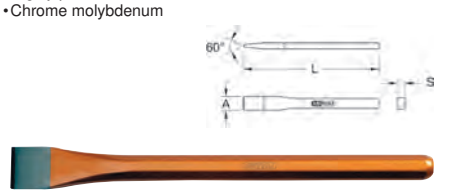

	L mm	A mm	S mm		g	
162.0481	200.0	27.0	16.0	162.0445	300	
162.0482	250.0	27.0	16.0	162.0445	380	
162.0483	300.0	30.0	18.0	162.0446	600	
162.0484	350.0	30.0	18.0	162.0446	700	
162.0485	400.0	30.0	20.0	162.0447	980	
162.0486	500.0	30.0	20.0	162.0447	1240	

Bricklayers chisel with hand grip

- DIN 7254 form B
- 8 point
- Ground point
- With hand protection grip
- Quenched and tempered
- Shaft with gold coated lacquer
- Tip can be resharpened
- Chrome molybdenum

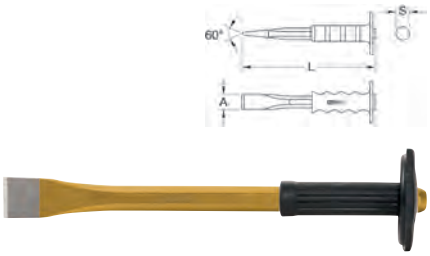

	L mm	A mm	S mm	g	
162.0222	250.0	27.0	16.0	380	
162.0223	300.0	30.0	18.0	600	
162.0224	350.0	30.0	18.0	700	
162.0225	400.0	30.0	20.0	980	
162.0226	500.0	30.0	20.0	1240	

POINTED CHISELS

Pointed chisel

- DIN 7256
- 8 point
- Tip can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

	L mm	S mm		g	
162.0231	200.0	16.0	162.0445	280	
162.0232	250.0	16.0	162.0445	360	
162.0233	300.0	18.0	162.0446	560	
162.0234	350.0	18.0	162.0446	660	
162.0235	400.0	20.0	162.0447	940	
162.0236	500.0	20.0	162.0447	1200	
162.0237	600.0	20.0	162.0447	1480	
162.0238	800.0	20.0	162.0447	1960	
162.0239	1000.0	20.0	162.0447	2440	

Pointed chisel with hand grip

- DIN 7256
- 8 point
- Tip can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

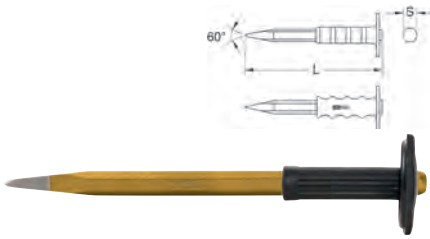

	L mm	S mm	g	
162.0242	250.0	16.0	360	
162.0243	300.0	18.0	560	
162.0244	350.0	18.0	660	
162.0245	400.0	20.0	940	
162.0246	500.0	20.0	1200	
162.0247	600.0	20.0	1480	
162.0248	800.0	20.0	1960	
162.0249	1000.0	20.0	2440	

Pointed chisel

- 8 point
- Quenched and tempered
- Tip can be resharpened
- Shaft with powder coated lacquer
- Carbon manganese silicon steel

	L mm	S mm		g	
156.0511	250.0	16.0	162.0445	390	
156.0512	300.0	16.0	162.0445	400	
156.0513	350.0	16.0	162.0445	450	
156.0514	400.0	18.0	162.0446	660	

Pointed chisel with hand grip

- 8 point
- Quenched and tempered
- Tip can be resharpened
- Shaft with powder coated lacquer
- Carbon manganese silicon steel

	L mm	S mm	g	
156.0515	250.0	16.0	530	
156.0516	300.0	16.0	620	
156.0517	350.0	16.0	710	
156.0518	400.0	16.0	790	

Pointed chisel

- 8 point
- Quenched and tempered
- Blade can be resharpened
- Shaft with powder coated lacquer
- Carbon manganese silicon steel

	L mm	S mm		g	
156.0550	150.0	10.0	-	60	

ELECTRICIANS CHISEL

Electrians chisel

- 4 point
- Quenched and tempered
- Blade can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum



	L mm	A mm	S mm		g	
162.0251	200.0	8.0	6.0	-	60	
162.0252	200.0	10.0	8.0	-	100	
162.0253	200.0	12.0	8.0	-	101	
162.0254	200.0	12.0	10.0	-	140	
162.0255	250.0	10.0	8.0	-	120	
162.0256	250.0	12.0	8.0	-	120	
162.0257	250.0	12.0	10.0	-	185	
162.0258	300.0	12.0	8.0	-	140	

Electrians chisel

- 8 point
- Quenched and tempered
- Blade can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

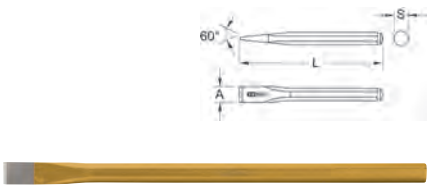

	L mm	A mm	S mm		
162.0261	200.0	12.0	10.0	-	120
162.0262	200.0	14.0	12.0	-	160
162.0263	250.0	12.0	10.0	-	150
162.0264	250.0	14.0	12.0	-	210
162.0265	300.0	12.0	10.0	-	200
162.0266	300.0	14.0	12.0	-	260

CROSS CHISEL

Cross chisel

- DIN 6451
- Flat oval form
- Tip can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

	L mm	A mm	B mm	H mm		
162.0281	100.0	5.0	14.0	9.0	-	60
162.0282	125.0	5.0	14.0	9.0	-	80
162.0283	150.0	6.0	17.0	11.0	-	160
162.0284	175.0	7.0	20.0	12.0	-	240
162.0285	200.0	8.0	23.0	13.0	162.0442	340
162.0286	250.0	8.0	23.0	13.0	162.0442	460
162.0287	300.0	9.0	23.0	13.0	162.0442	560

Cross chisel with hand grip

- DIN 6451
- Flat oval form
- Tip can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

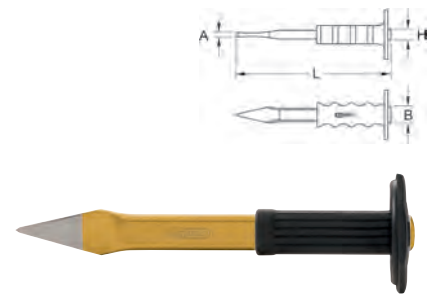

	L mm	A mm	B mm	H mm	
162.0293	250.0	8.0	23.0	13.0	460
162.0294	300.0	9.0	23.0	13.0	560

Cross chisel

- 8 point
- Quenched and tempered
- Tip can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

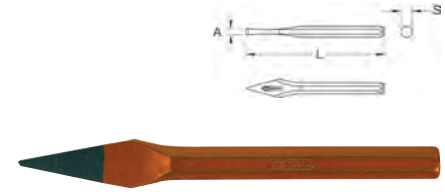

	L mm	A mm	S mm		
162.0301	125.0	4.0	10.0	-	60

Cross chisel

- Flat oval form
- Quenched and tempered
- Tip can be resharpened
- Black lacquer
- Chrome vanadium

	L mm	A mm	B mm	H mm		
156.0326	210.0	8.0	20.0	12.0	-	311
156.0327	250.0	9.0	23.0	13.0	-	430

Cross chisel

- 8 point
- Quenched and tempered
- Chrome plated and mirror polished
- Highly polished
- Chrome vanadium

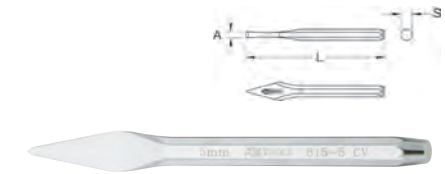

	L mm	A mm	S mm		
156.0161	130.0	5.0	10.0	-	60

Cross chisel with hand grip

- 8 point
- Quenched and tempered
- Tip can be resharpened
- Highly polished
- Chrome molybdenum

	L mm	A mm	S mm	
156.0242	190.0	7.0	12.0	169

TILERS POINTED CHISELS

Tilers pointed chisel

- 4 point
- Quenched and tempered
- Blade can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

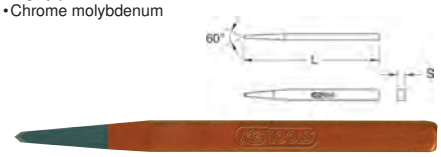

	L mm	S mm		
162.0321	100.0	8.0	-	40
162.0322	200.0	6.0	-	60
162.0323	200.0	8.0	-	100
162.0324	250.0	8.0	-	120
162.0325	250.0	10.0	-	180

BODYWORK CHISELS

Bodywork slitting chisel

- Flat oval form
- Quenched and tempered
- Blade can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

	L mm	A mm	B mm	H mm		
162.0271	250.0	30.0	23.0	13.0	162.0442	460

Bodywork slitting chisel

- DIN 7255
- Flat oval form
- Blade can be resharpened
- Extra fl t
- Burnished
- Chrome vanadium

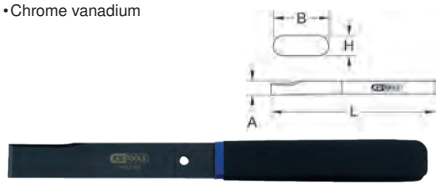

	L mm	A mm	B mm	H mm		
140.2162	300.0	21.0	25.0	6.0	-	310

Bodywork slitting chisel with hand grip

- DIN 7255
- Flat oval form
- Blade can be resharpened
- Extra fl t
- Burnished
- Chrome vanadium

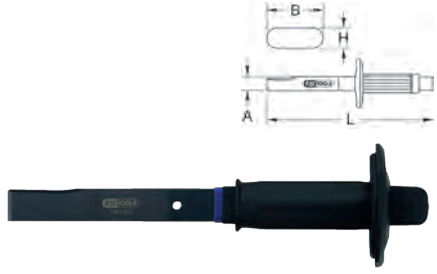

	L mm	A mm	B mm	H mm	
140.2165	300.0	21.0	25.0	6.0	550

BOLSTER CHISEL

Bolster chisel

- Flat oval form
- Quenched and tempered
- Blade can be resharpened
- Shaft gold lacquer
- Carbon manganese silicon steel

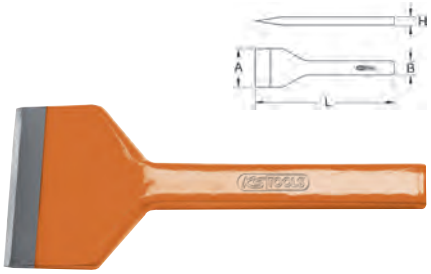

	L mm	A mm		H mm	
162.0431	200.0	60.0	-	15.0	500
162.0432	200.0	80.0	-	15.0	600
162.0433	220.0	100.0	-	18.0	750
162.0434	220.0	120.0	-	18.0	900

GLASS FIBRE CHISELS

Glassfib e chisel

- For paint preserving removal of ornament and window strips and wheel weights on aluminium rims
- Flexible chisel blade
- Impact cap for light impacts
- Ergonomic handle
- Special plastic

	A mm	
911.8131	19.0	130
911.8132	22.0	140
911.8133	26.0	150
911.8134	38.0	180

Glassfib e chisel set

- For paint preserving removal of ornament and window strips
- Flexible chisel blade
- Impact cap for light impacts
- Ergonomic handle
- Special plastic

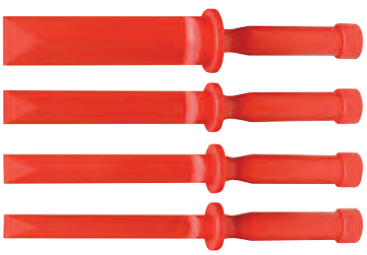

911.8130	4 pcs	19 - 22 - 26 - 38 mm	570

HAND GRIPS

Hand grip for chisel

- Standard version
- PVC

	L mm	D mm	Handle size mm	
162.0441	120.0	80.0	20x12	110
162.0442	120.0	80.0	23x13	110
162.0443	120.0	80.0	26x7	110
162.0444	120.0	80.0	26x13	110
162.0445	120.0	80.0	16	110
162.0446	120.0	80.0	18	110
162.0447	120.0	80.0	20	110

Safety hand grip for chisel

- Double hand protection
- PVC

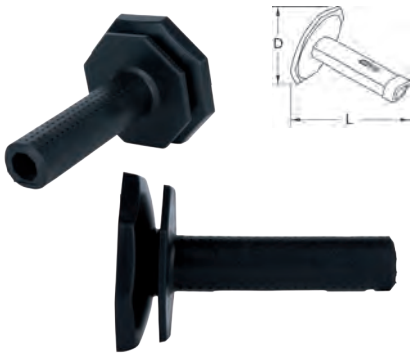

	L mm	D mm	Handle size mm	
162.2128	140.0	100.0	23x13	170
162.2129	140.0	100.0	20	170
162.2130	140.0	100.0	26x7	170
162.2132	140.0	100.0	26x13	170

PIN PUNCHES

Pin punch

- DIN 6458 form B
- 8 point
- Tip can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

	L mm	D mm	S mm		
162.0331	120.0	1.0	10.0	-	65
162.0332	120.0	2.0	10.0	-	65
162.0333	120.0	3.0	10.0	-	65
162.0334	120.0	4.0	10.0	-	65
162.0335	120.0	5.0	10.0	-	65
162.0336	120.0	6.0	10.0	-	65

Pin punch

- DIN 6458 form D
- 8 point
- Tip can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

	L mm	D mm	S mm		
162.0341	120.0	1.0	12.0	-	85
162.0342	120.0	2.0	12.0	-	85
162.0343	120.0	3.0	12.0	-	85
162.0344	120.0	4.0	12.0	-	90
162.0345	120.0	5.0	12.0	-	90
162.0346	120.0	6.0	12.0	-	90
162.0347	120.0	7.0	12.0	-	95
162.0348	120.0	8.0	12.0	-	95
162.0349	120.0	9.0	12.0	-	100
162.0350	120.0	10.0	12.0	-	105
162.0352	150.0	12.0	16.0	-	220

Pin punch with hollow tip

- DIN 6458
- 8 point
- Tip can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

	L mm	D mm	S mm		
162.0461	120.0	1.0	10.0	-	65
162.0462	120.0	2.0	10.0	-	65
162.0463	120.0	3.0	10.0	-	65
162.0464	120.0	4.0	10.0	-	65
162.0465	120.0	5.0	10.0	-	65
162.0466	120.0	6.0	10.0	-	65

Truck punch

- Conical tapered point
- Universal use
- For extracting cotter pins, bolts, bearing rings, etc.
- Ideally suited for daily workshop use
- High quality and substaintial construction
- Premium tempered and hardened steel
- Special steel

	Ø mm	L mm	
450.0091	6,4	300.0	390
450.0092	6,4	380.0	730
450.0093	8,0	300.0	410
450.0094	13,0	460.0	1310

Punch set for trucks

- Conical tapered point
- Universal use
- For extracting cotter pins, bolts, bearing rings, etc.
- Ideally suited for daily workshop use
- High quality and substaintial construction
- Premium tempered and hardened steel
- Special steel

			kg
450.0090	4 pcs	6,4 - 6,4 - 8,0 - 13,0 mm	2.91

Pin punch

- 8 point
- Quenched and tempered
- Chrome plated and mirror polished
- Highly polished
- Chrome vanadium

	L mm	D mm	S mm		g
156.0130	120.0	2.0	9.5	-	60
156.0131	120.0	3.0	9.5	-	60
156.0132	120.0	4.0	9.5	-	60
156.0133	120.0	5.0	9.5	-	60
156.0134	120.0	6.0	9.5	-	60

Pin punches with hand grip

- 8 point
- Quenched and tempered
- Tip can be resharpened
- Highly polished
- Chrome molybdenum

	L mm	D mm	S mm	g
156.0244	185.0	5.0	10.0	115

Pin punch set

- DIN 6458 Form B+D
- 8-point
- Quenched and tempered
- Tip can be re-sharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum
- In a plastic bag

			g
162.2126	6 pcs	120x10x1 - 120x10x2 - 120x10x3 - 120x10x4 - 120x10x5 - 120x10 mm	465

Pin punch set

- DIN 6458 Form B+D
- 8-point
- Quenched and tempered
- Tip can be re-sharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum
- In plastic stands

			g
162.2127	6 pcs	120x10x1 - 120x10x2 - 120x10x3 - 120x10x4 - 120x10x5 - 120x10 mm	465

Pin punch set

- DIN 6458 Form B+D
- 8-point
- Quenched and tempered
- Tip can be re-sharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum
- In metal storage cassette

			g
162.2124	6 pcs	120x10x1 - 120x10x2 - 120x10x3 - 120x10x4 - 120x10x5 - 120x10 mm	710

COTTER PIN DRIVES

Cotter pin drive, long

- 8 point
- Quenched and tempered
- Tip can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum



	L1 mm	L2 mm	D mm	S mm		g
162.0391	175.0	80.0	3.0	10.0	-	60
162.0392	175.0	80.0	4.0	10.0	-	70
162.0393	175.0	80.0	5.0	10.0	-	80
162.0394	175.0	80.0	6.0	10.0	-	90
162.0395	175.0	80.0	8.0	12.0	-	140
162.0396	175.0	80.0	10.0	12.0	-	150

Pin punches with hand grip

- Round
- Quenched and tempered
- Tip can be resharpened
- Burnished
- Chrome vanadium

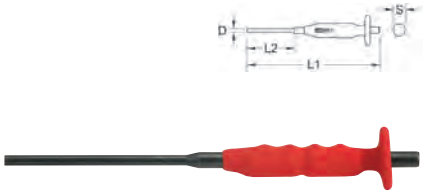

	L1 mm	L2 mm	D mm	S mm	g
156.0026	270.0	110.0	6.0	10.0	130
156.0028	300.0	130.0	8.0	12.0	220
156.0030	300.0	140.0	10.0	12.0	250
156.0032	300.0	140.0	12.0	14.0	340
156.0034	300.0	140.0	14.0	16.0	450

Pin punch set with hand protection grip

- Quenched and tempered
- Tip can be resharpened
- Burnished
- Chrome vanadium
- In metal stand with the possibility of wall hanging

			kg
156.0020	5 pcs	270x6 - 300x8 - 300x10 - 300x12 - 300x14 mm	2.70

Pin punch, extra long

- 8 point
- Quenched and tempered
- Tip can be resharpened
- Shaft with gold coated lacquer
- Chrome molybdenum

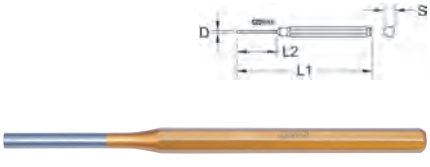

	L1 mm	L2 mm	D mm	S mm		g
162.0401	200.0	40.0	2.0	10.0	-	82
162.0402	200.0	50.0	3.0	10.0	-	90
162.0403	200.0	55.0	4.0	10.0	-	92
162.0404	200.0	55.0	5.0	10.0	-	96
162.0405	200.0	55.0	6.0	12.0	-	100
162.0406	200.0	55.0	8.0	12.0	-	150
162.0407	200.0	55.0	10.0	12.0	-	165

Brake pad cotter pin drive with guide tip

- 8-point
- Extra-long execution
- Quenched and tempered
- With guide pin for locking pins
- Suitable for locking pins on vehicles with disk brakes
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

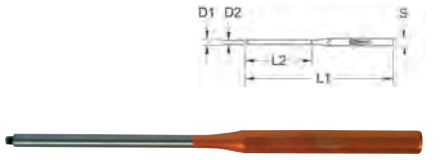

	L1 mm	L2 mm	D1 mm	D2 mm	S mm		g	
162.0411	175.0	85.0	4.0	2.7	10.0	-	60	
162.0412	175.0	85.0	6.0	3.8	10.0	-	70	

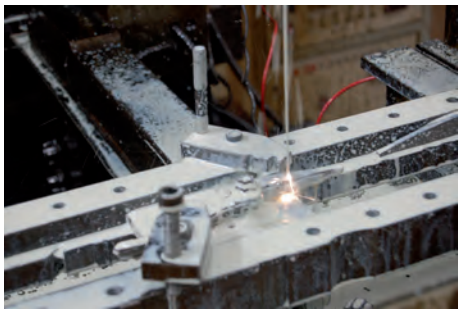

Brake pad cotter pin drive with guide tip

- 6-point
- Extra-long execution
- Quenched and tempered
- 150.2151 with guide pin for locking pins
- Suitable for locking pins on vehicles with disk brakes
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

	L1 mm	L2 mm	D1 mm	D2 mm	S mm		g	
150.2150	180.0	80.0	4.0	-	10.0	-	70	
150.2151	175.0	80.0	5.8	3.1	10.0	-	70	

Pin punch with hand protection grip

- Round
- Quenched and tempered
- Tip can be resharpened
- Burnished
- Chrome vanadium

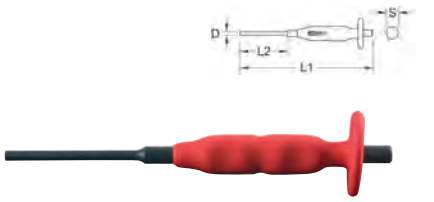

	L1 mm	L2 mm	D mm	S mm	g	
156.0002	130.0	30.0	3.0	8.0	50	
156.0003	145.0	40.0	3.0	8.0	60	
156.0004	180.0	50.0	4.0	8.0	100	
156.0005	180.0	60.0	5.0	10.0	100	
156.0006	205.0	80.0	6.0	10.0	130	
156.0008	225.0	85.0	8.0	12.0	150	
156.0010	225.0	90.0	10.0	12.0	200	

Pin punch set with hand protection grip

- With wall mounting possibility
- Tip can be resharpened
- Quenched and tempered
- Burnished
- Chrome vanadium
- In metal stand

			g	
156.0000	5 pcs	145x3 - 180x4 - 180x5 - 205x6 - 225x8 mm	650	

Pin punch

- 8 point
- Quenched and tempered
- Chrome plated and mirror polished
- Highly polished
- Chrome vanadium

	L1 mm	L2 mm	D mm	S mm		g	
156.0111	115.0	30.0	2.0	8.0	-	40	
156.0112	125.0	40.0	3.0	8.0	-	40	
156.0113	150.0	50.0	4.0	9.5	-	60	
156.0114	165.0	50.0	5.0	9.5	-	70	
156.0115	180.0	55.0	6.0	12.7	-	140	
156.0116	180.0	55.0	8.0	12.7	-	150	

Pin punch set

- Quenched and tempered
- Chrome plated and mirror polished
- Highly polished
- Chrome vanadium
- In plastic support bracket

			g	
156.0150	6 pcs	115x2 - 125x3 - 150x4 - 165x5 - 180x6 - 180x8 mm	520	

Pin punch, extra long

- 8 point
- Quenched and tempered
- chrome plated and mirror polished
- Highly polished
- Chrome vanadium

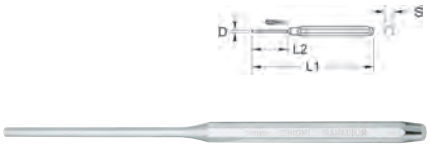

	L1 mm	L2 mm	D mm	S mm		g	
156.0121	200.0	80.0	3.0	9.5	-	70	
156.0122	200.0	85.0	4.0	9.5	-	70	
156.0123	200.0	90.0	5.0	9.5	-	80	
156.0124	200.0	93.0	6.0	9.5	-	80	
156.0125	200.0	93.0	8.0	12.7	-	150	
156.0126	200.0	93.0	10.0	12.7	-	170	

Pin punch set

- 8 point
- Quenched and tempered
- Chrome plated and mirror polished
- Highly polished
- Chrome vanadium
- In metal stand with the possibility of wall hanging

			kg	
156.0180	17 pcs	Pin punch set	1.00	

consists of:

		g	
156.0111	Pin punch octagonal shaft, 2mm	40	
156.0112	Pin punch octagonal shaft, 3mm	40	
156.0113	Pin punch octagonal shaft, 4mm	60	
156.0114	Pin punch octagonal shaft, 5mm	70	
156.0115	Pin punch octagonal shaft, 6mm	140	
156.0116	Pin punch octagonal shaft, 8mm	150	
156.0121	Pin punch octagonal shaft, XXL, 3mm	70	
156.0122	Pin punch octagonal shaft, XXL, 4mm	70	
156.0123	Pin punch octagonal shaft, XXL, 5mm	80	
156.0124	Pin punch octagonal shaft, XXL, 6mm	80	
156.0125	Pin punch octagonal shaft, XXL, 8mm	150	
156.0126	Pin punch octagonal shaft, XXL, 10mm	170	
156.0130	Pin punch, 2mm	60	
156.0131	Pin punch, 3mm	60	
156.0132	Pin punch, 4mm	60	
156.0133	Pin punch, 5mm	60	
156.0134	Pin punch, 6mm	60	

Combi tool set

- Quenched and tempered
- Chrome plated and mirror polished
- Highly polished
- Chrome vanadium
- In plastic support bracket

			g
156.0160	5 pcs	Combi tool set	360

consists of:

		g
156.0113	Punch, octagonal, mirror polished, Ø 4mm	60
156.0131	Punch, mirror polished, Ø 3mm	60
156.0175	Center punch, octagonal, mirror polished, Ø 5mm	60
156.0162	Flat chisel, octagonal, mirror polished, 130mm	70
156.0161	Cross chisel, mirror polished, 130mm	60

Pin punches with hand grip

- Round
- Quenched and tempered
- With two component handle
- Tip can be re-sharpened
- Tip polished, shaft burnished
- Chrome vanadium

	D mm	L1 mm	L2 mm	S mm	g
156.0211	2.0	150.0	30.0	10.0	100
156.0212	3.0	150.0	40.0	10.0	100
156.0213	4.0	150.0	55.0	10.0	100
156.0214	5.0	150.0	60.0	10.0	100
156.0215	6.0	150.0	60.0	10.0	100
156.0216	7.0	150.0	60.0	12.0	110
156.0217	8.0	150.0	60.0	12.0	110
156.0218	9.0	150.0	60.0	12.0	110
156.0219	10.0	150.0	60.0	12.0	130

Pin punch set with hand protection grip

- Round
- Quenched and tempered
- With two component handle
- Tip can be re-sharpened
- Tip polished, shaft burnished
- Chrome vanadium

			g
156.0220	5 pcs	3 - 4 - 5 - 6 - 8 mm	800

Pin punch, cylindrical shaft

- Quenched and tempered
- Tip can be resharpened
- Highly polished
- Chrome molybdenum

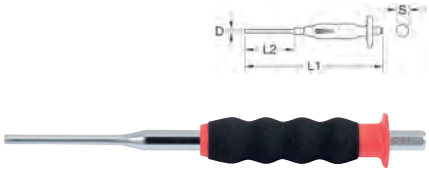

	L1 mm	L2 mm	D mm	S mm	g
156.0231	150,0	50.0	3.0	8.0	52
156.0232	180,0	61.0	4.0	10.0	93
156.0233	200,0	61.0	5.0	10.0	109
156.0234	210,0	71.0	6.0	12.0	160
156.0235	220,0	85.0	8.0	12.0	172

Punch set, cylindrical shaft

- Quenched and tempered
- Tip can be resharpened
- Highly polished
- Chrome molybdenum

			g
156.0230	5 pcs	3 - 4 - 5 - 6 - 8 mm	715

Chisel and punch set

- Quenched and tempered
- Tip can be resharpened
- Highly polished
- Chrome molybdenum

			g
156.0240	5 pcs	Chisel and punch set	900

consists of:

		g
156.0232	Cotter pin drive Ø 4 mm, cylindrical	93
156.0241	Flat chisel, 20 mm, 8-point	273
156.0242	Cross chisel, 7 mm, 8-point	169
156.0243	Centre punch, 10 mm, 8-point	118
156.0244	Punch, Ø 5 mm, conical	115

Cotter pin drive with guide sleeve

- Guide sleeve, coded
- Ø 0.9 to 4.9 mm with loose guide sleeve
- Ø 5.9 mm with fi ed sleeve
- Highly polished
- Chrome vanadium

	L mm	D mm	S mm	g
162.2249	70.0	0.9	5.0	15
162.2250	80.0	1.4	6.0	21
162.2251	83.0	1.8	6.0	21
162.2252	92.0	2.4	7.0	30
162.2253	94.0	2.8	7.0	30
162.2254	100.0	3.4	8.0	35
162.2255	100.0	3.9	8.0	35
162.2256	110.0	4.9	10.0	45
162.2257	115.0	5.9	12.0	68

Cotter pin drive set with guide sleeve

- Guide sleeve, coded
- Ø 0.9 to 4.9 mm with loose guide sleeve
- Ø 5.9 mm with fi ed sleeve
- Highly polished
- Chrome vanadium
- In a plastic bag

			g
162.2310	8 pcs	70x0,9 - 80x1,4 - 83x1,8 - 92x2,4 - 94x2,8 - 100x3,4 - 100x3,9 - 115x5,9 mm	240

Pin punch

- DIN 6450 form C
- 8 point
- Tip can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum



	L1 mm	L2 mm	D mm	S mm		g
162.0371	150.0	35.0	2.0	10.0	-	60
162.0372	150.0	40.0	2.5	10.0	-	60
162.0373	150.0	40.0	3.0	10.0	-	60
162.0374	150.0	40.0	3.5	10.0	-	65
162.0375	150.0	50.0	4.0	10.0	-	65
162.0376	150.0	50.0	4.5	10.0	-	65
162.0377	150.0	50.0	5.0	10.0	-	65
162.0378	150.0	50.0	6.0	10.0	-	70
162.0379	150.0	55.0	7.0	10.0	-	95
162.0380	150.0	55.0	8.0	12.0	-	100
162.0381	150.0	55.0	9.0	12.0	-	110
162.0382	150.0	55.0	10.0	12.0	-	115
162.0383	150.0	55.0	12.0	16.0	-	170

Pin punch set

- Quenched and tempered
- Tip can be re-sharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum
- In a plastic bag



162.2122	6 pcs	150x10x3 - 150x10x4 - 150x10x5 - 150x10x6 - 150x12x8 - 150x12x10 mm	470

Pin punch set

- Quenched and tempered
- Tip can be re-sharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome vanadium
- In a plastic holder

162.2123	6 pcs	150x10x3 - 150x10x4 - 150x10x5 - 150x10x6 - 150x12x8 - 150x12x10 mm	470

Pin punch set

- Quenched and tempered
- Tip can be resharpened
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum
- In metal storage box

162.0370	6 pcs	150x10x3 - 150x10x4 - 150x10x5 - 150x10x6 - 150x12x8 - 150x12x10mm	750

Combination set

- Evenly hardened and carefully tempered through the whole length
- Impact heads inductively tempered
- Working ends polished ground and clear lacquered
- In metal storage cassette

162.2114	6 pcs	Combination set	740

consists of:

162.0212	Flat chisel, 8-point, 150mm	120
162.0301	Cross chisel, 8-point, 4x125mm	60
162.0361	Centre punch, 8-point, Ø 4mm	65
162.0375	Cotter pin drive, 8-point, Ø 4mm	65
162.0333	Punch, 8-point, Ø 3mm	65
162.0345	Punch, 8-point, Ø 5mm	90

Combination set

- Evenly hardened and carefully tempered through the whole length
- Impact heads inductively tempered
- Working ends polished ground and clear lacquered
- In a plastic bag

162.2117	6 pcs	Combination set	510

consists of:

162.0212	Flat chisel, 8-point, 150mm	120
162.0301	Cross chisel, 8-point, 4x125mm	60
162.0361	Centre punch, 8-point, Ø 4mm	65
162.0375	Cotter pin drive, 8-point, Ø 4mm	65
162.0333	Punch, 8-point, Ø 3mm	65
162.0345	Punch, 8-point, Ø 5mm	90

Combination set

- Evenly hardened and carefully tempered through the whole length
- Impact heads inductively tempered
- Working ends polished ground and clear lacquered
- In a plastic holder

162.2118	6 pcs	Combination set	510

consists of:

162.0212	Flat chisel, 8-point, 150mm	120
162.0301	Cross chisel, 8-point, 4x125mm	60
162.0361	Centre punch, 8-point, Ø 4mm	65
162.0375	Cotter pin drive, 8-point, Ø 4mm	65
162.0333	Punch, 8-point, Ø 3mm	65
162.0345	Punch, 8-point, Ø 5mm	90

CENTRE PUNCH

Centre punch

- Round
- Quenched and tempered
- Tip can be resharpened
- Black surface finis
- Chrome vanadium

	L mm	D mm	S mm		
156.0340	150.0	5.0	10.0	-	70
156.0342	150.0	6.0	12.0	-	120
156.0344	210.0	7.0	14.0	-	170
156.0346	215.0	8.0	16.0	-	230
156.0348	220.0	9.0	18.0	-	310
156.0350	220.0	10.0	20.0	-	410
156.0352	220.0	11.0	22.0	-	510
156.0354	250.0	12.0	24.0	-	640

CENTRE PUNCHES

Centre punch

- DIN 7250
- 8 point
- Tip can be resharpened
- Quenched and tempered
- Shaft with gold coated lacquer
- Highly polished
- Chrome molybdenum

	L mm	D mm	S mm		
162.0361	120.0	4.0	10.0	-	65
162.0362	120.0	5.0	12.0	-	90
162.0363	150.0	5.0	12.0	-	120
162.0364	150.0	6.0	14.0	-	200
162.0365	150.0	8.0	18.0	-	260

Centre punch

- Round
- Quenched and tempered
- Burnished
- Chrome vanadium

	L mm	D mm	S mm		g
156.0404	100.0	4.0	10.0	-	30
156.0406	115.0	6.0	10.0	-	60
156.0408	120.0	8.0	12.0	-	120
156.0410	130.0	10.0	14.0	-	135

Centre punch

- 8 point
- Quenched and tempered
- Chrome plated and mirror polished
- Highly polished
- Chrome vanadium

	L mm	D mm	S mm		g
156.0175	120.0	5.0	10.0	-	60

Centre punch with hand grip

- 8 point
- Quenched and tempered
- Tip can be resharpened
- Highly polished
- Chrome molybdenum

	L mm	D mm	S mm	g
156.0243	185.0	10.0	10.0	118

Automatic centre punch

- Round
- Ergonomic handle
- Power of impact 17-20 kg
- Phosphate finis
- Chrome vanadium



	L mm	D mm	S mm	g
156.0466	160.0	4.0	25.0	250

SCRIBER

Scriber

- For marking of work pieces
- Straight and 70° bent tip
- Knurled handle
- Hardened point
- Burnished
- Special steel

	L mm	D mm	g
300.0300	190.0	4.0	10

Hard metal scriber

- For marking of workpieces
- Straight and 70° bent tip
- With hard metal tip
- With hardened point
- Special steel

	L mm	D mm	g
300.2136	250.0	8.0	46

Hard metal scriber

- For marking of workpieces
- Straight and one-sided tip
- With hard metal tip
- With hardened point
- Special steel

	L mm	D mm	g
300.2135	170.0	4.0	38

Hard metal scriber

- For marking of work pieces
- Straight form
- Hard metal tip
- Pocket clip
- Hardened point
- Chrome plated
- Special steel

	L mm	D mm	g
300.0301	145.0	5.0	60
300.2137	150.0	6.0	36

Hard metal scriber in ball-point pen form

- For marking of work pieces
- Straight form
- Hardened and interchangeable hard metal tips
- Pocket clip
- Protection through foldaway needle tip
- Adjustable and lead bow mine
- Metal housing

	L mm	D mm	Replacement tip	g
300.0302	150.0	8.0	300.0303	40

Hard metal scriber in ball-point pen form

- For marking of workpieces
- Straight form
- With hardened and interchangeable hard metal tips
- With pocket clip
- Protection through foldaway needle tip
- With adjustable and lead bow mine
- Metal housing

	L mm	D mm	Replacement tip	g
300.2138	160.0	8.0	300.2139	22

PUNCHES

Punches

- Impact cap on the handle end
- Sealed beech wood handle
- Chrome plated and mirror polished
- Highly polished
- Chrome vanadium



	L1 mm	L2 mm	D mm	g
300.1081	190.0	100.0	6.0	70

AWLE

Awle

- Impact cap on the handle end
- Sealed beech wood handle
- Chrome plated and mirror polished
- Highly polished
- Chrome vanadium



	L1 mm	L2 mm	D mm	g
300.1082	190.0	100.0	6.0	70

STAMP SETS

Number stamping set

- Lettering to DIN 1451
- Numbers „0 - 9“
- For stamping in materials up to 100 kp / mm² resistance
- 4 point shaft
- Font size 5 - 6mm
- Shaft engraved
- In plastic storage box

			g
156.0467	10 pcs	Number stamping set	500

Letter stamping set

- Lettering to DIN 1451
- Letters „A - Z“
- For stamping in materials up to 100 kp / mm² resistance
- 4 point shaft
- Font size 5 - 6mm
- Shaft engraved
- In plastic storage box

			kg
156.0468	27 pcs	Letter stamping set	1.33

Universal letter and number punch set

- Lettering to DIN 1451
- For stamping in materials up to 100 kp / mm² resistance
- 4 point shaft
- Font size 5 - 6mm
- Shaft engraved
- In durable plastic storage case

			kg
156.0465	40 pcs	Universal letter and number punch set	2.37
1 x			
1 x		0 - 9	
1 x		A - Z	
1 x			
1 x			

GASKET RING DISMANTLING TOOL

Gasket ring dismantling tool

- Burnished
- Chrome vanadium

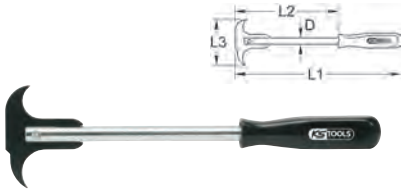

	L1 mm	L2 mm	L3 mm	D mm	g	
550.1060	300.0	195.0	85.0	12.0	380	

Hook tool set

- Ideal for removing and use of O rings and seals
- With one component handle
- With hanging hole
- Special steel

			g
550.1045	4 pcs	Hook tool set	120

consists of:

		g
550.1046	Hook tool 120mm blade, straight version	27
550.1047	Hook tool 120mm blade, 45° angled version	27
550.1048	Hook tool 120mm blade, 90° angled version	27
550.1049	Hook tool 120mm blade, 135° angled version	27

Master hook tool set

- Ideal for removing and use of O rings and seals
- With hanging hole
- Special steel

			g
550.1070	9 pcs	Master hook tool set	680

consists of:

		g
550.1046	Hook tool 120mm blade, straight version	27
550.1047	Hook tool 120mm blade, 45° angled version	27
550.1048	Hook tool 120mm blade, 90° angled version	27
550.1049	Hook tool 120mm blade, 135° angled version	27
550.1071	Hook tool large, straight	91
550.1072	Hook tool large, 90°offset	105
550.1073	Hook tool large, sickle form	88
550.1074	T-handle hook tool, S-form small	42
550.1075	T-handle hook tool, S-form big	96

HANDLE PUNCH

Handle punch

- According to DIN 7200 form A
- Strong forged form
- Pipe polished ground
- For punching holes and production of seals and gasket rings
- Interior conical for removing the blank head
- Shaft machined
- Red lacquer
- Cutting edge hardened
- Special tool steel

	L mm	D mm	D	kg	
129.2002	100.0	2.0	-	0.04	
129.2003	100.0	3.0	-	0.04	
129.2004	105.0	4.0	-	0.04	
129.2005	110.0	5.0	-	0.05	
129.2006	110.0	6.0	-	0.05	
129.2007	115.0	7.0	-	0.05	
129.2008	120.0	8.0	-	0.07	
129.2009	120.0	9.0	-	0.07	
129.2010	130.0	10.0	-	0.07	
129.2011	130.0	11.0	-	0.10	
129.2012	130.0	12.0	15/32	0.12	
129.2013	140.0	13.0	1/2	0.16	
129.2014	140.0	14.0	9/16	0.16	
129.2015	140.0	15.0	19/32	0.16	
129.2016	145.0	16.0	5/8	0.17	
129.2017	145.0	17.0	21/32	0.21	
129.2018	145.0	18.0	11/16	0.21	
129.2019	145.0	19.0	3/4	0.21	
129.2020	160.0	20.0	25/32	0.29	
129.2021	160.0	21.0	13/16	0.29	
129.2022	160.0	22.0	7/8	0.30	
129.2023	170.0	23.0	29/32	0.33	
129.2024	170.0	24.0	15/16	0.34	
129.2025	170.0	25.0	1	0.36	
129.2026	170.0	26.0	1.1/32	0.36	
129.2027	175.0	27.0	1.1/16	0.45	
129.2028	175.0	28.0	1.3/32	0.46	
129.2029	175.0	29.0	1.1/8	0.46	
129.2030	190.0	30.0	1.3/16	0.56	
129.2031	190.0	31.0	-	0.56	
129.2032	192.0	32.0	1.1/4	0.56	
129.2033	195.0	33.0	-	0.64	
129.2034	195.0	34.0	1.5/16	0.65	
129.2035	195.0	35.0	1.3/8	0.66	
129.2036	195.0	36.0	-	0.66	
129.2037	205.0	37.0	1.7/16	0.75	
129.2038	205.0	38.0	1.1/2	0.78	
129.2039	205.0	39.0	-	0.80	
129.2040	205.0	40.0	1.9/16	0.81	
129.2041	205.0	41.0	1.5/8	0.82	
129.2042	220.0	42.0	-	0.98	
129.2043	220.0	43.0	1.11/16	0.98	
129.2044	220.0	44.0	-	0.98	
129.2045	220.0	45.0	1.3/4	1.00	
129.2046	220.0	46.0	1.13/16	1.10	
129.2047	230.0	47.0	1.7/8	1.16	
129.2048	230.0	48.0	-	1.18	
129.2049	230.0	49.0	1.15/16	1.19	
129.2050	230.0	50.0	-	1.20	
129.2051	230.0	51.0	2	1.20	
129.2052	240.0	52.0	-	1.85	
129.2053	240.0	53.0	-	1.85	
129.2054	240.0	54.0	2.1/8	1.85	
129.2055	240.0	55.0	-	1.85	
129.2056	260.0	56.0	2.3/16	1.85	
129.2057	260.0	57.0	-	1.85	
129.2058	260.0	58.0	2.1/4	1.85	
129.2059	260.0	59.0	-	1.85	
129.2060	260.0	60.0	-	1.85	
129.2061	260.0	61.0	-	1.85	

	L mm	D mm	D	kg	
129.2062	260.0	62.0	-	1.85	
129.2063	260.0	63.0	-	1.85	
129.2064	260.0	64.0	2.1/2	1.85	
129.2065	260.0	65.0	-	3.65	
129.2066	260.0	66.0	-	3.65	
129.2067	300.0	67.0	-	3.65	
129.2068	300.0	68.0	-	3.65	
129.2069	300.0	69.0	-	3.65	
129.2070	300.0	70.0	2.3/4	3.65	
129.2071	300.0	71.0	-	3.65	
129.2072	300.0	72.0	-	3.65	
129.2073	300.0	73.0	-	3.65	
129.2074	300.0	74.0	-	3.65	
129.2075	300.0	75.0	-	4.30	
129.2076	300.0	76.0	3	4.30	
129.2077	340.0	77.0	-	4.30	
129.2078	340.0	78.0	-	4.30	
129.2079	340.0	79.0	-	4.30	
129.2080	340.0	80.0	-	4.30	
129.2085	340.0	85.0	-	4.30	
129.2090	345.0	90.0	-	5.15	
129.2095	345.0	95.0	3.3/4	8.50	
129.2100	380.0	100.0	-	8.50	
129.2105	380.0	105.0	-	8.50	
129.2110	380.0	110.0	-	8.50	
129.2115	380.0	115.0	4.1/2	8.50	
129.2120	380.0	120.0	-	8.50	

Arc punch set

- According to DIN 7200 form A
- Strong forged form
- Pipe polished ground
- For punching holes and production of seals and gasket rings
- Interior conical for removing the blank head
- Shaft machined
- Red lacquer
- Cutting edge hardened
- Special tool steel

			kg	
129.2102	7 pcs	3 - 5 - 7 - 8 - 10 - 11 - 13 mm	0.72	
129.2103	8 pcs	3 - 5 - 7 - 8 - 10 - 13 - 16 - 19 mm	1.00	
129.2106	8 pcs	6 - 8 - 10 - 12 - 14 - 16 - 20 - 25 mm	1.51	
129.2104	10 pcs	3 - 5 - 7 - 8 - 10 - 13 - 16 - 19 - 22 - 25 mm	1.00	

ROUND HOLE PUNCH

Round hole punch

- According to DIN 7200 form B
- Strong forged form
- Pipe polished ground
- For punching holes and production of seals and gasket rings
- Interior conical for removing the blank head
- Red lacquer
- Cutting edge hardened
- Special tool steel

	L mm	D mm	g	
129.2301	105.0	1.0	22	
129.23015	105.0	1.5	22	
129.2302	105.0	2.0	22	
129.23025	105.0	2.5	28	
129.2303	105.0	3.0	28	
129.23035	110.0	3.5	35	
129.2304	110.0	4.0	35	
129.23045	115.0	4.5	47	
129.2305	115.0	5.0	47	
129.2306	115.0	6.0	56	
129.2307	120.0	7.0	56	
129.2308	120.0	8.0	71	
129.2309	125.0	9.0	71	
129.2310	125.0	10.0	82	
129.2311	125.0	11.0	110	
129.2312	130.0	12.0	130	
129.2313	130.0	13.0	140	
129.2314	135.0	14.0	170	
129.2315	135.0	15.0	180	
129.2316	140.0	16.0	200	
129.2317	140.0	17.0	220	
129.2318	150.0	18.0	280	
129.2319	150.0	19.0	300	
129.2320	156.0	20.0	350	
129.2321	156.0	21.0	380	
129.2322	156.0	22.0	430	
129.2323	156.0	23.0	460	
129.2324	160.0	24.0	550	
129.2325	160.0	25.0	580	

Round hole punch set

- According to DIN 7200 form B
- Strong forged form
- Pipe polished ground
- For punching holes and production of seals and gasket rings
- Interior conical for removing the blank head
- Shaft machined
- Red lacquer
- Cutting edge hardened
- Special tool steel

			g	
129.2113	7 pcs	5 - 6 - 7 - 10 - 11 - 12 mm	620	
129.2108	7 pcs	3 - 5 - 7 - 8 - 10 - 11 - 13 mm	730	
129.2109	8 pcs	3 - 5 - 7 - 8 - 10 - 13 - 16 - 19 mm	1260	
129.2107	9 pcs	2 - 3 - 4 - 5 - 6 - 7 - 8 - 9 - 10 mm	640	
129.2111	9 pcs	3 - 5 - 7 - 8 - 10 - 13 - 16 - 19 - 22 mm	1760	
129.2112	10 pcs	3 - 5 - 7 - 8 - 10 - 13 - 16 - 19 - 22 - 25 mm	2360	

HOLE PUNCHES

Hole punch set

- For punching out rings and for making discs and holes
- Punches can also be used in pairs
- Chrome vanadium
- In durable plastic storage case

Suitable for: foam rubber, cardboard, leather, rubberfib ous materials, plastics and lead

			kg	
129.0100	16 pcs	Hole punch set	1.10	

consists of:

		g	
129.0101	Three-size holder for seal punches	300	
129.0103	Hole punch, thread holder, 3mm	10	
129.0104	Hole punch, thread holder, 4mm	10	
129.0106	Hole punch, thread holder, 6mm	10	
129.0108	Hole punch, thread holder, 8mm	10	
129.0110	Hole punch, thread holder, 10mm	10	
129.0112	Hole punch, punching iron mandrel, 12mm	20	
129.0114	Hole punch, punching iron mandrel, 14mm	20	
129.0116	Hole punch, punching iron mandrel, 16mm	20	
129.0118	Hole punch, punching iron mandrel, 18mm	20	
129.0120	Hole punch, punching iron mandrel, 20mm	20	
129.0122	Hole punch, punching iron mandrel, 22mm	40	
129.0124	Hole punch, punching iron mandrel, 24mm	40	
129.0126	Hole punch, punching iron mandrel, 26mm	40	
129.0128	Hole punch, punching iron mandrel, 28mm	40	
129.0130	Hole punch, punching iron mandrel, 30mm	40	

RIVET PROCESSING TOOL

Rivet setters

- Working ends polished ground and clear lacquered
- Suitable for rivets according to DIN 660 / 661 / 662 / 674
- Chrome vanadium

	Ø rivet mm	L mm	S mm	g	
129.2400	2.0	100.0	10.0	60	
129.2401	3.0	100.0	10.0	60	
129.2402	4.0	100.0	12.0	90	
129.2403	5.0	110.0	14.0	135	
129.2404	6.0	110.0	14.0	135	
129.2405	7.0	120.0	16.0	190	
129.2406	8.0	120.0	16.0	190	
129.2407	9.0	130.0	18.0	265	
129.2408	10.0	130.0	20.0	325	

Rivet setter set

- According to DIN 7200 Form B
- Suitable for rivets according to DIN 660 / 661 / 662 / 674
- Strong forged form
- Pipe polished ground
- For punching holes and production of seals and gasket rings
- Interior conical for removing the blank head
- Shaft machined
- Red lacquer
- Cutting edge hardened
- Special tool steel
- In a plastic holder

			g
129.2420	5 pcs	2 - 3 - 4 - 5 - 6 mm	520

Rivet setter and rivet header, combined

- 8-point
- Premium tempered and hardened steel
- Lacquered
- Chrome vanadium

	Ø rivet mm	L mm	B mm	H mm	g
129.2210	2.0	100.0	16.0	10.0	115
129.2211	3.0	100.0	16.0	10.0	115
129.2212	4.0	100.0	20.0	10.0	145
129.2213	5.0	110.0	25.0	12.0	215
129.2214	6.0	120.0	25.0	15.0	310
129.2215	7.0	120.0	30.0	15.0	330
129.2216	8.0	140.0	40.0	20.0	680
129.2217	9.0	160.0	40.0	25.0	950
129.2218	10.0	160.0	40.0	25.0	940

RIVET SETS

Rivet head setter

- Working ends polished ground and clear lacquered
- Suitable for rivets according to DIN 660
- Chrome vanadium

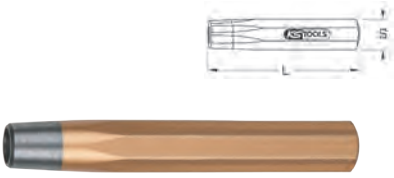

	Ø rivet mm	L mm	S mm	g
129.2199	2.0	100.0	10.0	60
129.2200	3.0	100.0	10.0	60
129.2201	4.0	100.0	12.0	90
129.2202	5.0	110.0	14.0	135
129.2203	6.0	110.0	16.0	175
129.2204	7.0	120.0	18.0	240
129.2205	8.0	120.0	20.0	305
129.2206	9.0	130.0	22.0	400
129.2207	10.0	130.0	24.0	480

Rivet head setter set

- Working ends polished ground and clear lacquered
- Suitable for rivets according to DIN 660
- Chrome vanadium
- In a plastic holder

			g
129.2209	5 pcs	2 - 3 - 4 - 5 - 6 mm	520

FLATTENERS

Tapware assembly and dismantling set

- 8-point
- Quenched and tempered
- Special steel

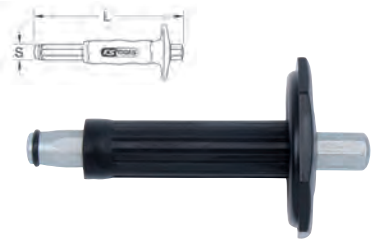

	L mm	S mm	g
156.0770	170.0	16.0	510

TAPER PUNCHES

Punch drawbore pin

- Hardened through the whole length
- Cone polished
- Carbon manganese silicon steel

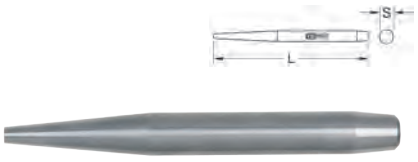

	L mm	S mm	kg
129.2161	110.0	11.0	0.07
129.2162	120.0	13.0	0.11
129.2163	150.0	15.0	0.19
129.2164	170.0	17.0	0.27
129.2165	170.0	19.0	0.34
129.2166	190.0	21.0	0.45
129.2167	200.0	23.0	0.47
129.2168	200.0	25.0	0.68
129.2169	210.0	27.0	0.84
129.2170	210.0	28.0	0.91
129.2171	230.0	29.0	1.06
129.2172	230.0	31.0	1.21
129.2173	250.0	33.0	1.52
129.2174	280.0	34.0	1.80
129.2175	280.0	36.0	2.02
129.2176	280.0	37.0	2.14

Assembly drawbore pin

- Hardened through the whole length
- Cone polished
- Carbon manganese silicon steel

	L mm	D mm	S mm	g
129.2177	120.0	5.0	11.0	75
129.2178	120.0	5.0	13.0	90
129.2179	150.0	6.0	15.0	165
129.2180	170.0	7.0	17.0	240
129.2181	170.0	7.0	19.0	300
129.2182	190.0	8.0	21.0	410
129.2183	190.0	9.0	23.0	485
129.2184	200.0	10.0	25.0	585
129.2185	210.0	12.0	28.0	805
129.2186	230.0	12.0	31.0	1050
129.2187	250.0	13.0	34.0	1345
129.2188	270.0	14.0	37.0	1720

Assembly punch

- Hardened through the whole length
- Cone polished
- Chrome vanadium

	L mm	D mm	S mm	g
129.2189	180.0	5.0	12.0	110
129.2190	200.0	6.0	13.0	150
129.2191	200.0	8.0	16.0	220
129.2192	200.0	9.0	20.0	340
129.2193	230.0	10.0	22.0	460
129.2194	250.0	11.0	24.0	620
129.2195	280.0	12.0	27.0	870
129.2196	315.0	14.0	30.0	1260
129.2197	340.0	15.0	32.0	1570
129.2198	380.0	16.0	36.0	2230

BENDING IRONS AND PRY BARS

Pry bar

- round
- Quenched and tempered
- Forged
- Cone polished
- Special steel

	D mm	L1 mm	L2 mm	S mm	g
129.2220	5.5	500.0	170.0	20.0	970

Bending iron/pry bar

- 4-point
- Quenched and tempered
- Forged
- Cone polished
- Special steel

	D1 mm	D2 mm	L mm	S mm	g
129.2221	14.0	1.0	400.0	14.0	500

Bending iron/pry bar

- round
- Quenched and tempered
- Forged
- Special steel

	D1 mm	D2 mm	L mm	S mm	kg
129.2219	22.0	5.0	605.0	19.0	1.30

Bending iron/pry bar

- 6-point
- Quenched and tempered
- Forged
- Cone polished
- Special steel

	D1 mm	D2 mm	L mm	S mm	g
129.2222	22.0	5.0	405.0	16.0	650

Crow bar

- 8-point
- Quenched and tempered
- Red powder coating
- Special steel



	D mm	L m	S mm		kg
156.0595	50.0	1.50	25.0	-	4.84
156.0596	50.0	1.80	25.0	-	5.89
156.0597	50.0	1.25	25.0	-	7.07

Special crow bar

- flat
- Quenched and tempered
- Red powder coating
- Forged
- Special steel

	D1 mm	D2 mm	L mm	kg
129.2223	35.0	37.0	500.0	1.35
129.2224	35.0	37.0	600.0	1.80
129.2225	35.0	37.0	800.0	2.30

Crow bar

- 6 point
- Quenched and tempered
- Red powder coating
- Forged
- Special steel

	D1 mm	D2 mm	L m	S mm		kg
156.0590	30.0	37.0	0.45	19.0	-	1.16
156.0591	32.0	40.0	0.60	19.0	-	1.30
156.0592	37.0	40.0	0.70	19.0	-	1.56
156.0593	38.0	45.0	0.80	19.0	-	1.95
156.0594	38.0	45.0	1.00	19.0	-	3.27

Crow bar

- 8-point
- Quenched and tempered
- Red powder coating
- Special steel

	D1 mm	D2 mm	L m	S mm		kg
156.0575	105.0	25.0	1.60	25.0	-	6.21
156.0576	105.0	25.0	1.80	25.0	-	7.94

Steel reinforcement pry bar

- Round
- For bending and aligning of steel reinforcement and armouring rod
- Quenched and tempered
- Special steel

	D1 mm	D2 mm	L mm	S mm		kg
118.3120	6.0	8.0	375.0	11.0	-	0.32
118.3121	8.0	10.0	465.0	12.0	-	0.55
118.3122	10.0	12.0	560.0	14.0	-	0.79
118.3123	12.0	14.0	650.0	16.0	-	1.02

21 INDUSTRIAL SAFETY / WORKWEAR

KS TOOLS®

Innovation is our mission!

	PAGE
HEAD PROTECTION	582
EYE PROTECTION	582 - 583
EAR PROTECTION	583 - 584
WELDING PROTECTION	584
RESPIRATORY PROTECTION	585
HAND PROTECTION	586 - 588
FOOT PROTECTION	589 - 592
T-SHIRTS	592
POLO SHIRTS	592 - 593
SWEATSHIRTS/SWEATERS	593
SHIRTS	593
SOFTSHELLJACKETS	593
FLEECE JACKETS	593 - 594
TROUSERS	594
WORK COAT	594
OVERALL	594

WORKWEAR / INDUSTRIAL SAFETY

Head protection

Eye protection

Hearing protection

Welding protection

Respiratory protection

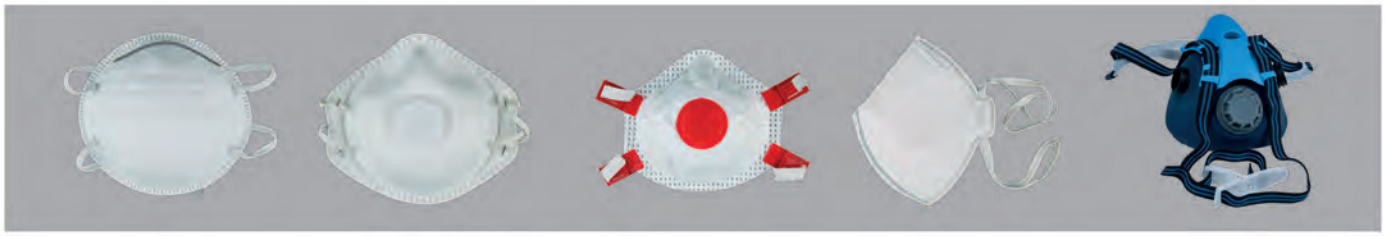

Hand protection

Foot protection

Work garments

Perfect grip - perfect protection

Univesal gloves for occupation and leisure, particularly suitably for working in technical area, excellent comfot for working with small parts, dirt and humidity resistant material.

Vent holes in the fi ger area

Inner hand surfaces from hard-wearing synthetic leather and, in addition, with vibration damping gel inserts

Hidden hem seam, prevents fraying

Back of the hand made from special material, prevents pulling out of threads

Elastic wrist band with velcro fastening for safe grip

HEAD PROTECTION

Baseball cap - red-black

- One size - adjustable
- With buckle
- With embroidered patch racing logo

Material:
100 % Cotton

		g
985.0003	Baseball cap - red-black	75

Baseball cap - red

- One size - adjustable
- With hook and loop fastener
- Embroidered logo

Material:
100 % Cotton

		g
985.0012	Baseball cap - red	75

Baseball cap - black

- One size - adjustable
- With hook and loop fastener
- Embroidered logo

Material:
100% Cotton

		g
985.0013	Baseball cap - black	75

Work protective hardhat

- DE EN397
- PP case
- 4-point suspension
- Buckle adjustment
- Lateral space for accessories
- Shock absorption (<5kn)
- Extremely flammable >5 s)
- Temperature resistant (> -10 < 50)



	Colour code	L mm	B mm	H mm	g
985.0021		265.0	225.0	160.0	330

Work protective hardhat

- DIN EN 397
- Special plastic



	Colour code	L mm	B mm	H mm	g
117.1608		290.0	225.0	175.0	370
117.1609		290.0	225.0	175.0	370
117.1610		290.0	225.0	175.0	370

Carrying bag for work helmet

- Made out of red leather
- With carrying strap

	B mm	H mm	g
117.1612	500.0	480.0	500

EYE PROTECTION

Visor

- DE EN166
- Frame made from aluminium
- Visor material: PC
- Suitable for standard safety helmets
- Frame made from aluminium
- Size adjustment takes place using spring strip

	Total depth mm	g
985.0024	200.0	280

Electrician's face shield

- DIN EN 166
- Fault arc tested to DGUV GS-ET-29, test level W(LBP) = 318 kJ (corresponds to prospective test short-circuit current 7 kA/0.5 s) EN 166
- Personal eye protection equipment
- Also fault arc tested to ASTM F2178, ATPV: 7.0 cal/cm²
- Natural rendering of colours thanks to transparent, non-tinted visor
- Colour rendering index > 90%
- Light transmission > 70%
- Suitable for standard electrician's hardhat
- Anti-mist protective gel supplied

	Arc fault		g
117.1796	class 2	1000V	525

Welders protective helmet

- Turns fully automatically from bright after dark as soon as the light arch is ignited
- Due to high quality solar cells battery replacement is no longer require
- Equiped with a sensitivityand delaying switch for switching between dark and light to prevent welders blindness when welding at high amp capacity
- Quick switching is possible when changing from seam to spot welding
- Selection switch for reaction time
- Robust multi positional head band
- Complete neck protection
- Face protection to EN 175 / eye protection to EN379 1/2/1



Technical data:

Switching timed:	1/25,000 s
	0.6 s delay
Window:	98 x 40 mm (3.7/8" x 1.5/8")
Cassette size:	110 x 90 x 9 mm (4.3/8" x 3.1/2" x 0,35")
Power requirement:	litium battery + solar cells
UV / IR protection:	according to EN169 / to DIN 16
Colour selection:	varible adjustment from DIN 9-13
	standard light adjustment DIN 3 (4)
Working temperature:	-5° to +55°C
Storage temperature:	-20° up tp +70°C

	L mm	B mm	H mm	g
310.0180	330.0	200.0	200.0	830

Glasses - blue

- Blue shading for comfortable and relaxed viewing
- Suitable for long duration usage
- With UV protection
- Sporting design
- Extremely substantial frame
- Offer protection in maching operations
- Optimal design
- Polycarbonate lens

		g
310.0160	Glasses - blue	30

Glasses - yellow

- Yellow shading to increase contrast
- With UV protection
- Sporting design
- Extremely substantial frame
- Offer protection in maching operations
- Optimal design
- Polycarbonate lens

		g
310.0165	Glasses - yellow	30

Glasses - black

- Glasses grey tinted
- With UV protection
- Sporting design
- Extremely substantial frame
- Offer protection in maching operations
- Optimal design
- Polycarbonate lens

		g
310.0170	Glasses - black	30

Glasses - transparent

- Glasses clear
- With UV protection
- Sporting design
- Extremely substantial frame
- Offer protection in maching operations
- Optimal design
- Polycarbonate lens

		g
310.0175	Glasses - transparent	30

Glasses - transparent

- EN 166
- Practical for spectacle wearers
- With ventilation holes for clear visibility
- With firm f ame
- With ear clip
- Polycarbonate lens

		g
310.0110	Glasses - transparent	45

Goggles with elastic headband - transparent

- EN 166
- Practical for spectacle wearers
- With ventilation holes for clear visibility
- With adjustable headband
- With soft PVC frame
- Polycarbonate lens

		g
310.0120	Goggles with elastic headband - transparent	75

Goggles with elastic headband - transparent with ventilation

- CE EN 166
- With 4 vent holes
- Practical for spectacle wearers
- With ventilation holes for clear visibility
- Adjustable elastic band
- With soft PVC frame
- Polycarbonate lens

		g
310.0112	Goggles with elastic headband - transparent with ventilation	75

EAR PROTECTION

Ear plugs PU, without cord

- 20 pairs
- CE / EN 352-2
- Made from 100% PU
- Without cord
- Sound level reduction: 33 dB

Content		g
985.7050	20 pairs	550

Ear plugs PU, with cord

- 20 pairs
- CE / EN 352-2
- Made from 100% PU
- With cord
- Sound level reduction: 33 dB

Content		g
985.7051	20 pairs	50

Ear plugs PU, with cord and mushroom head

- 20 pairs
- CE / EN 352-2
- Made from 100% PU
- With cord
- With mushroom head
- Sound level reduction: 33 dB

Content		g
985.7055	20 pairs	80

Padded ear defenders with headband - red

- CE / EN 352-1
- With adjustable and padded ear shells for comfortable wear
- Ear shells with stepless fast adjustment
- Sound level reduction: 19 dB

		g
310.0130	Padded ear defenders with headband - red	200

Padded ear defenders with headband - blue

- CE / EN 352-1
- With adjustable and padded ear shells for comfortable wear
- Ear shells with stepless fast adjustment
- Sound level reduction: 25 dB

		g
310.0131	Padded ear defenders with headband - blue	181

Electronic padded ear protection with headband - black

- With integrated microphone
- Protects against duration noise and impulse sounds over 85 dB
- Perception of warning signals through microphone possible
- Volumes regulation through adjusting button

		g
310.0135	Electronic padded ear protection with headband - black	250

WELDING PROTECTION

Welding coat

- Double leather closure, front
- With hook and loop fastener
- Adjustable cuffs
- Lined collar and with hook and loop fastener for additional protection
- Inner pocket

		kg
985.7000	L	1.80
985.7001	XL	1.80
985.7002	XXL	1.82
985.7003	XXXL	1.82

Welding apron

- Made from leather
- Adjustable in length
- Size of the waist adjustable
- Breast pocket

		L mm	g
985.7019	L	910.0	775
985.7020	XL	1080.0	775

Leather sleeves

- Dark brown
- Made from leather
- Ends with elastic band

	L mm	Content	g
985.7021	400.0	2	320

Leather sleeves

- Light brown
- Made from leather
- Ends with elastic band

	L mm	Content	g
985.7022	400.0	2	335

Welding leather gloves

- Made from leather
- Good, comfortable wear
- Can be used for applications with heat
- With open sleeves

	Size mm	g
985.7034	M	365
985.7035	L	365
985.7036	XL	365
985.7037	XXL	365

Welding leather gloves, long

- Made from leather
- Extra long
- Good, comfortable wear
- Can be used for applications with heat
- With open sleeves

	Size mm	g
985.7038	M	495
985.7039	L	495
985.7040	XL	495
985.7041	XXL	495

Flame proof mats

- Asbestos free
- Reduced fi e risk
- Very fl xible
- Good formability

	B mm	L mm	max. °C	g
610.3350	330.0	500.0	700	330
610.3351	460.0	800.0	700	650
610.3399	1500.0	2000.0	600	2110

Frame for welding protection screen

- Very stable frame made from steel tubing
- With direct rolls
- With 360° swivel joint

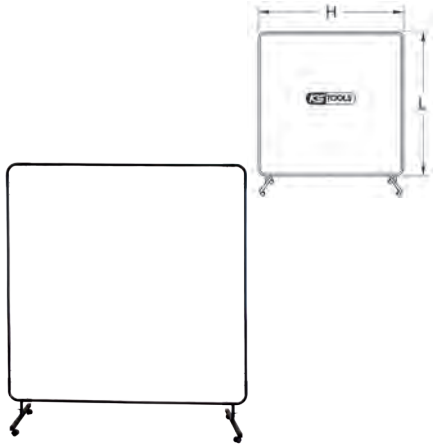

	L mm	H mm	kg
985.7026	1780.0	1780.0	4.50

Welding protection awning

- Resistant against UV rays, flam s and wear
- Edges with eyelets at 30cm intervals
- Without frame

	Colour code	L mm	H mm	kg
985.7027		1740.0	1740.0	1.72
985.7028		1740.0	1740.0	1.72
985.7029		1740.0	1740.0	1.72

RESPIRATORY PROTECTION

Particle fil er type	Retention capacity (half/quarter mask)	Material group
P 1 FFP1 R oder **NR**	Low (up to 4 times the general limit value*)	**Fine dusts, fumes and aerosols on a water and oil basis** Against non-toxic powders, e.g. aluminium oxide, bauxite, borax, brick dust, cellulose, pulp, cement, coal dust, plaster, limestone, pollen, sugar.
P 2 FFP2 R oder **NR**	Medium (up to 10 times the general limit value*)	**Against harmful and cancer causing dusts on a water and oil basis** As for FFP1 but up to a higher concentration, plus brake dust, calcium oxide, concrete dust, cotton dust, granite, hay, lead dust and fumes, welding fumes, silicon, sodium, wood dust, zinc oxide fumes.
P 3 FFP3 R oder **NR**	High (up to 30 times the general limit value*)	**Against harmful and cancer causing dusts on a water and oil basis** As for FFP2 but up to a higher concentration, plus ceramic fib es, chromate, chromium, cobalt, nickel, micro-organisms, radioactive and biochemically active aerosols.

FFP = **F**iltering **f**ace **p**iece **MNS** = **M**outh and **n**ose protection **AGW** = General limit value

Mouth protection mask FFP1 without valve

- FFP1
- Without valve
- Made from cotton

	Class	Content	g	
985.1110	FFP1	20	190	

Fine dust fil er mask FFP1 with valve

- FFP1
- With valve
- Made from cotton

	Class	Content	g	
985.1114	FFP1	20	300	

Fold fl t dust mask FFP1 without valve

- FFP1
- Without valve
- Made from cotton

	Class	Content	g	
985.1112	FFP1	20	350	

Fine dust fil er mask FFP1 without valve

- FFP1
- Without valve
- Made from cotton

	Class	Content	g	
985.1113	FFP1	20	300	

Fine dust fil er mask FFP2 with valve

- FFP2
- With valve
- Made from cotton

	Class	Content	g	
985.1115	FFP2	20	400	

Half mask

- Double cartridges
- Breathing resistance: 0.5 mbar at 30l/min and 1.3 mbar at 95l/min
- Gas: A1; B1; E1; K1; A1E1; ABEK1
- Material: Silicon
- Supplied without gas and combination fil er

	Replacement filter	g	
985.1117	985.1118 - 985.1123	120	

Mouth protection mask FFP1 with valve

- FFP1
- With valve
- Made from cotton

	Class	Content	g	
985.1111	FFP1	20	200	

Fine dust fil er mask FFP3 with valve

- FFP3
- With valve
- Made from cotton



	Class	Content	g	
985.1116	FFP3	20	400	

Filter pair for half mask

- Filter pair for half mask 985.1117
- Gas: A1; B1; E1; K1; A1E1; ABEK1
- Gas and combination fil er
- Breathing resistance: 1 mbar at 15l/min

	Class	Content	g	
985.1118	A1	2	60	
985.1119	B1	2	60	
985.1120	E1	2	60	
985.1121	K1	2	60	
985.1122	A1E1	2	60	
985.1123	ABEK1	2	60	

Specifi ations and rules for hand protection

In order to find he correct protective glove safely and quickly which is suitable for your work area, our products are divided into categories.
This means you can find he glove that meets your requirements reliably:

I - low risk of injury
basic, mechanical protection again welding, fi gerprints, etc.

II - specific isk of injury
excellent protection against mechanical exposure

III - irreversible damage and risk to life
highest protection against chemical, bacterial, thermal and static exposure

Fully adequate chemical protection (EN 374)

Protection against the cold (EN 511)

Protection from heat and fire (EN 407)

Protection from ionising radiation (EN 421)

Protection from radioactive contamination (EN 421)

Bear the information brochure in mind (EN 420)

Suitable for processing foodstuffs

Basic chemical protection (EN 374)
for waterproof gloves with low protection against chemical substances

Protection against mechanical dangers (EN 388)
applies for the following physical and mechanical exposure:

- **Wear resistance**
  number of cycles required for the glove to wear through
- **Cut resistance**
  number of cycles required to cut through the glove
- **Tear resistance**
  force required to rip through the glove
- **Penetration resistance**
  force required to puncture the glove

Vinyl single-use glove, transparent

- Only for use with minimal risks
- Made from vinyl
- Without powder coating
- Very comfortable design and fi
- Supple and comfortable
- Can be used for applications with foodstuffs, in hospitals and in laboratories

	Size mm	Content	kg	
310.0485	S	100 pcs	0.80	
310.0486	M	100 pcs	0.54	
310.0487	L	100 pcs	1.00	
310.0488	XL	100 pcs	1.10	

Vinyl single-use gloves, blue

- Only for use with minimal risks
- Made from vinyl
- With powder coating
- Very comfortable design and fi
- Supple and comfortable
- Can be used for applications with foodstuffs, in hospitals and in laboratories

	Size mm	Content	kg	
310.0465	S	100 pcs	0.80	
310.0466	M	100 pcs	0.90	
310.0467	L	100 pcs	1.00	
310.0468	XL	100 pcs	1.10	

Micro fine oven gloves - white

- CE / EN 388 [1131]
- Very comfortable design and fi
- Especially breathe able fabric
- With PU reinforced gripping palm
- Ideal for working with small parts
- Printed logo

	Size mm	Content	g	
310.0450	L	12 pair	385	
310.0455	XL	12 pair	435	
310.0460	XXL	12 pair	482	

Micro fine oven gloves - black

- CE / EN 388 [1131]
- Very comfortable design and fi
- Especially breatheable fabric
- With PU reinforced gripping palm
- Ideal for working with small parts
- Printed logo

	Size mm	Content	g	
310.0470	L	12 pair	398	
310.0475	XL	12 pair	430	
310.0480	XXL	12 pair	445	

Anti-slip gloves

- CE / EN 388 [4142] / EN 1149-5
- With PU coating
- Very comfortable design and fi
- Ideal for working with small parts
- Especially slip-proof
- With elasticated wrist band

	Size mm	g	
310.0426	M	40	
310.0427	L	45	
310.0428	XL	50	

Chemical protection gloves

- CE / EN 388 [4232] / EN 374 GKL
- Made from nitrile
- Lined with jersey
- Can be used for heavy and dangerous work
- Suitable for work with chemicals, oils and greases
- With open sleeves

	Size mm	g	
310.0421	M	140	
310.0422	L	155	
310.0423	XL	165	

Gloves

- CE / EN 388 [3142]
- Glove exterior surface made from polyester
- Glove interior made from nitrile
- Very comfortable design and fi
- Especially breathable fabric
- Good to wear

	Size mm	g	
310.0416	M	60	
310.0417	L	65	
310.0418	XL	70	

Gloves, cut resistant

- CE / EN 388 [4343]
- With PU coating
- Especially cut resistant
- Ideal for working with small parts
- Very comfortable design and fi
- With elasticated wrist band
- With hook and loop fastener

	Size mm	g	
310.0441	M	60	
310.0442	L	65	
310.0443	XL	70	

Winter gloves

- CE / EN 388 [2142] / EN 511 12X
- Made from latex and synthetic material
- Very comfortable design and fi
- Especially breathable fabric
- Good to wear
- Ideal for the winter
- Ideal for working with cold
- With hook and loop fastener

	Size mm	g	
310.0411	M	110	
310.0412	L	120	
310.0413	XL	135	

Gloves

- CE / EN 388 [2142]
- Made from nitrile
- With silicone gel padding in the palm area
- Good to wear
- With elasticated wrist band

	Size mm	g	
310.0431	M	60	
310.0432	L	65	
310.0433	XL	70	

Gloves, extremely cut resistant

- CE / EN 388 [3542]
- Glove exterior with PU coating
- Glove interior made from glass fib e
- Extremely cut resistant
- Ideal for working with small parts
- Very comfortable design and fi
- Good to wear
- With elasticated wrist band

	Size mm	g	
310.0446	M	100	
310.0447	L	110	
310.0448	XL	125	

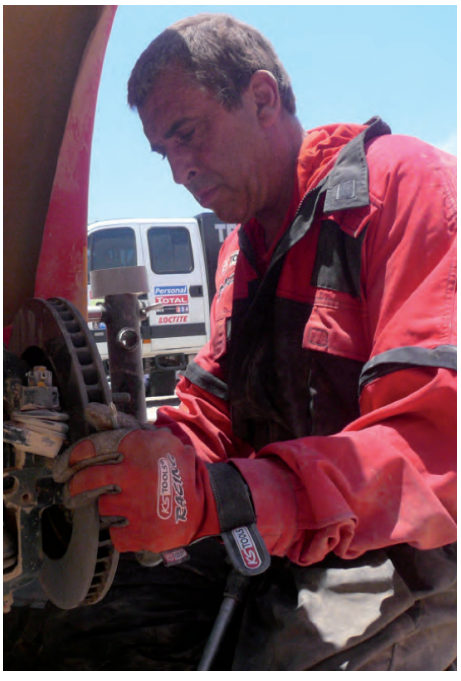

Welding leather gloves

- Made from leather
- Good, comfortable wear
- Can be used for applications with heat
- With open sleeves

	Size mm	g	
985.7034	M	365	
985.7035	L	365	
985.7036	XL	365	
985.7037	XXL	365	

Leather mechanic gloves displays

- CE / EN 388 [2112]
- Universal use for work and leisure
- Ideal for working with small parts secure grip
- With anti-vibration protection
- With elasticated wrists
- With hook and loop fastener

	Content L	Content XL	Content XXL	kg	
310.0250D	20			2.67	
310.0255D		20		2.72	
310.0260D			20	2.73	
310.0240D	10	10	10	3.99	

Insulated electrician's protective gloves made from natural latex

- Dielectric latex gloves
- Insulated to DIN EN 60903
- With anatomical fi
- Anti-allergy treated
- With straight edge
- UV-resistant packaging

The use of glove liners is recommended for absorbing skin moisture and for better ventilation.

Attention: Over-gloves are necessary for mechanical protection!

	Thickness mm	Size mm	Electrosoft Class	L mm		g	
117.1762	2,0	10	0	410.0	1000V	470	

Welding leather gloves, long

- Made from leather
- Extra long
- Good, comfortable wear
- Can be used for applications with heat
- With open sleeves

	Size mm	g	
985.7038	M	495	
985.7039	L	495	
985.7040	XL	495	
985.7041	XXL	495	

Mechanic gloves

- CE / EN 388 [2112]
- Universal use for work and leisure
- Ideal for working with small parts secure grip
- With silicone gel padding in the palm area
- With elasticated wrists
- With hook and loop fastener

	Size mm	g	
310.0350	L	85	
310.0355	XL	90	
310.0360	XXL	95	

Insulated electrician's protective gloves made from natural latex

- Dielectric latex gloves
- Insulated to DIN EN 60903
- With anatomical fi
- Anti-allergy treated
- With straight edge
- UV-resistant packaging

The use of glove liners is recommended for absorbing skin moisture and for better ventilation.

Attention: Over-gloves are necessary for mechanical protection!

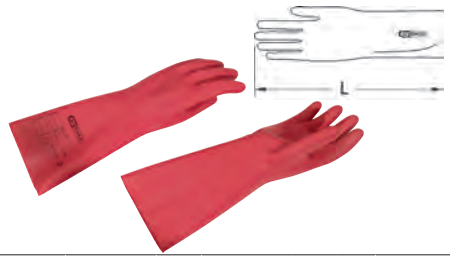

	Thickness mm	Size mm	Electrosoft Class	L mm		g	
117.1756	1,0	9	00	410.0	500V	168	
117.1757	1,0	10	00	410.0	500V	189	

Leather mechanic glove

- CE / EN 388 [2112]
- Universal use for work and leisure
- Ideal for working with small parts secure grip
- Inner palm - synthetic material leather
- With anti-vibration protection
- With elasticated wrists
- With hook and loop fastener

	Size mm	g	
310.0250	L	95	
310.0255	XL	95	
310.0260	XXL	100	

Mechanic gloves displays

- CE / EN 388 [2112]
- Universal use for work and leisure
- Ideal for working with small parts secure grip
- With silicone gel padding in the palm area
- With elasticated wrists
- With hook and loop fastener

	Content L	Content XL	Content XXL	kg	
310.0350D	20			2.49	
310.0355D		20		2.36	
310.0360D			20	2.64	
310.0340D	10	10	10	3.73	

Insulated electrician's protective gloves made from natural latex

- Dielectric latex gloves
- Insulated to DIN EN 60903
- With anatomical fi
- Anti-allergy treated
- With straight edge
- UV-resistant packaging

The use of glove liners is recommended for absorbing skin moisture and for better ventilation.

Attention: Over-gloves are necessary for mechanical protection!

	Thickness mm	Size mm	Electrosoft Class	L mm		g	
117.1132	2,0	10	1	360.0	7500V	250	
117.1133	2,0	10	3	410.0	26500V	690	
117.1134	2,5	10	4	410.0	36000V	890	

FOOT PROTECTION

Symbol	Properties	S1	S1P	S2	S3	S4
	Toe protection cap made from steel or plastic	✔	✔	✔	✔	✔
	Oil, hydrocarbon and solvent resistant sole	✔	✔	✔	✔	✔
	Anti-static shoe	✔	✔	✔	✔	✔
	Energy absorption in the heel area	✔	✔	✔	✔	✔
	Anti slip safety sole	X	X	X	✔	X
	Constancy against through arch repeated > 60.000	✔	✔	✔	✔	✔
	Resistant against water	X	✔	✔	✔	✔
	Insole and through sole insert	X	✔	X	✔	X

Declaration and construction of the EN safety classes

EN	20345	S1	CI
Europe standard	Standard no.	Safety class (see table)	• Additional designation: • CI (cold insulation) • HRO (resistance against heat) • P (perforation protection)

EN 20345 safety boots, energy absorption of the toe protection cap 200 joules

Comfort foot bed inlay

- To maintain the anatomical bone position
- For correction of the body plumb line
- Comfortable, support and weight distributing
- Edgeless cushion, anatomically formed
- Made from materials used in orthopaedic shoe technology
- Active basis of the ligamentous and support apparatus of the whole body
- Impact absorbing function

Material:
Cotton mixed fabric (perspiration-absorbing, anti-bacterial, washable)

	Size mm	g	
310.1500	37	38	
310.1505	38	38	
310.1510	39	40	
310.1515	40	40	
310.1520	41	42	
310.1525	42	45	
310.1530	43	50	
310.1535	44	50	
310.1540	45	50	
310.1545	46	50	
310.1550	47	52	

Safety shoes

- DIN EN ISO20345:2004 S1P + SRC-09
- Rubber safety sole
- Safety steel toe cap
- Energy absorption in the heel area
- Anti-static shoe
- Oil, hydrocarbon and solvent resistant sole
- Constancy against through arch repeated > 60.000

	Size mm	kg	
310.0500	37	1.14	
310.0505	38	1.19	
310.0510	39	1.24	
310.0515	40	1.30	
310.0520	41	1.36	
310.0525	42	1.42	
310.0530	43	1.48	
310.0535	44	1.54	
310.0540	45	1.60	
310.0545	46	1.66	
310.0550	47	1.72	

Safety shoes

- DIN EN ISO20345:2011 S1P + SRC Class 2
- Extremely breathable
- Very light
- Rubber safety sole
- Safety steel toe cap
- Energy absorption in the heel area
- Anti-static shoe
- Oil, hydrocarbon and solvent resistant sole
- Constancy against through arch repeated > 60.000
- With replacement shoelaces

	Size mm	kg	
310.1400	37	1.15	
310.1405	38	1.19	
310.1410	39	1.24	
310.1415	40	1.27	
310.1420	41	1.30	
310.1425	42	1.35	
310.1430	43	1.41	
310.1435	44	1.48	
310.1440	45	1.54	
310.1445	46	1.54	
310.1450	47	1.60	

Safety boots, blue

- DIN EN ISO20345:2011 S1P + SRC Class 2
- Very modern style
- Rubber safety sole
- Safety steel toe cap
- Energy absorption in the heel area
- Anti-static shoe
- Oil, hydrocarbon and solvent resistant sole
- Constancy against through arch repeated > 60.000
- With replacement shoelaces

	Size mm	kg	
310.2000	37	1.15	
310.2005	38	1.19	
310.2010	39	1.24	
310.2015	40	1.27	
310.2020	41	1.30	
310.2025	42	1.35	
310.2030	43	1.41	
310.2035	44	1.48	
310.2040	45	1.54	
310.2045	46	1.54	
310.2050	47	1.60	

Safety shoes

- DIN EN ISO20345:2011 S1P + SRC Class 2
- Rubber safety sole
- Safety steel toe cap
- Energy absorption in the heel area
- Anti-static shoe
- Oil, hydrocarbon and solvent resistant sole
- Constancy against through arch repeated > 60.000
- With replacement shoelaces

	Size mm	kg	
310.0800	37	1.42	
310.0805	38	1.55	
310.0810	39	1.46	
310.0815	40	1.57	
310.0820	41	1.58	
310.0825	42	1.58	
310.0830	43	1.58	
310.0835	44	1.85	
310.0840	45	1.88	
310.0845	46	1.85	
310.0850	47	1.88	

Safety boots with air cushions, white

- DIN EN ISO20345:2011 S1P + SRC Class 2
- With air cushions
- Very sporty style
- Rubber safety sole
- Safety steel toe cap
- Energy absorption in the heel area
- Anti-static shoe
- Oil, hydrocarbon and solvent resistant sole
- Constancy against through arch repeated > 60.000
- With replacement shoelaces

	Size mm	kg	
310.1900	37	1.15	
310.1905	38	1.19	
310.1910	39	1.24	
310.1915	40	1.27	
310.1920	41	1.30	
310.1925	42	1.35	
310.1930	43	1.41	
310.1935	44	1.48	
310.1940	45	1.54	
310.1945	46	1.54	
310.1950	47	1.60	

Safety boots, beige

- DIN EN ISO20345:2011 S1P + SRC Class 2
- Very modern style
- Rubber safety sole
- Safety steel toe cap
- Energy absorption in the heel area
- Anti-static shoe
- Oil, hydrocarbon and solvent resistant sole
- Constancy against through arch repeated > 60.000
- With replacement shoelaces

	Size mm	kg	
310.2100	37	1.15	
310.2105	38	1.26	
310.2110	39	1.30	
310.2115	40	1.34	
310.2120	41	1.38	
310.2125	42	1.42	
310.2130	43	1.46	
310.2135	44	1.50	
310.2140	45	1.54	
310.2145	46	1.54	
310.2150	47	1.62	

Safety boots with air cushions, blue

- DIN EN ISO20345:2011 S1P + SRC Class 2
- With air cushions
- Very sporty style
- Rubber safety sole
- Safety steel toe cap
- Energy absorption in the heel area
- Anti-static shoe
- Oil, hydrocarbon and solvent resistant sole
- Constancy against through arch repeated > 60.000
- With replacement shoelaces

	Size mm	kg	
310.1200	37	1.15	
310.1205	38	1.19	
310.1210	39	1.24	
310.1215	40	1.27	
310.1220	41	1.30	
310.1225	42	1.35	
310.1230	43	1.41	
310.1235	44	1.48	
310.1240	45	1.54	
310.1245	46	1.68	
310.1250	47	1.60	

Safety boots with air cushions, red

- DIN EN ISO20345:2011 S1P + SRC Class 2
- With air cushions
- Very sporty style
- Rubber safety sole
- Safety steel toe cap
- Energy absorption in the heel area
- Anti-static shoe
- Oil, hydrocarbon and solvent resistant sole
- Constancy against through arch repeated > 60.000
- With replacement shoelaces

	Size mm	kg	
310.1600	37	1.15	
310.1605	38	1.36	
310.1610	39	1.24	
310.1615	40	1.27	
310.1620	41	1.30	
310.1625	42	1.35	
310.1630	43	1.41	
310.1635	44	1.48	
310.1640	45	1.54	
310.1645	46	1.54	
310.1650	47	1.60	

Safety boots

- DIN EN ISO20345: 2011 S3 + SRC Class 2
- Rubber safety sole
- Safety steel toe cap
- Energy absorption in the heel area
- Anti-static shoe
- Oil, hydrocarbon and solvent resistant sole
- Constancy against through arch repeated > 60.000
- With replacement shoelaces

	Size mm	kg	
310.1300	37	1.15	
310.1305	38	1.19	
310.1310	39	1.24	
310.1315	40	1.27	
310.1320	41	1.30	
310.1325	42	1.35	
310.1330	43	1.41	
310.1335	44	1.48	
310.1340	45	1.54	
310.1345	46	1.54	
310.1350	47	1.60	

Safety boots

- DIN EN ISO20345: 2011 S1P + SRC Class 2
- Rubber safety sole
- Safety steel toe cap
- Energy absorption in the heel area
- Anti-static shoe
- Oil, hydrocarbon and solvent resistant sole
- Constancy against through arch repeated > 60.000
- With replacement shoelaces

	Size mm	kg	
310.0900	37	1.42	
310.0905	38	1.55	
310.0910	39	1.42	
310.0915	40	1.55	
310.0920	41	1.85	
310.0925	42	1.88	
310.0930	43	1.85	
310.0935	44	1.88	
310.0940	45	1.88	
310.0945	46	1.88	
310.0950	47	1.88	

KS Tools safety boot

- Safety boot S3 with steel toe cap
- Resitant against water and moisture
- In addition with steel inserted sole
- For use in dangerous areas stops sharp objects entering the sole

	Size mm	kg	
310.0700	37	1.52	
310.0705	38	1.58	
310.0710	39	1.64	
310.0715	40	1.70	
310.0720	41	1.76	
310.0725	42	1.82	
310.0730	43	1.88	
310.0735	44	1.94	
310.0740	45	2.00	
310.0745	46	2.06	
310.0750	47	2.12	

Safety shoe - ankle type

- DIN EN ISO20345:2004 S1P + SRC-09
- Rubber safety sole
- Safety steel toe cap
- Energy absorption in the heel area
- Anti-static shoe
- Oil, hydrocarbon and solvent resistant sole
- Anti-slip safty sole
- Constancy against through arch repeated > 60.000
- Resistant against water

	Size mm	kg	
310.0600	37	1.49	
310.0605	38	1.55	
310.0610	39	1.61	
310.0615	40	1.66	
310.0620	41	1.72	
310.0625	42	1.78	
310.0630	43	1.84	
310.0635	44	1.90	
310.0640	45	1.96	
310.0645	46	2.02	
310.0650	47	2.08	

Safety boots S3

- DIN EN ISO20345: 2011S3 + SRC Class 2
- Rubber safety sole
- Safety steel toe cap
- Energy absorption in the heel area
- Anti-static shoe
- Oil, hydrocarbon and solvent resistant sole
- Constancy against through arch repeated > 60.000
- Resistant against water
- With replacement shoelaces

	Size mm	kg	
310.2200	37	1.60	
310.2205	38	1.15	
310.2210	39	1.19	
310.2215	40	1.24	
310.2220	41	1.27	
310.2225	42	1.30	
310.2230	43	1.35	
310.2235	44	1.41	
310.2240	45	1.48	
310.2245	46	1.54	
310.2250	47	1.54	

Insulated safety rubber boots

- For working enviroment of voltages AC 1000 V and DC 1500 V
- In accordance with new standard EN 50321
- With steel bar

	Size mm		kg	
117.1613	39	1000V	3.00	
117.1614	40	1000V	3.00	
117.1615	41	1000V	3.00	
117.1616	42	1000V	3.00	
117.1617	43	1000V	3.00	
117.1618	44	1000V	3.00	
117.1619	45	1000V	3.00	
117.1620	46	1000V	3.00	
117.1621	47	1000V	3.00	

T-SHIRTS

T-Shirt

- With strech collar
- Printed logo
- Washable up to 30°

Material:
100% Cotton

	Size mm	g	
985.0172	M	210	
985.0173	L	240	
985.0174	XL	270	
985.0175	XXL	300	

T-Shirt

- With strech collar
- Embroidered logo
- Washable up to 35°

Material:
100 % Cotton

	Size mm	g	
986.0011	S	80	
986.0012	M	210	
986.0013	L	225	
986.0014	XL	240	
986.0015	XXL	255	

T-Shirt

- With strech collar
- Embroidered logo
- Washable up to 35°

Material:
100 % Cotton

	Size mm	g	
986.0021	S	195	
986.0022	M	210	
986.0023	L	225	
986.0024	XL	240	
986.0025	XXL	255	

T-Shirt, red-black

- With strech collar
- Embroidered logo
- Washable up to 35°

Material:
100 % Cotton

	Size mm	g	
986.0131	S	210	
986.0132	M	225	
986.0133	L	240	
986.0134	XL	250	
986.0135	XXL	260	

T-Shirt, white-black

- With strech collar
- Embroidered logo
- Washable up to 35°

Material:
100 % Cotton

	Size mm	g	
986.0141	S	210	
986.0142	M	225	
986.0143	L	240	
986.0144	XL	250	
986.0145	XXL	260	

POLO SHIRTS

Polo shirt

- With 3 button fastening
- Reinforced double seams
- Embroidered logo
- Washable up to 35°

Material:
100 % Cotton

	Size mm	g	
986.0031	S	210	
986.0032	M	230	
986.0033	L	245	
986.0034	XL	260	
986.0035	XXL	275	

Polo shirt

- With 3 button fastening
- Reinforced double seams
- Embroidered logo
- Washable up to 35°

Material:
100 % Cotton

	Size mm	g	
986.0041	S	215	
986.0042	M	235	
986.0043	L	255	
986.0044	XL	270	
986.0045	XXL	285	

SHIRTS

Business shirt

- Non iron
- With spread collar
- With breast pocket
- Long sleeve
- Embroidered logo
- Washable up to 45°

Material: 100% Cotton

	Size mm	g	
986.0051	S	280	
986.0052	M	290	
986.0053	L	300	
986.0054	XL	310	
986.0055	XXL	320	

SOFTSHELLJACKETS

Softshellvest

- With antipilling fabric
- With zip fastener
- Embroidered logo
- Washable up to 45°

Material: 100% Polyester

	Size mm	g	
986.0091	S	730	
986.0092	M	750	
986.0093	L	770	
986.0094	XL	790	
986.0095	XXL	810	

SWEATSHIRTS/SWEATERS

Sweatshirt

- With elastic cuffs
- Embroidered logo
- Washable up to 35°

Material:
80% Cotton
20% Polyester

	Size mm	g	
986.0071	S	490	
986.0072	M	515	
986.0073	L	530	
986.0074	XL	550	
986.0075	XXL	570	

Sport shirt

- Non iron
- With spread collar
- With breast pocket
- Long sleeve
- Embroidered logo
- Washable up to 45°

Material: 100% Cotton

	Size mm	g	
986.0061	S	280	
986.0062	M	290	
986.0063	L	300	
986.0064	XL	310	
986.0065	XXL	320	

Softshellvest

- With antipilling fabric
- With zip fastener
- Two full sized pockets with double seam
- Embroidered logo
- Washable up to 45°

Material: 100% Polyester

	Size mm	g	
986.0101	S	620	
986.0102	M	640	
986.0103	L	660	
986.0104	XL	680	
986.0105	XXL	700	

Sweatshirt

- With elastic cuffs
- Embroidered logo
- Washable up to 35°

Material:
80% Cotton
20% Polyester

	Size mm	g	
986.0081	S	490	
986.0082	M	515	
986.0083	L	530	
986.0084	XL	550	
986.0085	XXL	570	

Unisex Ultimate Precision shirt, black

- Easy care fabric
- Long sleeve
- Logo stitched and ironed
- Washable up to 30°

Material:
100% Cotton

	Size mm	g	
985.0751	S	260	
985.0752	M	290	
985.0753	L	320	
985.0754	XL	350	
985.0755	XXL	380	

FLEECE JACKETS

Fleece jacket

- With antipilling fabric
- With zip fastener
- Two full sized pockets with double seam
- Embroidered logo
- Washable up to 35°

Material: 100% Polyester

	Size mm	g	
986.0111	S	525	
986.0112	M	550	
986.0113	L	570	
986.0114	XL	590	
986.0115	XXL	610	

Fleece jacket

- With antipilling fabric
- With zip fastener
- Two full sized pockets with double seam
- Embroidered logo
- Washable up to 35°

Material: 100% Polyester

	Size mm	g	
986.0121	S	525	
986.0122	M	550	
986.0123	L	570	
986.0124	XL	590	
986.0125	XXL	610	

TROUSERS

Work shorts

- With various universal pockets
- Embroidered logo
- Washable up to 60°

Material:
65% cotton
35% polyester

	Size mm	g	
985.0660	48	380	
985.0661	50	405	
985.0662	52	435	
985.0663	56	470	
985.0664	60	500	

Work trousers

- With elasticated waistband inserts
- With hammer loop
- With various universal pockets
- Embroidered logo

Material:
65% cotton
35% polyester

	Size mm	g	
985.0670	48	660	
985.0671	50	685	
985.0672	52	705	
985.0673	56	800	
985.0674	60	750	

Work dungarees

- With various universal pockets
- Adjustable strap with clip closures
- Adjustable drawstring on the leg
- Embroidered logo

Material:
65% cotton
35% polyester

	Size mm	g	
985.0650	48	930	
985.0651	50	900	
985.0652	52	915	
985.0653	56	935	
985.0654	60	980	

WORK COAT

Smock - red-black

- With button fasteners
- With various universal pockets
- Embroidered logo
- Washable up to 60°

Material:
100% Diagonal-Cotton

	Size mm	g	
985.0741	L	600	
985.0742	XL	640	
985.0743	XXL	680	

OVERALL

Overall - red-black

- With zip fastener
- With various universal pockets
- With padding
- Embroidered logo
- Washable up to 30°

Material:
35% Cotton
65% Polyester

	Size mm	kg	
100391	M	1.10	
100392	L	1.20	
100393	XL	1.30	
100394	XXL	1.40	

KS TOOLS

Innovation is our mission!

INDUSRIAL SAFETY/ WORKWEAR

- Head protection
- Eye protection
- Hearing protection
- Welding protection
- Respiratory protection
- Hand protection
- Foot protection

DIN AND STANDARD PARTS RANGES

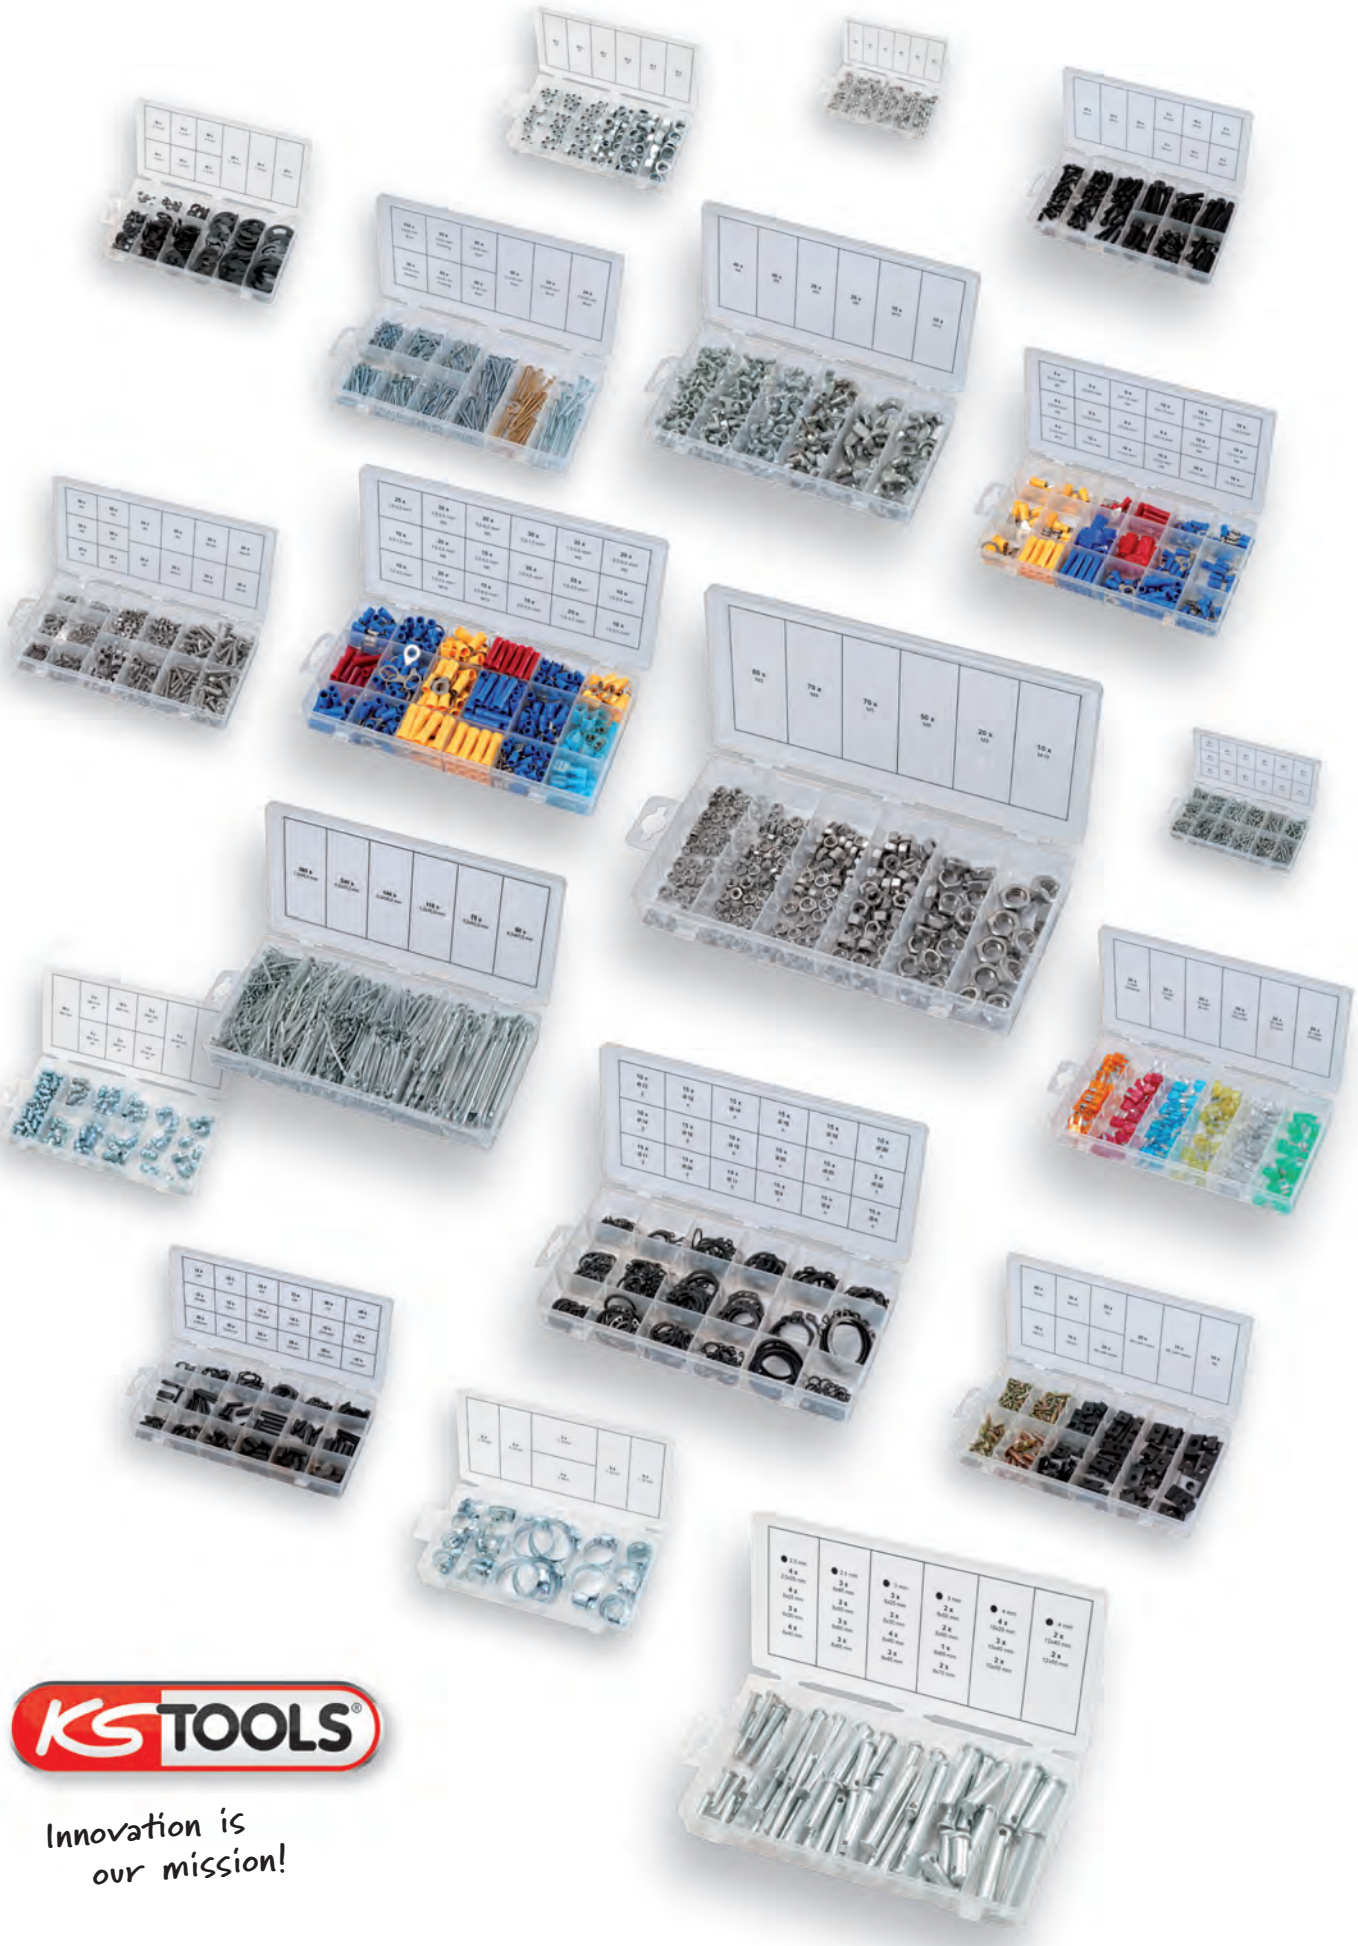

KS TOOLS®

Innovation is our mission!

	PAGE
FUSES	600
CABLE SPLICES	600 - 601
SHRINK TUBING	601
SNAP RINGS	601 - 602
E-RING CIRCLIPS	602
HOSE CLAMPS	602
GREASE NIPPLES	602 - 603
SAFETY ELEMENTS	603 - 605
NAILS	605
SCREWS/NUTS/RING WASHERS	605 - 607
SPECIAL NUTS & SCREWS	608
BLIND RIVETS	609
GROMMETS	609
BODYWORK ELEMENTS	609
O-RINGS/WASHERS	609 - 612
OIL REDUCTION SCREWS & WASHERS	612

DIN AND VARIOUS CONSUMABLE ASSORTMENTS

Advantages

- Very extensive range (from screws to O rings)
- For industry, automotive and plumbing
- Quick amortisation, as no looking for a long time in the event of a repair
- The range is determined based on the products most often required

Mini fuses

Automotive fuses

Glass fuses

Crimp connectors

Crimp connectors

Shrink tubing

Lockrings, internal

Lockrings, external

Lockrings, internal and external

Electric circlips

Electric circlips SAE

Hose clamp

Grease nipples

Grease nipples, imperial

Split pins

Split pins

Hollow roll pin

Safety bolts

Spring split pins



Roll pin / Seeger ring / feather keys / electric circlips

Springs

Nuts, metric

Stainless steel nuts, metric

Self-locking nuts

UNC self-tightening nuts

UNF self-tightening nuts

Lock and ring washers

Spring rings



Stainless steel cap nuts

O-rings

Wing nuts

Headless screw, metric

Hexagon screws

Ball head machine screws

O-rings SAE

Blind rivets

Rubber grommets

Bodywork nuts + screws

Self-tapping, wooden and machine screws

Metal and wooden screws

Ball head Parker screws

Wood screws

Clip bolts and eyebolts

Copper washers

Nails

O-rings

O-rings for HNBR air conditioning



O-rings for HNBR air conditioning



Aluminium washers

Copper washers

Oil pan screws and washers

Plumbing washers

Workshop assortment

DIN / ISO

FUSES

Automotive mini fuses assortment

- According to ISO 8820-3
- Fuses colour-coded according to ampere sizes
- In plastic storage case

970.0280	120 pcs	Automotive mini fuses assortment	190 g
20 x		5 A / ISO 8820-3	
20 x		10 A / ISO 8820-3	
20 x		15 A / ISO 8820-3	
20 x		20 A / ISO 8820-3	
20 x		25 A / ISO 8820-3	
20 x		30 A / ISO 8820-3	

Automotive fuses assortment

- According to ISO 8820-3
- Fuses colour-coded according to ampere sizes
- In plastic storage case

970.0250	120 pcs	Automotive fuses assortment	210 g
20 x		5 A / ISO 8820-3	
20 x		10 A / ISO 8820-3	
20 x		15 A / ISO 8820-3	
20 x		20 A / ISO 8820-3	
20 x		25 A / ISO 8820-3	
20 x		30 A / ISO 8820-3	

Glass fuses assortment

- Trigger characteristics: Idle
- In plastic storage case

970.0270	120 pcs	Glass fuses assortment	220 g
20 x		5 A	
20 x		10 A	
20 x		15 A	
20 x		20 A	
20 x		25 A	
20 x		30 A	

CABLE SPLICES

Crimp connectors assortment

- Suitable for wire cross sections: Red 0.5-1.5 mm², blue 1.5-2.5 mm², yellow 2.5-6.0 mm²
- In plastic storage case

970.0290	160 pcs	Crimp connectors assortment	260 g
12 x		0,5-1,5 mm²	
18 x		1,5-2,5 mm²	
20 x		1,5-2,5 mm²	
12 x		2,5-6,0 mm²	
8 x		0,5-1,5 mm² M4	
10 x		1,5-2,5 mm² M4	
10 x		1,5-2,5 mm² M5	
10 x		1,5-2,5 mm² M6	
4 x		2,5-6,0 mm² M5	
4 x		2,5-6,0 mm² M8	
4 x		2,5-6,0 mm² M10	
10 x		1,5-2,5 mm²	
5 x		2,5-6,0 mm²	
10 x		1,5-2,5 mm²	
5 x		2,5-6,0 mm²	
10 x		1,5-2,5 mm² M4	
4 x		0,5-1,5 mm²	
4 x		1,5-2,5 mm²	

Crimp connectors assortment

- Suitable for wire cross sections: Red 0.5-1.5 mm², blue 1.5-2.5 mm², yellow 2.5-6.0 mm²
- In plastic storage case

970.0300	360 pcs	Crimp connectors assortment	450 g
10 x		0,5-1,5 mm²	
30 x		0,5-1,5 mm²	
30 x		1,5-2,5 mm²	
10 x		1,5-2,5 mm²	
15 x		2,5-6,0 mm²	
30 x		1,5-2,5 mm² M5	
20 x		1,5-2,5 mm² M6	
20 x		1,5-2,5 mm² M10	
20 x		2,5-6,0 mm² M5	
15 x		2,5-6,0 mm² M6	
15 x		2,5-6,0 mm² M10	
25 x		1,5-2,5 mm²	
25 x		1,5-2,5 mm²	
30 x		1,5-2,5 mm² M5	
20 x		2,5-6,0 mm² M5	
25 x		1,5-2,5 mm²	
10 x		1,5-2,5 mm²	
10 x		1,5-2,5 mm²	

Branch connectors assortment

- Suitable for wire cross sections: Red 0.5-1.5 mm², blue 1.5-2.5 mm²
- In plastic storage case

970.0570	50 pcs	Branch connectors assortment	145
25 x		0,5-1,5 mm²	
25 x		1,5-2,5 mm²	

SHRINK TUBING

Shrink-on tubes assortment

- Shrinkage ratio 2:1
- In plastic storage case

970.0230	127 pcs	Shrink-on tubes assortment	100
30 x		2,0x40 mm	
25 x		2,5x40 mm	
20 x		3,5x40 mm	
20 x		5,0x40 mm	
16 x		7,0x80 mm	
8 x		10,0x80 mm	
8 x		13,0x85 mm	

Shrink tubing assortment

- Shrinkage ratio 2:1
- In plastic storage case

970.0540	100 pcs	Shrink tubing assortment	130
30 x		1,5x100 mm	
30 x		2,5x100 mm	
20 x		4,0x100 mm	
10 x		6,0x100 mm	
6 x		10,0x100 mm	
4 x		13,0x100 mm	

SNAP RINGS

Snap rings assortment, internal

- in accordance with DIN 472
- In plastic storage case

970.0090	180 pcs	Snap rings assortment, internal	180
15 x		Ø 3 mm / DIN 472	
10 x		Ø 4 mm / DIN 472	
10 x		Ø 5 mm / DIN 472	
15 x		Ø 6 mm / DIN 472	
10 x		Ø 8 mm / DIN 472	
15 x		Ø 10 mm / DIN 472	
10 x		Ø 11 mm / DIN 472	
10 x		Ø 12 mm / DIN 472	
10 x		Ø 13 mm / DIN 472	
10 x		Ø 14 mm / DIN 472	
10 x		Ø 16 mm / DIN 472	
10 x		Ø 19 mm / DIN 472	
10 x		Ø 20 mm / DIN 472	
8 x		Ø 22 mm / DIN 472	
8 x		Ø 25 mm / DIN 472	
8 x		Ø 26 mm / DIN 472	
6 x		Ø 28 mm / DIN 472	
5 x		Ø 32 mm / DIN 472	

Snap rings assortment, external

- in accordance with DIN 471
- In plastic storage case

970.0100	300 pcs	Snap rings assortment, external	290
20 x		Ø 3 mm / DIN 471	
10 x		Ø 4 mm / DIN 471	
15 x		Ø 5 mm / DIN 471	
25 x		Ø 6 mm / DIN 471	
15 x		Ø 8 mm / DIN 471	
20 x		Ø 9 mm / DIN 471	
15 x		Ø 11 mm / DIN 471	
15 x		Ø 12 mm / DIN 471	
25 x		Ø 13 mm / DIN 471	
15 x		Ø 14 mm / DIN 471	
20 x		Ø 16 mm / DIN 471	
25 x		Ø 19 mm / DIN 471	
15 x		Ø 20 mm / DIN 471	
20 x		Ø 22 mm / DIN 471	
15 x		Ø 25 mm / DIN 471	
15 x		Ø 26 mm / DIN 471	
10 x		Ø 28 mm / DIN 471	
5 x		Ø 32 mm / DIN 471	

Snap rings assortment, external & internal

- In accordance with DIN 471/472
- In plastic storage case

970.0310	225 pcs	Snap rings assortment, external & internal	250

15 x		Ø 6 mm / DIN 471
15 x		Ø 8 mm / DIN 471
15 x		Ø 9 mm / DIN 471
15 x		Ø 11 mm / DIN 471
15 x		Ø 13 mm / DIN 471
15 x		Ø 14 mm / DIN 471
15 x		Ø 16 mm / DIN 471
15 x		Ø 19 mm / DIN 471
10 x		Ø 20 mm / DIN 471
10 x		Ø 22 mm / DIN 471
10 x		Ø 25 mm / DIN 471
5 x		Ø 32 mm / DIN 471
15 x		Ø 11 mm / DIN 472
10 x		Ø 13 mm / DIN 472
10 x		Ø 14 mm / DIN 472
15 x		Ø 16 mm / DIN 472
10 x		Ø 19 mm / DIN 472
10 x		Ø 20 mm / DIN 472

E-RING CIRCLIPS

Sortiment E-Sicherungsringe

- nach DIN 6799
- Lieferung im Kunststoffkoffer

970.0110	300-tlg.	Sortiment E-Sicherungsringe	460

30 x		Ø 1,5 mm / DIN 6799
30 x		Ø 3,0 mm / DIN 6799
40 x		Ø 5,0 mm / DIN 6799
50 x		Ø 6,0 mm / DIN 6799
50 x		Ø 10,0 mm / DIN 6799
40 x		Ø 12,0 mm / DIN 6799
20 x		Ø 15,0 mm / DIN 6799
20 x		Ø 19,0 mm / DIN 6799
20 x		Ø 22,0 mm / DIN 6799

SAE E-Ring circlips assortment

- in accordance with DIN 6799
- In plastic storage case

970.0320	300 pcs	SAE E-Ring circlips assortment	530

30 x		1/16“ / DIN 6799
30 x		1/8“ / DIN 6799
40 x		3/16“ / DIN 6799
50 x		1/4“ / DIN 6799
50 x		3/8“ / DIN 6799
40 x		1/2“ / DIN 6799
20 x		5/8“ / DIN 6799
20 x		3/4“ / DIN 6799
20 x		7/8“ / DIN 6799

HOSE CLAMPS

Hose clamp assortment

- Suitable for tube diameters 16-40mm
- In plastic storage case

970.0070	26 pcs	Hose clamp assortment	300

8 x		Ø 16 mm
6 x		Ø 22 mm
4 x		Ø 25 mm
2 x		Ø 28 mm
2 x		Ø 35 mm
4 x		Ø 40 mm

GREASE NIPPLES

Grease nipple assortment

- in accordance with DIN 71412
- In plastic storage case

970.0030	110 pcs	Grease nipple assortment	500

60 x		M6 x1 mm / DIN 71412
10 x		M8 x1 mm / DIN 71412
10 x		M10x1 mm / DIN 71412
5 x		M6 x1 mm/45° / DIN 71412
5 x		M8 x1 mm/45° / DIN 71412
5 x		M10x1 mm/45° / DIN 71412
5 x		M6 x1 mm/90° / DIN 71412
5 x		M8 x1 mm/90° / DIN 71412
5 x		M10x1 mm/90° / DIN 71412

Greasing nipples assortment, metric & imperial

- In plastic storage case

970.0360	70 pcs	Greasing nipples assortment, metric & imperial	410

10 x	1/8"x27,0 mm	/ DIN 71412
20 x	1/4"x28,0 mm	/ DIN 71412
10 x	6x 1,0 mm	/ DIN 71412
5 x	8x 1,0 mm	/ DIN 71412
5 x	10x 1,0 mm	/ DIN 71412
5 x	1/8"x27,0 mm/45°	/ DIN 71412
5 x	1/4"x28,0 mm/45°	/ DIN 71412
5 x	1/8"x27,0 mm/90°	/ DIN 71412
5 x	1/4"x28,0 mm/90°	/ DIN 71412

SAFETY ELEMENTS

Split pins assortment

- in accordance with DIN 94
- Straight design
- In plastic storage case

970.0080	555 pcs	Split pins assortment	700

150 x	1,6x25 mm / DIN 94
150 x	2,4x25 mm / DIN 94
100 x	2,4x38 mm / DIN 94
75 x	3,2x32 mm / DIN 94
50 x	3,2x50 mm / DIN 94
30 x	4,0x64 mm / DIN 94

Split pins assortment

- in accordance with DIN 94
- Straight design
- In plastic storage case

970.0330	1000 pcs	Split pins assortment	1.00

380 x	1,5x25 mm / DIN 94
240 x	2,5x25 mm / DIN 94
140 x	2,5x38 mm / DIN 94
115 x	3,0x30 mm / DIN 94
75 x	3,0x50 mm / DIN 94
50 x	4,0x60 mm / DIN 94

Roll pins assortment

- in accordance with DIN 1481
- Ideally suited for the automotive sector
- In plastic storage case

970.0020	315 pcs	Roll pins assortment	810

10 x	1,5x 5,0 mm / DIN 1481
10 x	1,5x 8,0 mm / DIN 1481
10 x	1,5x20,0 mm / DIN 1481
10 x	2,0x 6,0 mm / DIN 1481
10 x	2,0x12,0 mm / DIN 1481
10 x	2,0x25,0 mm / DIN 1481
10 x	2,5x16,0 mm / DIN 1481
10 x	2,5x25,0 mm / DIN 1481
10 x	2,5x30,0 mm / DIN 1481
15 x	3,0x16,0 mm / DIN 1481
15 x	3,0x25,0 mm / DIN 1481
15 x	3,0x30,0 mm / DIN 1481
10 x	4,0x16,0 mm / DIN 1481
10 x	4,0x25,0 mm / DIN 1481
10 x	4,0x40,0 mm / DIN 1481
15 x	5,0x16,0 mm / DIN 1481
15 x	5,0x25,0 mm / DIN 1481
15 x	5,0x30,0 mm / DIN 1481
10 x	5,5x16,0 mm / DIN 1481
10 x	5,5x30,0 mm / DIN 1481
10 x	5,5x45,0 mm / DIN 1481
10 x	6,0x16,0 mm / DIN 1481
10 x	6,0x30,0 mm / DIN 1481
10 x	6,0x45,0 mm / DIN 1481
10 x	8,0x20,0 mm / DIN 1481
10 x	8,0x40,0 mm / DIN 1481
10 x	8,0x50,0 mm / DIN 1481
5 x	10,0x20,0 mm / DIN 1481
5 x	10,0x40,0 mm / DIN 1481
5 x	10,0x50,0 mm / DIN 1481

Security bolts assortment

- Split pin mounting 2.5 - 3 - 4mm
- In plastic storage case

				g
970.0210	60 pcs	Security bolts assortment		1050
4 x		2,5 mm	5,0x25 mm	
4 x		2,5 mm	6,0x25 mm	
3 x		2,5 mm	6,0x30 mm	
4 x		2,5 mm	6,0x40 mm	
3 x		2,5 mm	6,0x45 mm	
3 x		2,5 mm	6,0x50 mm	
3 x		2,5 mm	6,0x60 mm	
3 x		2,5 mm	6,0x65 mm	
3 x		3,0 mm	8,0x25 mm	
3 x		3,0 mm	8,0x30 mm	
4 x		3,0 mm	8,0x40 mm	
3 x		3,0 mm	8,0x45 mm	
2 x		3,0 mm	8,0x50 mm	
2 x		3,0 mm	8,0x60 mm	
1 x		3,0 mm	8,0x65 mm	
2 x		3,0 mm	8,0x70 mm	
4 x		4,0 mm	10x25 mm	
3 x		4,0 mm	10x40 mm	
2 x		4,0 mm	10x50 mm	
2 x		4,0 mm	12x40 mm	
2 x		4,0 mm	12x50 mm	

Lynch pins assortment

- For securing to agricultural and construction machines
- In plastic storage case

				kg
970.0550	50 pcs	Lynch pins assortment		1.46
16 x		Ø	4,5x36 mm	
18 x		Ø	6,0x45 mm	
6 x		Ø	8,0x45 mm	
10 x		Ø	11,0x45 mm	

Spring split pins assortment

- In accordance with DIN 11024
- Fuse element in machine and vehicle construction
- In plastic storage case

				g
970.0060	150 pcs	Spring split pins assortment		520
30 x			2,0x33 mm / DIN 11024	
25 x			2,0x40 mm / DIN 11024	
42 x			2,4x31 mm / DIN 11024	
25 x			2,8x42 mm / DIN 11024	
20 x			3,5x45 mm / DIN 11024	
8 x			4,0x75 mm / DIN 11024	

Roll pins/Seeger rings/ feather keys/E-Ring circlips assortment

- In accordance with DIN 471
- According to ISO 3912/13337
- In plastic storage case

				g
970.0520	295 pcs	Roll pins/Seeger rings/ feather keys/E-Ring circlips assortment		220
12 x			3/8“ / DIN 471	
12 x			1/2“ / DIN 471	
12 x			5/8“ / DIN 471	
12 x			3/4“ / DIN 471	
20 x			1/4“	
20 x			3/8“	
12 x			1/8“x5/8“ / ISO 13337	
12 x			1/8“x 1“ / ISO 13337	
12 x			5/32“x5/8“ / ISO 13337	
12 x			5/32“x 1“ / ISO 13337	
12 x			3/16“x5/8“ / ISO 13337	
12 x			3/16“x 1“ / ISO 13337	
25 x			3/32“x3/8“ / ISO ISO3912	
25 x			3/32“x1/2“ / ISO ISO3912	
25 x			1/8“x1/2“ / ISO ISO3912	
25 x			1/8“x5/8“ / ISO ISO3912	
25 x			5/32“x5/8“ / ISO ISO3912	
10 x			3/16“x3/4“ / ISO ISO3912	

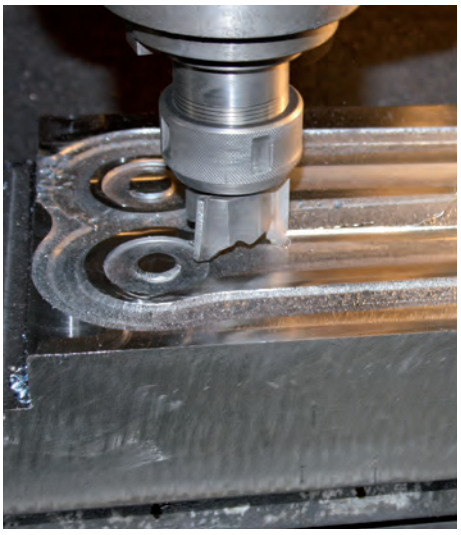

Feather keys assortment

- For securing of shafts
- In plastic storage case

970.0560	80 pcs	Feather keys assortment	335

10 x		3x5,0x13 mm
10 x		3x6,5x16 mm
10 x		4x5,0x13 mm
10 x		4x6,5x16 mm
10 x		4x7,5x19 mm
10 x		5x7,5x19 mm
10 x		5x9,0x22 mm
10 x		6x9,0x22 mm

Springs assortment

- Range of compression and tension springs
- In plastic storage case

970.0010	200 pcs	Springs assortment	370

12 x		4,0x79,5 mm
8 x		4,5x44,5 mm
10 x		5,0x20,5 mm
10 x		5,5x25,5 mm
10 x		6,5x22,0 mm
10 x		7,0x38,0 mm
12 x		7,0x51,0 mm
8 x		8,0x28,5 mm
10 x		8,0x31,5 mm
12 x		8,0x44,5 mm
10 x		8,5x36,5 mm
12 x		8,5x47,0 mm
10 x		5,5x17,0 mm
10 x		5,5x38,0 mm
10 x		6,5x10,0 mm
10 x		7,0x12,5 mm
10 x		7,0x19,0 mm
8 x		9,0x35,0 mm
6 x		9,5x16,0 mm
12 x		9,5x19,0 mm

NAILS

Nails assortment

- ideal for hobbies and workshops
- In plastic storage case

970.0370	550 pcs	Nails assortment	400

100 x		1,3x22 mm
80 x		1,4x25 mm
80 x		1,6x30 mm
50 x		2,0x38 mm
20 x		2,5x50 mm
80 x		1,6x25 mm
80 x		1,6x31 mm
30 x		2,0x38 mm
30 x		2,5x30 mm

SCREWS/NUTS/RING WASHERS

Metal & wooden screws assortment, self-tapping

- According to ISO 7049/7050
- In plastic storage case

970.0410	240 pcs	Metal & wooden screws assortment, self-tapping	360

20 x		#4x1/2" / ISO 7049
20 x		#6x1/2" / ISO 7049
20 x		#6x5/8" / ISO 7049
20 x		#6x3/4" / ISO 7049
20 x		#8x5/8" / ISO 7049
20 x		#8x 1" / ISO 7049
20 x		#6x1/2" / ISO 7050
20 x		#6x3/4" / ISO 7050
20 x		#8x1/2" / ISO 7050
20 x		#8x5/8" / ISO 7050
20 x		#8x3/4" / ISO 7050
20 x		#10x 1" / ISO 7050

Ball head Parker screws assortment

- In accordance with ISO 7049
- In plastic storage case

970.0420	550 pcs	Ball head Parker screws assortment	680

65 x		#4x 1/2" / ISO 7049
55 x		#4x 5/8" / ISO 7049
60 x		#6x 3/8" / ISO 7049

65 x		#6x 1/2“ / ISO 7049
60 x		#6x 5/8“ / ISO 7049
45 x		#6x 3/4“ / ISO 7049
50 x		#8x 1/2“ / ISO 7049
40 x		#8x 5/8“ / ISO 7049
30 x		#8x 1“ / ISO 7049
20 x		#8x1.1/4“ / ISO 7049
25 x		#10x 3/4“ / ISO 7049
20 x		#10x 1“ / ISO 7049
15 x		#10x1.1/4“ / ISO 7049

Wooden screws assortment

- In accordance with ISO 7050
- In plastic storage case

970.0430	550 pcs	Wooden screws assortment	680
65 x		#4x 1/2“ / ISO 7050	
55 x		#4x 5/8“ / ISO 7050	
60 x		#6x 3/8“ / ISO 7050	
65 x		#6x 1/2“ / ISO 7050	
60 x		#6x 5/8“ / ISO 7050	
45 x		#6x 3/4“ / ISO 7050	
50 x		#8x 1/2“ / ISO 7050	
40 x		#8x 5/8“ / ISO 7050	
30 x		#8x 1“ / ISO 7050	
20 x		#8x1.1/4“ / ISO 7050	
25 x		#10x 3/4“ / ISO 7050	
20 x		#10x 1“ / ISO 7050	
15 x		#10x1.1/4“ / ISO 7050	

Self-tapping/wooden/machine screws assortment

- In accordance with DIN 7985/126/555/7981/7982
- In plastic storage case

970.0500	347 pcs	Self-tapping/wooden/machine screws assortment	480
32 x		M3,5x12,0 mm / DIN 7981	
26 x		M3,5x20,0 mm / DIN 7981	
13 x		M5 x25,0 mm / DIN 7981	
24 x		M5 x20,0 mm / DIN 7985	
19 x		M5 x25,0 mm / DIN 7985	
10 x		M6 x20,0 mm / DIN 7985	
43 x		M3 x12,0 mm / DIN 7982	
32 x		M3,5x20,0 mm / DIN 7982	
10 x		M4 x25,0 mm / DIN 7982	
59 x		M5 / DIN 126	
19 x		M6 / DIN126	
49 x		M5 / DIN 555	
11 x		M6 / DIN 555	

Nuts assortment, metric

- In accordance with DIN 934
- In plastic storage case

970.0440	300 pcs	Nuts assortment, metric	480
80 x		M3 / DIN 934	
70 x		M4 / DIN 934	
70 x		M5 / DIN 934	
50 x		M6 / DIN 934	
20 x		M8 / DIN 934	
10 x		M10 / DIN 934	

Stainless steel nuts assortment, metric

- In accordance with DIN 934
- In plastic storage case

970.0450	300 pcs	Stainless steel nuts assortment, metric	480
80 x		M3 / DIN 934	
70 x		M4 / DIN 934	
70 x		M5 / DIN 934	
50 x		M6 / DIN 934	
20 x		M8 / DIN 934	
10 x		M10 / DIN 934	

Self locking nuts assortment

- In accordance with DIN 985
- In plastic storage case

970.0120	146 pcs	Self locking nuts assortment	560
35 x		M4 / DIN 985	
35 x		M5 / DIN 985	
25 x		M6 / DIN 985	
25 x		M8 / DIN 985	
16 x		M10 / DIN 985	
10 x		M12 / DIN 985	

UNC self-tightening nuts assortment

- In accordance with ISO 7040
- In plastic storage case

970.0480	100 pcs	UNC self-tightening nuts assortment	600
25 x		#10x24 mm / ISO 7040	
25 x		1/4"x20 mm / ISO 7040	
20 x		5/16"x18 mm / ISO 7040	
20 x		3/8"x16 mm / ISO 7040	
5 x		7/16"x14 mm / ISO 7040	
5 x		1/2"x13 mm / ISO 7040	

UNF self-tightening nuts assortment

- In accordance with ISO 7040
- In plastic storage case

970.0490	100 pcs	UNF self-tightening nuts assortment	600
25 x		#10x32 mm / ISO 7040	
25 x		1/4"x28 mm / ISO 7040	
20 x		5/16"x24 mm / ISO 7040	
20 x		3/8"x24 mm / ISO 7040	
5 x		7/16"x20 mm / ISO 7040	
5 x		1/2"x20 mm / ISO 7040	

Toothed and standard washers assortment

- In accordance with DIN 127
- In plastic storage case

970.0240	720 pcs	Toothed and standard washers assortment	270
50 x		M3 / DIN 127	
50 x		M4 / DIN 127	
50 x		M5 / DIN 127	
40 x		M6 / DIN 127	
30 x		M8 / DIN 127	
20 x		M10 / DIN 127	
50 x		M3 / DIN 127	
50 x		M4 / DIN 127	
50 x		M5 / DIN 127	
40 x		M6 / DIN 127	
30 x		M8 / DIN 127	
20 x		M10 / DIN 127	
50 x		M3 / DIN 127	
50 x		M4 / DIN 127	
50 x		M5 / DIN 127	
40 x		M6 / DIN 127	
30 x		M8 / DIN 127	
20 x		M10 / DIN 127	

Spring washers assortment

- In accordance with DIN 127
- In plastic storage case

970.0220	1200 pcs	Spring washers assortment	480
300 x		M3 / DIN 127	
300 x		M4 / DIN 127	
300 x		M5 / DIN 127	
150 x		M6 / DIN 127	
100 x		M8 / DIN 127	
50 x		M10 / DIN 127	

Clip bolts & eyebolts assortment

- Open and closed
- In plastic storage case

970.0380	151 pcs	Clip bolts & eyebolts assortment	590
60 x		15/16"	
12 x		1.13/16"	
12 x		1.15/16"	
50 x		1.5/8"	
12 x		2.1/2"	
5 x		3.3/8"	

SPECIAL NUTS & SCREWS

Stainless steel nuts assortment, metric

- In accordance with DIN 1587
- In plastic storage case

970.0460	150 pcs	Stainless steel nuts assortment, metric	700
30 x		M3 / DIN 1587	
30 x		M4 / DIN 1587	
30 x		M5 / DIN 1587	
30 x		M6 / DIN 1587	
20 x		M8 / DIN 1587	
10 x		M10 / DIN 1587	

Wing nuts assortment

- In accordance with DIN 315
- In plastic storage case

970.0470	150 pcs	Wing nuts assortment	750
40 x		M4 / DIN 315	
40 x		M5 / DIN 315	
25 x		M6 / DIN 315	
25 x		M8 / DIN 315	
20 x		M10 / DIN 315	

Headless screws assortment

- In accordance with DIN 913
- In plastic storage case

970.0400	160 pcs	Headless screws assortment	350
15 x		3x 5 mm / DIN 913	
15 x		4x 5 mm / DIN 913	
10 x		5x 6 mm / DIN 913	
20 x		6x 6 mm / DIN 913	
10 x		6x10 mm / DIN 913	
20 x		8x10 mm / DIN 913	
10 x		8x12 mm / DIN 913	
10 x		10x10 mm / DIN 913	
10 x		10x12 mm / DIN 913	
15 x		6x 6 mmF / DIN 913	
15 x		8x10 mmF / DIN 913	
10 x		10x10 mmF / DIN 913	

Hexagon screws assortment, metric

- In accordance with DIN 912
- In plastic storage case

970.0390	106 pcs	Hexagon screws assortment, metric	650
25 x		M4 x12 mm / DIN 912	
25 x		M5 x12 mm / DIN 912	
20 x		M5 x25 mm / DIN 912	
10 x		M6 x12 mm / DIN 912	
10 x		M6 x25 mm / DIN 912	
5 x		M8 x25 mm / DIN 912	
5 x		M8 x40 mm / DIN 912	
3 x		M10x25 mm / DIN 912	
3 x		M10x40 mm / DIN 912	

Ball head machine screws assortment, metric

- In accordance with DIN 7985/126/127/555
- In plastic storage case

970.0510	475 pcs	Ball head machine screws assortment, metric	590
20 x		M4x16,0 mm / DIN 7985	
20 x		M4x25,0 mm / DIN 7985	
20 x		M5x20,0 mm / DIN 7985	
20 x		M5x25,0 mm / DIN 7985	
20 x		M6x20,0 mm / DIN 7985	
50 x		M4 / DIN 127	
50 x		M5 / DIN 127	
25 x		M6 / DIN 127	
50 x		M4 / DIN 126	
50 x		M5 / DIN 126	
25 x		M6 / DIN 126	
50 x		M4 / DIN 555	
50 x		M5 / DIN 555	
25 x		M6 / DIN 555	

BLIND RIVETS

Blind rivets assortment

- Breakable pin made from steel
- In plastic storage case

970.0150	400 pcs	Blind rivets assortment	250
100 x		2,4 mm	
100 x		3,2 mm	
100 x		4,0 mm	
100 x		4,8 mm	

GROMMETS

Rubber grommets assortment

- For secure guiding of cables into bore holes
- In plastic storage case

970.0050	110 pcs	Rubber grommets assortment	180
25 x		Ø 8,3 mm	
20 x		Ø 10,3 mm	
20 x		Ø 13,5 mm	
20 x		Ø 15,0 mm	
10 x		Ø 15,4 mm	
5 x		Ø 20,2 mm	
5 x		Ø 27,0 mm	
5 x		Ø 32,5 mm	

BODYWORK ELEMENTS

Bodywork nuts & screws assortment

- Wing clamps / bodywork nuts in various sizes and forms
- In plastic storage case

970.0530	170 pcs	Bodywork nuts & screws assortment	300
20 x		M3	
20 x		M4	
15 x		M5	
20 x		M3	
10 x		M6	
40 x		M3x 8	
20 x		M4x16	
15 x		M5x12	
10 x		M6x20	

O-RINGS/WASHERS

O-rings assortment, internal

- In accordance with DIN 3771
- In plastic storage case

970.0180	225 pcs	O-rings assortment, internal	120
20 x		3,0x 5,0x1,0 mm / DIN 3771	
20 x		4,0x 6,0x1,0 mm / DIN 3771	
20 x		4,5x 8,5x2,0 mm / DIN 3771	
20 x		5,0x 9,0x2,0 mm / DIN 3771	
20 x		6,0x10,0x2,0 mm / DIN 3771	
20 x		6,0x11,0x2,5 mm / DIN 3771	
20 x		6,0x12,0x3,0 mm / DIN 3771	
20 x		7,0x11,0x2,0 mm / DIN 3771	
20 x		8,0x12,0x2,0 mm / DIN 3771	
5 x		9,0x12,5x2,0 mm / DIN 3771	
5 x		10,0x14,0x2,0 mm / DIN 3771	
5 x		12,0x18,0x3,0 mm / DIN 3771	
5 x		13,0x19,0x3,0 mm / DIN 3771	
5 x		14,0x19,0x2,5 mm / DIN 3771	
5 x		17,0x22,0x2,5 mm / DIN 3771	
5 x		18,0x26,0x4,0 mm / DIN 3771	
5 x		20,0x24,0x2,0 mm / DIN 3771	
5 x		22,0x26,0x2,0 mm / DIN 3771	

O-rings assortment

- In accordance with DIN 3771
- In plastic storage case

970.0130	419 pcs	O-rings assortment	630
20 x		R01 Ø 3,0 mm / DIN 3771	
20 x		R02 Ø 4,4 mm / DIN 3771	
18 x		R03 Ø 5,0 mm / DIN 3771	
23 x		R04 Ø 7,0 mm / DIN 3771	
23 x		R05 Ø 10,0 mm / DIN 3771	
23 x		R06 Ø 13,0 mm / DIN 3771	
14 x		R07 Ø 10,0 mm / DIN 3771	
13 x		R08 Ø 11,0 mm / DIN 3771	
14 x		R09 Ø 13,0 mm / DIN 3771	
13 x		R10 Ø 14,0 mm / DIN 3771	
14 x		R11 Ø 16,0 mm / DIN 3771	
14 x		R12 Ø 18,0 mm / DIN 3771	
13 x		R13 Ø 19,0 mm / DIN 3771	
14 x		R14 Ø 21,0 mm / DIN 3771	
13 x		R15 Ø 22,0 mm / DIN 3771	
10 x		R16 Ø 18,0 mm / DIN 3771	
10 x		R17 Ø 20,0 mm / DIN 3771	
10 x		R18 Ø 22,0 mm / DIN 3771	
10 x		R19 Ø 23,5 mm / DIN 3771	
10 x		R20 Ø 25,0 mm / DIN 3771	
10 x		R21 Ø 26,5 mm / DIN 3771	
10 x		R22 Ø 28,0 mm / DIN 3771	
10 x		R23 Ø 30,0 mm / DIN 3771	
10 x		R24 Ø 31,0 mm / DIN 3771	
10 x		R25 Ø 33,0 mm / DIN 3771	
10 x		R26 Ø 34,5 mm / DIN 3771	
10 x		R27 Ø 36,0 mm / DIN 3771	
10 x		R28 Ø 38,0 mm / DIN 3771	
10 x		R29 Ø 41,0 mm / DIN 3771	
10 x		R30 Ø 44,0 mm / DIN 3771	
10 x		R31 Ø 47,0 mm / DIN 3771	
10 x		R32 Ø 50,0 mm / DIN 3771	

SAE O-rings assortment

- ideal for hobbies and workshops
- In plastic storage case

970.0350	407 pcs	SAE O-rings assortment	600
20 x		R01 Ø 1/8"	
20 x		R02 Ø 3/16"	
20 x		R03 Ø 1/4"	
20 x		R04 Ø 5/16"	
20 x		R05 Ø 3/8"	
20 x		R06 Ø 1/2"	
13 x		R07 Ø 3/8"	
13 x		R08 Ø 7/16"	
13 x		R09 Ø 1/2"	
13 x		R10 Ø 9/16"	
13 x		R11 Ø 5/8"	
13 x		R12 Ø 1 1/16"	
13 x		R13 Ø 3/4"	
13 x		R14 Ø 13/16"	
13 x		R15 Ø 7/8"	
10 x		R16 Ø 3/4"	
10 x		R17 Ø 13/16"	
10 x		R18 Ø 7/8"	
10 x		R19 Ø 15/16"	
10 x		R20 Ø 1"	
10 x		R21 Ø 1.1/16"	
10 x		R22 Ø 1.1/8"	
10 x		R23 Ø 1.3/16"	
10 x		R24 Ø 1.1/4"	
10 x		R25 Ø 1.5/16"	
10 x		R26 Ø 1.3/8"	
10 x		R27 Ø 1.7/16"	
10 x		R28 Ø 1.1/2"	
10 x		R29 Ø 1.5/8"	
10 x		R30 Ø 1.3/4"	
10 x		R31 Ø 1.7/8"	
10 x		R32 Ø 2"	

O-rings assortment for HNBR air-conditioning

- In accordance with DIN 3771
- Made from HNBR: Specially for use on air conditioning lines
- In plastic storage case

970.0260	225 pcs	O-rings assortment for HNBR air-conditioning	120
20 x		3,0x1,0 mm / DIN 3771	
20 x		4,0x1,0 mm / DIN 3771	
20 x		4,5x2,0 mm / DIN 3771	
20 x		5,0x2,0 mm / DIN 3771	
20 x		6,0x2,0 mm / DIN 3771	
20 x		6,0x2,5 mm / DIN 3771	
20 x		6,0x3,0 mm / DIN 3771	
20 x		7,0x2,0 mm / DIN 3771	
20 x		8,0x2,0 mm / DIN 3771	
5 x		9,0x2,0 mm / DIN 3771	
5 x		10,0x2,0 mm / DIN 3771	
5 x		12,0x3,0 mm / DIN 3771	
5 x		13,0x3,0 mm / DIN 3771	
5 x		14,0x2,5 mm / DIN 3771	
5 x		17,0x2,5 mm / DIN 3771	
5 x		18,0x4,0 mm / DIN 3771	
5 x		20,0x2,0 mm / DIN 3771	
5 x		22,0x2,0 mm / DIN 3771	

O-rings assortment for HNBR air conditioning

- Made from HNBR: Specially for use in air conditioning lines
- In plastic storage case

970.0340	270 pcs	O-rings assortment for HNBR air conditioning	150
20 x		5,29x1,78 mm	
20 x		6,07x1,78 mm	
20 x		6,80x1,90 mm	
20 x		7,65x1,78 mm	
40 x		7,80x1,90 mm	
20 x		8,80x1,90 mm	
20 x		10,00x2,00 mm	
15 x		10,70x2,62 mm	
15 x		11,00x2,00 mm	
15 x		11,00x1,78 mm	
15 x		12,90x2,00 mm	
10 x		13,90x1,78 mm	
10 x		14,00x2,00 mm	
10 x		17,00x1,78 mm	
10 x		17,00x2,00 mm	
10 x		17,00x3,53 mm	

Copper sealing rings assortment

- In accordance with DIN 93
- In plastic storage case

970.0140	300 pcs	Copper sealing rings assortment	790
10 x		5x 9,0x1,0 mm / DIN 93	
10 x		6x10,0x1,0 mm / DIN 93	
10 x		6x12,0x1,0 mm / DIN 93	
10 x		8x12,0x1,0 mm / DIN 93	
10 x		8x14,0x1,0 mm / DIN 93	
10 x		8x14,0x1,5 mm / DIN 93	
10 x		9x14,0x1,0 mm / DIN 93	
10 x		10x14,0x1,0 mm / DIN 93	
10 x		10x14,0x1,5 mm / DIN 93	
10 x		10x16,0x1,0 mm / DIN 93	
10 x		12x16,0x1,0 mm / DIN 93	
10 x		12x16,0x1,5 mm / DIN 93	
10 x		12x18,0x1,5 mm / DIN 93	
10 x		13x18,0x1,0 mm / DIN 93	
10 x		14x18,0x1,5 mm / DIN 93	
10 x		14x20,0x1,5 mm / DIN 93	
10 x		14x20,0x2,0 mm / DIN 93	
10 x		16x20,0x1,5 mm / DIN 93	
10 x		16x22,0x1,5 mm / DIN 93	
10 x		18x22,0x1,5 mm / DIN 93	
10 x		18x24,0x1,5 mm / DIN 93	
10 x		19x26,0x2,0 mm / DIN 93	
10 x		20x24,5x1,5 mm / DIN 93	
10 x		20x24,5x0,8 mm / DIN 93	
10 x		22x27,0x1,0 mm / DIN 93	
10 x		22x29,0x1,5 mm / DIN 93	
10 x		24x29,0x1,5 mm / DIN 93	
10 x		24x32,0x2,0 mm / DIN 93	
10 x		26x34,0x2,0 mm / DIN 93	
10 x		28x36,0x2,0 mm / DIN 93	

Copper sealing rings assortment

- In accordance with DIN 93
- In plastic storage case

970.0040	150 pcs	Copper sealing rings assortment	320
10 x		5,0x10x1,0 mm / DIN 93	
10 x		6,0x10x1,0 mm / DIN 93	
10 x		7,0x10x1,0 mm / DIN 93	
10 x		8,0x12x1,0 mm / DIN 93	
10 x		10,0x16x1,0 mm / DIN 93	
10 x		10,5x17x1,5 mm / DIN 93	
10 x		11,0x17x1,5 mm / DIN 93	
10 x		12,0x20x1,5 mm / DIN 93	
10 x		12,5x20x1,5 mm / DIN 93	
10 x		14,0x18x1,0 mm / DIN 93	
10 x		14,0x20x1,5 mm / DIN 93	
10 x		15,0x20x2,0 mm / DIN 93	
10 x		16,0x22x2,0 mm / DIN 93	
10 x		16,5x24x2,0 mm / DIN 93	
10 x		17,5x24x2,0 mm / DIN 93	

Aluminium sealing rings assortment

- In accordance with DIN 93
- In plastic storage case

970.0160	300 pcs	Aluminium sealing rings assortment	430
10 x		5x 9,0x1,0 mm / DIN 93	
10 x		6x10,0x1,0 mm / DIN 93	
10 x		6x12,0x1,0 mm / DIN 93	
10 x		8x12,0x1,0 mm / DIN 93	
10 x		8x14,0x1,0 mm / DIN 93	
10 x		8x14,0x1,5 mm / DIN 93	
10 x		9x14,0x1,0 mm / DIN 93	
10 x		10x14,0x1,0 mm / DIN 93	
10 x		10x14,0x1,5 mm / DIN 93	
10 x		10x16,0x1,0 mm / DIN 93	
10 x		12x16,0x1,0 mm / DIN 93	
10 x		12x16,0x1,5 mm / DIN 93	
10 x		12x18,0x1,5 mm / DIN 93	
10 x		13x18,0x1,0 mm / DIN 93	
10 x		14x18,0x1,5 mm / DIN 93	
10 x		14x20,0x1,5 mm / DIN 93	
10 x		14x20,0x2,0 mm / DIN 93	
10 x		16x20,0x1,5 mm / DIN 93	
10 x		16x22,0x1,5 mm / DIN 93	
10 x		18x22,0x1,5 mm / DIN 93	
10 x		18x24,0x1,5 mm / DIN 93	
10 x		19x26,0x2,0 mm / DIN 93	
10 x		20x24,5x0,8 mm / DIN 93	
10 x		20x24,5x1,5 mm / DIN 93	
10 x		22x27,0x1,0 mm / DIN 93	
10 x		22x29,0x1,5 mm / DIN 93	
10 x		24x29,0x1,5 mm / DIN 93	
10 x		24x32,0x2,0 mm / DIN 93	
10 x		26x34,0x2,0 mm / DIN 93	
10 x		28x36,0x2,0 mm / DIN 93	

Sealing rings assortment, plumbing

- In accordance with DIN 7337
- In plastic storage case

970.0190	141 pcs	Sealing rings assortment, plumbing	150
5 x		3/8“ / 8,0x18,0x4,0 mm / DIN 7337	
5 x		3/8“ / 10,5x14,0x4,0 mm / DIN 7337	
10 x		1/2“ / 4,0x16,0x4,0mm / DIN 7337	
10 x		1/2“ / 4,0x17,0x4,0 mm / DIN 7337	
5 x		1/2“ / 8,0x14,0x4,0 mm / DIN 7337	
10 x		1/2“ / 8,0x18,0x4,0 mm / DIN 7337	
10 x		3/4“ / 12,0x24,0x2,0mm / DIN 7337	
5 x		3/4“ / 15,0x24,0x3,0mm / DIN 7337	
10 x		3/8“ / 10,0x13,5x2,0 mm / DIN 7337	
10 x		3/8“ / 12,0x17,5x1,5 mm / DIN 7337	
10 x		1/2“ / 17,0x21,0x1,5 mm / DIN 7337	
10 x		1/2“ / 17,0x24,0x1,5 mm / DIN 7337	
10 x		3/4“ / 20,5x25,0x1,5 mm / DIN 7337	
5 x		1“ / 27,0x33,0x1,5 mm / DIN 7337	
10 x		1/2“ / 12,0x17,5x1,0 mm / DIN 7337	
10 x		3/4“ / 17,0x24,0x2,0 mm / DIN 7337	
3 x		1.1/4“ / 30,0x39,0x1,0 mm / DIN 7337	
3 x		1.1/2“ / 27,0x38,0x2,0 mm / DIN 7337	

OIL REDUCTION SCREWS & WASHERS

Oil sump screws and gaskets assortment

- Screws M10 - M20
- Washers 6 - 20 mm
- In plastic storage case

970.0200	534 pcs	Oil sump screws and gaskets assortment	2000
50 x		6 mm	
50 x		8 mm	
50 x		10 mm	
50 x		12 mm	
50 x		13 mm	
50 x		14 mm	
50 x		15 mm	
50 x		16 mm	
50 x		18 mm	
50 x		20 mm	
5 x		M10	
5 x		M12	
5 x		M13	
5 x		M14	
5 x		M15	
3 x		M16	
3 x		M18	
3 x		M20	

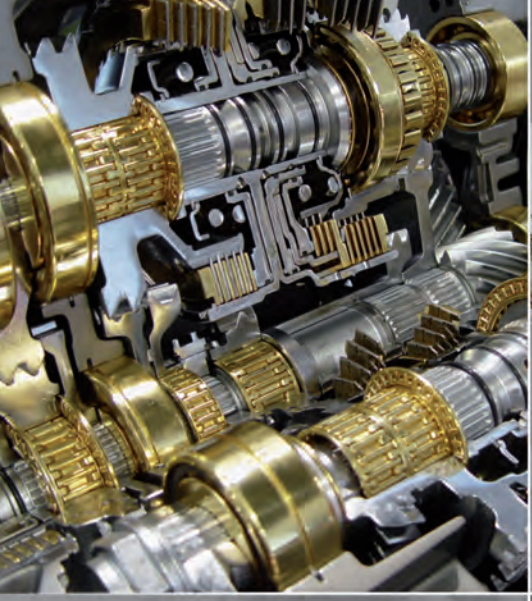

KS TOOLS®

Innovation is our mission!

DIN AND VARIOUS CONSUMABLE ASSORTMENTS

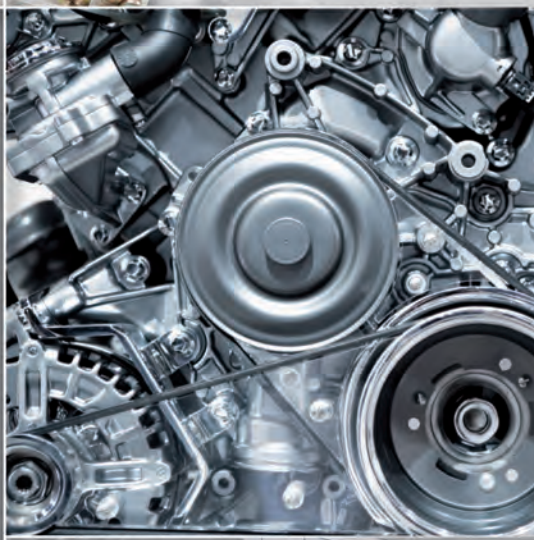

- Very extensive range
  (from screws to O rings)
- For industry, automotive and plumbing
- Quick amortisation,
  as no looking for a long time in the event of a repair
- The range is determined
  based on the products most often required

Workshop assortment

INDEX

KS TOOLS®

Innovation is our mission!

PAGE

ALPHABETICAL INDEX 616 - 623

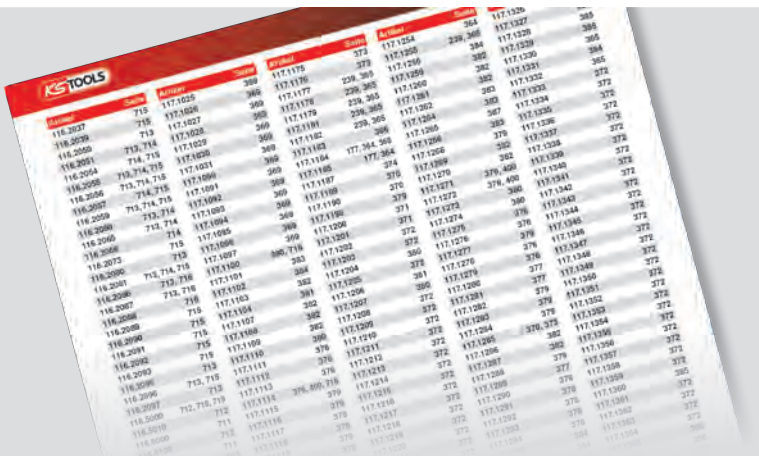

NUMERICAL INDEX 624 - 659

TECHNICAL TABLES 660 - 673

A	
Adapters, pneumatic	389 - 390
Air service unit	389
Air service unit, pneumatic	389
Alu grooved top, MASTERline	442
Alu grooved top, ULTIMATEline	444
ALUTORQUEprecision Torque wrench	164 - 168
Angle drill, pneumatic	373
Angle grinders, cordless	398
Angled die grinders, pneumatic	375 - 376
Assortment DIN and Standard Parts	600 - 612
Automotive clip removal pliers	267
AV cable	367
Awle	573
Axes	558
Axle boots assembly devices, pneumatic	386
Axle stands	431
B	
Back wall system	420
Baldes	542
Ball bearing extractors	326
Ball ended hexagon key wrench	217 - 218
Ball ended hexagon key wrench display	219
Ball ended hexagon key wrench sets	218 - 219
Ball joint extractor	343 - 347
Ball point pen, LED	406
Baseball cap	582
BASICline Tool cabinets	438 - 439
Batteries	399
Batteries, cordless	399
Battery booster	400
Bearing punch	326 - 327
Belt pulley puller	342
Belt sander, pneumatic	377
Bench vice	421
Bending iron / pry bar	577
Bit adapter	62, 186 - 187
Bit adapter 1/2"	116 - 117
Bit adapter 1/4"	74
Bit adapter 3/4"	127 - 128
Bit adapter 3/8"	96 - 97
Bit holders	186
Bit ratchets	188 - 189
Bit screwdrivers 1/4"	240
Bit sets 1/4" TORSIONpower	205
Bit sets 1/4", 25 mm	193 - 197
Bit sets 1/4", 75 mm	201
Bit sets 10 mm	207 - 208
Bit sets 5/16"	206
Bit sockets 1"	130
Bit sockets 1/2"	109 - 115
Bit sockets 1/4"	70 - 73
Bit sockets 3/4"	127
Bit sockets 3/8"	92 - 96
Bits 1/4" TIN, 25 mm	202
Bits 1/4" TIN, 50 mm	202 - 203
Bits 1/4" TORSIONpower 75 mm	204
Bits 1/4" TORSIONpower, 25 mm	203
Bits 1/4", 25 mm	190 - 193
Bits 1/4", 50 mm	198 - 199
Bits 1/4", 75 mm	199 - 201
Bits 10 mm, 120 mm	207
Bits 10 mm, 30 mm	206 - 207
Bits 10 mm, 75 mm	207
Bits 5/16"	205 - 206
Bits, micro	189 - 190
Blind rivets	609
Blow out tools, pneumatic	387 - 388
Bodywork nuts & screws	609
Bodywork slitting chisels	567
Bolster chisel	558
Bolster chisels	568
Bolt cutters	265
Booster	400
Box spanners	47 - 49
Brake disk vernier caliper	296 - 297
Brake drum caliper	297
Brake pliers	268 - 269
Brick hammer	557
Bricklayer's hammer	558
Bricklayers chisels	566
Burnisher, pneumatic	376
Bush driver	326 - 327
C	
Cable reel	442, 444
Cable splices	600 - 601
Car charger lead	400
Cartridge guns, cordless	398 - 399
Cartridge tip pliers	267
Castor wheel sets for work lamps	413
Centre drills	507
Centre punches	572 - 573
Charger for battery booster	400
Chargers	399
Chargers, cordless	399
Chassis pliers	268 - 269
Chemical protection gloves	587
Chipping hammer	558
Chisel hammer, pneumatic	379 - 380
Circlip pliers for external circlips	255
Circlip pliers for internal circlips	254 - 255
Circlip pliers sets for circlips	256
Circuit stopper pliers	274
Clamping yoke	336
Claw hammer	554, 557
Cleaning set	367
Cleaning station	431
Cloakroom cupboard	420
Club hammer	554 - 555
Coats	594

Coil spring compressor	355 - 356
Combination pliers	246
Combination ratcheting spanners	54 - 55
Combination ratcheting spanners, DUO	57
Combination ratcheting spanners, extra long	55 - 56
Combination ratcheting spanners, stubby	54
Combination spanners	28 - 34
Combination spanners, extra long	36 - 37
Combination spanners, mini	28
Compressed air hose	388
Compressed air hose, pneumatic	388
Cone cutters, HSS	509 - 510
Cone cutters, HSS CO	510
Cone cutters, HSS TIN	510 - 511
Coolant	500
Cordless angle grinders	398
Cordless cartridge guns	398 - 399
Cordless drill machines	397
Cordless grease guns	398
Cordless grinding machines	397 - 398
Cordless impact wrench	396 - 397
Cordless polisher	398
Cordless reversing ratchet	396
Cordless riveting tool pistols	399
Cotter pin drives	569 - 572
Countersink 120°	516
Countersink 60°	513
Countersink 75°	513
Countersink 90°	514 - 515
Crimping pliers	263 - 264
Cross chisels	567
Crow bar	577
Cupplings, pneumatic	389 - 390
Cut off wheels	533
Cutting pliers	248
D	
Data cable, USB	367
Deburrer 120°	516
Deburrer 60°	513
Deburrer 75°	513
Deburrer 90°	514 - 515
Demagnetizer	284
Depth vernier caliper	297
Dial gauge	298-299
Dial torque wrench with a drag indicator	173
Die grinders, pneumatic	374 - 375
Die holders	520
Die stocks	518 - 519
DIN and Standard Parts	600 - 612
Disc cutters, pneumatic	381 - 382
Dividers	306 - 307
Double open ended spanners	38 - 39
Double ratchet ring spanners	60 - 62
Double revolving head spanners	46 - 47
Double ring ratchet spanners, TX-E	61 - 62
Double ring spanners	42 - 43
Double ring spanners, extra long	43
Double ring spanners, offset	43 - 45
Double ring spanners, open	41
Double ring spanners, TX-E	45 - 46
Drawer divider set	439, 442, 444
Drill machines, cordless	397
Drive shaft ejector	347 - 348
Drive shaft removal pliers	268
DUO GEARplus® Combination ratcheting spanners	57
E	
Ear plugs	583
Ear protection	583 - 584
Electrians chisels	566 - 567
Electrician‘s protective gloves	588
Electricians hammer	554
Emergency light	406
Empty system inserts 1/1	495
Empty system inserts 1/3	468
Empty system inserts 2/3	476
Erasing machines, pneumatic	379
ERGOTORQUE Screwdriver sets	232 - 233
ERGOTORQUE Screwdrivers	231 - 232
ERGOTORQUE Screwdrivers displays	234
ERGOTORQUE WOOD Screwdrivers	230
ERGOTORQUE®basic Torque wrench	152
ERGOTORQUE®precision Torque wrench	153 - 155
ERGOTORQUE®precision Torque wrench toolkit	155 - 157
ERGOTORQUEmax Screwdriver sets	238
ERGOTORQUEmax Screwdrivers	237 - 238
ERGOTORQUEmax Screwdrivers displays	239
ERGOTORQUEplus Screwdriver sets	236 - 237
ERGOTORQUEplus Screwdrivers	234 - 236
ERGOTORQUEplus Screwdrivers displays	237
E-ring retaining rings	602
ESD Precision pliers	286 - 289
ESD Precision pliers sets	290
Exhaust pliers	274
Expendable	600 - 612
Extending tripod for work lamps	413
Extensions 1"	131
Extensions 1/2"	118 - 119
Extensions 1/4"	75 - 77
Extensions 3/4"	128
Extensions 3/8"	98 - 99
Extra long combination spanners	36 - 37
Extra long, double ring spanners	43
Eye protection	582 - 583
F	
Face shield	582
Feeler gauges	299 - 300
Files	534 - 535
Filter for half mask	585
Fine dust fil er mask	585
Fitters hammer	553 - 554

Fitters pliers	254
Five star profile amperproof key wrench	222
Five star profile amperproof key wrench sets	222
Flap wheels	533
Flash lights	409
Flash lights, accessories	409
Flat chisels	564
Flat pliers	246
Flatteners	576
Fleece jackets	593 - 594
Flexible combination ratcheting spanners	58 - 59
Flexible combination spanners	34 - 36
Flexible locking combination ratcheting spanners	59 - 60
Flexible open double ring spanner	41
Folding knives	541
Folding rules	302 - 303
Foot bed inlay	589
Foot protection	589 - 592
Frame for welding protection screen	584
Fuel service pliers	269 - 270
Fuses	600
G	
Gasket ring dismantling tools	574
GEARplus® 4 in 1 reversing double ratchet ring spanner	61
GEARplus® Bit adapter	62
GEARplus® Combination ratcheting spanners	54 - 55
GEARplus® Combination ratcheting spanners, extra long	55 - 56
GEARplus® Combination ratcheting spanners, stubby	54
GEARplus® Double ratchet ring spanners	60 - 61
GEARplus® Double ring ratchet spanners, TX-E	61 - 62
GEARplus® Flexible combination ratcheting spanners	58 - 59
GEARplus® Flexible locking combination ratcheting spanners	59 - 60
GEARplus® Reversing combination ratcheting spanners	56 - 57
GEARplus® Reversing double ratchet ring spanners	61
GEARplus® Ring-Stop reversing combination ratcheting spanners	58
GEARplus® Ring-Stop socket adapter	62
GEARplus® Socket adapter	62
GEARplus® Socket adapter, Ring-Stop	62
GEARplus® Universal double ratchet ring spanners	62
Glasses	583
Glassfib e chisels	568
Gloves	585 - 588
Glow plug extractors	353
Glow plug pliers	273 - 274
Go through reversing ratchet	115 - 116
Grease gun, pneumatic	386
Grease guns, cordless	398
Grease nipples	602 - 603
Greases	386
Greases, pneumatic	386
Grinding machine, pneumatic	377
Grinding machines, cordless	397 - 398
Grommets	609
H	
Half mask	585
Hammer & chisel system inserts 1/1	493
Hand axes	559
Hand grip for chisels	568
Hand lamps, LED	407 - 408
Hand protection	586 - 588
Hand wire brushes	530 - 532
Hand-impact screwdriver 1/2"	241
Handle punches	574
Handsaws	524 - 526
Head protection	582
Headlamps	406
Hexagon key wrench	214 - 215
Hexagon key wrench display	216 - 217
Hexagon key wrench sets	215 - 216
Hinged door cabinet	420 - 421
Hole punches	575
Hole walls	426 - 427
Holesaws	523 - 524
Hook assortment for hole wall system	422 - 426
Hook wrench	49 - 50
Hooks	336 - 338
Hose clamp pliers	270 - 272
Hose clamp pliers sets	272 - 273
Hose clamps	602
Hose strap cutter, angled	273
HSS CO Cone cutters	510
HSS CO Stepped drills	512
HSS CO Threaded tap	517 - 518
HSS Cone cutters	509 - 510
HSS Stepped drills	511
HSS Threaded tap	516 - 517
HSS TIN Cone cutters	510 - 511
HSS TIN Stepped drills	512 - 513
HSS TIN Twist drills	506 - 507
HSS-G CO Twist drills	504 - 506
HSS-G Twist drills	502 - 504
HSS-R Twist drills	500 - 502
Hydraulic pullers	338 - 341
Hydraulic pumps	338 - 341
I	
Impact bit sockets 1"	144
Impact bit sockets 1/2"	139 - 140
Impact bit sockets 3/4"	141 - 142
Impact extension 1"	145
Impact extension 1/2"	140
Impact extension 1/4"	132
Impact extension 3/4"	142 - 143
Impact extension 3/8"	134
Impact securing elements 1"	145
Impact securing elements 1/2"	141
Impact securing elements 1/4"	132
Impact securing elements 3/4"	143
Impact securing elements 3/8"	134
Impact socket 1"	143
Impact socket 1/2"	134 - 135

Impact socket 1/4"	132
Impact socket 3/4"	141
Impact socket 3/8"	133 - 134
Impact socket adapter 1"	145
Impact socket adapter 1/2"	140
Impact socket adapter 1/4"	132
Impact socket adapter 3/4"	143
Impact socket adapter 3/8"	134
Impact socket wrench system inserts 1/1	490
Impact socket wrench system inserts 1/3	465
Impact universal ball joint 1"	145
Impact universal ball joint 1/2"	140
Impact universal ball joint 3/4"	143
Impact wrench sets, pneumatic	384
Impact wrench, cordless	396 - 397
Impact wrench, pneumatic	382 - 384
Incandescent bulbs plier	273
Injector extractors	353
Inspection lamps	406 - 407
Inspection mirror	280 - 281
Insulated torque wrench	170
Internal extractor sets	324 - 325
Internal extractors	324
Internal puller sets	325
J	
Jacks	431
Jigsaw blades	526 - 528
Joggler pliers	266
Jointing chisels	565
K	
Key wrench display, ball ended hexagon	219
Key wrench display, hexagon	216 - 217
Key wrench display, TX	220
Key wrench display, TX ball ended	221
Key wrench display, TX tamperproof	222
Key wrench sets, ball ended hexagon	218 - 219
Key wrench sets, fi e star profile amperproof	222
Key wrench sets, hexagon	215 - 216
Key wrench sets, RIBE®	223
Key wrench sets, spline	223
Key wrench sets, TX	220
Key wrench sets, TX ball ended	221
Key wrench sets, TX tamperproof	221 - 222
Key wrench, ball ended hexagon	217 - 218
Key wrench, fi e star profile amperproof	222
Key wrench, hexagon	214 - 215
Key wrench, RIBE®	222
Key wrench, spline	223
Key wrench, TX	219
Key wrench, TX ball ended	220
Key wrench, TX tamperproof	221
L	
Leather sleeves	584
LED ball point pen	406
LED hand lamps	407 - 408
Lifting tools	431
Locking device	559
Locking pliers	257 - 261
Long nosed pliers	246 - 247
M	
Machine operating wire brushes	532 - 533
Magnetic holder	280
Magnetizer	284
Magnetizer and demagnetizer	241
Manual drive tools 1"	131
Manual drive tools 1/2"	119
Manual drive tools 1/4"	77
Manual drive tools 3/4"	128
Manual drive tools 3/8"	99
Marking gauge	305 - 306
MASTER Camera probe	363 - 365
MASTER Probe accessories	365
MASTER Videoscope sets	362 - 363
MASTERline Alu grooved top	442
MASTERline Storage tray insert	442
MASTERline Tool cabinets	439 - 443
MASTERline Wooden worktop	442
Measurement software	367
Measurement stand	299
Measuring and checking tool system inserts 1/3	467
Measuring tool sets	297 - 298
Measuring tools, electronic	307
Mechanic gloves	588
Mechanic gloves displays	588
Metal shear, pneumatic	382
Metal shears	544 - 546
Micro fine oven gloves	586 - 587
Micrometer	298
Micrometer holder	298
Milling drills	509
Mini combination spanners	28
Mouth protection mask	585
Multi purpose trolley	429
Multi-grinders, pneumatic	379
N	
Nails	605
Needle scaler, pneumatic	380
Nibblers, pneumatic	380
Nut splitter	354 - 355
Nuts	605 - 607
O	
Offset screwdriver	214
Offset screwdrivers	240
Oil service pliers	270
Oil sump screws	612
Oils	386
Oils, pneumatic	386
One ended spanners	37 - 38
Open double ring spanner, with fl xible joint	41
Open double ring spanners	41

O-rings	609 - 612
Oscillating cutter, pneumatic	385
Overalls	594
P	
Padded ear defenders	583 - 584
Panel beaters hammer	555 - 556
Pencil grinders, pneumatic	374
Pick axe	558
Pin punches	568 - 569
Pipe wrench	252 - 254
Pipe wrench sets	254
Piston ring pliers	273
Platform trolleys	428
Pliers system inserts 1/1	491 - 492
Pliers system inserts 1/3	466 - 467
Plumber pliers	266 - 267
Pneumatic adapters	389 - 390
Pneumatic angle drill	373
Pneumatic angled die grinders	375 - 376
Pneumatic axle boots assembly devices	386
Pneumatic Belt sander	377
Pneumatic blow out tools	387 - 388
Pneumatic burnisher	376
Pneumatic chisel hammer	379 - 380
Pneumatic cupplings	389 - 390
Pneumatic die grinders	374 - 375
Pneumatic disc cutters	381 - 382
Pneumatic erasing machines	379
Pneumatic grease gun	386
Pneumatic grinding machine	377
Pneumatic impact wrench	382 - 384
Pneumatic impact wrench sets	384
Pneumatic metal shear	382
Pneumatic multi-grinders	379
Pneumatic needle scaler	380
Pneumatic nibblers	380
Pneumatic oscillating cutter	385
Pneumatic pencil grinders	374
Pneumatic random orbit sanders	378
Pneumatic reversing ratchet	372
Pneumatic riveting tool pistol	385
Pneumatic rough grinders	378
Pneumatic saws	381
Pneumatic spot weld drill	374
Pneumatic spray guns	387
Pneumatic straight drill	373
Pneumatic tyre filli g gauge	386 - 387
Pneumatic vibro extractor	385
Pointed chisels	566
Polisher, cordless	398
Polo shirts	592 - 593
Precision pliers	284 - 285
Precision pliers sets	285 - 286
Precision screwdriver dislpay	284
Precision screwdriver sets	283 - 284
Precision screwdrivers	282 - 283
Protection kneeling mats	430
protective hardhat	582
Protractor	302
Pry bar	576
Puller legs	336 - 338
Puller sets, 2 arm	330 - 331
Puller sets, 3 arm	334
Pullerr system inserts 1/3	468
Pullers, 2 arm	327 - 330
Pullers, 3 arm	332 - 334
Punched hole	266
Punches	573
Push fit oolkit	177
Push fit ools	174 - 176
R	
Random orbit sanders, pneumatic	378
Ratchet bit schrewdriver	188
Ratchet bit screwdrivers 1/4"	240 - 241
Ratchet spanner with revolving head	41
Ratchets 1"	131
Ratchets 1/2"	119 - 120
Ratchets 1/4"	77 - 78
Ratchets 3/4"	128 - 129
Ratchets 3/8"	99 - 100
Rear wall system for tool cabinets	442, 444
Replacement blades	542
Replacement handles	559
Replacement hooks	336 - 338
Replacement spindle	338
Respratory protection	585
Reversing combination ratcheting spanners	56 - 57
Reversing double ratchet ring spanners	61
Reversing double ratchet ring spanners, 4 in 1	61
Reversing ratchet, cordless	396
Reversing ratchet, pneumatic	372
Revolving punch pliers	266
RIBE® Key wrench	222
RIBE® Key wrench sets	223
Ring washers	605 - 607
Ring-Stop reversing combination ratcheting spanners	58
Riverting pliers	261 - 263
Rivet processing tools	575 - 576
Rivet sets	576
Riveting tool pistol, pneumatic	385
Riveting tool pistols, cordless	399
Rotary angle discs	151
Rotary burrs	520 - 523
Rough grinders, pneumatic	378
Round hole punches	575
Round keys	559
Rubber boots	591
Rulers	305
S	
Sabre saw blades	528 - 530

Saddler pliers	266
Safety covering foil	341
Safety elements	603 - 605
Safety glasses	583
Safety rubber boots	591
Safety shoes	589 - 592
Sales support for shoes	592
Saws, pneumatic	381
Scabbling pick	556 - 557
Scaffolding clamp for work lamps	413
Scrapers	546 - 547
Screw hole punch	523
Screwdriver bits	187
Screwdriver sets, ERGOTORQUE	232 - 233
Screwdriver sets, ERGOTORQUEmax	238
Screwdriver sets, ERGOTORQUEplus	236 - 237
Screwdriver system inserts 1/1	490 - 491
Screwdriver system inserts 1/3	465 - 466
Screwdrivers displays, ERGOTORQUE	234
Screwdrivers displays, ERGOTORQUEmax	239
Screwdrivers displays, ERGOTORQUEplus	237
Screwdrivers, ERGOTORQUE	231 - 232
Screwdrivers, ERGOTORQUE WOOD	230
Screwdrivers, ERGOTORQUEmax	237 - 238
Screwdrivers, ERGOTORQUEplus	234 - 236
Screwdriversystem inserts 2/3	476 - 476
Screwdriving tools	189
Screws	605 - 607
Scriber	305 - 306, 573
SCS system insert sets	448 - 451
SD card	367
Sealing rings	609 - 612
Separator puller tool sets	335 - 336
Separator puller tools	335
Service trolleys	427 - 428
Shears	543 - 544
Shirts	593
Shoes	589 - 592
Shrink tubes	607
Side cutters	248 - 249
Single ring spanners	39 - 40, 51
Single-use gloves	586
Sledge hammer	555
Slipper torque wrench, Pre-set	169
Slitting chisels	565
Slogging spanner	50 - 51
Snap off blade knives	540 - 541
Snap rings	601 - 602
Socket adapter	62
Socket adapter, Ring-Stop	62
Socket display 1/2"	126
Socket display 1/4"	88
Socket display 3/8"	104 - 105
Socket sets 1"	131
Socket sets 1/2"	120 - 126
Socket sets 1/4"	78 - 88
Socket sets 3/4"	129
Socket sets 3/8"	100 - 104
Socket wrench system inserts 1/1	480 - 489
Socket wrench system inserts 1/3	454 - 464
Socket wrench system inserts 2/3	470 - 475
Sockets 1"	130
Sockets 1/2"	105 - 109
Sockets 1/4"	68 - 70
Sockets 3/4"	127
Sockets 3/8"	88 - 92
Soft faced hammer, recoil free	552
Soft head hammer	552 - 553
Softshelljackest	593
Soldering Technology	290
Soldering wire pliers	273
Spanner system inserts 1/1	476 - 480
Spanner system inserts 1/3	453 - 454
Spanner system inserts 2/3	469 - 470
Spark plug pliers	273 - 274
Special nuts	608
Special screws	608
Spindle	338
Spirit level	304 - 305
Spline key wrench	223
Spline key wrench sets	223
Spot weld drill, pneumatic	374
Spot weld drills	507 - 509
Spray guns, pneumatic	387
Squares	300 - 302
Stamping sets	574
Steel reinforcement pry bar	577
Steering wheel puller	342
Stepped drills, HSS	511
Stepped drills, HSS CO	512
Stepped drills, HSS TIN	512 - 513
Stools	430
Storage tray insert, MASTERline	442
Straight drill, pneumatic	373
Straightedge	305
Stud bolt pullers	353 - 354
SUPERCHARGED Camera probe	366
SUPERCHARGED Probe accessories	366 - 367
SUPERCHARGED Videoscope sets	365 - 366
Sweatshirts	593
System insert sets	448 - 451
System inserts 1/1	476 - 495
System inserts 1/3	453 - 468
System inserts 2/3	469 - 476
System inserts-Empty 1/1	495
System inserts-Empty 1/3	468
System inserts-Empty 2/3	476
System inserts-Hammer & chisel 1/1	493
System inserts-Impact socket wrench 1/1	490
System inserts-Impact socket wrench 1/3	465

System inserts-Measuring and checking tool 1/3	467
System inserts-Pliers 1/1	491 - 492
System inserts-Pliers 1/3	466 - 467
System inserts-Pullerr 1/3	468
System inserts-Screwdriver 1/1	490 - 491
System inserts-Screwdriver 1/3	465 - 466
System inserts-Screwdriver 2/3	475 - 476
System inserts-Socket wrench 1/1	480 - 489
System inserts-Socket wrench 1/3	454 - 464
System inserts-Socket wrench 2/3	470 - 475
System inserts-Spanner 1/1	476 - 480
System inserts-Spanner 1/3	453 - 454
System inserts-Spanner 2/3	469 - 470
System inserts-VDE 1/3	467
System inserts-Workshop supplies 1/1	493 - 495
System inserts-Workshop supplies 1/3	468
System inserts-Workshop supplies 2/3	476
T	
Tap wrenches	519
Tape measures	303
Taper punches	576
Telephone pliers	247 - 248
Test equipment	180
Testing tools, electronic	307
T-handle ball ended hexagon key wrench	224
T-handle ball ended hexagon key wrench sets	224
T-handle ball ended TX key wrench	225
T-Handle felxible wrench	49
T-handle hexagon key wrench	223
T-handle hexagon key wrench sets	224
T-handle socket srewdriver	223
T-handle socket srewdriver sets	223
T-handle TX key wrench	224
T-handle TX key wrench sets	225
T-handle TX tamperproof key wrench	225
T-handle TX tamperproof key wrench sets	225
T-handles 1"	130
T-handles 1/2"	118
T-handles 1/4"	75
T-handles 3/4"	128
T-handles 3/8"	98
Thread fil s	535
Thread gauge	520
Thread gauges	299 - 300
Thread grease	336
Threaded tap, HSS	516 - 517
Threaded tap, HSS CO	517 - 518
Tilers fl t chisels	565
Tilers pointed chisels	567
Tool bags	436
Tool boxes	437
Tool cabinets accessories, ULTIMATEline	444
Tool cabinets, BASICline	438 - 439
Tool cabinets, MASTERline	439 - 443
Tool cabinets, ULTIMATEline	442 - 443
Tool cases	436 - 437
Torque limiters	151
Torque multiplier	178 - 180
Torque screwdriver	150 - 151
Torque testing instrument	180
Torque wrench toolkit, ERGOTORQUE®precision	155 - 157
Torque wrench toolkit, ULTIMATEprecision	161 - 163
Torque wrench with close gap release	172
Torque wrench with quick set feature	171
Torque wrench, ALUTORQUEprecision	164 - 168
Torque wrench, ERGOTORQUE®basic	152
Torque wrench, ERGOTORQUE®precision	153 - 155
Torque wrench, ULTIMATEprecision	158 - 160
Torque wrench, VDE	177
Transport sack trolleys	429 - 430
Trousers	594
T-Shirts	592
Twist drills, HSS TIN	506 - 507
Twist drills, HSS-G	502 - 504
Twist drills, HSS-G CO	504 - 506
Twist drills, HSS-R	500 - 502
TX ball ended key wrench	220
TX ball ended key wrench display	221
TX ball ended key wrench sets	221
TX key wrench	219
TX key wrench display	220
TX key wrench sets	220
TX tamperproof key wrench	221
TX tamperproof key wrench display	222
TX tamperproof key wrench sets	221 - 222
TX-E Double ring spanners	45 - 46
Tyre filli g gauge, pneumatic	386 - 387
U	
ULTIMATEline Alu grooved top	444
ULTIMATEline Tool cabinets	442 - 443
ULTIMATEline Tool cabinets accessories	444
ULTIMATEline Wooden worktop	444
ULTIMATEprecision Torque wrench	158 - 160
ULTIMATEprecision Torque wrench toolkit	161 - 163
Universal 2 arm puller sets	330 - 331
Universal 2 arm pullers	327 - 330
Universal 3 arm puller sets	334
Universal 3 arm pullers	332 - 334
Universal automotive pullers	348 - 349
Universal clamping yoke	336
Universal joint 1/2"	117 - 118
Universal joint 1/4"	74 - 75
Universal joint 3/8"	97
Universal knives with trapezoid blade	541 - 542
Universal pliers sets	249 - 250
V	
Vacuums	388
Vacuums, pneumatic	388
Valve shaft removal pliers	273
VDE precision screwdriver sets	282

VDE precision screwdrivers	281 - 282
VDE screwdriver displays	240
VDE screwdriver sets	239
VDE screwdrivers	239
VDE system inserts 1/3	467
VDE Torque wrench	177
Vernier calipers, analogue	296
Vernier calipers, digital	296
Vibro extractor, pneumatic	385
Video grabber, USB	367
Videoscope Camera probe, MASTER	363 - 365
Videoscope Camera probe, SUPERCHARGED	366
Videoscope Probe accessories, MASTER	365
Videoscope Probe accessories, SUPERCHARGED	366 - 367
Videoscope sets, MASTER	362 - 363
Videoscope sets, SUPERCHARGED	365 - 366
W	
Wall cupboards	420
Water pump pliers	251
Water pump pliers sets	251 - 252
Welders protective helmet	582
Welding apron	584
Welding chipping hammer	558
Welding coat	584
Welding leather gloves	584
Welding protection	584
Welding protection awning	584
Wheel assembly impact socktes 1/2"	137 - 138
Wheel bearing pullers	349 - 353
Wheel hub extractor	347 - 348
Wheel nut cap pliers	267 - 268
Windscreen holder	429
Windscreen wiper arm puller	343
Wire processing pliers	265
Wire stripper	249
Wooden worktop, MASTERline	442
Wooden worktop, ULTIMATEline	444
Work lamps	410 - 411
Work lamps with tripods	411 - 413
Work platform	428
Work waistcoat	436
Workbenches	418 - 420
Workshop cable reel	410
Workshop lamps	408
Workshop supplies system inserts 1/1	493 - 495
Workshop supplies system inserts 1/3	468
Workshop supplies system inserts 2/3	476

item	page
1	
10010	406
10012	406
100391	594
100392	594
100393	594
100394	594
111.1000	253
111.1500	253
111.2000	253
111.3000	253
111.3100	252
111.3200	252
111.3300	252
111.3500	252
111.3505	252
111.3510	252
111.3515	252
111.3520	252
111.3525	252
111.3530	252
111.3535	252
111.3550	253
112.1000	253
112.1500	253
112.2000	253
113.0500	253
113.1000	253
113.1500	253
113.2000	253
113.2100	254
113.3000	253
114.0008	252
114.0010	252
114.0012	252
114.0014	252
114.0018	252
114.0024	252
114.0036	252
114.0040	254
114.0050	37
114.0051	37
114.0150	253
114.0160	253
114.0170	253
114.0171	253
115.0000	251
115.0570	259
115.0573	259
115.0900	270
115.0991	268
115.0992	268
115.0993	268
115.1000	251
115.1004	250
115.1010	250
115.1011	248
115.1012	248
115.1013	248
115.1014	249
115.1015	248
115.1016	246
115.1017	246
115.1018	247
115.1019	247
115.1020	246
115.1021	246
115.1022	246
115.1023	247
115.1024	247
115.1028	249
115.1029	249
115.1031	257
115.1032	257
115.1033	257
115.1034	258
115.1035	258
115.1036	261
115.1037	261
115.1038	261
115.1039	270
115.1040	270
115.1041	271, 273
115.1042	271, 272, 273
115.1043	271, 273
115.1044	269, 273
115.1045	271, 272, 273
115.1046	271, 273
115.1047	272, 273
115.1048	268
115.1049	268
115.1050	270
115.1051	267
115.1052	273
115.1053	270
115.1054	273
115.1055	273
115.1056	270
115.1057	272
115.1061	273
115.1062	272
115.1063	272
115.1064	271
115.1065	271, 272
115.1067	269
115.1068	260
115.1070	259
115.1071	259
115.1072	259
115.1073	259
115.1074	259
115.1075	259
115.1076	258
115.1077	258
115.1078	259
115.1079	259
115.1080	260
115.1081	260
115.1082	260
115.1083	260
115.1084	260
115.1085	260
115.1087	267
115.1088	267
115.1091	270
115.1092	270
115.1093	270
115.1094	269
115.1097	267
115.1098	267
115.1099	270
115.1104	272
115.1125	272
115.1126	272
115.1127	272
115.1150	261
115.1151	258
115.1152	258
115.1155	261
115.1160	261
115.1165	261
115.1170	261
115.1171	258
115.1175	258
115.1176	258
115.1177	258
115.1178	259
115.1180	261
115.1185	272
115.1186	273
115.1187	272
115.1188	272
115.1190	271
115.1196	257
115.1197	257
115.1230	263, 448
115.1231	263
115.1235	263
115.1236	263
115.1237	263
115.1244	249
115.1245	249
115.1249	249
115.1304	250
115.1310	250
115.1311	248
115.1312	248
115.1313	248
115.1314	249
115.1315	248
115.1316	246
115.1317	246
115.1318	246
115.1319	246
115.1320	246
115.1321	246
115.1322	246
115.1323	247
115.1324	247
115.1350	251
115.1351	251
115.1352	251
115.1361	252
115.1362	252
115.1363	252
115.1400	264
115.1425	263
115.1430	263
115.1435	263
115.1440	263
115.1445	263
115.1450	263
115.1455	263
115.1460	263
115.1465	263
115.1470	263
115.1480	264
115.1490	264
115.1501	257
115.1502	257
115.1504	258
115.1505	258
115.1506	257
115.1520	264
115.1521	264
115.1522	264
115.2000	251
115.2001	251
115.2006	257
115.2008	259
115.2009	259
115.2010	251
115.2011	251
115.2012	251
115.2013	260
115.2014	260
115.2031	257
115.2032	257
115.2033	257
115.2034	258
115.2035	258
115.2072	257
115.2076	258
115.2077	258
115.2078	259
115.2079	259
115.3000	251
115.3011	257
115.3012	257
115.5050	274
115.5052	274
115.5053	274
115.5054	274
115.5055	274
115.5057	274
115.5058	274
115.5059	274
115.7000	251
115.8000	251
115.8500	251
115.8501	252
115.8502	251
115.8510	254
115.8520	251
115.8525	251
115.8530	251
116.1000	254
116.1002	254
116.1200	253
116.1300	265
116.1301	265
116.1302	265
116.1400	265
116.1401	265
116.1403	265
116.1404	265
116.1410	265
116.1411	265
116.1412	265
117.0502	239
117.0504	239
117.0506	239
117.0508	239
117.0512	239
117.0514	239
117.0516	239
117.0518	239
117.0522	239
117.0524	239
117.0526	239
117.0528	239
117.0540	239
117.0550	239
117.0551	239
117.0552	239
117.0553	239
117.0554	239
117.0555	239
117.0556	239
117.0560	240
117.1001	177
117.1126	553
117.1127	553
117.1131	553
117.1132	588
117.1133	588
117.1134	588
117.1177	239
117.1178	239
117.1179	239
117.1181	239
117.1182	239
117.1184	177
117.1185	177
117.1235	239
117.1236	239
117.1237	239
117.1238	239
117.1239	239
117.1240	239
117.1241	239
117.1242	239
117.1243	239
117.1244	239
117.1247	239
117.1255	239
117.1300	177
117.1301	177
117.1302	177
117.1303	177
117.1400	177
117.1402	177
117.1608	582
117.1609	582
117.1610	582
117.1612	582
117.1613	591
117.1614	591
117.1615	591
117.1616	591
117.1617	591
117.1618	591
117.1619	591
117.1620	591
117.1621	591
117.1630	280
117.1756	588
117.1757	588
117.1762	588
117.1796	582
117.3805	177
117.3810	177
117.3922	177
118.0010	543
118.0011	543
118.0012	543
118.0015	249, 265
118.0032	265
118.0041	266
118.0042	266

item	page
118.0043	266
118.0045	546
118.0046	546
118.0050	546
118.0051	545
118.0052	545
118.0053	546
118.0055	266
118.0056	266
118.0057	266
118.0058	266
118.0060	543
118.0065	543
118.0066	543
118.0067	543
118.0071	543
118.0072	544
118.0073	544
118.0075	543
118.0076	543
118.0077	543
118.0078	543
118.0079	543
118.0086	281
118.0087	281
118.0088	281
118.0090	544
118.0091	544
118.0092	544
118.0118	265
118.0124	265
118.0130	265
118.0136	265
118.0142	265
118.0145	544
118.0146	544
118.0147	545
118.0148	545
118.0149	545
118.0150	545
118.0151	545
118.0152	545
118.0153	545
118.0160	266
118.0161	266
118.0162	266
118.0218	265
118.0224	265
118.0230	265
118.0236	265
118.0246	265
118.3120	577
118.3121	577
118.3122	577
118.3123	577
119.2004	250
119.2010	250
119.2011	248
119.2012	248
119.2013	248
119.2014	249
119.2016	246
119.2018	247
119.2019	247
119.2020	246
119.2021	246
119.2022	246
119.2023	248

item	page
119.2024	248
119.2025	249
119.2027	251
119.2050	256
119.2051	255, 256
119.2052	255, 256
119.2053	254, 256
119.2054	254, 256
119.2055	256
119.2056	255, 256
119.2057	255, 256
119.2058	254, 256
119.2059	254, 256
119.2060	256
119.2061	255, 256
119.2062	255, 256
119.2063	254, 256
119.2064	254, 256
120.2000	269
122.1295	274
122.1296	274
122.1297	274
122.2100	189, 195
122.2100D	189, 195
122.2101	189
122.2102	189
122.2103	189
122.2104	189
122.2105	189
122.2106	189
122.2107	189
122.2108	189
122.2171	189
122.2172	189
122.2173	189
129.0012	523
129.0013	523
129.0015	523
129.0016	523
129.0018	523
129.0020	523
129.0021	523
129.0022	523
129.0025	523
129.0026	523
129.0028	523
129.0030	523
129.0032	523
129.0035	523
129.0037	523
129.0038	523
129.0040	523
129.0047	523
129.0050	523
129.0054	523
129.0100	575
129.0101	575
129.0103	575
129.0104	575
129.0106	575
129.0108	575
129.0110	575
129.0112	575
129.0114	575
129.0116	575
129.0118	575
129.0120	575
129.0122	575

item	page
129.0124	575
129.0126	575
129.0128	575
129.0130	575
129.0312	523
129.0313	523
129.0315	523
129.0316	523
129.0318	523
129.0320	523
129.0321	523
129.0322	523
129.0325	523
129.0326	523
129.0328	523
129.0330	523
129.0332	523
129.0335	523
129.0337	523
129.0338	523
129.0340	523
129.0347	523
129.0350	523
129.0354	523
129.0360	523
129.0363	523
129.2002	574
129.2003	574
129.2004	574
129.2005	574
129.2006	574
129.2007	574
129.2008	574
129.2009	574
129.2010	574
129.2011	574
129.2012	574
129.2013	574
129.2014	574
129.2015	574
129.2016	574
129.2017	574
129.2018	574
129.2019	574
129.2020	574
129.2021	574
129.2022	574
129.2023	574
129.2024	574
129.2025	574
129.2026	574
129.2027	574
129.2028	574
129.2029	574
129.2030	574
129.2031	574
129.2032	574
129.2033	574
129.2034	574
129.2035	574
129.2036	574
129.2037	574
129.2038	574
129.2039	574
129.2040	574
129.2041	574
129.2042	574
129.2043	574

item	page
129.2044	574
129.2045	574
129.2046	574
129.2047	574
129.2048	574
129.2049	574
129.2050	574
129.2051	574
129.2052	574
129.2053	574
129.2054	574
129.2055	574
129.2056	574
129.2057	574
129.2058	574
129.2059	574
129.2060	574
129.2061	574
129.2062	575
129.2063	575
129.2064	575
129.2065	575
129.2066	575
129.2067	575
129.2068	575
129.2069	575
129.2070	575
129.2071	575
129.2072	575
129.2073	575
129.2074	575
129.2075	575
129.2076	575
129.2077	575
129.2078	575
129.2079	575
129.2080	575
129.2085	575
129.2090	575
129.2095	575
129.2100	575
129.2102	575
129.2103	575
129.2104	575
129.2105	575
129.2106	575
129.2107	575
129.2108	575
129.2109	575
129.2110	575
129.2111	575
129.2112	575
129.2113	575
129.2115	575
129.2120	575
129.2161	576
129.2162	576
129.2163	576
129.2164	576
129.2165	576
129.2166	576
129.2167	576
129.2168	576
129.2169	576
129.2170	576
129.2171	576
129.2172	576
129.2173	576

item	page
129.2174	576
129.2175	576
129.2176	576
129.2177	576
129.2178	576
129.2179	576
129.2180	576
129.2181	576
129.2182	576
129.2183	576
129.2184	576
129.2185	576
129.2186	576
129.2187	576
129.2188	576
129.2189	576
129.2190	576
129.2191	576
129.2192	576
129.2193	576
129.2194	576
129.2195	576
129.2196	576
129.2197	576
129.2198	576
129.2199	576
129.2200	576
129.2201	576
129.2202	576
129.2203	576
129.2204	576
129.2205	576
129.2206	576
129.2207	576
129.2209	576
129.2210	576
129.2211	576
129.2212	576
129.2213	576
129.2214	576
129.2215	576
129.2216	576
129.2217	576
129.2218	576
129.2219	577
129.2220	576
129.2221	577
129.2222	577
129.2223	577
129.2224	577
129.2225	577
129.2301	575
129.23015	575
129.2302	575
129.23025	575
129.2303	575
129.23035	575
129.2304	575
129.23045	575
129.2305	575
129.2306	575
129.2307	575
129.2308	575
129.2309	575
129.2310	575
129.2311	575
129.2312	575
129.2313	575

item	page
129.2314	575
129.2315	575
129.2316	575
129.2317	575
129.2318	575
129.2319	575
129.2320	575
129.2321	575
129.2322	575
129.2323	575
129.2324	575
129.2325	575
129.2400	575
129.2401	575
129.2402	575
129.2403	575
129.2404	575
129.2405	575
129.2406	575
129.2407	575
129.2408	575
129.2420	576
129.3101	526
129.3103	526
129.31035	526
129.3103S	526
129.3104	526
129.3105	526
129.3106	526
129.3110	527
129.3111	527
129.3111F	527
129.3113	527
129.31135F	527
129.3116	527
129.3118	527
129.3118F	527
129.3150F	526
129.3740	528
129.3742	528
129.3744	528
129.3746	528
129.3750	528
129.3752	528
129.3754	528
129.3756	528
129.4010	528
129.4011	527
129.4014	528
129.4016	528
129.4020	528
129.4022	528
129.4031	529
129.4401	529
129.4402	529
129.4404	529
129.4405	529
129.4411	529
129.4415	529
129.4422	529
129.4430	529
129.4431	528
129.4432	528
129.4440V	530
129.4441V	530
129.4451	530
129.4454	530
129.4457	530
129.4482	530
129.4483	530
129.4486	530
129.5014	524
129.5016	524
129.5017	524
129.5019	524
129.5020	524
129.5021	524
129.5022	524
129.5024	524
129.5025	524
129.5027	524
129.5029	524
129.5030	524
129.5032	524
129.5033	524
129.5035	524
129.5037	524
129.5038	524
129.5040	524
129.5041	524
129.5043	524
129.5044	524
129.5045	524
129.5046	524
129.5048	524
129.5050	524
129.5051	524
129.5052	524
129.5054	524
129.5055	524
129.5057	524
129.5059	524
129.5060	524
129.5064	524
129.5065	524
129.5067	524
129.5068	524
129.5070	524
129.5073	524
129.5075	524
129.5076	524
129.5079	524
129.5083	524
129.5086	524
129.5089	524
129.5092	524
129.5095	524
129.5098	524
129.5100	524
129.5102	524
129.5105	524
129.5108	524
129.5111	524
129.5114	524
129.5121	524
129.5127	524
129.5140	524
129.5146	524
129.5152	524
129.5501	523
129.5502	523
129.5503	523
129.5504	523
129.5505	523
129.5520	524
129.5525	523
129.5526	523
129.5570	524
129.5575	524
129.5580	524
129.6620V	525
129.6620-18	526
129.6620-24	526
129.6620-32	526
140.1213	558
140.1215	552
140.1220	558
140.1230	552
140.1234	553
140.1237	553
140.1239	559
140.2001	556
140.2002	557
140.2003	557
140.2004	559
140.2005	557
140.2006	557
140.2015	557
140.2017	558
140.2019	558
140.2030	557
140.2062	559
140.2063	559
140.2066	558
140.2067	559
140.2068	559
140.2069	559
140.2070	558
140.2075	555
140.2076	555
140.2077	555
140.2081	553
140.2082	553
140.2130	556
140.2131	556
140.2132	556
140.2133	556
140.2134	556
140.2135	556
140.2136	556
140.2137	556
140.2138	556
140.2139	556
140.2162	567
140.2165	567
140.2170	558
140.2171	558
140.2175	544
140.2219	385
140.2220	267
140.2225	429
140.2226	429
140.2251	385
140.2252	385
140.2255	385
140.2256	385
140.2261	385
140.2263	385
140.2282	547
140.2286	547
140.2288	547
140.3000	535
140.3030	557
140.3040	557
140.3050	534
140.3051	534
140.3052	534
140.3053	534
140.3054	534
140.3055	534
140.3056	534
140.3057	534
140.3058	534
140.3059	534
140.4003	555
140.5201	552
140.5202	552
140.5211	552
140.5212	552
140.5221	552
140.5222	552
140.5223	552
140.5231	553
140.5232	553
140.5233	553
140.5252	552
140.5254	552
140.5255	552
140.5256	552
140.5257	552
140.5258	552
140.5259	552
140.5260	552
140.5270	552
140.5271	552
140.5272	552
140.5273	552
140.5274	552
140.5275	552
140.5276	552
140.5277	552
140.5301	559
140.5303	559
140.5304	559
140.5305	559
140.5306	559
140.5315	559
140.5320	559
140.5321	559
140.5322	559
140.5323	559
140.5330	559
140.5331	559
140.5336	559
140.5401	559
140.5402	559
140.5403	559
140.5404	559
140.5405	559
140.5406	559
140.6510	555
142.1030	553
142.1031	554
142.1050	553
142.1051	554
142.1080	553
142.1081	554
142.1100	553
142.1101	554
142.1150	553
142.1151	554
142.1210	555
142.1221	553
142.1223	555
142.1250	553
142.1310	553
142.1311	553
142.1320	553
142.1321	553
142.1330	553
142.1331	553
142.1350	553
142.1351	553
142.1380	553
142.1381	553
142.1400	553
142.1401	553
142.1508	554
142.1512	554
142.1516	554
142.1524	554
142.1532	554
142.2008	557
142.2010	557
142.2020	554
142.2021	554
142.2033	554
142.2045	554
142.2046	554
142.4020	554
142.4030	554
142.5100	554
142.5101	554
142.5102	555
142.5103	555
142.5125	554
142.5126	554
142.5127	555
142.5128	555
142.5150	554
142.5151	554
142.5152	555
142.5153	555
142.5162	555
142.5165	554
142.5166	554
142.5301	559
142.5302	559
142.5303	559
142.5304	559
142.5305	559
142.5306	559
142.5307	559
142.5308	559
142.5309	559
142.5310	559
142.5311	559
142.5312	559
142.5313	559
142.5314	559
142.5315	559
142.5316	559
142.5317	559
142.5318	559
142.5319	559
142.5332	559
142.6300	555
142.6301	555
142.6400	555
142.6401	555

item	page
142.6500	555
142.6501	555
150.1175	273
150.1176	273
150.1177	273
150.1179	273
150.1245	274
150.1340	535
150.1345	535
150.1535	274
150.1640	353
150.1642	353
150.1995	268
150.2023	267
150.2024	268
150.2025	268
150.2075	315, 352
150.2076	352
150.2077	352
150.2078	352
150.2079	352
150.2080	352
150.2081	352
150.2082	352
150.2083	352
150.2084	352
150.2085	352
150.2086	352
150.2087	352
150.2089	352
150.2092	350, 352
150.2093	350, 352
150.2116	269
150.2118	269
150.2130	315, 349
150.2131	349
150.2132	349
150.2133	349
150.2134	349
150.2135	349
150.2136	349
150.2137	349
150.2138	349
150.2141	349
150.2142	349
150.2143	349
150.2145	315, 349
150.2145-1	349
150.2146	315, 349, 350
150.2147	349
150.2148	349
150.2149	349
150.2150	570
150.2151	570
150.2211	269
150.2230	298
150.2240	297
150.2250	315, 350
150.2251	350
150.2252	350
150.2253	350
150.2254	350
150.2255	350
150.2256	350
150.2257	350
150.2258	350
150.2259	350
150.2260	350
150.2261	350
150.2262	350
150.2263	350
150.2264	350
150.2265	350
150.2266	350
150.2267	350
150.2268	350
150.2269	350
150.2270	350
150.2271	350
150.2272	350
150.2273	350
150.2274	350
150.2275	350
150.2350	315, 350
150.2351	350
150.2352	350
150.2353	350
150.2354	350
150.2355	350
150.2356	350
150.2357	350
150.2358	350
150.3040	307
150.3115	315, 342
150.3116	342
150.3117	342
150.3118	342
150.3119	342
150.3120	342
150.3130	315, 342
150.3133	342
150.3140	315
150.3170	315, 342
150.4219	409
150.4240	408
150.4255	410, 411
150.4257	411
150.4260	410, 412
150.4263	412
150.4265	411, 412
150.4267	411, 412, 413
150.4268	411, 412, 413
150.4269	413
150.4271	412
150.4305	409
150.4310	408
150.4320	409
150.4330	408
150.4340	408
150.4350	408
150.4360	407
150.4365	407
150.4366	407
150.4367	407
150.4368	408
150.4370	406
150.4385	411, 412
150.4386	412
150.4390	411, 413
150.4391	413
150.4395	411, 413
150.4396	413
150.9302	449
150.9317	270
150.9510	262
150.9520	262
150.9530	262
150.9540	262
150.9570	262
150.9571	262
150.9572	262
150.9573	262
150.9574	262
150.9575	262
150.9578	262
150.9579	262
150.9580	262
150.9610	262
150.9611	262
150.9613	262
150.9614	262
150.9615	262
150.9616	262
150.9620	262
150.9630	262
150.9631	262
150.9632	262
150.9633	262
150.9634	262
150.9635	262
150.9636	262
150.9638	262
150.9640	262
150.9650	261
150.9651	262
150.9652	262
150.9653	262
150.9654	262
150.9655	262
151.1100	238
151.1101	238
151.1102	238
151.1104	238
151.1105	238
151.1106	238
151.1107	237
151.1109	77, 237
151.1123	238
151.1125	238
151.1128	238
151.1131	237
151.1132	238
151.1133	238
151.1134	238
151.1141	238
151.1142	238
151.1144	238
151.1145	238
151.1146	238
151.1147	237
151.1150	238
151.1160	238
151.1165	238
151.1170	239
151.20213	214
151.20215	214
151.2022	214
151.20225	214
151.2023	214
151.20235	214
151.2024	214
151.20245	214
151.2025	214
151.20255	214
151.2026	214
151.2027	214
151.2028	214
151.2029	214
151.2030	214
151.2031	214
151.2032	214
151.2033	214
151.2034	214
151.2036	214
151.2038	214
151.2039	214
151.2040	216
151.2040D	216
151.20413	215
151.20415	215
151.2042	215
151.20425	215
151.2043	215
151.20435	215
151.2044	215
151.20445	215
151.2045	215
151.20455	215
151.2046	215
151.2047	215
151.2048	215
151.2049	215
151.2050	215
151.2052	215
151.2054	215
151.2057	215
151.2059	215
151.2061	215
151.2062	215
151.2063	215
151.2064	215
151.2065	215
151.2066	215
151.2067	215
151.2068	215
151.2069	215
151.2070	216
151.2070D	216
151.2071	215
151.2072	215
151.2073	215, 354, 355
151.2074	215
151.2075	215
151.2076	215
151.2077	215
151.2080	216
151.2080D	217
151.2082	214
151.2083	214
151.2084	214
151.2085	214
151.2086	214
151.2087	214
151.2088	214
151.2089	214
151.2090	214
151.2091	214
151.2092	214
151.2093	214
151.2094	214
151.2095	214
151.2096	214
151.2097	214
151.2098	214
151.2099	214
151.2100	218
151.2100D	219
151.21013	217
151.21015	217
151.2102	217
151.21025	217
151.2103	217
151.21035	217
151.2104	217
151.21045	217
151.2105	217
151.21055	217
151.2106	217
151.2107	217
151.2108	217
151.2110	217
151.2112	217
151.2114	217
151.2130	218
151.2130D	219
151.2131	217
151.2132	217
151.2133	217
151.2134	217
151.2135	217
151.2136	217
151.2137	217
151.2138	217
151.2139	217
151.2140	217
151.2141	217
151.2142	217
151.2143	217
151.2144	217
151.2150	218
151.21615	217
151.2162	217
151.21625	217
151.2163	217
151.2164	217
151.2165	217
151.2166	217
151.2168	217
151.2170	217
151.2172	217
151.2174	217
151.2180	218
151.2180D	219
151.2200	221
151.2200D	222
151.2201	221
151.2202	221
151.2203	221
151.2204	221
151.2205	221
151.2206	221
151.2207	221
151.2208	221
151.2209	221
151.2210	221
151.2211	221
151.2212	221
151.2213	221
151.2214	221
151.2215	221

item	page
151.2241	221
151.2242	221
151.2243	221
151.2244	221
151.2245	221
151.2246	221
151.2247	221
151.2248	221
151.2249	221
151.2250	221
151.2251	221
151.2252	221
151.2253	221
151.2254	221
151.2255	221
151.2280	222
151.2280D	222
151.2300	220
151.2300D	220
151.2301	219
151.2302	219
151.2303	219
151.2304	219
151.2305	219
151.2306	219
151.2307	219
151.2308	219
151.2309	219
151.2310	219
151.2311	219
151.2312	219
151.2313	219
151.2314	219
151.2315	219
151.2341	219
151.2342	219
151.2343	219
151.2344	219
151.2345	219
151.2346	219
151.2347	219
151.2348	219
151.2349	219
151.2350	219
151.2351	219
151.2352	219
151.2353	219
151.2354	219
151.2355	219
151.2380	220
151.2380D	220
151.2400	221
151.2400D	221
151.2401	220
151.2402	220
151.2403	220
151.2404	220
151.2405	220
151.2406	220
151.2407	220
151.2408	220
151.2450	223
151.2451	222
151.2452	222
151.2453	222
151.2454	222
151.2455	222
151.2456	222
151.2457	222
151.2458	222
151.2470	222
151.2471	222
151.2472	222
151.2473	222
151.2474	222
151.2475	222
151.2476	222
151.2477	222
151.2478	222
151.2479	222
151.26007	214
151.26009	214
151.26013	214
151.26015	214
151.2602	214
151.26025	214
151.2603	214
151.26035	214
151.2604	214
151.26045	214
151.2605	214
151.26055	214
151.2606	214
151.2607	214
151.2608	214
151.2609	214
151.2610	214
151.2611	214
151.2612	214
151.2613	214
151.2614	214
151.2616	214
151.2617	214
151.2618	214
151.2619	214
151.2621	214
151.2622	214
151.2624	214
151.2630	214
151.2631	214
151.2632	214
151.2633	214
151.2634	214
151.2635	214
151.2636	214
151.2637	214
151.2638	214
151.2639	214
151.2640	214
151.2641	214
151.2642	214
151.2643	214
151.2644	214
151.2645	214
151.2646	214
151.2647	214
151.2648	214
151.2649	214
151.2650	214
151.2651	214
151.2652	214
151.2653	214
151.2654	214
151.2655	214
151.2656	215
151.2657	215
151.2658	215
151.2670	222
151.2671	222
151.2672	222
151.2673	223
151.2674	214, 240
151.2675	214, 240
151.2676	214, 240
151.2677	214, 240
151.2678	214, 240
151.2679	214, 240
151.2680	214, 240
151.2681	214, 240
151.2682	214, 240
151.2683	214, 240
151.2684	214, 240
151.2686	223
151.2687	223
151.2688	223
151.2689	223
151.2690	223
151.2691	223
151.2692	223
151.2693	223
151.2694	223
151.2695	223
151.27013	214
151.27015	214
151.2702	214
151.27025	214
151.2703	215
151.27035	215
151.2704	215
151.27045	215
151.2705	215
151.2706	215
151.2707	215
151.2708	215
151.2709	215
151.2710	215
151.2712	215
151.2714	215
151.2717	215
151.2719	215
151.2720	215
151.2721	215
151.2722	215
151.2723	215
151.2724	215
151.2725	215
151.2726	215
151.2727	215
151.2728	215
151.2729	215
151.2730	215
151.2731	215
151.2732	215
151.2733	215
151.2734	215
151.2735	215
151.2751	225
151.2752	225
151.2753	225
151.2754	225
151.2755	225
151.2756	225
151.2757	225
151.2758	225
151.2759	225
151.2760	225
151.2761	225
151.28015	215
151.2802	215
151.28025	215
151.2803	215
151.2804	215
151.2805	215
151.28055	215
151.2806	215
151.2807	215
151.2808	215
151.2810	215
151.2812	215
151.2814	215
151.2817	215
151.2819	215
151.2820	215
151.2821	215
151.2822	215
151.2823	215
151.2824	215
151.2825	215
151.2826	215
151.2827	215
151.2828	215
151.2829	215
151.2830	215
151.29013	217
151.29015	217
151.2902	217
151.29025	217
151.2903	217
151.29035	217
151.2904	217
151.29045	217
151.2905	217
151.29055	217
151.2906	217
151.2907	217
151.2908	217
151.2910	217
151.2912	217
151.2914	217
151.2920	217
151.2921	217
151.2922	217
151.2923	217
151.2924	217
151.2925	217
151.2926	217
151.2927	217
151.2928	217
151.2929	217
151.2930	217
151.2931	217
151.2932	217
151.2933	217
151.30013	217
151.30015	217
151.3002	217
151.30025	217
151.3003	217
151.30035	217
151.3004	217
151.30045	217
151.3005	217
151.30055	217
151.3006	217
151.3007	217
151.3008	217
151.3010	217
151.3012	217
151.3014	217
151.3017	217
151.3019	217
151.3020	217
151.3021	217
151.3022	217
151.3023	217
151.3024	217
151.3025	217
151.3026	217
151.3027	217
151.3028	217
151.3029	217
151.3030	217
151.3031	217
151.3032	217
151.3033	217
151.31013	217
151.31015	217
151.3102	217
151.31025	217
151.3103	217
151.3104	217
151.3105	217
151.31055	217
151.3106	218
151.3107	218
151.3108	218
151.3110	218
151.3112	218
151.3114	218
151.3117	218
151.3119	218
151.31315	215
151.3132	215
151.31325	215
151.3133	215
151.3134	215
151.3135	215
151.3136	215
151.3137	215
151.3138	215
151.3140	215
151.3142	215
151.3144	215
151.3147	215
151.3149	215
151.3150	215
151.3151	215
151.3152	215
151.3153	215
151.3154	215
151.3155	215
151.3156	215
151.3157	215
151.3158	215
151.3159	215
151.3160	215
151.3161	219
151.3162	219
151.3163	219
151.3164	219

item	page
151.3165	219
151.3166	219
151.3167	219
151.3168	219
151.3169	219
151.3170	215
151.3181	221
151.3182	221
151.3183	221
151.3184	221
151.3185	221
151.3186	221
151.3187	221
151.3188	221
151.3189	221
151.3200	218
151.3200D	219
151.3210	215
151.3220	218
151.3250	216
151.3301	218
151.3302	218
151.3303	218
151.3304	218
151.3305	218
151.3306	218
151.3307	218
151.3308	218
151.3309	218
151.3311	218
151.3312	218
151.3313	218
151.3314	218
151.3315	218
151.4100	223
151.4101	223
151.4102	223
151.4103	223
151.4104	223
151.4105	223
151.4106	223
151.4107	223
151.4108	223
151.4150	221
151.8121	225
151.8122	225
151.8123	225
151.8124	225
151.8125	225
151.8126	225
151.8127	225
151.8128	225
151.8129	225
151.8130	224
151.8131	224
151.8132	224
151.8133	224
151.8134	224
151.8135	224
151.8136	224
151.8137	224
151.8138	224
151.8139	224
151.8150	224
151.8155	224
151.8160	225
151.8165	225
152.1005	315, 354
152.1006	315, 354
152.1007	315, 354
152.1008	315, 354
152.1010	315, 354
152.1012	315, 354
152.1014	315, 354
152.1050	353
152.1055	353
152.1056	349, 353
152.1057	353
152.1060	385
152.1061	385
152.1062	385
152.1063	385
152.1064	385
152.1065	385
152.1080	315, 353
152.1090	305
152.1100	315, 354
152.1101	315, 354
156.0000	570
156.0002	570
156.0003	570
156.0004	570
156.0005	570
156.0006	570
156.0008	570
156.0010	570
156.0020	569
156.0026	569
156.0028	569
156.0030	569
156.0032	569
156.0034	569
156.0111	570
156.0112	570
156.0113	570, 571
156.0114	570
156.0115	570
156.0116	570
156.0121	570
156.0122	570
156.0123	570
156.0124	570
156.0125	570
156.0126	570
156.0130	569, 570
156.0131	569, 570, 571
156.0132	569, 570
156.0133	569, 570
156.0134	569, 570
156.0150	570
156.0160	571
156.0161	567, 571
156.0162	564, 571
156.0175	571, 573
156.0180	570
156.0211	571
156.0212	571
156.0213	571
156.0214	571
156.0215	571
156.0216	571
156.0217	571
156.0218	571
156.0219	571
156.0220	571
156.0230	571
156.0231	571
156.0232	571
156.0233	571
156.0234	571
156.0235	571
156.0240	571
156.0241	564, 571
156.0242	567, 571
156.0243	571, 573
156.0244	569, 571
156.0326	567
156.0327	567
156.0340	572
156.0342	572
156.0344	572
156.0346	572
156.0348	572
156.0350	572
156.0352	572
156.0354	572
156.0404	573
156.0406	573
156.0408	573
156.0410	573
156.0415	327
156.0416	327
156.0425	326
156.0426	326
156.0436	327
156.0440	327
156.0441	327
156.0442	327
156.0443	327
156.0447	326
156.0449	327
156.0450	327
156.0451	327
156.0455	326
156.0457	327
156.0458	327
156.0459	327
156.0463	326
156.0465	574
156.0466	573
156.0467	574
156.0468	574
156.0511	566
156.0512	566
156.0513	566
156.0514	566
156.0515	566
156.0516	566
156.0517	566
156.0518	566
156.0531	564
156.0532	564
156.0533	564
156.0534	564
156.0535	564
156.0536	564
156.0537	564
156.0550	566
156.0555	564
156.0556	564
156.0557	564
156.0570	565
156.0571	565
156.0575	577
156.0576	577
156.0585	564
156.0586	564
156.0587	564
156.0588	564
156.0590	577
156.0591	577
156.0592	577
156.0593	577
156.0594	577
156.0595	577
156.0596	577
156.0597	577
156.0690	564
156.0691	564
156.0692	564
156.0693	564
156.0694	564
156.0770	576
157.0004	534
157.0005	534
157.0006	534
157.0007	534
157.0008	534
157.0014	534
157.0015	534
157.0016	534
157.0025	534
157.0026	534
157.0027	534
157.0028	534
157.0104	534
157.0105	534
157.0106	534
157.0107	534
157.0114	534
157.0115	534
157.0116	534
157.0125	534
157.0126	534
157.0127	534
157.0128	534
157.0204	535
157.0205	535
157.0206	535
157.0214	535
157.0215	535
157.0224	535
157.0225	535
157.0226	535
157.0304	535
157.0305	535
157.0306	535
157.0314	535
157.0315	535
157.0324	535
157.0325	535
157.0326	535
157.0404	535
157.0405	535
157.0406	535
157.0407	535
157.0414	535
157.0415	535
157.0416	535
157.0424	535
157.0425	535
157.0426	535
157.0427	535
158.3510	220
158.3510D	220
158.3520	218
158.3520D	219
158.3530	221
158.3530D	222
158.3540	215
158.3540D	216
158.5000	48, 223
158.50055	48, 223
158.5006	48, 223
158.5007	48, 223
158.5008	48, 223
158.5009	48, 223
158.5010	48, 223
158.5011	48, 223
158.5012	48, 223
158.5013	48, 223
158.5014	48, 223
158.5100	224
158.5102	223
158.51025	223
158.5103	223
158.5104	223
158.51045	223
158.5105	223
158.5106	223
158.5108	223
158.5110	223
158.5200	225
158.5201	224
158.5202	224
158.5203	224
158.5204	224
158.5205	224
158.5206	224
158.5207	224
158.5208	224
158.5209	224
158.5408	49, 223
158.5409	49, 223
158.5410	49, 223
158.5413	49, 223
158.5414	49, 223
158.8015	224
158.8016	224
158.8017	224
158.8018	224
158.8019	224
158.8020	224
158.8021	224
158.8022	224
158.8023	224
158.8024	224
158.8025	224
158.8026	224
158.8027	224
158.8028	224
158.8032	223
158.80325	223
158.8033	223
158.8034	223
158.8035	223
158.8036	223
158.8037	223
158.8038	223
158.8040	223

item	page
158.8050	225
158.8051	224
158.8052	224
158.8053	224
158.8054	224
158.8055	224
158.8056	224
158.8130	224
158.8160	225
159.0005	236
159.0010	236
159.0020	236
159.0030	236
159.0040	236
159.0100	236
159.0136	237
159.1001	234
159.1002	234
159.1003	234
159.1004	234
159.1005	234
159.1006	234
159.1007	234
159.1008	234
159.1009	234
159.1010	234
159.1011	234
159.1012	234
159.1013	234
159.1020	235
159.1021	235
159.1022	235
159.1023	235
159.1024	235
159.1025	235
159.1026	234
159.1027	235
159.1028	235
159.1029	235
159.1030	235
159.1031	235
159.1032	235
159.1033	235
159.1034	235
159.1035	235
159.1036	235
159.1037	235
159.1038	235
159.1040	235
159.1041	235
159.1042	235
159.1043	235
159.1044	235
159.1045	235
159.1046	234
159.1047	235
159.1048	235
159.1049	235
159.1050	235
159.1051	235
159.1052	235
159.1053	235
159.1054	235
159.1055	235
159.1056	235
159.1057	235
159.1058	235
159.1060	235
159.1061	235
159.1062	235
159.1063	235
159.1064	235
159.1065	235
159.1100	234
159.1107	234
159.1128	235
159.1198	187, 235, 240
159.1200	48, 237
159.1201	48, 235
159.1202	48, 235
159.1203	48, 235
159.1204	48, 235
159.1205	48, 235
159.1206	48, 235
159.1207	48, 235
159.1208	48, 235
159.1209	48, 235
159.1210	48, 235
159.1211	48, 235
159.1212	48, 235
159.2010	236
159.2050	241
159.2051	188, 241
159.2061	188, 241
160.0040	431
160.0224	429
160.0225	429
160.0226	430
160.0227	430
160.0228	429
160.0229	430
160.0315	431
160.0350	431
160.0351	431
160.0352	431
160.0354	431
160.0356	431
160.0358	431
160.0359	431
160.0360	431
160.0370	431
160.0371	431
160.0372	431
160.0716	431
161.0004	534
161.0005	534
161.0006	534
161.0007	534
161.0008	534
161.0010	535
161.0011	535
161.0012	535
161.0013	535
161.0014	534
161.0015	534
161.0016	534
161.0025	534
161.0026	534
161.0027	534
161.0104	535
161.0105	535
161.0106	535
161.0107	535
161.0114	535
161.0115	535
161.0116	535
161.0125	535
161.0126	535
161.0127	535
161.0128	535
161.0204	535
161.0205	535
161.0206	535
161.0214	535
161.0215	535
161.0224	535
161.0225	535
161.0226	535
161.0304	535
161.0305	535
161.0306	535
161.0314	535
161.0315	535
161.0324	535
161.0325	535
161.0326	535
161.0405	535
161.0406	535
161.0407	535
161.0414	535
161.0415	535
161.0416	535
161.0424	535
161.0425	535
161.0426	535
161.0427	535
162.0101	564
162.0102	564
162.0103	564
162.0104	564
162.0105	564
162.0106	564
162.0107	564
162.0113	564
162.0114	564
162.0131	565
162.0141	565
162.0151	565
162.0152	565
162.0161	565
162.0162	565
162.0171	565
162.0172	565
162.0173	565
162.0181	565
162.0182	565
162.0183	565
162.0191	566
162.0192	566
162.0193	566
162.0194	566
162.0195	566
162.0196	566
162.0197	566
162.0198	566
162.0199	566
162.0202	566
162.0203	566
162.0204	566
162.0205	566
162.0206	566
162.0207	566
162.0208	566
162.0209	566
162.0211	564
162.0212	564, 572
162.0222	566
162.0223	566
162.0224	566
162.0225	566
162.0226	566
162.0231	566
162.0232	566
162.0233	566
162.0234	566
162.0235	566
162.0236	566
162.0237	566
162.0238	566
162.0239	566
162.0242	566
162.0243	566
162.0244	566
162.0245	566
162.0246	566
162.0247	566
162.0248	566
162.0249	566
162.0251	566
162.0252	566
162.0253	566
162.0254	566
162.0255	566
162.0256	566
162.0257	566
162.0258	566
162.0261	567
162.0262	567
162.0263	567
162.0264	567
162.0265	567
162.0266	567
162.0271	567
162.0281	567
162.0282	567
162.0283	567
162.0284	567
162.0285	567
162.0286	567
162.0287	567
162.0293	567
162.0294	567
162.0301	567, 572
162.0311	565
162.0321	567
162.0322	567
162.0323	567
162.0324	567
162.0325	567
162.0331	568
162.0332	568
162.0333	568, 572
162.0334	568
162.0335	568
162.0336	568
162.0341	568
162.0342	568
162.0343	568
162.0344	568
162.0345	568, 572
162.0346	568
162.0347	568
162.0348	568
162.0349	568
162.0350	568
162.0352	568
162.0361	572
162.0362	572
162.0363	572
162.0364	572
162.0365	572
162.0370	572
162.0371	571
162.0372	571
162.0373	571
162.0374	571
162.0375	571, 572
162.0376	571
162.0377	571
162.0378	571
162.0379	571
162.0380	571
162.0381	571
162.0382	571
162.0383	571
162.0391	569
162.0392	569
162.0393	569
162.0394	569
162.0395	569
162.0396	569
162.0401	569
162.0402	569
162.0403	569
162.0404	569
162.0405	569
162.0406	569
162.0407	569
162.0411	570
162.0412	570
162.0421	565
162.0431	558, 568
162.0432	558, 568
162.0433	558, 568
162.0434	558, 568
162.0441	568
162.0442	568
162.0443	568
162.0444	568
162.0445	568
162.0446	568
162.0447	568
162.0461	568
162.0462	568
162.0463	568
162.0464	568
162.0465	568
162.0466	568
162.0471	565
162.0481	566
162.0482	566
162.0483	566
162.0484	566
162.0485	566
162.0486	566
162.2114	572
162.2117	572
162.2118	572
162.2122	572
162.2123	572

item	page
162.2124	569
162.2126	569
162.2127	569
162.2128	568
162.2129	568
162.2130	568
162.2132	568
162.2249	571
162.2250	571
162.2251	571
162.2252	571
162.2253	571
162.2254	571
162.2255	571
162.2256	571
162.2257	571
162.2310	571
2	
201.2300	531
201.2301	531
201.2302	531
201.2305	530
201.2306	531
201.2310	531
201.2311	531
201.2315	532
201.2316	532
201.2320	531
201.2321	531
201.2322	531
201.2325	531
201.2326	531
204.4400	304
204.4410	304
204.4500	304
204.4600	304
204.4610	304
204.4800	304
204.4810	304
204.4900	304
204.5400	304
204.5470	304
204.5471	304
204.5480	304
204.5481	304
204.5487	305
204.5500	304
204.5600	304
204.5610	304
204.5800	304
204.5810	304
204.5900	304
204.5910	304
204.6400	304
204.6500	304
204.6600	304
204.6800	304
204.7050	304
204.7060	304
204.7080	304
204.7100	304
204.7150	304
222.1601	266
222.1602	267
222.1603	267
222.2051	544
222.2060	544
222.2062	544
3	
300.0040	303
300.0041	303
300.0042	303
300.0043	303
300.0049	303
300.0050	303
300.0051	303
300.0052	303
300.0053	303
300.0054	303
300.0055	303
300.0056	303
300.0060	302
300.0061	303
300.0062	302
300.0063	303
300.0101	305
300.0102	305
300.0103	305
300.0104	305
300.0105	305
300.0106	305
300.0110	305
300.0111	305
300.0112	305
300.0113	303
300.0114	303
300.0115	303
300.0116	303
300.0117	305
300.0118	305
300.0121	305
300.0122	305
300.0123	305
300.0124	305
300.0125	305
300.0131	303
300.0132	303
300.0133	303
300.0134	303
300.0135	303
300.0143	303
300.0199	300
300.0200	300
300.0201	300
300.0202	300
300.0203	300
300.0204	300
300.0205	300
300.0206	300
300.0207	302
300.0209	301
300.0210	301
300.0211	301
300.0212	301
300.0213	301
300.0214	301
300.0215	301
300.0216	301
300.0217	302
300.0218	302
300.0219	302
300.0220	301
300.0224	302
300.0230	302
300.0231	300
300.0232	300
300.0233	300
300.0234	300
300.0235	300
300.0236	300
300.0237	300
300.0238	300
300.0239	300
300.0240	302
300.0241	300
300.0250	301
300.0251	301
300.0252	301
300.0253	301
300.0254	300
300.0255	300
300.0256	300
300.0257	300
300.0258	300
300.0259	300
300.0260	300
300.0261	300
300.0270	301
300.0271	301
300.0272	301
300.0273	301
300.0274	301
300.0275	301
300.0276	301
300.0277	301
300.0278	301
300.0279	301
300.0281	301
300.0282	301
300.0283	301
300.0284	301
300.0285	301
300.0286	301
300.0287	301
300.0288	301
300.0291	300
300.0292	300
300.0293	300
300.0294	300
300.0295	300
300.0296	300
300.0297	300
300.0300	305, 573
300.0301	305, 573
300.0302	305, 573
300.0311	301
300.0312	301
300.0313	301
300.0314	301
300.0315	301
300.0316	301
300.0317	301
300.0318	301
300.0319	301
300.0327	302
300.0328	302
300.0329	302
300.0330	302
300.0331	302
300.0402	306
300.0404	306
300.0405	306
300.0406	306
300.0407	307
300.0408	307
300.0411	306
300.0412	306
300.0413	306
300.0414	306
300.0415	306
300.0416	306
300.0417	306
300.0418	306
300.0419	306
300.0421	306
300.0422	306
300.0423	306
300.0424	306
300.0425	307
300.0426	307
300.0427	307
300.0428	307
300.0429	307
300.0431	307
300.0432	307
300.0433	307
300.0510	296
300.0515	296
300.0525	297
300.0530	297
300.0531	296
300.0532	296
300.0535	296
300.0536	296
300.0538	298
300.0539	297
300.0540	297
300.0541	296
300.0542	296
300.0543	296
300.0544	296
300.0545	296
300.0546	296
300.0547	296
300.0549	297
300.0550	297
300.0551	297
300.0552	297
300.0553	297
300.0554	297
300.0555	298
300.0556	298
300.0557	298
300.0558	298
300.0559	296
300.0560	298
300.0561	297
300.0562	296
300.0563	296
300.0564	298
300.0565	298
300.0571	297
300.0572	297
300.0573	297
300.0574	297
300.0575	297
300.0576	297
300.0577	297
300.0580	298
300.0581	298
300.0582	298
300.0583	298
300.0600	299
300.0610	299
300.0611	300
300.0612	300
300.0613	300
300.0614	300
300.0615	300
300.0616	300
300.0617	300
300.0618	300
300.0619	299
300.0622	299
300.0623	299
300.0624	299
300.0625	298, 299
300.0626	307
300.0627	306
300.0628	306
300.0629	306
300.0630	305
300.0631	305
300.0632	305
300.0633	305
300.0634	305
300.0635	305
300.0636	305
300.0637	305
300.0638	305
300.0639	305
300.0640	302
300.0641	302
300.0642	302
300.0643	302
300.0644	302
300.0645	302
300.0646	302
300.0647	302
300.0648	302
300.0649	302
300.0652	306
300.0680	298
300.0700	302
300.0701	302
300.1001	230
300.1002	230
300.1003	230
300.1004	230
300.1005	230
300.1006	230
300.1007	230
300.1008	230
300.1011	230
300.1012	230
300.1013	230
300.1014	230
300.1021	230
300.1022	230
300.1023	230
300.1024	230
300.1050	230
300.1051	230
300.1052	230
300.1053	230
300.1054	230
300.1055	230
300.1061	230
300.1062	230
300.1063	230

item	page
300.1071	230
300.1072	230
300.1073	230
300.1081	573
300.1082	573
300.1100	230
300.2135	573
300.2136	573
300.2137	573
300.2138	573
301.0090	299, 520
301.0095	299, 520
310.0110	583
310.0112	583
310.0120	583
310.0130	583
310.0131	583
310.0135	584
310.0160	583
310.0165	583
310.0170	583
310.0175	583
310.0180	582
310.0240D	588
310.0250	588
310.0250D	588
310.0255	588
310.0255D	588
310.0260	588
310.0260D	588
310.0340D	588
310.0350	588
310.0350D	588
310.0355	588
310.0355D	588
310.0360	588
310.0360D	588
310.0411	587
310.0412	587
310.0413	587
310.0416	587
310.0417	587
310.0418	587
310.0421	587
310.0422	587
310.0423	587
310.0426	587
310.0427	587
310.0428	587
310.0431	587
310.0432	587
310.0433	587
310.0441	587
310.0442	587
310.0443	587
310.0446	587
310.0447	587
310.0448	587
310.0450	586
310.0455	586
310.0460	586
310.0465	586
310.0466	586
310.0467	586
310.0468	586
310.0470	587
310.0475	587
310.0480	587

item	page
310.0485	586
310.0486	586
310.0487	586
310.0488	586
310.0500	589
310.0505	589
310.0510	589
310.0515	589
310.0520	589
310.0525	589
310.0530	589
310.0535	589
310.0540	589
310.0545	589
310.0550	589
310.0600	591
310.0605	591
310.0610	591
310.0615	591
310.0620	591
310.0625	591
310.0630	591
310.0635	591
310.0640	591
310.0645	591
310.0650	591
310.0700	591
310.0705	591
310.0710	591
310.0715	591
310.0720	591
310.0725	591
310.0730	591
310.0735	591
310.0740	591
310.0745	591
310.0750	591
310.0800	590
310.0805	590
310.0810	590
310.0815	590
310.0820	590
310.0825	590
310.0830	590
310.0835	590
310.0840	590
310.0845	590
310.0850	590
310.0900	591
310.0905	591
310.0910	591
310.0915	591
310.0920	591
310.0925	591
310.0930	591
310.0935	591
310.0940	591
310.0945	591
310.0950	591
310.0990	592
310.1200	590
310.1205	590
310.1210	590
310.1215	590
310.1220	590
310.1225	590
310.1230	590
310.1235	590

item	page
310.1240	590
310.1245	590
310.1250	590
310.1300	591
310.1305	591
310.1310	591
310.1315	591
310.1320	591
310.1325	591
310.1330	591
310.1335	591
310.1340	591
310.1345	591
310.1350	591
310.1400	589
310.1405	589
310.1410	589
310.1415	589
310.1420	589
310.1425	589
310.1430	589
310.1435	589
310.1440	589
310.1445	589
310.1450	589
310.1500	589
310.1505	589
310.1510	589
310.1515	589
310.1520	589
310.1525	589
310.1530	589
310.1535	589
310.1540	589
310.1545	589
310.1550	589
310.1600	590
310.1605	590
310.1610	590
310.1615	590
310.1620	590
310.1625	590
310.1630	590
310.1635	590
310.1640	590
310.1645	590
310.1650	590
310.1900	590
310.1905	590
310.1910	590
310.1915	590
310.1920	590
310.1925	590
310.1930	590
310.1935	590
310.1940	590
310.1945	590
310.1950	590
310.2000	590
310.2005	590
310.2010	590
310.2015	590
310.2020	590
310.2025	590
310.2030	590
310.2035	590
310.2040	590
310.2045	590

item	page
310.2050	590
310.2100	590
310.2105	590
310.2110	590
310.2115	590
310.2120	590
310.2125	590
310.2130	590
310.2135	590
310.2140	590
310.2145	590
310.2150	590
310.2200	591
310.2205	591
310.2210	591
310.2215	591
310.2220	591
310.2225	591
310.2230	591
310.2235	591
310.2240	591
310.2245	591
310.2250	591
330.0030	519
330.0040	519
330.0050	519
330.0060	519
330.0070	519
330.0080	519
330.0090	519
330.0100	519
330.0110	519
330.0120	519
330.0140	519
330.0160	519
330.0180	519
330.0200	519
330.1003	500
330.1004	500
330.1005	500
330.1006	500
330.1007	500
330.1008	500
330.1009	500
330.1010	500
330.1011	500
330.1012	500
330.1013	500
330.1014	500
330.1015	500
330.1016	500
330.1017	500
330.1018	500
330.1019	500
330.1020	500
330.1021	500
330.1022	500
330.1023	500
330.1024	500
330.1025	500
330.1026	500
330.1027	500
330.1028	500
330.1029	500
330.1030	500
330.1031	500
330.1032	500
330.1033	500

item	page
330.1034	500
330.1035	500
330.1036	500
330.1037	500
330.1038	500
330.1039	500
330.1040	500
330.1041	500
330.1042	500
330.1043	500
330.1044	500
330.1045	500
330.1046	500
330.1047	500
330.1048	500
330.1049	500
330.1050	500
330.1051	500
330.1052	500
330.1053	500
330.1054	500
330.1055	500
330.1056	500
330.1057	500
330.1058	500
330.1059	500
330.1060	500
330.1061	500
330.1062	500
330.1063	500
330.1064	500
330.1065	500
330.1066	500
330.1067	500
330.1068	500
330.1069	500
330.1070	500
330.1071	500
330.1072	500
330.1073	500
330.1074	500
330.1075	500
330.1076	500
330.1077	500
330.1078	500
330.1079	500
330.1080	500
330.1081	500
330.1082	500
330.1083	500
330.1084	500
330.1085	500
330.1086	500
330.1087	500
330.1088	500
330.1089	500
330.1090	500
330.1091	500
330.1092	500
330.1093	500
330.1094	500
330.1095	500
330.1096	500
330.1097	500
330.1098	500
330.1099	500
330.1100	500
330.1101	500

item	page
330.1102	500
330.1103	500
330.1104	500
330.1105	500
330.1106	500
330.1107	500
330.1108	500
330.1109	500
330.1110	500
330.1111	501
330.1112	501
330.1113	501
330.1114	501
330.1115	501
330.1116	501
330.1117	501
330.1118	501
330.1119	501
330.1120	501
330.1121	501
330.1122	501
330.1123	501
330.1124	501
330.1125	501
330.1126	501
330.1127	501
330.1128	501
330.1129	501
330.1130	501
330.1135	501
330.1140	501
330.1145	501
330.1150	501
330.1155	501
330.1160	501
330.1165	501
330.1170	501
330.1175	501
330.1180	501
330.1185	501
330.1190	501
330.1195	501
330.1200	501
330.1201	507
330.1202	507
330.1203	507
330.1204	507
330.1205	507
330.1206	507
330.1207	507
330.1208	507
330.1211	507
330.1212	507
330.1213	507
330.1214	507
330.1215	507
330.1216	507
330.1217	507
330.1218	507
330.1610	501
330.1613	501
330.1620	501
330.1623	501
330.1640	501
330.1650	502
330.2003	502
330.2004	502
330.2005	502
330.2006	502
330.2007	502
330.2008	502
330.2009	502
330.2010	502
330.2011	502
330.2012	502
330.2013	502
330.2014	502
330.2015	502
330.2016	502
330.2017	502
330.2018	502
330.2019	502
330.2020	502
330.2021	502
330.2022	502
330.2023	502
330.2024	502
330.2025	502
330.2026	502
330.2027	502
330.2028	502
330.2029	502
330.2030	502
330.2031	502
330.2032	502
330.2033	502
330.2034	502
330.2035	502
330.2036	502
330.2037	502
330.2038	502
330.2039	502
330.2040	502
330.2041	502
330.2042	502
330.2043	502
330.2044	502
330.2045	502
330.2046	502
330.2047	502
330.2048	502
330.2049	502
330.2050	502
330.2051	502
330.2052	502
330.2053	502
330.2054	502
330.2055	502
330.2056	502
330.2057	502
330.2058	502
330.2059	502
330.2060	502
330.2061	502
330.2062	502
330.2063	502
330.2064	502
330.2065	502
330.2066	502
330.2067	502
330.2068	502
330.2069	502
330.2070	502
330.2071	502
330.2072	502
330.2073	502
330.2074	502
330.2075	502
330.2076	502
330.2077	502
330.2078	502
330.2079	502
330.2080	502
330.2081	502
330.2082	502
330.2083	502
330.2084	502
330.2085	502
330.2086	502
330.2087	502
330.2088	502
330.2089	502
330.2090	502
330.2091	502
330.2092	502
330.2093	502
330.2094	502
330.2095	502
330.2096	502
330.2097	502
330.2098	502
330.2099	502
330.2100	502
330.2101	502
330.2102	502
330.2103	502
330.2104	502
330.2105	502
330.2106	502
330.2107	502
330.2108	502
330.2109	502
330.2110	502
330.2111	502
330.2112	502
330.2113	502
330.2114	502
330.2115	502
330.2116	502
330.2117	502
330.2118	502
330.2119	502
330.2120	502
330.2121	502
330.2122	502
330.2123	502
330.2124	502
330.2125	502
330.2126	502
330.2127	502
330.2128	502
330.2129	502
330.2130	502
330.2135	502
330.2140	502
330.2145	502
330.2150	502
330.2155	502
330.2160	502
330.2301	511
330.2302	511
330.2303	511
330.2304	511
330.2305	511
330.2306	511
330.2307	511
330.2308	511
330.2309	511
330.2310	511
330.2311	511
330.2312	511
330.2313	511
330.2314	511
330.2315	511
330.2316	511
330.2317	511
330.2318	511
330.2319	511
330.2320	511
330.2321	511
330.2322	512
330.2323	512
330.2324	512
330.2325	512
330.2326	512
330.2327	512
330.2328	512
330.2329	512
330.2330	512
330.2331	512
330.2332	512
330.2333	512
330.2334	512
330.2335	512
330.2336	512
330.2337	512
330.2338	512
330.2339	512
330.2340	512
330.2341	512
330.2342	512
330.2343	512
330.2344	512
330.2345	512
330.2346	512
330.2347	512
330.2348	512
330.2349	512
330.2350	512
330.2351	512
330.2352	512
330.2353	512
330.2354	512
330.2355	512
330.2356	512
330.2357	512
330.2358	512
330.2359	512
330.2360	512
330.2361	512
330.2362	512
330.2363	512
330.2371	511
330.2372	511
330.2373	511
330.2374	512
330.2375	512
330.2376	512
330.2381	511
330.2382	511
330.2383	511
330.2384	512
330.2385	512
330.2386	512
330.2403	511
330.2404	511
330.2413	512
330.2414	512
330.2423	513
330.2424	513
330.2610	503
330.2613	503
330.2620	503
330.2623	503
330.2640	504
330.2650	504
330.3003	504
330.3004	504
330.3005	504
330.3006	504
330.3007	504
330.3008	504
330.3009	504
330.3010	504
330.3011	504
330.3012	504
330.3013	504
330.3014	504
330.3015	504
330.3016	504
330.3017	504
330.3018	504
330.3019	504
330.3020	504
330.3021	504
330.3022	504
330.3023	504
330.3024	504
330.3025	504
330.3026	504
330.3027	504
330.3028	504
330.3029	504
330.3030	504
330.3031	504
330.3032	504
330.3033	504
330.3034	504
330.3035	504
330.3036	504
330.3037	504
330.3038	504
330.3039	504
330.3040	504
330.3041	504
330.3042	504
330.3043	504
330.3044	504
330.3045	504
330.3046	504
330.3047	504
330.3048	504
330.3049	504
330.3050	505
330.3051	505
330.3052	505
330.3053	505
330.3054	505
330.3055	505
330.3056	505

item	page
330.3057	505
330.3058	505
330.3059	505
330.3060	505
330.3061	505
330.3062	505
330.3063	505
330.3064	505
330.3065	505
330.3066	505
330.3067	505
330.3068	505
330.3069	505
330.3070	505
330.3071	505
330.3072	505
330.3073	505
330.3074	505
330.3075	505
330.3076	505
330.3077	505
330.3078	505
330.3079	505
330.3080	505
330.3081	505
330.3082	505
330.3083	505
330.3084	505
330.3085	505
330.3086	505
330.3087	505
330.3088	505
330.3089	505
330.3090	505
330.3091	505
330.3092	505
330.3093	505
330.3094	505
330.3095	505
330.3096	505
330.3097	505
330.3098	505
330.3099	505
330.3100	505
330.3101	505
330.3102	505
330.3103	505
330.3104	505
330.3105	505
330.3106	505
330.3107	505
330.3108	505
330.3109	505
330.3110	505
330.3111	505
330.3112	505
330.3113	505
330.3114	505
330.3115	505
330.3116	505
330.3117	505
330.3118	505
330.3119	505
330.3120	505
330.3121	505
330.3122	505
330.3123	505
330.3124	505
330.3125	505
330.3126	505
330.3127	505
330.3128	505
330.3129	505
330.3130	505
330.3135	505
330.3140	505
330.3145	505
330.3150	505
330.3155	505
330.3160	505
330.3610	505
330.3613	505
330.3620	505
330.3623	505
330.3640	506
330.3650	506
330.4003	506
330.4004	506
330.4005	506
330.4006	506
330.4007	506
330.4008	506
330.4009	506
330.4010	506
330.4011	506
330.4012	506
330.4013	506
330.4014	506
330.4015	506
330.4016	506
330.4017	506
330.4018	506
330.4019	506
330.4020	506
330.4021	506
330.4022	506
330.4023	506
330.4024	506
330.4025	506
330.4026	506
330.4027	506
330.4028	506
330.4029	506
330.4030	506
330.4031	506
330.4032	506
330.4033	506
330.4034	506
330.4035	506
330.4036	506
330.4037	506
330.4038	506
330.4039	506
330.4040	506
330.4041	506
330.4042	506
330.4043	506
330.4044	506
330.4045	506
330.4046	506
330.4047	506
330.4048	506
330.4049	506
330.4050	506
330.4051	506
330.4052	506
330.4053	506
330.4054	506
330.4055	506
330.4056	506
330.4057	506
330.4058	506
330.4059	506
330.4060	506
330.4061	506
330.4062	506
330.4063	506
330.4064	506
330.4065	506
330.4066	506
330.4067	506
330.4068	506
330.4069	506
330.4070	506
330.4071	506
330.4072	506
330.4073	506
330.4074	506
330.4075	506
330.4076	506
330.4077	506
330.4078	506
330.4079	506
330.4080	506
330.4081	506
330.4082	506
330.4083	506
330.4084	506
330.4085	506
330.4086	506
330.4087	506
330.4088	506
330.4089	506
330.4090	506
330.4091	506
330.4092	506
330.4093	506
330.4094	506
330.4095	506
330.4096	506
330.4097	506
330.4098	506
330.4099	506
330.4100	506
330.4101	506
330.4102	506
330.4103	506
330.4104	506
330.4105	506
330.4106	506
330.4107	506
330.4108	506
330.4109	506
330.4110	506
330.4111	506
330.4112	506
330.4113	506
330.4114	506
330.4115	506
330.4116	506
330.4117	506
330.4118	506
330.4119	506
330.4120	506
330.4121	506
330.4122	506
330.4123	506
330.4124	506
330.4125	506
330.4126	506
330.4127	506
330.4128	506
330.4129	506
330.4130	506
330.4135	506
330.4140	506
330.4145	506
330.4150	506
330.4155	506
330.4160	506
330.4610	507
330.4613	507
330.4620	507
330.4623	507
330.5020	500
330.5021	500
330.5022	500
330.5023	500
330.5024	500
330.5025	500
330.5026	500
330.5027	500
330.5028	500
330.5029	500
330.5030	500
330.5031	500
330.5032	500
330.5033	500
330.5034	500
330.5035	500
330.5036	500
330.5037	500
330.5038	500
330.5039	500
330.5040	500
330.5041	500
330.5042	500
330.5043	500
330.5044	500
330.5045	500
330.5046	500
330.5047	500
330.5048	500
330.5049	500
330.5050	500
330.5051	500
330.5052	500
330.5053	500
330.5054	500
330.5055	500
330.5056	500
330.5057	500
330.5058	500
330.5059	500
330.5060	500
330.5061	500
330.5062	500
330.5063	500
330.5064	500
330.5065	500
330.5066	500
330.5067	500
330.5068	500
330.5069	500
330.5070	500
330.5071	500
330.5072	500
330.5073	500
330.5074	500
330.5075	500
330.5076	500
330.5077	500
330.5078	500
330.5079	500
330.5080	500
330.5085	500
330.5090	500
330.5095	500
330.5100	500
330.6020	504
330.6025	504
330.6030	504
330.6031	504
330.6032	504
330.6033	504
330.6034	504
330.6035	504
330.6036	504
330.6037	504
330.6038	504
330.6039	504
330.6040	504
330.6041	504
330.6042	504
330.6043	504
330.6044	504
330.6045	504
330.6046	504
330.6047	504
330.6048	504
330.6049	504
330.6050	504
330.6051	504
330.6052	504
330.6053	504
330.6054	504
330.6055	504
330.6056	504
330.6057	504
330.6058	504
330.6059	504
330.6060	504
330.6061	504
330.6062	504
330.6063	504
330.6064	504
330.6065	504
330.6066	504
330.6067	504
330.6068	504
330.6069	504
330.6070	504
330.6071	504
330.6072	504
330.6073	504
330.6074	504
330.6075	504
330.6076	504
330.6077	504
330.6078	504

item	page
330.6079	504
330.6080	504
330.6085	504
330.6090	504
330.6095	504
330.6100	504
330.6102	504
330.6105	504
330.6110	504
330.6115	504
330.6120	504
330.6125	504
330.6130	504
330.7025	502
330.7030	502
330.7031	502
330.7032	502
330.7033	502
330.7034	502
330.7035	502
330.7036	502
330.7037	502
330.7038	502
330.7039	502
330.7040	502
330.7041	502
330.7042	502
330.7043	502
330.7044	502
330.7045	502
330.7046	502
330.7047	502
330.7048	502
330.7049	502
330.7050	503
330.7051	503
330.7052	503
330.7053	503
330.7054	503
330.7055	503
330.7056	503
330.7057	503
330.7058	503
330.7059	503
330.7060	503
330.7061	503
330.7062	503
330.7063	503
330.7064	503
330.7065	503
330.7066	503
330.7067	503
330.7068	503
330.7069	503
330.7070	503
330.7071	503
330.7072	503
330.7073	503
330.7074	503
330.7075	503
330.7076	503
330.7077	503
330.7078	503
330.7079	503
330.7080	503
330.7081	503
330.7082	503
330.7083	503
330.7084	503
330.7085	503
330.7086	503
330.7087	503
330.7088	503
330.7089	503
330.7090	503
330.7091	503
330.7092	503
330.7093	503
330.7094	503
330.7095	503
330.7096	503
330.7097	503
330.7098	503
330.7099	503
330.7100	503
330.7105	503
330.7110	503
330.7115	503
330.7120	503
330.7125	503
330.7130	503
331.0001	520
331.0002	520
331.0003	520
331.0004	520
331.0005	520
331.0006	520
331.0007	520
331.0008	520
331.0009	520
331.0011	519
331.0012	519
331.0013	519
331.0014	519
331.0015	519
331.0016	519
331.0017	519
331.0018	519
331.0019	519
331.0020	516
331.0021	519
331.0022	520
331.0023	520
331.0024	520
331.0025	516
331.0026	520
331.0029	519
331.0030	516
331.0035	516
331.0040	516
331.0050	516
331.0060	516
331.0070	516
331.0080	516
331.0100	516
331.0110	516
331.0120	516
331.0140	516
331.0160	516
331.0180	516
331.0200	516
331.0220	516
331.0223	517
331.0224	517
331.0225	517
331.0226	517
331.0228	517
331.0230	517
331.0232	517
331.0240	516
331.0241	520
331.0242	520
331.0243	520
331.0244	520
331.0245	520
331.0246	520
331.0247	520
331.0248	520
331.0249	520
331.0253	519
331.0254	519
331.0255	519
331.0256	519
331.0257	519
331.0258	519
331.0259	519
331.0270	516
331.0300	516
331.0620	520
331.0621	520
331.0622	520
331.0623	520
331.0624	520
331.0625	520
331.0626	520
331.0627	520
331.0628	520
331.0632	517
331.0644	517
331.0654	517
331.0660	520
331.0665	520
331.0670	520
331.0675	520
331.0732	518
331.0744	518
331.0754	518
331.1101	516
331.1102	516
331.1103	516
331.1104	516
331.1105	516
331.1106	516
331.1107	516
331.1108	516
331.1109	516
331.1110	516
331.1111	516
331.1112	516
331.1113	516
331.1114	516
331.1115	516
331.1116	516
331.1117	516
331.1118	516
331.1119	516
331.1120	516
331.1121	516
331.1122	516
331.1123	516
331.1124	516
331.1125	516
331.1126	516
331.2020	517
331.2025	517
331.2030	517
331.2035	517
331.2040	517
331.2050	517
331.2060	517
331.2070	517
331.2080	517
331.2100	517
331.2110	517
331.2120	517
331.2140	517
331.2160	517
331.2180	517
331.2200	517
331.2220	517
331.2240	517
331.2270	517
331.2300	517
332.0001	519
332.0002	519
332.0003	519
332.0004	519
332.0005	519
332.0006	519
332.0007	519
332.0008	519
332.0009	519
332.0010	519
332.0011	519
332.0012	519
332.0013	519
332.0030	518
332.0040	518
332.0050	518
332.0060	518
332.0070	518
332.0080	518
332.0090	518
332.0100	518
332.0106	508
332.0108	374, 508
332.0110	508
332.0120	518
332.0140	518
332.0160	518
332.0180	518
332.0200	518
332.0206	508
332.0208	508
332.0210	508
332.0308	508
332.0310	508
332.0330	509
332.0331	509
332.0332	509
332.0333	509
332.0408	508
332.0508	508
332.0608	508
332.0708	508
332.0808	508
332.0809	508
332.0908	508
332.0938	509
332.0950	508
332.0951	507
332.0953	507
332.1000	519
332.1001	519
332.1002	519
332.1003	519
332.1004	519
332.1005	519
332.1006	519
332.1007	519
332.1008	519
332.1009	519
332.1010	519
332.1011	519
332.1012	519
332.1013	519
332.1014	519
332.1015	519
332.1016	519
332.1017	519
332.1018	519
332.1019	519
332.1020	519
332.1021	519
332.1022	519
332.1023	519
332.1024	519
332.1025	519
332.1026	519
332.1027	519
333.0017	519
333.0018	519
333.0019	519
333.0020	519
333.0021	519
333.0022	519
333.0023	519
333.0024	519
333.0025	519
333.0026	519
333.0027	519
333.0028	519
333.0029	519
333.0031	519
333.0032	519
333.0033	519
333.0034	519
333.0035	519
333.0036	519
333.0037	519
333.0038	519
333.0039	519
333.0041	519
333.0042	519
333.0043	519
333.0044	519
333.0045	519
333.0046	519
333.0047	519
333.0048	519
333.0049	519
333.0051	519
333.0052	519
333.0053	519
333.0054	519
333.0055	519
333.0056	519
333.0057	519
333.0058	519
336.0001	509

item	page
336.0002	509
336.0003	509
336.0004	509
336.0005	509
336.0006	509
336.0007	509
336.0008	509
336.0009	509
336.0011	510
336.0012	510
336.0013	510
336.0014	510
336.0015	510
336.0016	510
336.0017	510
336.0018	510
336.0019	510
336.0020	510
336.0021	510
336.0022	510
336.0023	510
336.0024	509
336.0025	509
336.0026	509
336.0031	509
336.0033	510
336.0034	513
336.0035	513
336.0036	513
336.0037	513
336.0038	513
336.0039	513
336.0040	513
336.0041	513
336.0042	513
336.0043	513
336.0044	513
336.0045	513
336.0046	513
336.0047	513
336.0048	513
336.0049	513
336.0050	514
336.0051	514
336.0052	514
336.0053	514
336.0054	514
336.0055	514
336.0056	514
336.0057	514
336.0058	514
336.0059	514
336.0060	514
336.0061	514
336.0062	514
336.0063	514
336.0064	514
336.0065	514
336.0066	514
336.0067	514
336.0068	514
336.0069	514
336.0070	514
336.0071	514
336.0072	514
336.0073	514
336.0074	514
336.0075	514
336.0076	516
336.0077	516
336.0078	516
336.0079	516
336.0080	516
336.0081	516
336.0082	516
336.0102	513
336.0103	513
336.0104	513
336.0105	513
336.0106	513
336.0107	513
336.0108	513
336.0109	513
336.0110	513
336.0111	513
336.0112	513
336.0113	513
336.0114	513
336.0115	513
336.0116	513
336.0117	513
336.0118	514
336.0119	514
336.0120	514
336.0121	514
336.0122	514
336.0123	514
336.0124	514
336.0125	514
336.0126	514
336.0127	514
336.0128	514
336.0129	514
336.0130	514
336.0131	514
336.0132	514
336.0133	514
336.0134	514
336.0135	514
336.0136	514
336.0137	514
336.0138	514
336.0139	514
336.0140	514
336.0141	514
336.0142	514
336.0143	514
336.0144	516
336.0145	516
336.0146	516
336.0147	516
336.0148	516
336.0149	516
336.0150	516
336.0170	515
336.0171	515
336.0172	515
336.0173	515
336.0174	515
336.0175	515
336.0176	515
336.0177	515
336.0178	515
336.0179	515
336.0180	515
336.0181	515
336.0182	515
336.0183	515
336.0184	515
336.0185	515
336.0186	515
336.0187	515
336.0188	515
336.0189	515
336.0190	515
336.0191	515
336.0192	515
336.0193	515
336.0194	515
336.0195	515
336.0201	516
336.0202	516
336.0203	516
336.0204	516
336.0205	516
336.0206	516
336.0207	516
336.0274	514
336.0275	514
336.0276	514
336.0277	514
336.0278	514
336.0279	514
336.0300	514
336.0301	514
336.0302	514
336.0303	514
336.0304	514
336.0305	514
336.0326	515
336.0327	515
336.0328	515
336.0329	515
336.0330	515
336.0331	515
336.0406	514
336.0416	515
336.0426	515
336.0446	514
336.0456	515
336.0466	515
336.0503	510
336.0513	510
336.0523	510
336.0533	510
336.0543	510
336.0553	511
336.0621	516
336.0631	518
336.0641	517
336.0651	518
337.2005	375, 533
337.2010	382, 533
337.2015	533
337.2025	533
337.2050	533
337.2055	533
337.2060	533
337.2065	533
337.2070	533
337.2075	533
340.0001	532
340.0002	532
340.0003	532
340.0004	532
340.0005	532
340.0011	532
340.0012	532
340.0013	532
340.0014	532
340.0015	532
340.0016	532
340.0017	532
340.0018	532
340.0019	532
340.0020	532
340.0021	532
340.0022	532
340.0023	532
340.0024	532
340.0025	532
340.0026	532
340.0027	532
340.0028	532
340.0029	532
340.0030	532
340.0031	532
340.0032	532
340.0033	532
340.0034	532
340.0035	532
340.0036	532
340.0037	532
340.0038	533
340.0039	533
340.0040	533
340.0041	533
340.0042	533
340.0043	533
340.0044	533
340.0045	533
340.0046	533
340.0047	533
340.0048	533
340.0049	533
340.0050	533
340.0051	533
390.0190	500
4	
450.0000	315, 348
450.0001	315, 348
450.0002	315, 348
450.0003	315, 348
450.0004	315, 348
450.0035	315
450.0040	315, 348
450.0041	348
450.0043	348
450.0044	348
450.0045	348
450.0046	348
450.0048	348
450.0049	348
450.0050	315, 345
450.0051	315, 345
450.0052	345
450.0055	348
450.0060	315, 343
450.0061	315, 343
450.0062	315, 343
450.0066	344
450.0070	315, 345
450.0071	315, 345
450.0075	315, 344
450.0076	315, 344
450.0080	327, 350
450.0081	350
450.0082	327, 350
450.0083	327, 350
450.0084	327, 350
450.0085	315, 344
450.0087	327, 350
450.0088	327, 350
450.0090	569
450.0091	568
450.0092	568
450.0093	568
450.0094	568
450.0120	315, 346
450.0121	346
450.0122	346
450.0123	346
450.0124	346
450.0126	315, 346
450.0127	346
450.0210	269
450.0300	315, 344
450.0305	315, 344
450.0320	269
450.0350	261
450.0351	261
450.0352	261
450.0420	143, 145
450.0422	143, 145
450.0423	143, 145
450.0425	143, 145
450.0426	143, 145
450.0427	143, 145
450.0428	143, 145
450.0429	143, 145
450.0430	143, 145
450.0431	143, 145
450.0433	143, 145
450.0434	143, 145
450.0435	143, 145
450.0436	143, 145
450.0437	143, 145
450.0438	143, 145
450.0441	142
450.0442	142
450.0443	142
450.0444	142
450.0445	142
450.0451	142
450.0452	142
450.0453	142
450.0454	142
450.0461	142
450.0462	142
450.0463	142
450.0464	142
450.0471	145
450.0472	145
450.0473	145
450.0474	145
450.0475	145
450.0476	145
450.0477	145
450.0478	145
450.0479	145

item	page
450.0481	144
450.0482	144
450.0483	144
450.0484	144
450.0485	145
450.0486	145
450.0487	145
450.0488	145
450.0491	145
450.0492	145
450.0493	145
450.0494	145
450.0495	145
450.0496	145
450.0497	145
450.0498	145
450.0960	428
455.0012	142
455.0013	142
455.0081	142
455.0130	307
455.0131	307
5	
500.0190	284
500.1025	255
500.1026	255
500.1027	255
500.1028	255
500.1029	255
500.1030	255
500.1031	254
500.1032	254
500.1033	254
500.1034	254
500.1035	254
500.1036	254
500.1037	255
500.1038	255, 269
500.1039	255, 269
500.1300	256
500.1320	256
500.1340	255
500.1345	255
500.1350	256
500.5007	40
500.5008	40
500.5009	40
500.5010	40
500.5011	40
500.5012	40
500.5013	40
500.5014	40
500.5016	40
500.5017	40
500.5018	40
500.5019	40
500.5022	40
500.5024	40
500.5027	40
500.5030	40
500.5032	40
500.5606	40
500.6136	282
500.6137	282
500.6138	281
500.6139	281
500.6140	281
500.6141	281
500.6142	281
500.6165	282
500.7006	284
500.7007	284
500.7019	290
500.7020	285
500.7021	285
500.7022	284
500.7024	285
500.7025	285
500.7028	285
500.7030	285
500.7032	285
500.7050	249
500.7051	246, 247
500.7052	247
500.7053	247
500.7060	249
500.7061	247
500.7062	246
500.7063	247
500.7064	286
500.7065	286
500.7066	286
500.7067	286
500.7068	286
500.7069	286
500.7070	287
500.7071	287
500.7072	286
500.7073	287
500.7074	287
500.7075	287
500.7076	287
500.7077	286
500.7078	287
500.7079	287
500.7080	287
500.7081	287
500.7082	288
500.7083	288
500.7084	288
500.7085	288
500.7086	288
500.7087	288
500.7088	288
500.7089	288
500.7090	288
500.7091	289
500.7092	289
500.7093	289
500.7094	289
500.7095	289
500.7096	289
500.7097	289
500.7098	289
500.7099	289
500.7106	282
500.7107	282
500.7108	282
500.7109	282
500.7110	282
500.7111	282
500.7112	282
500.7113	282
500.7114	282
500.7115	282
500.7116	282
500.7117	282
500.7119	282
500.7120	282
500.7121	282
500.7122	282
500.7123	282
500.7124	282
500.7125	282
500.7126	282
500.7128	282
500.7129	282
500.7130	283
500.7131	283
500.7132	283
500.7133	283
500.7134	283
500.7135	283
500.7136	283
500.7137	283
500.7138	283
500.7139	283
500.7140	282
500.7141	282
500.7142	282
500.7144	282
500.7145	282
500.7146	282
500.7147	282
500.7148	282
500.7149	282
500.7150	283
500.7151	282
500.7152	282
500.7153	282
500.7154	282
500.7155	282
500.7156	282
500.7157	282
500.7160	283
500.7165	283
500.7170	283
500.7180	284, 285, 448
500.7190	284, 286
500.7310	274
500.7330	274
500.7335	274
500.7510	273
500.7701	282
500.7702	282
500.7713	282
500.7718	282
500.7721	282
500.7722	282
500.7723	282
500.7724	282
500.7725	282
500.7726	282
500.7727	282
500.7728	282
500.7729	282
500.7730	282
500.7731	283
500.7733	283
500.7734	283
500.7735	283
500.7738	283
500.8020	430
500.8030	430
500.8040	430
500.8045	430
500.8100	429
500.8503	355
500.8504	355
500.8505	355
500.8506	355
500.8507	355
500.8509	355
500.8510	355
500.8511	355
500.8512	355
500.8513	355
500.8514	355
500.8515	355
500.8610	315, 355
500.8611	355
500.8612	355
500.8613	355
500.8614	355
500.8620	315, 355
500.8621	355
500.8700	315, 356
500.8701	356
500.8703	356
500.8704	356
500.8705	356
500.8706	356
500.8710	356
500.8711	356
500.8712	356
500.8713	356
503.0100	58, 59
503.4008	36, 55
503.4010	36, 55
503.4012	36, 55
503.4013	36, 55
503.4014	36, 55
503.4015	36, 55
503.4016	36, 55
503.4017	36, 55
503.4018	36, 55
503.4019	36, 55
503.4050	37, 56
503.4102	30, 54
503.4103	30, 54
503.4104	30, 54
503.4105	30, 54
503.4106	30, 54
503.4107	30, 54
503.4108	30, 54
503.4109	30, 54
503.4200	31, 55
503.4202	30, 54
503.4204	30, 54
503.4205	30, 54
503.42055	30, 54
503.4206	30, 54
503.4207	30, 54
503.4208	30, 54
503.4209	30, 54
503.4210	30, 54
503.4211	30, 54
503.4212	30, 54
503.4213	30, 54
503.4214	30, 54
503.4215	30, 54
503.4216	30, 54
503.4217	30, 54
503.4218	30, 54
503.4219	30, 54
503.4221	30, 54
503.4222	30, 54
503.4224	30, 54
503.4227	30, 54
503.4228	30, 54
503.4229	30, 54
503.4230	30, 54
503.4255	30, 54
503.4259	30, 55
503.4260	31, 55
503.4265	31, 55
503.4266	31, 55
503.4270	30, 54
503.4286	62
503.4287	62
503.4290	62
503.4292	62
503.4293	62
503.4294	62
503.4296	62
503.4297	62
503.4298	62
503.4351	46, 61
503.4353	46, 61
503.4355	46, 61
503.4357	46, 61
503.4364	46, 62
503.4402	42, 60
503.4403	42, 60
503.4404	42, 60
503.4405	42, 60
503.4502	42, 60
503.4503	42, 60
503.4504	42, 60
503.4505	42, 60
503.4506	42, 60
503.4507	42, 60
503.4511	42, 60, 188
503.4512	42, 60
503.4540	43, 61
503.4541	43, 61
503.4543	43, 61
503.4546	43, 61
503.4550	43, 61
503.4552	42, 60
503.4553	43, 61
503.4554	43, 61
503.4556	42, 61
503.4557	42, 61
503.4560	43, 61
503.4565	43, 61
503.4571	44, 61
503.4572	44, 61
503.4573	44, 61
503.4574	44, 61
503.4575	44, 61
503.4576	44, 61
503.4577	44, 61
503.4578	44, 61
503.4580	44, 61
503.4586	43, 61
503.4589	43, 61
503.4600	33, 57
503.4602	31, 56
503.4604	31, 56

item	page
503.4605	31, 56
503.4606	31, 56
503.4607	31, 56
503.4608	31, 56
503.4609	31, 56
503.4610	31, 56
503.4611	31, 56
503.4612	31, 56
503.4613	31, 56
503.4614	31, 56
503.4615	31, 56
503.4616	31, 56
503.4617	31, 56
503.4618	31, 56
503.4619	31, 56
503.4621	31, 56
503.4622	31, 56
503.4624	31, 56
503.4625	45, 62
503.4627	31, 56
503.4628	31, 56
503.4629	31, 56
503.4630	31, 56
503.4631	28, 54
503.4632	28, 54
503.4633	28, 54
503.4634	28, 54
503.4635	28, 54
503.4636	28, 54
503.4637	28, 54
503.4638	28, 54
503.4639	28, 54
503.4640	28, 54
503.4641	28, 54
503.4642	28, 54
503.4643	31, 56
503.4644	31, 56
503.4645	45, 62
503.4646	32, 56
503.4647	32, 56
503.4648	31, 56
503.4650	32, 56
503.4652	28, 54
503.4653	28, 54
503.4655	43, 61
503.4656	43, 61
503.4657	43, 61
503.4665	32, 57
503.4666	32, 57
503.4670	190
503.4678	189
503.4679	189
503.4681	31, 56
503.4683	31, 56
503.4684	31, 56
503.4685	31, 56
503.4686	31, 56
503.4687	31, 56
503.4688	31, 56
503.4689	31, 56
503.4691	188
503.4700	35, 59
503.4708	34, 58
503.4709	34, 58
503.4710	34, 58
503.4711	34, 58
503.4712	34, 58
503.4713	34, 58
503.4714	34, 58
503.4715	34, 58
503.4716	34, 58
503.4717	34, 58
503.4718	34, 58
503.4719	34, 58
503.4721	34, 58
503.4722	34, 58
503.4724	34, 58
503.4745	43, 61
503.4759	34, 58
503.4760	34, 59
503.4765	34, 59
503.4766	35, 59
503.4800	36, 60
503.4808	35, 59
503.4809	35, 59
503.4810	35, 59
503.4811	35, 59
503.4812	35, 59
503.4813	35, 59
503.4814	35, 59
503.4815	35, 59
503.4816	35, 59
503.4817	35, 59
503.4818	35, 59
503.4819	35, 59
503.4859	35, 60
503.4865	35, 60
503.4867	35, 60
503.4868	36, 60
503.4908	33, 58
503.4909	33, 58
503.4910	33, 58
503.4911	33, 58
503.4912	33, 58
503.4913	33, 58
503.4914	33, 58
503.4915	33, 58
503.4916	33, 58
503.4917	33, 58
503.4918	33, 58
503.4919	33, 58
503.4955	33, 58
503.4960	33, 58
503.4978	58
503.4979	58
503.4980	58
503.4981	58
503.4982	58
503.4983	58
503.4984	58
503.4985	58
503.4986	58
503.4987	58
503.4988	58
503.4989	58
503.4998	62
503.5205	33, 57
503.5208	33, 57
503.5209	33, 57
503.5210	33, 57
503.5211	33, 57
503.5212	33, 57
503.5213	33, 57
503.5214	33, 57
503.5215	33, 57
503.5216	33, 57
503.5217	33, 57
503.5218	33, 57
503.5219	33, 57
503.5221	33, 57
503.5222	33, 57
503.5224	33, 57
503.5227	33, 57
503.5228	33, 57
503.5229	33, 57
503.5905	34, 57
503.5908	34, 57
503.5909	34, 57
503.5910	34, 57
503.5911	34, 57
503.5912	34, 57
503.5913	34, 57
503.5914	34, 57
503.5915	34, 57
503.5916	34, 57
503.5917	34, 57
503.5918	34, 57
503.5919	34, 57
503.5921	34, 57
503.5922	34, 57
503.5924	34, 57
503.5927	34, 57
503.5928	34, 57
503.5929	34, 57
503.8101	189
503.8102	189
503.8103	189
503.8131	189
503.8132	189
503.8133	189
503.8134	189
503.8135	189
503.8152	190
503.8153	190
503.8154	190
503.8155	190
503.8170	190
503.8171	190
503.8172	190
503.8173	190
503.8174	190
503.8175	190
503.8176	190
503.8177	190
503.8178	190
503.8200	190
503.8201	190
503.8202	190
503.8203	190
503.8204	190
503.8205	190
503.8206	190
503.8207	190
503.8208	190
503.8221	189
503.8232	186
503.8233	186
514.1102	186
514.1103	186
514.1104	186
514.1105	186
514.1106	186
514.1107	186
514.1108	186
514.1109	186
514.1110	186
514.1111	186
514.1113	186
514.1114	186
514.1130	187
514.1131	187
514.1132	187
514.1133	187
514.1134	187
515.0001	142
515.0002	142
515.0003	142
515.0004	142
515.0005	142
515.0006	142
515.0012	143
515.0013	143
515.0016	142
515.0017	142
515.0018	142
515.0019	142
515.0040	135
515.0041	135
515.0042	135
515.0043	135
515.0044	135
515.0045	135
515.0046	135
515.0047	135
515.0048	135
515.0049	135
515.0050	135
515.0051	135
515.0052	135
515.0053	135
515.0054	135
515.0100	132, 141, 143
515.0103	137
515.0112	135
515.0208	141
515.0308	144
515.0510	141
515.0608	133
515.0610	144
515.0612	135
515.0648	133
515.0900	136
515.0901	135
515.0902	135
515.0903	135
515.0904	135
515.0905	135
515.0906	135
515.0907	135
515.0908	135
515.0909	135
515.0910	135
515.0911	135
515.0912	135
515.0913	135
515.0914	135
515.0915	135
515.0916	135
515.0917	135
515.0918	135
515.0919	135
515.0920	135
515.0921	135
515.0922	135
515.0923	135
515.0924	135
515.0925	135
515.0926	135
515.0927	135
515.0928	135
515.0929	135
515.0930	135
515.0931	135
515.0933	135
515.0934	135
515.0935	135
515.0936	135
515.0937	135
515.0938	135
515.0939	135
515.0940	136
515.0941	136
515.0942	136
515.0943	136
515.0944	136
515.0945	136
515.0946	136
515.0947	136
515.0948	136
515.0949	136
515.0950	133
515.0951	136
515.0952	136
515.0953	136
515.0954	136
515.0955	136
515.0956	136
515.0957	136
515.0958	133
515.0959	133
515.0960	133
515.0961	133
515.0962	133
515.0963	133
515.0964	133
515.0965	133
515.0966	133
515.0967	133
515.0968	133
515.0969	133
515.0971	136
515.0972	136
515.0973	136
515.0974	136
515.0975	136
515.0976	136
515.0977	136
515.0978	136
515.0980	134
515.0981	134
515.0982	134
515.0983	134
515.0984	134
515.0985	134
515.0986	134
515.0987	135
515.0988	135
515.0989	138
515.0990	138
515.0991	138

item	page
515.0992	138
515.0993	138
515.0994	138
515.0995	138
515.1003	241
515.1004	241
515.1005	138
515.1006	138
515.1007	138
515.1008	135
515.1009	135
515.1010	135
515.1011	135
515.1012	135
515.1013	135
515.1014	135
515.1015	135
515.1016	135
515.1017	135
515.1018	135
515.1019	135
515.1020	135
515.1021	135
515.1022	135
515.1023	135
515.1024	135
515.1025	135
515.1026	135
515.1027	135
515.1028	135
515.1029	135
515.1030	135
515.1031	135
515.1032	135
515.1040	138
515.1050	136
515.1051	136
515.1052	136
515.1053	136
515.1054	136
515.1055	136
515.1056	136
515.1057	136
515.1058	136
515.1059	136
515.1060	140
515.1061	140
515.1062	140
515.1063	140
515.1064	140
515.1065	140
515.1070	138
515.1072	138
515.1073	138
515.1075	138
515.1076	138
515.1077	138
515.1102	139
515.1103	139
515.1104	139
515.1105	139
515.1106	136
515.1107	139
515.1108	135
515.1109	135
515.1110	135
515.1111	135
515.1112	135
515.1113	135
515.1114	135
515.1115	135
515.1116	135
515.1117	135
515.1118	135
515.1119	135
515.1120	135
515.1121	135
515.1122	135
515.1123	135
515.1124	135
515.1125	135
515.1126	135
515.1127	135
515.1128	135
515.1129	135
515.1130	135
515.1131	135
515.1132	135
515.1133	140
515.1134	140
515.1135	140
515.1136	140
515.1137	141
515.1138	141
515.1140	136
515.1141	141
515.1142	141
515.1143	141
515.1144	141
515.1182	142
515.1183	142
515.1184	142
515.1191	142
515.1192	142
515.1193	142
515.1194	142
515.1205	374
515.1206	374
515.1207	374
515.1208	374
515.1210	383
515.1215	383
515.1220	384
515.1243	379
515.1244	379
515.1250	382
515.1265	373
515.1275	382
515.1285	379
515.1290	383
515.1305	509
515.1308	509
515.1310	374
515.1311	374
515.1312	374
515.1313	374
515.1314	374
515.1317	141
515.1318	141
515.1319	141
515.1320	141
515.1321	141
515.1322	141
515.1323	141
515.1324	141
515.1325	141
515.1326	141
515.1327	141
515.1328	141
515.1329	141
515.1330	141
515.1331	141
515.1332	141
515.1333	141
515.1334	141
515.1335	141
515.1336	141
515.1337	141
515.1338	141
515.1341	141
515.1346	141
515.1350	141
515.1355	141
515.1360	141
515.1365	141
515.1370	141
515.1372	143
515.1373	143
515.1374	143
515.1375	143
515.1376	143
515.1377	143
515.1378	143
515.1379	143
515.1381	143
515.1382	143
515.1383	143
515.1384	143
515.1385	143
515.1386	141
515.1387	141
515.1388	141
515.1389	141
515.1390	141
515.1391	141
515.1392	141
515.1393	141
515.1394	141
515.1395	141
515.1396	141
515.1397	141
515.1398	141
515.1399	141
515.1401	141
515.1402	141
515.1403	132
515.1404	132
515.1417	141
515.1418	141
515.1419	141
515.1420	141
515.1421	141
515.1422	142
515.1423	142
515.1424	142
515.1425	142
515.1426	142
515.1427	142
515.1428	142
515.1429	142
515.1430	142
515.1431	142
515.1432	142
515.1433	142
515.1434	142
515.1435	142
515.1436	142
515.1437	142
515.1438	142
515.1441	142
515.1443	142
515.1446	142
515.1450	142
515.1461	144
515.1462	144
515.1463	144
515.1464	144
515.1465	144
515.1466	144
515.1467	144
515.1468	144
515.1469	144
515.1501	132
515.1502	132
515.1503	132
515.1505	132
515.1506	133
515.1507	133
515.1508	133
515.1509	133
515.1510	133
515.1511	133
515.1512	133
515.1513	133
515.1514	133
515.1515	133
515.1516	133
515.1517	133
515.1518	133
515.1519	133
515.1520	133
515.1521	133
515.1522	133
515.1523	133
515.1524	133
515.1525	132
515.1526	133
515.1527	133
515.1528	133
515.1529	133
515.1530	132
515.1531	134
515.1532	134
515.1533	134
515.1534	134
515.1535	134
515.1536	134
515.1537	134
515.1538	135
515.1539	135
515.1540	134
515.1541	132
515.1542	132
515.1543	132
515.1544	132
515.1545	132
515.1546	132
515.1547	132
515.1548	132
515.1549	132
515.1550	132
515.1551	133
515.1552	132
515.1553	132
515.1554	132
515.1555	132
515.1556	132
515.1557	133
515.1558	133
515.1559	133
515.1560	132
515.1561	133
515.1562	133
515.1563	133
515.1564	133
515.1565	133
515.1566	133
515.1567	133
515.1568	133
515.1569	133
515.1570	133
515.1571	133
515.1572	133
515.1573	133
515.1574	133
515.1575	133
515.1576	133
515.1577	133
515.1578	133
515.1579	133
515.1606	133
515.1607	133
515.1608	133
515.1609	133
515.1610	133
515.1611	133
515.1612	133
515.1613	133
515.1614	133
515.1615	133
515.1616	133
515.1617	133
515.1618	133
515.1619	133
515.1620	133
515.1621	133
515.1622	133
515.1623	133
515.1624	133
515.1722	144
515.1724	144
515.1727	144
515.1729	144
515.1730	144
515.1731	144
515.1732	144
515.1733	144
515.1734	144
515.1736	144
515.1737	144
515.1738	144
515.1740	144
515.1741	144
515.1742	144
515.1746	144
515.1750	144
515.1755	144
515.1760	144
515.1765	144
515.1770	144

item	page
515.1775	144
515.1780	144
515.1785	144
515.1790	144
515.1795	144
515.1798	145
515.1799	145
515.1801	145
515.1804	145
515.1806	145
515.1807	145
515.1809	145
515.1812	145
515.1822	144
515.1824	144
515.1827	144
515.1830	144
515.1832	144
515.1833	144
515.1834	144
515.1836	144
515.1838	144
515.1841	144
515.1846	144
515.1850	144
515.1855	144
515.1860	144
515.1865	144
515.1870	144
515.1875	144
515.1880	144
515.1881	144
515.1882	144
515.1883	144
515.1884	144
515.1885	144
515.1886	144
515.1887	144
515.1890	144
515.1891	144
515.1892	144
515.1893	144
515.1894	144
515.1895	144
515.1896	144
515.1897	144
515.1898	144
515.1901	387
515.1902	387
515.1903	387
515.1904	387
515.1907	388
515.1908	387
515.1921	388
515.1930	387
515.1950	386
515.1960	387
515.2015	137
515.2017	137
515.2019	137
515.2021	137
515.2022	137
515.2040	138
515.2041	138
515.2042	138
515.2043	138
515.2124	144
515.2127	144
515.2130	144
515.2132	144
515.2133	144
515.2134	144
515.2136	144
515.2138	144
515.2141	144
515.3000	381
515.3005	375
515.3010	375
515.3015	375
515.3016	375
515.3017	375, 533
515.3020	376
515.3025	373
515.3030	373
515.3035	373
515.3040	378
515.3045	378
515.3050	380
515.3055	382
515.3061	378
515.3066	378
515.3070	380
515.3075	382
515.3080	372
515.3085	372
515.3090	372
515.3100	386
515.3101	385
515.3102	385
515.3198	374
515.3203	522
515.3207	522
515.3210	523
515.3220	523
515.3221	521
515.3222	521
515.3223	521
515.3224	521
515.3225	521
515.3226	521
515.3231	521
515.3232	521
515.3233	521
515.3234	521
515.3235	521
515.3236	521
515.3241	521
515.3242	521
515.3243	521
515.3244	521
515.3245	521
515.3246	521
515.3251	522
515.3252	522
515.3253	522
515.3254	522
515.3255	522
515.3256	522
515.3261	522
515.3262	522
515.3263	522
515.3264	522
515.3265	522
515.3266	522
515.3271	522
515.3272	522
515.3273	522
515.3274	522
515.3275	522
515.3276	522
515.3281	522
515.3282	522
515.3283	522
515.3284	522
515.3285	522
515.3286	522
515.3290	521
515.3291	520
515.3292	520
515.3293	520
515.3294	521
515.3295	521
515.3296	521
515.3310	388
515.3330	388
515.3335	388
515.3340	388
515.3344	388
515.3345	388
515.3350	389
515.3355	389
515.3356	389
515.3360	389
515.3361	374, 386
515.3365	390
515.3370	389
515.3375	390
515.3380	390
515.3381	390
515.3382	390
515.3383	390
515.3384	390
515.3385	390
515.3386	390
515.3387	390
515.3388	390
515.3389	390
515.3390	390
515.3391	390
515.3392	390
515.3394	389
515.3395	389
515.3396	389
515.3410	388
515.3415	388
515.3480	389
515.3481	389
515.3482	389
515.3483	389
515.3484	389
515.3485	389
515.3486	390
515.3487	390
515.3488	390
515.3489	389
515.3490	389
515.3491	389
515.3492	390
515.3493	390
515.3494	390
515.3495	390
515.3496	390
515.3497	390
515.3499	396
515.3500	396
515.3501	396
515.3504	396
515.3505	396
515.3506	396
515.3509	396
515.3510	396
515.3511	396
515.3514	396
515.3515	396
515.3516	396
515.3519	397
515.3520	397
515.3521	397
515.3524	397
515.3525	397
515.3526	397
515.3529	397
515.3530	397
515.3531	397
515.3534	397
515.3535	397
515.3536	397
515.3539	396
515.3540	396
515.3541	396
515.3544	397
515.3545	397
515.3546	397
515.3548	398
515.3549	377
515.3550	398
515.3551	377
515.3552	377
515.3553	377
515.3554	398
515.3555	398
515.3558	398
515.3559	398
515.3560	398
515.3561	398
515.3569	398
515.3570	398
515.3571	398
515.3574	399
515.3575	399
515.3576	399
515.3579	399
515.3580	399
515.3581	399
515.3590	399
515.3591	399
515.3592	399
515.3597	399
515.3599	399
515.3735	383
515.3745	384
515.3750	383
515.3756	398
515.3765	384
515.3770	383
515.3801	379
515.3802	379
515.3803	379
515.3804	379
515.3805	379
515.3806	379
515.3810	379
515.3815	379
515.3840	380
515.3841	380
515.3842	380
515.3843	380
515.3844	380
515.3845	380
515.3846	380
515.3847	380
515.3880	380
515.3881	380
515.3882	380
515.3885	380
515.3886	380
515.3887	380
515.3888	380
515.3889	380
515.3900	386
515.4104	399
515.4105	399
515.4106	399
515.4109	398
515.4110	398
515.4111	398
515.5005	372
515.5010	372
515.5015	372
515.5020	373
515.5025	373
515.5030	374
515.5035	375
515.5040	376
515.5045	381
515.5050	381
515.5055	381
515.5056	381
515.5057	381
515.5058	382
515.5060	381
515.5065	387
515.5070	377
515.5071	377
515.5072	377
515.5073	377
515.5074	377
515.5075	377
515.5080	377
515.5081	377
515.5082	377
515.5083	377
515.5084	377
515.5085	377
515.5086	377
515.5087	377
515.5090	388
515.5093	385
515.5094	385
515.5095	385
515.5096	385
515.5097	385
515.5100	377
515.5101	376, 377
515.5102	376, 377
515.5103	376, 377
515.5110	378
515.5111	378
515.5112	376, 378
515.5113	376, 378

item	page
515.5114	377, 378
515.5115	377, 378
515.5116	377, 378
515.5117	377, 378
515.5118	377, 378
515.5119	377, 378
515.5120	376
515.5121	376
515.5122	376
515.5123	376
515.5124	376
515.5125	376
515.5126	376
515.5127	376
515.5128	376
515.5129	376
515.5130	379
515.5131	379
515.5132	379
515.5133	379
515.5134	379
515.5135	379
515.5136	379
515.5137	379
515.5138	379
515.5139	379
515.5140	384
515.5150	384
515.5166	379
515.5167	379
515.5168	379
516.0100	180
516.0200	180
516.1151	178
516.1152	178
516.1153	178
516.1180	178
516.1181	178
516.1182	178
516.1184	178
516.1185	178
516.1186	178
516.1187	178
516.1188	178
516.1195	151
516.1196	151
516.1197	151
516.1198	151
516.1225	177
516.1403	154, 160
516.1404	154, 160
516.1412	154
516.1413	154, 160
516.1414	154, 160
516.1415	155
516.1422	154
516.1423	154, 160
516.1424	154, 160
516.1425	155
516.1432	154
516.1435	155
516.1442	154
516.1443	154, 160
516.1444	154, 160
516.1445	156
516.1472	154
516.1475	156
516.1482	154

item	page
516.1490	154
516.1491	154, 160
516.1493	154
516.1494	154, 160
516.1495	154
516.1496	154, 160
516.1501	151
516.1502	151
516.1503	151
516.1504	151
516.1507	151
516.1508	151
516.1512	154
516.1515	155
516.1522	154
516.1525	155
516.1532	154
516.1535	156
516.1542	154
516.1545	156
516.1572	154
516.1575	156
516.1582	154
516.1585	156
516.1612	154, 174
516.1615	157
516.1622	154, 174
516.1625	157
516.1632	154, 174
516.1633	154, 174
516.1635	157
516.1642	154, 174
516.1645	157
516.1652	154, 174
516.1672	154, 174
516.1675	157
516.1682	154, 174
516.1685	157
516.1720	177
516.1730	177
516.1810	155
516.1820	155
516.1830	155
516.1840	155
516.1932	154
516.1933	154
516.1942	154
516.1943	154
516.1972	154
516.2005	176
516.2010	176
516.2020	176
516.2040	176
516.2050	176
516.2060	176
516.2070	176
516.2107	175
516.2108	175
516.2109	175
516.2110	175
516.2111	175
516.2112	175
516.2113	175
516.2114	175
516.2115	175
516.2116	175
516.2117	175
516.2118	175

item	page
516.2119	175
516.2213	174, 176
516.2214	174, 176
516.2215	174, 176
516.2216	174, 176
516.2217	174, 176
516.2218	174, 176
516.2219	174, 176
516.2221	174, 176
516.2222	174, 176
516.2224	174, 176
516.2226	174, 176
516.2227	174, 176
516.2229	174, 176
516.2230	174, 176
516.2232	174, 176
516.2234	174, 176
516.2236	174, 176
516.2238	174, 176
516.2241	174, 176
516.2307	175
516.2308	175
516.2310	175
516.2311	175
516.2312	175
516.2313	175
516.2314	175
516.2315	175
516.2316	175
516.2317	175
516.2318	175
516.2319	175
516.2321	175
516.2322	175
516.2413	176
516.2414	176
516.2415	176
516.2416	176
516.2417	176
516.2418	176
516.2419	176
516.2421	176
516.2422	176
516.2424	176
516.2427	176
516.2430	176
516.2432	176
516.2434	176
516.2436	176
516.2441	176
516.2510	175
516.2511	175
516.2512	175
516.2513	175
516.2514	175
516.2517	175
516.2518	175
516.2519	175
516.2522	175
516.2612	175
516.2614	175
516.2638	175
516.2712	176
516.2734	176
516.2812	175
516.2814	175
516.2838	175
516.2912	176

item	page
516.2934	176
516.3006	175
516.3008	175
516.3010	175
516.3012	175
516.3014	175
516.3114	176
516.3118	176
516.3120	176
516.3124	176
516.3210	150
516.3215	150
516.3220	150
516.3225	150
516.3235	150
516.3240	150
516.3245	150
516.3250	150
516.3255	150
516.3260	151
516.3265	151
516.3270	151
516.3280	151
516.3310	180
516.3315	180
516.3320	180
516.3325	180
516.3330	180
516.3335	180
516.3410	180
516.3415	180
516.3420	180
516.3425	180
516.3430	180
516.3435	180
516.3510	172
516.3515	172
516.3520	172
516.3525	172
516.3530	172
516.3535	172
516.3540	172
516.3545	172
516.3550	172
516.3555	172
516.3610	173
516.3615	173
516.3620	173
516.3625	173
516.3630	173
516.3635	173
516.3640	173
516.3645	173
516.3650	173
516.3655	173
516.3660	173
516.3700	178
516.3705	178
516.3740	179
516.3742	179
516.3743	179
516.3744	179
516.3745	179
516.3747	179
516.3748	179
516.3750	179
516.3752	179
516.3755	179

item	page
516.3760	180
516.3762	180
516.3765	180
516.3767	180
516.3910	150
516.3915	150
516.3920	150
516.3925	150
516.3930	151
516.3935	151
516.3940	151
516.4012	160
516.4015	161
516.4022	160
516.4025	161
516.4032	160
516.4035	161
516.4042	160
516.4045	161
516.4072	160
516.4075	162
516.4082	160
516.4085	162
516.4090	160
516.4093	160
516.4095	160
516.4212	160
516.4215	163
516.4222	160
516.4225	163
516.4232	160
516.4235	163
516.4242	160
516.4245	163
516.4252	160
516.4272	160
516.4275	163
516.4282	160
516.4285	163
516.4290	160
516.4293	160
516.4522	171
516.4532	171
516.4542	171
516.4572	171
516.4590	171
516.4595	171
516.4622	171
516.4632	171
516.4642	171
516.4672	171
516.4810	160
516.4820	160
516.4830	160
516.4840	160
516.4890	175
516.4895	175
516.4912	160
516.4915	161
516.4922	160
516.4925	161
516.4932	160
516.4935	162
516.4942	160
516.4945	162
516.4972	160
516.4975	162
516.4982	160

item	page
516.4985	162
516.5000	169
516.5001	169
516.5002	169
516.5003	169
516.5004	169
516.5020	168
516.5021	168
516.5022	168
516.5023	168
516.5024	168
516.5025	168
516.5026	168
516.5027	168
516.5028	168
516.5030	166
516.5031	166
516.5032	166
516.5033	166
516.5034	166
516.5035	166
516.5036	166
516.5037	166
516.5038	166
516.5039	166
516.5040	166
516.5041	166
516.5042	166
516.5043	166
516.5044	166
516.5045	166
516.5046	166
516.5047	166
516.5048	166
516.5049	166
516.5050	166
516.5051	166
516.5052	166
516.5053	166
516.5054	166
516.5055	166
516.5056	167
516.5057	167
516.5058	167
516.5059	167
516.5061	170
516.5062	170
516.5063	170
516.5064	170
516.5065	170
516.5066	170
516.5067	170
516.5068	170
516.5069	170
516.5080	168
516.5081	168
516.5082	168
516.5085	168
516.5086	168
516.5087	168
516.5100	167
516.5101	167
516.5102	167
516.5103	167
516.5104	167
516.5105	167
516.5106	167
516.5107	167
516.5108	167
516.5109	167
516.5110	167
516.5111	167
516.5112	167
516.5113	167
516.5114	167
516.5115	167
516.5116	167
516.5117	167
516.5118	167
516.5119	167
516.5120	167
516.5121	167
516.5122	167
516.5123	167
516.5124	167
516.5150	170
516.5151	170
516.5152	170
516.5153	170
516.5154	170
516.5155	170
516.5156	170
516.5157	170
516.5158	170
516.5159	170
516.5160	170
517.0043	29
517.0045	29
517.0048	29
517.0052	29
517.0080	29
517.0085	29
517.0090	29
517.0095	29
517.0099	29
517.0123	38
517.0124	37, 50
517.0125	38
517.0127	38, 50
517.0130	38, 50
517.0132	38, 50
517.0136	38, 50
517.0141	38, 50
517.0145	38
517.0146	38, 50
517.0148	38
517.0149	38
517.0150	38, 50
517.0155	38, 50
517.0160	38, 50
517.0165	38, 50
517.0170	38, 50
517.0175	38, 50
517.0180	38, 50
517.0185	38, 50
517.0190	38, 50
517.0195	38, 50
517.0196	38, 50
517.0222	44
517.0248	44
517.0250	44
517.0252	41
517.0253	41
517.0254	41
517.0255	41
517.0257	41
517.0258	41
517.0260	41
517.0261	41
517.0263	41
517.0264	41
517.0265	41
517.0266	41
517.0267	41
517.0268	41
517.0269	41
517.0270	41
517.0295	44
517.0300	46
517.0301	46
517.0302	46
517.0303	46
517.0304	46
517.0305	46
517.0306	46
517.0307	46
517.0308	46
517.0310	47
517.0315	47
517.0316	47
517.0317	47
517.0318	47
517.0319	47
517.0320	47
517.0330	46
517.0332	46
517.0333	46
517.0334	46
517.0335	46
517.0340	46
517.0341	47
517.0342	47
517.0343	47
517.0406	47
517.0407	47
517.0408	47
517.0409	47
517.0410	47
517.0411	47
517.0412	47
517.0413	47
517.0414	47
517.0415	47
517.0416	47
517.0417	47
517.0418	47
517.0419	47
517.0420	47
517.0421	47
517.0422	47
517.0423	47
517.0424	47
517.0427	47
517.0430	47
517.0432	47
517.0434	47
517.0436	47
517.0450	47
517.0451	47
517.0452	47
517.0453	47
517.0454	47
517.0455	47
517.0522	37
517.0524	37
517.0527	37
517.0530	37
517.0532	37
517.0536	37
517.0538	37
517.0540	37
517.0541	37
517.0542	37
517.0546	37
517.0548	37
517.0550	37
517.0555	37
517.0560	37
517.0565	37
517.0570	37
517.0575	37
517.0580	37
517.0585	37
517.0590	37
517.0595	37
517.0596	37
517.0606	28
517.0607	28
517.0608	28
517.0609	28
517.0610	28
517.0611	28
517.0612	28
517.0613	28
517.0614	28
517.0615	28
517.0616	28
517.0617	28
517.0618	28
517.0619	28
517.0620	29
517.0621	29
517.0622	29
517.0623	29
517.0624	29
517.0625	29
517.0626	29
517.0627	29
517.0628	29
517.0629	29
517.0630	29
517.0632	29
517.0634	29
517.0635	37
517.0636	29
517.0638	29
517.0641	29
517.0646	29
517.0650	29
517.0701	38
517.0702	38
517.0704	38
517.0706	38
517.0707	38
517.0708	38
517.0709	38
517.0710	38
517.0711	38
517.0712	38
517.0713	38
517.0714	38
517.0715	38
517.0716	38
517.0718	38
517.0725	38
517.0726	38
517.0728	38
517.0736	38
517.0737	38
517.0738	38
517.0739	38
517.0740	38
517.0741	38
517.0742	38
517.0743	38
517.0744	38
517.0745	38
517.0747	38
517.0748	38
517.0749	38
517.0751	38
517.0752	38
517.0753	38
517.0757	38
517.0758	38
517.0761	38
517.0764	38
517.0765	38
517.0766	38
517.0767	38
517.0768	38
517.0769	38
517.0771	38
517.0772	38
517.0781	38
517.0782	38
517.0783	38
517.0784	38
517.0785	38
517.0786	38
517.0787	38
517.0788	38
517.0789	38
517.0791	38
517.0792	38
517.0793	38
517.0794	38
517.0795	38
517.0796	38
517.0797	38
517.0801	43
517.0802	43
517.0804	43
517.0806	43
517.0807	43
517.0808	43
517.0809	43
517.0810	43
517.0811	43
517.0812	43
517.0813	43
517.0814	43
517.0815	43
517.0816	43
517.0817	43
517.0818	43
517.0819	43
517.0821	43
517.0825	43
517.0826	43

item	page
517.0827	43
517.0835	43
517.0836	43
517.0837	43
517.0838	43
517.0839	43
517.0841	43
517.0842	43
517.0843	43
517.0844	43
517.0845	43
517.0846	43
517.0847	43
517.0848	43
517.0852	43
517.0853	43
517.0854	43
517.0856	43
517.0857	43
517.0858	43
517.0859	43
517.0861	43
517.0862	43
517.0863	43
517.0864	43
517.0865	43
517.0866	43
517.0881	43
517.0882	43
517.0883	43
517.0884	43
517.0885	43
517.0886	43
517.0887	43
517.0888	43
517.0889	43
517.0891	44
517.0892	44
517.0893	44
517.0894	44
517.0895	44
517.0896	44
517.0922	40, 51
517.0924	40, 51
517.0927	40, 51
517.0930	40, 51
517.0932	40, 51
517.0936	40, 51
517.0941	40, 51
517.0946	40, 51
517.0950	40, 51
517.0955	40, 51
517.0960	40, 51
517.0965	40, 51
517.0970	40, 51
517.0975	40, 51
517.0980	40, 51
517.0985	40, 51
517.0990	40, 51
517.0995	40, 51
517.0996	40, 51
517.1108	49
517.1109	49
517.1110	49
517.1111	49
517.1112	49
517.1113	49
517.1114	49

item	page
517.1115	49
517.1116	49
517.1117	49
517.1118	49
517.1119	49
517.1125	49
517.1126	49
517.1127	49
517.1131	49
517.1132	49
517.1133	49
517.1134	49
517.1302	50
517.1303	50
517.1304	50
517.1305	50
517.1312	50
517.1313	50
517.1314	50
517.1315	50
517.1316	50
517.1317	50
517.1318	50
517.1319	50
517.1320	50
517.1323	50
517.1324	50
517.1325	50
517.1326	50
517.1327	50
517.1328	50
517.1329	50
517.1330	50
517.1370	49
517.1371	49
517.1372	49
517.1373	49
517.1374	49
517.1375	49
517.1376	49
517.1377	49
517.1378	49
517.1379	49
517.1380	49
517.1381	49
517.1382	49
517.1383	49
517.1397	50
517.1398	50
517.1399	50
517.1406	39
517.1407	39
517.1408	39
517.1409	39
517.1410	39
517.1411	39
517.1412	39
517.1413	39
517.1414	39
517.1415	39
517.1416	39
517.1417	39
517.1418	39
517.1419	39
517.1420	39
517.1422	39
517.1423	39
517.1425	39

item	page
517.1426	39
517.1430	39
517.1432	39
517.1436	39
517.1441	39
517.1446	39
517.1450	39
517.1455	39
517.1465	39
517.1471	49
517.1472	49
517.1473	49
517.1474	49
517.1475	39
517.1476	49
517.1477	49
517.1478	49
517.1479	49
517.1480	49
517.1481	49
517.1482	49
517.1483	49
517.1484	49
517.1485	49
517.1486	49
517.1487	49
517.1488	49
517.1490	39
517.1491	39
517.1500	36
517.1505	36
517.1508	36
517.1509	36
517.1510	36
517.1511	36
517.1512	36
517.1513	36
517.1514	36
517.1515	36
517.1516	36
517.1517	36
517.1518	36
517.1519	36
517.1520	36
517.1521	36
517.1522	36
517.1523	36
517.1524	36
517.1525	36
517.1526	36
517.1527	36
517.1528	36
517.1530	36
517.1532	36
517.1534	36
517.1536	36
517.1541	36
517.1546	36
517.1606	29
517.1607	29
517.1608	29
517.1609	29
517.1610	29
517.1611	29
517.1612	29
517.1613	29
517.1614	29
517.1615	29

item	page
517.1616	29
517.1617	29
517.1618	29
517.1619	29
517.1620	29
517.1621	29
517.1622	29
517.1623	29
517.1624	29
517.1625	29
517.1626	29
517.1627	29
517.1628	29
517.1629	29
517.1630	29
517.1632	29
517.1636	29
517.1638	29
517.1641	29
517.1646	29
517.1650	29
517.1655	29
517.1660	29
517.1665	29
517.1670	29
517.1675	29
517.1680	29
517.1901	29
517.1902	29
517.1903	29
517.1904	29
517.1905	40, 51
517.1906	29
517.1907	29
517.1908	29
517.1909	29
517.1910	40, 51
517.1911	29
517.1912	29
517.1913	29
517.1914	29
517.1915	40, 51
517.1916	29
517.1917	29
517.1918	29
517.1919	29
517.1920	40, 51
517.1921	29
517.1922	29
517.1923	29
517.1924	29
517.1925	40, 51
517.1930	40, 51
517.1935	40, 51
517.1940	40, 51
517.1945	40, 51
517.1950	40, 51
517.1951	29
517.1952	29
517.1955	40, 51
517.1960	40, 51
517.1965	40, 51
517.1970	40, 51
517.1975	40, 51
517.1980	40, 51
517.1985	40, 51
517.1990	40, 51
517.1995	40, 51

item	page
517.2013	50
517.2015	50
517.2020	50
517.2025	50
517.2030	50
517.2035	50
517.2040	50
517.2045	50
517.2050	50
517.2060	50
517.2075	50
517.2090	50
517.2105	38, 50
517.2110	38, 50
517.2115	38, 50
517.2120	38, 50
517.2122	37, 50
517.2125	38, 50
517.2130	38, 50
517.2135	38, 50
517.2140	38, 50
517.2145	38, 50
517.2150	38, 50
517.2155	38, 50
517.2160	38, 50
517.2165	38, 50
517.2170	38, 50
517.2175	38, 50
517.2180	38, 50
517.2185	38, 50
517.2190	38, 50
517.2195	38, 50
517.2200	38, 50
517.2205	38, 50
517.2210	38, 50
517.2220	38, 50
517.2251	38, 50
517.2252	38, 50
517.2253	38, 50
517.2254	38, 50
517.2255	38, 50
517.2256	38, 50
517.2257	38, 50
517.2258	38, 50
517.2259	38, 50
517.2260	38, 50
517.2261	38, 50
517.2262	38, 50
517.2263	38, 50
517.2264	38, 50
517.2265	38, 50
517.2266	38, 50
517.2267	38, 50
517.2268	38, 51
517.2269	38, 51
517.2270	38, 50
517.2271	38, 50
517.2272	38, 51
517.2273	38, 51
517.2274	38, 51
517.2275	38, 51
517.2276	38, 51
517.2277	38, 51
517.2278	38, 51
517.2279	38, 51
517.2280	38, 51
517.2281	38, 51
517.2282	38, 51

item	page
517.2283	38, 51
517.2284	38, 51
517.2285	38, 51
517.2286	38, 51
517.2287	38, 51
517.2288	38, 51
517.2289	38, 51
517.2290	38, 51
517.2291	38, 51
517.2292	38, 51
517.2293	38, 51
517.2294	38, 51
517.2295	38, 51
517.2296	38, 51
517.2297	38, 51
517.2401	39
517.2408	39
517.2409	39
517.2410	39
517.2411	39
517.2412	39
517.2413	39
517.2414	39
517.2417	39
517.2419	39
517.2421	39
517.2422	39
517.2427	39
517.2430	39
517.2506	37
517.2507	37
517.2508	37
517.2509	37
517.2510	37
517.2511	37
517.2512	37
517.2513	37
517.2514	37
517.2515	37
517.2516	37
517.2517	37
517.2518	37
517.2519	37
517.2601	29
517.2602	29
517.2603	29
517.2604	29
517.2605	37
517.2606	29
517.2607	29
517.2608	29
517.2609	29
517.2610	37
517.2611	29
517.2612	29
517.2613	29
517.2614	29
517.2615	37
517.2616	29
517.2617	29
517.2618	29
517.2619	29
517.2620	37
517.2621	29
517.2622	29
517.2623	29
517.2624	29
517.2625	37
517.2626	29
517.2627	29
517.2628	29
517.2629	29
517.2630	37
517.2631	29
517.2632	29
517.2633	29
517.2634	29
517.2635	29
517.2636	29
517.2637	29
517.2638	29
517.2639	29
517.2641	29
517.2642	29
517.2643	29
517.2644	29
517.2645	29
517.2646	29
517.2647	29
517.2651	29
517.2652	29
517.2653	29
517.2900	40, 51
517.2905	40, 51
517.2910	40, 51
517.2915	40, 51
517.2920	40, 51
517.2930	40, 51
517.2951	40, 51
517.2952	40, 51
517.2953	40, 51
517.2954	40, 51
517.2955	40, 51
517.2956	40, 51
517.2957	40, 51
517.2958	40, 51
517.2959	40, 51
517.2960	40, 51
517.2961	40, 51
517.2962	40, 51
517.2963	40, 51
517.2964	40, 51
517.2965	40, 51
517.2966	40, 51
517.2967	40, 51
517.2968	40, 51
517.2969	40, 51
517.2970	40, 51
517.2971	40, 51
517.2972	40, 51
517.2973	40, 51
517.2974	40, 51
517.2975	40, 51
517.2976	40, 51
517.2977	40, 51
517.2978	40, 51
517.2979	40, 51
517.2980	40, 51
517.2981	40, 51
517.2982	40, 51
517.2983	40, 51
517.2984	40, 51
517.2985	40, 51
517.2986	40, 51
517.2987	40, 51
517.2988	40, 51
517.2989	40, 51
517.2990	40, 51
517.2991	40, 51
517.2992	40, 51
517.2993	40, 51
517.2994	40, 51
517.2995	40, 51
517.2996	40, 51
517.2997	40, 51
517.2998	40, 51
517.9001	39, 51
517.9002	39, 51
517.9003	39, 51
517.9004	39, 51
517.9005	39, 51
517.9022	39, 51
517.9024	39, 51
517.9027	39, 51
517.9030	39, 51
517.9032	39, 51
517.9036	39, 51
517.9041	39, 51
517.9046	39, 51
517.9050	39, 51
517.9055	39, 51
517.9060	39, 51
517.9065	39, 51
517.9070	39, 51
517.9075	39, 51
517.9080	39, 51
517.9085	39, 51
517.9090	39, 51
517.9095	39, 51
517.9100	39, 51
517.9105	39, 51
517.9111	39, 51
517.9112	39, 51
517.9113	39, 51
517.9114	39, 51
517.9115	39, 51
517.9116	39, 51
517.9117	39, 51
517.9118	39, 51
517.9119	39, 51
517.9120	39, 51
517.9121	39, 51
517.9122	39, 51
517.9123	39, 51
517.9124	39, 51
517.9125	39, 51
517.9126	39, 51
517.9127	39, 51
517.9128	39, 51
517.9129	39, 51
517.9130	39, 51
517.9131	39, 51
517.9132	39, 51
517.9133	39, 51
517.9134	39, 51
517.9135	39, 51
517.9136	39, 51
517.9137	39, 51
517.9138	39, 51
517.9139	39, 51
517.9140	39, 51
517.9141	39, 51
517.9142	39, 51
517.9143	39, 51
517.9144	39, 51
517.9145	39, 51
517.9146	39, 51
517.9147	39, 51
517.9148	39, 51
518.0010	28
518.0011	28
518.0012	28
518.0013	28
518.0014	28
518.0015	28
518.0016	28
518.0017	28
518.0018	28
518.0019	28
518.0040	28
518.0300	44
518.0307	44
518.0308	44
518.0309	44
518.0310	44
518.0311	44
518.0321	41
518.0330	41
518.0332	41
518.0334	41
518.0336	41
518.0338	41
518.0350	41
518.0360	41
518.0370	41
518.0378	41
518.0379	41
518.0380	41
518.0381	41
518.0382	41
518.0383	41
518.0384	41
518.0387	41
518.0389	41
518.0405	48
518.0406	48
518.0408	48
518.0410	48
518.0412	48
518.0414	48
518.0416	48
518.0418	48
518.0420	48
518.0421	48
518.0424	48
518.0425	48
518.0427	48
518.0430	48
518.0450	48
518.0455	48
518.0460	48
518.0501	41
518.0503	41
518.0504	41
518.0505	41
518.0506	41
518.0507	41
518.0511	41
518.0512	41
518.0513	41
518.0514	41
518.0515	41
518.0516	41
518.0517	41
518.0518	41
518.0519	41
518.0520	41
518.0521	41
518.0522	41
518.0523	41
518.0524	41
518.0525	41
518.0526	41
518.0606	29
518.0607	29
518.0608	29
518.0609	29
518.0610	29
518.0611	29
518.0612	29
518.0613	29
518.0614	30
518.0615	30
518.0616	30
518.0617	30
518.0618	30
518.0619	30
518.0620	30
518.0621	30
518.0622	30
518.0624	30
518.0627	30
518.0630	30
518.0632	30
518.0640	30
518.0641	30
518.0643	30
518.0644	30
518.0701	38
518.0702	38
518.0704	38
518.0706	38
518.0707	38
518.0709	38
518.0710	38
518.0711	38
518.0712	38
518.0714	38
518.0715	38
518.0716	38
518.0718	38
518.0719	38
518.0720	38
518.0743	39
518.0747	39
518.0800	43
518.0801	44
518.0802	44
518.0804	44
518.0807	44
518.0809	44
518.0810	44
518.0811	44
518.0812	44
518.0814	44
518.0815	44
518.0816	44
518.0818	44
518.0821	43
518.0822	43

item	page
518.0823	43
518.0824	43
518.0825	43
518.0826	43
518.0827	43
518.0828	43
518.0840	48
518.0843	44
518.0847	44
518.0850	42
518.0852	42
518.0853	42
518.0856	42
518.0857	42
518.0859	42
518.0860	45
518.0861	45
518.0862	45
518.0863	45
518.0864	45
518.0865	47
518.0866	47
518.0868	47
518.0869	47
518.0870	47
518.0871	47
518.0872	47
518.0873	47
518.0874	47
518.0875	47
518.0876	47
518.0877	47
518.0878	47
518.0879	47
518.0880	47
518.0881	47
518.0882	47
518.0883	47
518.0884	47
518.0885	47
518.0886	47
518.0900	48
518.0930	46
518.0931	45
518.0932	45
518.0933	45
518.0934	45
518.0935	45
518.0936	45
518.3000	30
518.3001	30
518.3002	30
518.3003	30
518.3004	30
518.3005	30
518.3006	30
518.3007	30
518.3008	30
518.3009	30
518.3010	30
518.3011	30
518.3012	30
518.3013	30
518.3014	30
518.3015	30
518.3016	30
518.3020	30
518.3100	44
518.3101	44
518.3102	44
518.3103	44
518.3104	44
518.3105	44
518.3106	44
518.3107	44
518.3108	44
518.3109	44
518.3110	44
518.3111	44
518.3112	44
518.3113	44
518.3120	44
518.3200	39
518.3201	38
518.3202	38
518.3203	38
518.3204	38
518.3205	38
518.3206	38
518.3207	38
518.3208	38
518.3209	38
518.3220	39
519.0650	36
519.0651	36
519.0652	36
519.0653	36
519.0654	36
519.0655	36
519.0656	36
519.0657	36
519.0658	36
519.0659	36
519.0660	36
520.1000	45
520.1011	44
520.1100	45
520.1214	44
520.1317	44
520.1516	44
520.1922	44
520.2427	44
520.3032	44
522.1013	40
522.1317	40
522.1618	40
522.1719	40
522.1922	40
522.1924	40
522.2427	40
522.2430	40
522.3036	40
522.3236	40
550.1000	280
550.1001	280
550.1002	280, 281
550.1003	280
550.1004	280
550.1007	281
550.1009	281
550.1010	280
550.1019	281
550.1021	281
550.1023	280
550.1025	280
550.1026	280
550.1027	280
550.1030	281
550.1032	280
550.1035	386
550.1045	574
550.1046	574
550.1047	574
550.1048	574
550.1049	574
550.1050	280
550.1060	574
550.1070	574
550.1071	574
550.1072	574
550.1073	574
550.1074	574
550.1075	574
550.1102	281
550.1126	241, 284
550.1138	281, 407
550.1160	407
550.1165	406
550.1185	407
550.1238	406
550.1301	280
550.1360	406
550.1370	410
550.1371	409
550.1375	410
550.1376	409
550.1380	410
550.1381	409
550.1385	410
550.1386	409
550.1503	448
550.1710	400
550.1711	400
550.1712	400
550.1720	400
550.1721	400
550.1725	400
550.5003	362, 365, 367
550.5008	362, 365, 367
550.5015	367
550.5018	362, 365, 367
550.7049	362
550.7055	362
550.7221	364
550.7227	365
550.7228	365
550.7229	365
550.7351	363
550.7352	363
550.7353	363
550.7391	362
550.7392	362
550.7393	362
550.7459	365
550.7462	362
550.7463	362
550.7491	363
550.7492	363
550.7493	363
550.7502	362
550.7503	362
550.7551	363
550.7552	363
550.7553	363
550.7555	365
550.7556	365
550.7557	365
550.7558	365
550.7559	365
550.7571	363
550.7572	363
550.7573	363
550.7591	362
550.7592	362
550.7593	362
550.7601	364
550.7602	364
550.7603	364
550.7606	364
550.7611	362
550.7612	362
550.7613	362
550.7621	362
550.7801	363
550.7802	363
550.7803	363
550.7851	364
550.7852	364
550.7853	364
550.7854	363, 366
550.7857	365
550.7858	365
550.7859	365
550.7998	367
550.7999	362, 365
550.8002	366
550.8055	366
550.8061	366
550.8062	366
550.8551	366
550.8552	366
550.8555	366
550.8556	366
550.8557	366
550.8558	366
550.8601	366
550.8602	366
550.8603	367
550.8605	367
550.8606	367
550.8607	367
577.0100	37
577.0150	37
577.0199	37
577.0200	37
577.0201	37
577.0250	37
577.0251	37
577.0299	37
577.0300	37
577.0301	37
577.0375	37
577.0399	37
577.0450	37
6	
605.0001	335
605.0002	335
605.0003	335
605.0004	336
605.0005	336
605.0111	312, 315, 335
605.0112	312, 315, 335
605.0113	312, 315, 335
605.0114	312, 315, 336
605.0115	315, 335, 336
605.0116	315, 335
605.0301	335
605.0302	335
605.0303	335
605.0304	335
605.0401	335, 336
605.0501	335
605.0502	335
605.0503	335
605.0504	335, 336
605.0505	335, 336
605.0506	335
610.0100	341
610.1401	338
610.1402	338
610.1701	338
610.1702	338
610.1703	338
610.1704	338
610.1705	338
610.1706	338
610.1707	338
610.1901	338
610.1902	338
610.1903	338
610.1904	338
610.2201	338
610.2202	338
610.2203	338
610.2204	338
610.2205	338
610.2206	338
610.2701	338, 347
610.2702	338
610.2703	338
610.3350	584
610.3351	584
610.3399	584
610.3601	338
610.3602	338
610.3603	338
615.0001	315, 338
615.0002	315, 338
615.0003	315, 338
615.0004	315, 338
615.0101	336
615.0102	336
615.0103	336
615.0104	336
615.0501	336
615.0502	336
615.0503	336
615.0504	336
615.0505	336
615.0506	336
615.0507	336
615.0508	336
615.0901	337
615.0902	337
615.0903	337
615.0904	337
615.0905	337
615.0906	337
615.0907	337
615.0908	337

item	page
615.0909	337
615.1001	337
615.1002	337
615.1003	337
615.1004	337
615.1005	337
615.1006	337
615.1007	337
615.1008	337
615.1009	337
615.1101	337
615.1102	337
615.1103	337
615.3001	337
615.3002	337
615.3401	338
615.3402	338
615.3601	337
615.3602	337
615.3603	337
615.3604	337
615.3605	337
615.3606	337
615.3607	337
615.3608	337
615.3609	337
615.3610	337
615.4101	336
615.4102	336
615.4103	336
615.4301	336
615.4302	336
615.4303	336
615.4304	336
615.5101	336
615.5201	337
615.5202	337
615.5203	337
615.5301	337
615.5302	337
615.5401	337
615.5402	337
615.5403	337
615.5501	337
615.5502	337
615.5503	337
620.0101	315, 325, 330
620.0102	315, 327, 330
620.0103	315, 327, 330
620.0104	315, 327, 330
620.0105	315, 327, 330
620.0106	315, 327
620.0107	315, 327
620.0108	315, 327
620.0250	330
620.0301	315, 328
620.0302	315, 328
620.0303	315, 328
620.0304	315, 328
620.0305	315, 328
620.0306	315, 328
620.0307	315, 328
620.0501	315, 328
620.0502	315, 328
620.0503	315, 328
620.0504	315, 328
620.0505	315, 328
620.0506	315, 328
620.0507	315, 328
620.0508	315, 328
620.0509	315, 328
620.0510	315, 328
620.0511	315, 328
620.0512	315, 328
620.0513	315, 328
620.0701	315, 328
620.0702	315, 328
620.0703	315, 328
620.0704	315, 328
620.0705	315, 328
620.0706	315, 328
620.0707	315, 328
620.0708	315, 328
620.0709	315, 328
620.0710	315, 328
620.0711	315, 328
620.0901	315, 328
620.0902	315, 328
620.0903	315, 328
620.0904	315, 328
620.1101	315, 328
620.1102	315, 328
620.1103	315, 328
620.1104	315, 328
620.1301	315, 327
620.1302	315, 327
620.1303	315, 327
620.1304	315, 327
620.1305	315, 327
620.1306	315, 327
620.1701	312, 328, 334
620.1702	315, 328, 331
620.1703	312, 315, 334
620.1704	315, 328, 331
620.1705	312, 328, 331
620.1706	312, 315, 328
620.1850	331
620.1901	315, 328
620.1902	315, 328
620.1903	315, 328
620.1904	315, 328
620.3001	315, 330
620.3002	315, 330
620.3101	315, 325, 329
620.3102	315, 329
620.3103	315, 329
620.3401	315, 330
620.3402	315, 330
620.3601	315, 330
620.3602	315, 330
620.3603	315, 330
620.3604	315, 330
620.3605	315, 330
620.3606	315, 330
620.3607	315, 330
620.3608	315, 330
620.3609	315, 330
620.3610	315, 330
620.3801	315, 330
620.3802	315, 330
620.3803	315, 330
620.3804	315, 330
620.3805	315, 330
620.3806	315, 330
620.4101	315, 329
620.4102	315, 329
620.4103	315, 329
620.4301	315, 330
620.4302	315, 330
620.4303	315, 330
620.4304	315, 330
620.5201	315, 329
620.5202	315, 329
620.5203	315, 329
620.5301	315, 329
620.5302	315, 329
620.5401	315, 329
620.5402	315, 329
620.5403	315, 329
620.5501	315, 329
620.5502	315, 329
620.5503	315, 329
625.1701	331, 334
625.1703	331, 334
630.0101	315, 332
630.0102	315, 332
630.0103	315, 332
630.0104	315, 332
630.0301	315, 332
630.0302	315, 332
630.0901	315, 332
630.0902	315, 332
630.0903	315, 332
630.0904	315, 332
630.1101	315, 332
630.1102	315, 332
630.1103	315, 332
630.1104	315, 332
630.1701	315, 332, 334
630.1702	315, 332
630.1703	315, 332, 334
630.1704	315, 332
630.1901	315, 332
630.1902	315, 332
630.2301	315, 334
630.3001	315, 333
630.3002	315, 333
630.3101	315, 333
630.3102	315, 333
630.3103	315, 333
630.3401	315, 333
630.3402	315, 333
630.3601	315, 333
630.3602	315, 333
630.3603	315, 333
630.3604	315, 333
630.3605	315, 333
630.3606	315, 333
630.3607	315, 333
630.3608	315, 333
630.3609	315, 333
630.3610	315, 333
630.3801	315, 333
630.3802	315, 333
630.3803	315, 333
630.3804	315, 333
630.3805	315, 333
630.3806	315, 333
630.3807	315, 333
630.4101	315, 333
630.4102	315, 333
630.4103	315, 333
630.4301	315, 333
630.4302	315, 333
630.4303	315, 333
630.4304	315, 333
640.0010	315, 340
640.0020	315, 340
640.0030	315, 341
640.0110	315, 340
640.0120	315, 340
640.0130	315, 340
640.0140	315, 340
640.0150	315, 340
640.0160	315, 340
640.0165	315, 340
640.0170	315, 340
640.0180	315, 340
640.0190	315, 340
640.0210	315, 338
640.0215	315, 338
640.0217	315, 338
640.0220	315, 338
640.0230	315, 338
640.0250	315, 338
640.0310	315, 338
640.0315	315, 338
640.0317	315, 338
640.0320	315, 338
640.0330	315, 338
640.0350	315, 338
640.2315	315, 339
640.2317	315, 339
640.2415	315, 339
640.2417	315, 339
640.2420	315, 339
640.2430	316, 339
640.2450	316, 339
640.4203	332
640.4204	332
640.4205	332
645.0210	339
645.0215	339
645.0217	339
645.0220	339
645.0230	339
645.0250	339
645.0251	340
645.0252	340
645.0253	340
645.0254	340
645.0261	340
645.0262	340
645.0263	340
645.0310	339
645.0315	339
645.0317	339
645.0320	339
645.0330	339
645.0350	339
645.0351	340
645.0352	340
645.0353	340
645.0354	340
645.0361	340
645.0362	340
645.0363	340
645.2315	339
645.2316	339
645.2317	339
645.2415	339
645.2416	339
645.2417	339
645.2420	339
645.2421	339
645.2430	339
645.2431	339
645.2450	339
645.2451	339
645.2461	340
645.2462	340
645.2463	340
645.2464	340
650.0010	326
650.0011	318, 326
650.0012	318, 326
650.0013	318, 326
650.0014	318, 326
650.0015	318, 326
655.0011	326
655.0012	326
655.0013	326
655.0014	326
655.0015	326
655.0016	326
655.0017	326
655.0018	326
660.0011	324
660.0012	324
660.0013	325
660.0014	324
660.0015	324
660.0021	325
660.0022	325
660.0023	325
660.0101	319, 324
660.0102	319, 324
660.0103	319, 324
660.0104	319, 324
660.0105	319, 324
660.0106	319, 324, 325
660.0107	319, 324
660.0108	319, 324
660.0109	319, 324, 325
660.0111	319, 324
660.0112	319, 324
660.0113	319, 324
660.0114	319, 324, 325
660.0115	319, 324
660.0116	319, 324, 325
660.0117	319, 324
660.0118	319, 324
660.0119	319, 324, 325
660.0121	319, 324
660.0122	319, 324, 325
660.0123	319, 324
660.0124	319, 324
660.0125	319, 324, 325
660.0126	319, 324
660.0127	319, 324
660.0128	319, 324, 325
660.0501	324
660.0502	324
660.0503	324
660.0504	324
660.0505	324
660.0601	319, 324, 325
660.0602	316, 319, 324
660.0603	316, 324, 325
660.0604	316, 324, 325

item	page
660.0605	316, 324, 325
670.0001	347
670.0013	316, 347
670.0014	316, 347
670.0015	316, 347
670.0017	347
670.0018	347
670.0019	347
670.0020	347
670.0021	316, 355
670.0031	316, 355
670.0041	316, 355
670.0051	316, 355
670.0060	316, 344
670.0061	316, 344
670.0062	316, 344
670.0063	316, 344
670.0074	345, 346
670.0075	345
670.0076	346
670.0077	345, 346
670.0078	345, 346
670.0079	345
670.0091	347
670.0092	347
670.0093	347
670.0094	347
670.0095	347
670.0101	316, 344
670.0102	316, 344
670.0103	316, 344
670.0104	316, 344
670.0105	316, 344
670.0106	316, 344
670.0111	316, 346
670.0121	316, 346
670.0122	316, 346
670.0131	316, 346
670.0141	316, 346
670.0151	316, 347
670.0161	316, 346
670.0171	316, 347
670.0181	316, 347
670.0191	316, 342
670.0201	316, 342
670.0211	316, 342
670.0221	316, 325, 348
670.0231	316, 353
670.0232	316, 353
670.0233	316, 353
670.0241	316, 353
670.0251	347
7	
700.1100	316, 331, 334
700.1120	316, 331, 334
700.1130	316, 329, 334
700.1140	331, 334
700.1150	316, 354
700.1151	354
700.1152	354
700.1160	316, 355
700.1161	354, 355
700.1162	354, 355
700.1163	354, 355
700.1170	316, 354
700.1180	316, 354
700.1181	316, 354
700.1182	316, 354
700.1183	316, 354
700.1184	316, 354
700.1185	316, 343
700.1190	316, 329
700.1191	316, 343
700.1192	316, 343
700.1193	316, 343
700.1200	316, 331, 334
700.1202	331, 334
700.1203	331, 334
700.1204	331, 334
700.1205	331, 334
700.1206	331, 334
700.1207	331, 334
700.1208	331, 334, 352
700.1209	331, 334, 352
700.1210	331, 334
700.1220	331, 334
700.1221	331, 334
700.1222	331, 334
700.1223	331, 334
700.1231	343
700.1232	343
700.1233	343
700.1234	343
700.1235	343
700.1236	343
700.1237	343
700.1238	343
700.1239	343
700.1240	316, 343
700.1241	343
700.1242	343
700.1243	343
700.1244	343
700.1250	316, 353
700.1260	316, 329
700.1300	316, 331, 334
700.1311	330, 331, 334
700.1312	330, 331, 334
700.1313	331, 334
700.1314	330, 331, 334
700.1315	330, 331, 334
700.1316	330, 331, 334
700.1320	330
700.1348	327
700.1349	327
700.1350	327
700.1351	327
700.1352	327
700.1353	327
700.1354	327
700.1355	327
700.1356	327
700.1357	327
700.1358	327
700.1359	327
700.1360	327
700.1361	327
700.1362	327
700.1363	327
700.1364	327
700.1365	327
700.1366	327
700.1367	327
700.1368	327
700.1369	327
700.1370	327
700.1371	327
700.1372	327
700.1373	327
700.1374	327
700.1375	327
700.1376	327
700.1377	327
700.1378	327
700.1379	327
700.1380	327
700.1381	327
700.1382	327
700.1383	327
700.1384	327
700.1385	327
700.1386	327
700.1387	327
700.1388	327
700.1389	327
700.1390	327
700.1391	327
700.1392	327
700.1393	327
700.1394	327
700.1395	327
700.1396	327
700.1397	327
700.1398	327
700.1399	327
700.1400	316, 347
700.1400-1	316, 331, 352
700.1400-2	347
700.1400-3	347
700.1400-4	347
700.1400-5	316, 347
700.1400-7	347
700.1405	316
700.1410	316, 348
700.1411	348, 349
700.1412	348
700.1415	348, 349, 353
700.1420	316, 348
700.1421	348, 349
700.1423	349
700.1424	349
700.1425	349
700.1428	349
700.1430	349
700.1435	350
700.1436	350
700.1437	350
700.1438	350
700.1439	350
700.1440	350
700.1470	316, 348
700.1471	348
700.1472	348
700.1500	316, 326
700.1501	326
700.1502	326
700.1503	326
700.1504	326
700.1505	326
700.1506	326
700.1507	326
700.1508	326
700.1509	326
700.1510	326
700.1511	326
700.1550	351
700.1550-34	351
700.1550-36	351
700.1550-38	351
700.1550-40	351
700.1550-42	351
700.1550-44	351
700.1550-46	351
700.1550-48	351
700.1550-50	351
700.1550-52	351
700.1550-54	351
700.1550-56	351
700.1550-58	351
700.1550-60	351
700.1550-62	351
700.1550-64	351
700.1550-66	351
700.1550-68	351
700.1550-70	351
700.1550-72	351
700.1550-75	351
700.1550-80	351
700.1551	351
700.1551-01	351
700.1551-02	351
700.1552	351
700.1552-01	351
700.1552-02	351
700.1553	351
700.1553-01	351
700.1553-02	351
700.1554	351
700.1554-01	351
700.1554-02	351
700.1555	351
700.1556	351
700.1600	326
700.1601	326
700.1602	326
700.1603	326
700.1604	326
700.1605	326
700.1606	326
700.1607	326
700.1608	326
700.1609	326
700.1610	326
700.1611	326
700.1650	316, 352
700.1651	352
700.1652	352
700.1653	352
700.1654	352
700.1655	352
700.1656	352
700.1657	352
700.1658	352
700.1700	316, 351
700.1701	351
700.1702	351
700.1703	351
700.1704	351
700.1706	351
700.1707	351
700.1708	351
700.1709	351
700.1710	316, 351
700.1711	316, 351
700.1712	316, 351
700.1713	316, 351
700.1714	351
700.1715	351
700.1716	351
700.1717	351
700.1718	351
700.1719	351
700.1720	351
700.1721	351
700.1722	351
700.1723	351
700.1724	351
700.1725	351
700.1726	351
700.1727	351
700.1728	351
700.1729	351
700.1730	351
700.1731	351
700.1732	351
700.1733	351
700.1740	316, 348
700.1750	316, 352
700.1751	352
700.1751-1	352
700.1751-2	352
700.1754	352
700.1755	316, 352
700.1756	352
700.1757	316, 352
700.1758	352
700.1759	352
700.1760	351
700.1790	316, 341
700.1791	316, 341
700.1792	341
700.1793	341
700.1796	316, 341
700.5610	316, 345
700.5612	338
700.5615	316, 346
700.5620	316, 345
700.5625	316, 345
700.5630	316, 345
711.0000	495
711.0014	493
711.0016	449, 493
711.0017	494
711.0018	449, 451, 493
711.0021	490
711.0022	490
711.0023	495
711.0024	477
711.0025	449, 490
711.0026	477
711.0033	478
711.0034	491
711.0035	450, 451, 478
711.0036	478
711.0041	449, 478
711.0042	479
711.0047	479
711.0053	448, 482
711.0058	484
711.0061	481

item	page
711.0066	481
711.0073	451, 490
711.0075	486
711.0080	448, 450, 487
711.0090	486
711.0098	485
711.0128	488
711.0135	485
711.0136	482
711.0144	484
711.0160	488
711.0180	448, 450, 489
711.1012	448, 451, 491
711.1016	450, 492
711.1021	449, 493
711.1022	494
711.1024	490
711.1027	491
711.1029	451, 491
711.1031	448, 449, 482
711.1033	450, 495
711.1041	448, 495
711.1075	487
711.1095	480
711.1136	483
711.2012	479
711.2022	494
711.2030	477
711.2033	482
711.2036	492
711.3015	479
711.3031	449, 451, 480
711.3033	476
711.4015	479
711.5009	491
711.5018	492
711.5027	479
711.6017	448, 493
711.6027	449, 451, 491
711.7017	494
711.8024	490
711.8027	494
711.9013	492
712.0000	495
712.0001	448, 476
712.0009	470
712.0011	448, 450, 475
712.0012	449, 475
712.0014	470
712.0016	469
712.0020	475
712.0021	476
712.0023	473
712.0026	472
712.0027	469
712.0029	473
712.0034	471
712.0039	473
712.0057	450, 451, 474
712.0061	470
712.1008	476
712.1016	469
712.1029	472
712.1052	471
712.1057	475
712.2017	469
712.3005	469
712.3007	475
712.3011	469
712.4009	476
712.4040	474
712.5011	470
712.6030	472
712.7011	470
713.0000	448, 449, 468
713.0003	467
713.0004	453
713.0005	448, 453
713.0006	450, 465
713.0007	454
713.0008	465
713.0009	468
713.0011	453
713.0012	465
713.0013	461
713.0014	453
713.0015	462
713.0017	453
713.0019	450, 451, 465
713.0021	459
713.0026	461
713.0027	449, 464
713.0028	449, 460
713.0031	464
713.0032	463
713.0036	458
713.0039	459
713.0040	455
713.0042	456
713.0045	456
713.0101	450, 451, 457
713.1003	450, 451, 466
713.1004	466
713.1005	454
713.1006	465
713.1014	453
713.1017	457
713.2003	467
713.2004	449, 451, 454
713.2005	468
713.2006	467
713.2007	448, 467
713.2008	449, 451, 467
713.2009	465
713.2010	461
713.2011	454
713.2013	462
713.2014	468
713.2018	467
713.2023	448, 465
713.2024	458
713.2025	463
713.2046	456
713.2047	450, 457
713.3004	468
713.3005	450, 467
713.3006	465
713.3009	466
713.3018	460
713.3025	458
713.3047	463
713.4004	454
713.4006	466
713.4010	462
713.4013	463
713.4019	462
713.4024	460
713.4025	460
713.4026	461
713.4030	455
713.4037	455
713.4046	459
713.5004	466
713.5005	459
713.5006	450, 451, 466
713.6004	450, 466
713.7004	467
713.8004	466
713.8013	450, 468
713.9004	466
713.9005	465
713.9011	462
715.0116	450
715.0131	449
715.0171	448
715.0251	451
715.0299	450
715.0310	449
715.0316	448
715.0378	451
715.0404	450
715.0665	448
781.0024	477
781.0026	477
781.0031	477
781.0033	478
781.0035	478
781.0036	478
781.0041	478
781.0058	484
781.0061	481
781.0066	481
781.0075	486
781.0080	487
781.0090	487
781.0098	486
781.0128	488
781.0135	485
781.0136	483
781.0144	484
781.0160	489
781.0180	489
781.1075	488
781.1095	480
781.1136	483
781.2029	480
781.2030	477
781.3033	476
781.4031	448, 450, 480
782.0009	470
782.0023	473
782.0026	472
782.0027	469
782.0029	473
782.0034	471
782.0039	473
782.0057	474
782.0061	471
782.1029	472
782.1052	471
782.2017	469
782.3005	469
782.3011	470
782.4040	474
782.6030	472
783.0004	453
783.0005	454
783.0007	454
783.0011	453
783.0013	461
783.0015	462
783.0017	453
783.0021	459
783.0026	461
783.0027	448, 464
783.0028	461
783.0031	464
783.0032	463
783.0036	458
783.0039	459
783.0040	455
783.0042	456
783.0045	456
783.1017	457
783.2004	454
783.2005	454
783.2010	461
783.2013	463
783.2024	458
783.2025	463
783.2046	456
783.2047	457
783.3018	460
783.3025	458
783.3047	464
783.4010	462
783.4013	463
783.4019	462
783.4024	460
783.4025	460
783.4026	461
783.4030	455
783.4037	455
783.4046	459
783.5005	460
783.9011	462
8	
800.0015	428
800.0020	427
800.0021	428
800.0030	428
800.0031	428
800.0920	468, 476, 495
800.0960	428
801.0003	437
835.0004	438
835.0005	438
835.0007	438
835.0009	438
835.0014	438
836.0004	438
836.0005	438
836.0007	438
836.0009	438
836.0014	438
837.0004	438
837.0005	438
837.0007	438
837.0009	438
837.0014	438
838.0004	439
838.0005	439
838.0007	439
838.0009	439
838.0014	439
850.0300	436
850.0302	436
850.0303	436
850.0304	436
850.0305	436
850.0310	437
850.0325	436
850.0340	437
850.0345	437
850.0350	437
850.0355	437
850.0360	437
850.0502	420
850.0503	420
850.0505	437
850.0520	436
850.0530	436
850.0540	436
850.0560	436
860.0801	422
860.0802	422
860.0803	422
860.0804	422
860.0805	422
860.0806	422
860.0807	422
860.0809	422
860.0810	422
860.0811	422
860.0812	422
860.0813	422
860.0814	422
860.0815	422
860.0816	422
860.0817	422
860.0818	422
860.0819	422
860.0820	422
860.0821	422
860.0822	422
860.0823	423
860.0824	423
860.0825	423
860.0826	423
860.0827	423
860.0828	423
860.0829	423
860.0830	423
860.0831	423
860.0832	423
860.0833	423
860.0834	423
860.0835	423
860.0836	423
860.0837	423
860.0838	423
860.0839	423
860.0840	423
860.0841	423
860.0842	423
860.0843	423
860.0844	423
860.0845	424
860.0846	424
860.0847	425

item	page
860.0848	425
860.0849	424
860.0850	424
860.0851	424
860.0852	424
860.0853	424
860.0854	424
860.0855	424
860.0856	424
860.0857	424
860.0858	424
860.0859	424
860.0860	424
860.0861	424
860.0862	424
860.0863	424
860.0864	425
860.0865	425
860.0866	425
860.0867	425
860.0868	425
860.0869	425
860.0870	425
860.0871	425
860.0872	426
860.0873	425
860.0874	423
860.0875	423
860.0876	424
860.0877	424
860.0878	425
860.0879	425
860.0880	426
860.0881	426
860.0882	425
860.0883	425
860.0884	425
860.0885	426
860.0886	426
860.0887	426
860.0888	422
860.0889EB	426
860.0889HB	426
860.0889LB	426
860.0889LG	427
860.0889RG	427
860.0889RW	427
860.0889SG	427
860.0889TS	427
860.0889VG	427
860.0889VR	427
860.0890EB	426
860.0890HB	426
860.0890LB	426
860.0890LG	427
860.0890RG	427
860.0890RW	427
860.0890SG	427
860.0890TS	427
860.0890VG	427
860.0890VR	427
860.0891EB	426
860.0891HB	426
860.0891LB	426
860.0891LG	427
860.0891RG	427
860.0891RW	427
860.0891SG	427
860.0891TS	427
860.0891VG	427
860.0891VR	427
860.0892EB	426
860.0892HB	426
860.0892LB	426
860.0892LG	427
860.0892RG	427
860.0892RW	427
860.0892SG	427
860.0892TS	427
860.0892VG	427
860.0892VR	427
860.0894	426
860.0895	426
865.0000	420
865.0001	418
865.0002	418
865.0003	419
865.0004	419
865.0005	421
865.0006	419
865.0007	419
865.0008	420
865.0009	420
865.0010	418
865.0011	419
865.0012	418
865.0013	418
865.0101	419
865.0201	420
865.0205	420
875.0004	439
875.0005	439
875.0007	439
875.0009	439
875.0014	439
875.0016	441
875.0018	441
875.9915	442
875.9920	442
875.9925	442
875.9926	442
875.9930	442, 444
875.9940	439, 442, 444
875.9941	439, 442, 444
875.9942	439, 442, 444
875.9943	439, 442, 444
875.9944	439, 442, 444
875.9945	439, 442, 444
875.9946	439, 442, 444
876.0004	440
876.0005	440
876.0007	440
876.0009	440
876.0014	440
876.0016	441
876.0018	441
877.0004	440
877.0005	440
877.0007	440
877.0009	440
877.0014	440
877.0016	441
877.0018	441
878.0004	440
878.0005	440
878.0006	441
878.0007	440
878.0008	441
878.0009	440
878.0012	441
878.0014	440
878.0016	441
878.0018	441
878.1014	441
885.0004	442
885.0005	442
885.0007	442
885.0009	442
885.0014	442
885.9901	442, 444
885.9910	445
885.9911	445
885.9915	444
885.9920	444
885.9925	445
885.9926	445
885.9930	445
885.9931	445
885.9935	444
885.9936	444
885.9940	445
885.9941	445
885.9945	445
885.9946	445
885.9950	445
885.9951	445
885.9955	445
885.9956	445
885.9960	445
885.9961	445
886.0004	443
886.0005	443
886.0007	443
886.0009	443
886.0014	443
887.0004	443
887.0005	443
887.0007	443
887.0009	443
887.0014	443
888.0004	443
888.0005	443
888.0007	443
888.0009	443
888.0014	443
888.9902	442, 444
890.0002	427
891.0003	437
9	
903.6000	281
907.1105	525
907.1106	525
907.2100	525
907.2102	525
907.2103	525
907.2104D	540
907.2105	541
907.2105D	541
907.2110	525
907.2115	525
907.2120	540
907.2125	525
907.2130	525
907.2131	525
907.2135	540
907.2140	542
907.2141	541
907.2145	541
907.2145D	541
907.2150	542
907.2152	540
907.2155	542
907.2157	540
907.2158	540
907.2159	542
907.2160	542
907.2163	542
907.2164	542
907.2165	540
907.2166	542
907.2167	540
907.2168	542
907.2170	541
907.2172	541
907.2173	541
907.2174	541
907.2175	540
907.2175D	540
907.2176	542
907.2180	540
907.2195	541
907.2195D	541
907.2196	542
907.2200	547
907.2202	547
907.2203	547
907.2204	547
907.2205	547
907.2206	542
907.2210	547
907.2211	547
907.2212	547
907.2213	547
907.2214	547
907.2215	546
907.2230	547
907.2231	547
907.2232	547
907.2233	547
907.2234	547
907.2240	546
910.1114	186
911.0007	75, 98, 118
911.0009	76, 98, 118
911.0100	86, 125
911.0106	74, 117, 128
911.0136	234
911.0300	126
911.0310	126
911.0320	88
911.0330	88
911.0340	104
911.0350	105
911.0360	46
911.0361	46
911.0362	46
911.0363	46
911.0364	46
911.0365	46
911.0366	46
911.0370	45
911.0371	45
911.0372	45
911.0373	45
911.0374	45
911.0375	45
911.0376	45
911.0606	90
911.0608	88
911.0609	90
911.0611	89
911.0620	120
911.0623	78
911.0625	78
911.0626	100
911.0646	79
911.0650	122
911.0651	80
911.0653	80
911.0661	101
911.0670	81
911.0682	82
911.0688	85
911.0694	82
911.0708	84
911.0721	129
911.0722	129
911.0727	85
911.0735	85
911.0751	129
911.0752	129
911.0801	130
911.0802	130
911.0803	130
911.0804	130
911.0814	131
911.0815	131
911.0822	131
911.0824	131
911.0833	79
911.0901	140
911.0903	139
911.0904	139
911.0905	139
911.0906	139
911.0907	139
911.0908	139
911.0909	139
911.0911	139
911.0912	139
911.0913	139
911.0914	139
911.0915	139
911.0916	139
911.0917	139
911.0918	139
911.0919	139
911.0920	139
911.0921	139
911.0922	139
911.0924	139
911.0925	139
911.0926	139
911.0927	139
911.0928	139
911.0929	139
911.0930	139
911.0931	139
911.0932	139
911.0933	139

item	page
911.0934	140
911.0935	140
911.0936	140
911.0937	140
911.0938	140
911.0939	140
911.0940	140
911.0941	140
911.0942	140
911.0943	140
911.0944	140
911.0945	140
911.0946	140
911.0947	140
911.0948	140
911.0949	140
911.0950	140
911.0951	140
911.0952	140
911.0953	140
911.0955	139
911.0956	139
911.0957	139
911.0958	136
911.0959	136
911.0960	139
911.0961	136
911.0962	136
911.0963	136
911.0964	136
911.0965	139
911.0966	139
911.0967	139
911.0968	139
911.0969	136
911.0970	139
911.0972	139
911.0974	139
911.0977	139
911.0979	139
911.1019	131
911.1020	131
911.1021	130
911.1022	130
911.1023	130
911.1024	130
911.1025	130
911.1026	130
911.1027	130
911.1028	130
911.1029	130
911.1031	130
911.1032	130
911.1033	130
911.1034	130
911.1035	130
911.1036	130
911.1037	130
911.1038	130
911.1039	130
911.1040	131
911.1041	130
911.1042	130
911.1043	130
911.1044	130
911.1045	130
911.1046	130
911.1047	130
911.1048	130
911.1049	130
911.1050	130
911.1051	130
911.1052	130
911.1053	130
911.1054	130
911.1055	130
911.1056	130
911.1057	130
911.1058	130
911.1059	130
911.1060	130
911.1061	130
911.1062	130
911.1063	130
911.1064	130
911.1065	130
911.1066	130
911.1067	130
911.1068	130
911.1069	130
911.1070	130
911.1071	130
911.1072	130
911.1073	130
911.1074	130
911.1075	130
911.1076	130
911.1077	130
911.1078	130
911.1079	130
911.1080	130
911.1081	130
911.1082	130
911.1083	130
911.1084	130
911.1093	130
911.1094	130
911.1095	130
911.1096	130
911.1097	130
911.1098	130
911.1120	77, 232
911.1125	49, 232
911.1126	49, 232
911.1127	49, 232
911.1128	49, 232
911.1129	187, 232, 240
911.1130	231
911.1131	231
911.1132	231
911.1133	231
911.1134	231
911.1135	231
911.1136	231
911.1137	231
911.1138	231
911.1139	231
911.1141	231
911.1142	231
911.1144	231
911.1145	187, 232, 240
911.1146	231
911.1150	231
911.1151	231
911.1152	231
911.1153	231
911.1154	231
911.1155	231
911.1156	231
911.1157	231
911.1158	231
911.1160	231
911.1161	231
911.1162	231
911.1163	231
911.1164	231
911.1165	231
911.1166	231
911.1167	231
911.1168	231
911.1170	232
911.1171	235
911.1172	187, 235, 240
911.1175	49, 236
911.1176	49, 236
911.1177	49, 236
911.1178	49, 236
911.1180	237
911.1181	231
911.1182	231
911.1183	231
911.1184	231
911.1185	231
911.1186	231
911.1187	231
911.1188	231
911.1190	187, 232, 240
911.1191	232
911.1192	232
911.1193	232
911.1194	232
911.1195	232
911.1196	232
911.1197	232
911.1198	187, 232, 240
911.1199	187, 232, 240
911.1200	119
911.1201	118
911.1202	118
911.1203	118
911.1204	118
911.1205	109
911.1206	109
911.1207	97, 117
911.1233	117
911.1234	117
911.1235	118
911.1250	117
911.1253	116
911.1268-1	241
911.1271	241
911.1275	241
911.1276	241
911.1283-1	241
911.1284-1	241
911.1285	106
911.1286	241
911.1287	241
911.1304	110
911.1305	110
911.1306	110
911.1307	110
911.1308	110
911.1309	110
911.1310	110
911.1312	110
911.1313	113
911.1314	110
911.1315	118
911.1316	118
911.1317	110
911.1318	118
911.1319	110
911.1320	110
911.1321	110
911.1322	110
911.1323	118
911.1324	110
911.1325	111
911.1326	111
911.1327	111
911.1328	111
911.1329	111
911.1330	111
911.1331	119
911.1332	111
911.1335	114
911.1336	111
911.1337	111
911.1338	119
911.1339	111
911.1340	113
911.1341	113
911.1342	113
911.1343	113
911.1344	113
911.1345	113
911.1346	113
911.1347	113
911.1349	113
911.1350	114
911.1351	114
911.1352	114
911.1353	114
911.1354	114
911.1355	114
911.1356	114
911.1358	114
911.1359	114
911.1361	112
911.1362	112
911.1363	112
911.1364	112
911.1365	112
911.1366	112
911.1367	112
911.1368	112
911.1369	112
911.1370	112
911.1371	112
911.1372	112
911.1373	112
911.1374	112
911.1375	112
911.1376	112
911.1377	112
911.1378	112
911.1379	112
911.1380	112
911.1381	118
911.1382	118
911.1383	118
911.1384	118
911.1385	112
911.1386	113
911.1400	77
911.1401	70
911.1402	70
911.1403	70
911.1415	70
911.1416	70
911.1417	70
911.1418	70
911.1419	70
911.1420	70
911.1421	70
911.1422	75
911.1423	75
911.1424	75
911.1425	75
911.1434	77
911.1436	71
911.1437	71
911.1438	71
911.1439	71
911.1440	71
911.1441	71
911.1442	71
911.1443	71
911.1444	71
911.1445	71
911.1446	71
911.1447	71
911.1448	71
911.1449	71
911.1450	74
911.1451	75
911.1458	71
911.1460	72
911.1461	72
911.1462	72
911.1463	72
911.1464	72
911.1465	72
911.1466	72
911.1467	72
911.1468	72
911.1470	73
911.1471	73
911.1472	73
911.1473	73
911.1474	73
911.1475	73
911.1476	73
911.1477	73
911.1478	71
911.1480	73
911.1482	70
911.1483	70
911.1485	72
911.1486	75
911.1494	74
911.1495	78
911.1504	75
911.1506	76
911.1507	76
911.1508	76
911.1509	76
911.1510	77
911.1512	109

item	page
911.1513	109
911.1514	109
911.1517	112
911.1518	112
911.1519	112
911.1520	112
911.1521	112
911.1522	112
911.1523	112
911.1524	112
911.1525	112
911.1526	112
911.1527	112
911.1528	112
911.1529	112
911.1543	76
911.1544	71
911.1547	72
911.1550	94
911.1551	94
911.1552	94
911.1553	94
911.1554	94
911.1555	94
911.1556	94
911.1557	94
911.1558	94
911.1559	94
911.1560	93
911.1561	93
911.1562	93
911.1563	93
911.1564	93
911.1565	93
911.1566	93
911.1567	93
911.1570	106
911.1571	106
911.1572	106
911.1573	106
911.1574	106
911.1575	106
911.1576	106
911.1577	106
911.1578	106
911.1579	106
911.1580	106
911.1581	106
911.1582	106
911.1583	106
911.1584	106
911.1585	106
911.1586	106
911.1587	106
911.1589	106
911.1590	109
911.1595	121
911.1630	115
911.1641	231
911.1642	231
911.1643	231
911.1644	231
911.1645	231
911.1646	231
911.1647	231
911.1648	231
911.1649	231
911.1650	111
911.1651	231
911.1652	231
911.1653	231
911.1654	231
911.1655	111
911.1656	111
911.1657	111
911.1658	111
911.1659	111
911.1660	111
911.1662	111
911.1667	111
911.1669	111
911.1670	231
911.1671	231
911.1672	231
911.1673	231
911.1674	231
911.1805	130
911.1806	130
911.1807	130
911.1808	130
911.1809	130
911.1811	130
911.1921	114
911.1922	114
911.1923	114
911.1924	114
911.1925	114
911.1926	114
911.1980	114
911.1993	114
911.1994	114
911.1995	114
911.1996	114
911.1997	114
911.2000	197
911.2026	196
911.2027	197, 201
911.2029	195
911.2031	197, 201
911.2060	194
911.2070	194
911.2080	196
911.2085	196
911.2101	233
911.2110	232
911.2115	233
911.2120	232
911.2125	233
911.2130	232
911.2150	233
911.2175	283
911.2200	197
911.2201	191
911.2202	191
911.2204	191
911.2205	191
911.2207	191
911.2208	191
911.2210	198
911.2211	198
911.2213	198
911.2214	198
911.2216	198
911.2217	198
911.2219	192
911.2220	192
911.2222	192
911.2223	192
911.2225	192
911.2226	192
911.2228	198
911.2229	198
911.2231	198
911.2232	198
911.2234	198
911.2235	198
911.2237	190
911.2238	190
911.2240	190
911.2241	190
911.2243	190
911.2244	190
911.2246	190
911.2247	190
911.2249	190
911.2250	190
911.2252	190
911.2253	190
911.2255	191
911.2256	191
911.2258	191
911.2259	191
911.2261	191
911.2262	191
911.2264	191
911.2265	191
911.2267	191
911.2268	191
911.2270	191
911.2271	191
911.2273	192
911.2274	192
911.2276	192
911.2277	192
911.2279	192
911.2280	192
911.2282	192
911.2283	192
911.2285	192
911.2286	192
911.2288	192
911.2289	192
911.2291	192
911.2292	192
911.2294	192
911.2295	192
911.2297	192
911.2298	192
911.2300	192
911.2301	192
911.2303	192
911.2304	192
911.2306	192
911.2307	192
911.2309	192
911.2310	192
911.2312	192
911.2313	192
911.2315	192
911.2316	192
911.2318	192
911.2319	192
911.2321	192
911.2322	192
911.2324	192
911.2325	192
911.2327	192
911.2328	192
911.2330	192
911.2331	192
911.2334	192
911.2335	192
911.2341	192
911.2342	192
911.2344	192
911.2345	192
911.2347	192
911.2348	192
911.2350	192
911.2351	192
911.2353	192
911.2377	191
911.2386	191
911.2392	190
911.2393	192
911.2394	191
911.2396	191
911.2397	192
911.2399	191
911.2400	233
911.2470	188, 240
911.2475	188, 241
911.2492	190
911.2620	202
911.2621	202
911.2622	202
911.2623	202
911.2624	202
911.2625	202
911.2626	202
911.2627	202
911.2632	202
911.2633	202
911.2634	202
911.2635	202
911.2636	202
911.2637	202
911.2638	202
911.2639	202
911.2640	202
911.2641	202
911.2642	202
911.2643	202
911.2644	202
911.2645	202
911.2646	202
911.2647	202
911.2648	202
911.2649	202
911.2701	198
911.2702	198
911.2704	198
911.2705	198
911.2707	198
911.2708	198
911.2710	198
911.2711	198
911.2713	198
911.2714	198
911.2716	199
911.2717	199
911.2719	199
911.2720	199
911.2722	199
911.2723	199
911.2725	199
911.2726	199
911.2728	199
911.2729	199
911.2731	199
911.2732	199
911.2734	199
911.2735	199
911.2737	199
911.2738	199
911.2740	199
911.2741	199
911.2743	199
911.2744	199
911.2746	198
911.2747	198
911.2749	198
911.2750	198
911.2752	198
911.2753	198
911.2755	198
911.2756	198
911.2758	198
911.2759	198
911.2761	198
911.2762	198
911.2764	198
911.2765	198
911.2767	198
911.2768	198
911.2770	199
911.2771	199
911.2773	199
911.2774	199
911.2776	199
911.2777	199
911.2779	199
911.2780	199
911.2782	199
911.2783	199
911.2785	199
911.2786	199
911.2788	199
911.2789	199
911.2791	199
911.2792	199
911.2794	199
911.2795	199
911.2797	199
911.2798	199
911.2800	198
911.2801	198
911.2803	198
911.2804	198
911.2806	198
911.2807	198
911.2809	198
911.2810	198
911.2812	198
911.2813	198
911.2815	198
911.2816	198
911.2818	198
911.2819	198
911.2821	198

item	page
911.2822	198
911.2824	198
911.2825	198
911.2833	192
911.2836	192
911.2840	193
911.2840D	193
911.2845	193
911.2845D	194
911.2901	193
911.2902	193
911.2904	193
911.2905	193
911.2907	193
911.2908	193
911.2910	193
911.2911	193
911.2913	193
911.2914	193
911.2916	193
911.2917	193
911.2919	193
911.2920	193
911.2922	193
911.2923	193
911.2925	193
911.2926	193
911.2928	193
911.2929	193
911.2931	193
911.2932	193
911.2934	191
911.2935	191
911.2937	191
911.2938	191
911.2940	191
911.2941	191
911.2943	191
911.2944	191
911.2946	191
911.2947	191
911.2949	191
911.2950	191
911.2952	191
911.2953	191
911.2955	191
911.2956	191
911.2958	191
911.2959	191
911.2961	191
911.2962	191
911.2964	191
911.2965	191
911.2967	191
911.2968	191
911.3101	192
911.3102	192
911.3103	192
911.3104	192
911.3105	192
911.3106	192
911.3107	192
911.3111	192
911.3112	192
911.3113	192
911.3114	192
911.3115	192
911.3116	192
911.3117	192
911.3121	207
911.3122	207
911.3123	207
911.3124	207
911.3125	207
911.3240	192
911.3241	192
911.3242	192
911.3243	192
911.3244	192
911.3260	206
911.3261	206
911.3262	206
911.3263	206
911.3264	206
911.3303	190
911.3304	190
911.3305	190
911.3306	190
911.3307	190
911.3308	190
911.3309	190
911.3310	190
911.3311	190
911.3312	190
911.3313	190
911.3314	190
911.3315	198
911.3316	198
911.3317	198
911.3318	198
911.3319	198
911.3320	198
911.3321	198
911.3322	198
911.3323	198
911.3324	198
911.3325	198
911.3326	198
911.3327	198
911.3328	198
911.3329	198
911.3330	198
911.3331	198
911.3332	198
911.3333	191
911.3334	191
911.3335	191
911.3336	191
911.3337	191
911.3338	191
911.3339	198
911.3340	198
911.3341	198
911.3342	198
911.3345	192
911.3346	192
911.3347	198
911.3348	198
911.3349	198
911.3350	198
911.3351	192
911.3352	192
911.3353	192
911.3354	192
911.3355	192
911.3356	192
911.3357	192
911.3358	192
911.3359	192
911.3360	192
911.3363	192
911.3364	192
911.3365	199
911.3366	199
911.3367	199
911.3368	199
911.3369	199
911.3370	199
911.3371	199
911.3372	199
911.3373	199
911.3374	199
911.3375	199
911.3376	199
911.3377	200
911.3378	200
911.3379	200
911.3380	200
911.3381	200
911.3382	200
911.3389	192
911.3390	192
911.3391	192
911.3392	192
911.3393	192
911.3394	192
911.3395	192
911.3396	192
911.3397	192
911.3398	192
911.3399	192
911.3400	128
911.3401	128
911.3402	128
911.3403	128
911.3404	128
911.3405	128
911.3406	127
911.3407	127
911.3408	127
911.3409	127
911.3410	129
911.3411	127
911.3412	127
911.3413	127
911.3414	127
911.3416	127
911.3418	127
911.3419	127
911.3421	127
911.3422	127
911.3423	127
911.3424	127
911.3425	127
911.3426	127
911.3427	127
911.3428	127
911.3429	127
911.3430	127
911.3431	127
911.3432	127
911.3433	127
911.3435	127
911.3436	127
911.3437	127
911.3438	127
911.3439	127
911.3441	127
911.3442	127
911.3443	127
911.3444	127
911.3445	127
911.3446	127
911.3447	127
911.3448	127
911.3449	127
911.3450	127
911.3451	127
911.3452	127
911.3453	127
911.3454	127
911.3455	127
911.3456	127
911.3457	127
911.3458	127
911.3459	127
911.3461	127
911.3462	127
911.3463	127
911.3464	127
911.3465	127
911.3466	127
911.3467	127
911.3468	127
911.3469	127
911.3471	127
911.3472	127
911.3473	128
911.3490	128
911.3500	192
911.3517	127
911.3518	127
911.3519	127
911.3521	127
911.3522	127
911.3523	127
911.3524	127
911.3525	127
911.3526	127
911.3527	127
911.3528	127
911.3529	127
911.3530	127
911.3531	127
911.3532	127
911.3533	127
911.3534	127
911.3535	127
911.3536	127
911.3537	127
911.3538	127
911.3539	127
911.3541	127
911.3542	127
911.3543	127
911.3544	127
911.3545	127
911.3546	127
911.3547	127
911.3548	127
911.3549	127
911.3550	127
911.3557	127
911.3558	191
911.3559	191
911.3561	191
911.3563	191
911.3565	191
911.3566	191
911.3567	191
911.3568	191
911.3569	191
911.3570	191
911.3571	191
911.3572	191
911.3573	191
911.3574	191
911.3575	191
911.3576	191
911.3577	191
911.3578	198
911.3579	198
911.3580	198
911.3581	198
911.3582	191
911.3583	191
911.3584	191
911.3585	191
911.3586	191
911.3587	191
911.3588	191
911.3589	191
911.3590	191
911.3591	191
911.3592	191
911.3593	191
911.3594	193
911.3595	193
911.3596	193
911.3597	193
911.3598	127
911.3599	127
911.3611	191
911.3612	191
911.3613	191
911.3614	191
911.3615	191
911.3616	191
911.3617	191
911.3618	191
911.3619	191
911.3620	191
911.3621	191
911.3622	191
911.3625	193
911.3626	193
911.3627	193
911.3628	193
911.3629	193
911.3630	193
911.3631	193
911.3632	193
911.3633	193
911.3634	193
911.3635	193
911.3636	193
911.3637	193
911.3638	193
911.3639	193
911.3640	193

item	page
911.3641	203
911.3642	203
911.3643	203
911.3644	203
911.3645	203
911.3646	203
911.3650	202
911.3651	202
911.3652	202
911.3653	202
911.3654	202
911.3655	202
911.3656	202
911.3657	202
911.3658	202
911.3659	202
911.3660	202
911.3661	202
911.3662	202
911.3663	202
911.3664	202
911.3665	202
911.3666	202
911.3667	202
911.3668	202
911.3669	202
911.3670	202
911.3671	202
911.3672	202
911.3673	202
911.3674	202
911.3675	202
911.3676	202
911.3677	202
911.3678	202
911.3679	202
911.3680	205
911.3681	205
911.3682	205
911.3683	205
911.3684	205
911.3685	205
911.3686	205
911.3687	205
911.3688	205
911.3689	205
911.3690	205
911.3691	205
911.3692	205
911.3693	205
911.3694	205
911.3695	205
911.3696	205
911.3697	205
911.3698	205
911.3699	206
911.3700	191
911.3701	191
911.3702	191
911.3703	191
911.3704	191
911.3705	191
911.3706	191
911.3707	191
911.3708	191
911.3709	191
911.3710	191
911.3711	191
911.3713	191
911.3714	191
911.3715	191
911.3717	191
911.3718	191
911.3719	191
911.3720	191
911.3721	191
911.3722	191
911.3723	191
911.3724	191
911.3725	191
911.3754	206
911.3755	231
911.3756	231
911.3757	231
911.3758	231
911.3759	231
911.3760	231
911.3800	100
911.3801	98
911.3802	98
911.3803	98
911.3804	92
911.3805	92
911.3823	92
911.3826	97
911.3840	90
911.3841	90
911.3842	90
911.3843	90
911.3844	90
911.3845	90
911.3846	90
911.3847	90
911.3848	90
911.3849	90
911.3850	97
911.3851	90
911.3852	98
911.3855	98
911.3856	98
911.3862	93
911.3863	93
911.3864	93
911.3865	93
911.3866	93
911.3867	93
911.3868	93
911.3869	94
911.3870	94
911.3871	94
911.3872	94
911.3873	94
911.3874	94
911.3875	92
911.3876	92
911.3877	92
911.3878	92
911.3879	92
911.3880	92
911.3881	92
911.3882	92
911.3883	92
911.3884	94
911.3885	94
911.3887	94
911.3888	94
911.3889	94
911.3892	96
911.3894	96
911.3897	96
911.3908	92
911.3909	92
911.3910	98
911.3911	98
911.3912	98
911.3913	98
911.3914	98
911.3915	96
911.3916	96
911.3917	96
911.3918	96
911.3920	96
911.3921	94
911.3922	94
911.3923	96
911.3925	99
911.3930	91
911.3935	94
911.3940	95
911.3945	93
911.3946	92
911.3947	92
911.3948	92
911.3949	92
911.3950	99
911.3951	115
911.3952	115
911.3953	115
911.3954	115
911.3955	115
911.3956	115
911.3957	115
911.3958	115
911.3959	115
911.3960	95
911.3961	95
911.3962	95
911.3963	95
911.3964	95
911.3965	95
911.3966	95
911.3967	95
911.3968	95
911.3969	95
911.3970	95
911.3971	95
911.3972	95
911.3973	95
911.3974	95
911.3975	95
911.3976	95
911.3977	95
911.3978	95
911.3979	95
911.3980	95
911.3981	90
911.3982	90
911.3983	90
911.3984	90
911.3985	90
911.3986	90
911.3987	90
911.3988	90
911.3989	90
911.3990	92
911.3992	90
911.3993	90
911.3994	90
911.3995	100
911.3996	90
911.3997	90
911.3998	90
911.4000	90
911.4001	90
911.4002	90
911.4003	90
911.4004	90
911.4005	90
911.4006	90
911.4301-1	81, 102, 121
911.4301-2	81, 102, 122
911.4302	80, 102, 122
911.4304	208
911.4305	80, 122, 208
911.4306	206
911.4307	80
911.4310	208
911.4311	96
911.4312	116
911.4313	70
911.4314	70
911.4315	70
911.4316	70
911.4317	70
911.4318	91
911.4319	91
911.4320	91
911.4321	91
911.4322	108
911.4323	108
911.4324	108
911.4325	108
911.4326	108
911.4327	74
911.4328	96
911.4331	96
911.4332	70
911.4333	108
911.4334	108
911.4335	108
911.4336	108
911.4337	74
911.4338	91
911.4339	91
911.4340	91
911.4341	91
911.4342	91
911.4343	91
911.4344	91
911.4345	91
911.4350	70
911.4351	116, 241
911.4355	70
911.4410	108
911.4420	108
911.4423	108
911.4424	108
911.4425	108
911.4426	108
911.4427	108
911.4428	108
911.4429	108
911.4430	108
911.4431	108
911.4500	73
911.4651	191
911.4652	191
911.5020	207
911.5030	208
911.5040	208
911.5121	205
911.5122	205
911.5123	205
911.5124	205
911.5126	205
911.5127	205
911.5128	205
911.5129	205
911.5130	205
911.5131	205
911.5132	205
911.5133	205
911.5134	205
911.5135	205
911.5136	205
911.5137	205
911.5138	205
911.5139	205
911.5140	205
911.5141	205
911.5142	205
911.5143	205, 241
911.5144	205
911.5145	205
911.5146	205
911.5147	205
911.5148	205
911.5149	205
911.5152	205
911.5154	205
911.5155	205
911.5156	205
911.5157	205
911.5158	205
911.5159	205
911.5165	206
911.5166	206
911.5167	206
911.5168	206
911.5169	206
911.5170	206
911.5171	206
911.5172	206
911.5173	206
911.5174	206
911.5175	206
911.5176	206
911.5177	206
911.5260	193
911.5261	193
911.5262	193
911.5263	193
911.5264	193
911.5265	193
911.7501	200
911.7502	200
911.7503	200
911.7504	200
911.7505	200
911.7506	200

item	page
911.7507	200
911.7508	200
911.7509	200
911.7510	200
911.7511	200
911.7512	200
911.7513	200
911.7514	200
911.7515	200
911.7516	200
911.7517	200
911.7518	200
911.7519	201
911.7520	201
911.7521	201
911.7522	201
911.7523	200
911.7524	200
911.7525	200
911.7526	200
911.7527	200
911.7528	200
911.7529	200
911.7530	199
911.7531	199
911.7532	201
911.7533	199
911.7534	199
911.7535	199
911.7536	199
911.7537	199
911.7539	199
911.7550	201
911.7551	200
911.7552	200
911.7553	200
911.7554	200
911.7555	200
911.7556	200
911.7557	200
911.7558	199
911.7559	199
911.7560	199
911.7561	199
911.7562	199
911.7563	199
911.7701	200
911.7702	200
911.7703	200
911.7704	200
911.7705	200
911.7706	200
911.7707	200
911.7708	200
911.7709	200
911.7710	200
911.7711	200
911.7712	200
911.7713	200
911.7714	200
911.7715	200
911.7716	200
911.7717	200
911.7718	200
911.7719	201
911.7720	201
911.7721	201
911.7722	201

item	page
911.7723	200
911.7724	200
911.7725	200
911.7726	200
911.7727	200
911.7728	200
911.7729	200
911.7730	199
911.7731	199
911.7733	199
911.7734	199
911.7735	199
911.7736	199
911.7737	199
911.7739	199
911.7751	200
911.7752	200
911.7753	200
911.7754	200
911.7755	200
911.7756	200
911.7757	200
911.7758	199
911.7759	199
911.7760	199
911.7761	199
911.7762	199
911.7763	199
911.8126	546
911.8127	546
911.8130	547, 568
911.8131	547, 568
911.8132	547, 568
911.8133	547, 568
911.8134	547, 568
913.1240	137
913.1249	136, 137
913.1250	136, 137
913.1252	136, 137
913.1253	136, 137
913.1255	136, 137
913.1270	137
913.1271	137
913.1272	137
913.1273	137
913.1280	137
913.1281	137
913.1282	137
913.1283	137
913.1290	137
913.1291	137
913.1292	137
913.1293	137
913.1295	137
913.1408	132
913.1410	132
913.1412	132
913.1460	132, 137
913.1461	136
913.1462	136
913.1463	136
913.1464	136
913.1465	136
913.1466	136
913.1467	136
913.1468	136
913.1469	136
913.1470	132

item	page
913.1473	132
913.3800	91
913.3810	91
913.3811	91
913.3812	91
913.3813	91
913.3814	91
913.3815	91
913.3816	91
913.3817	91
913.3818	91
913.3819	91
913.3855	134
913.3860	134
913.3861	134
913.3862	134
913.3863	134
913.3864	134
913.3865	134
913.3866	134
913.3867	134
913.3868	134
913.3869	134
913.3870	134
913.3900	92
913.3910	91
913.3911	91
913.3912	91
913.3913	91
913.3914	91
913.3915	91
913.3916	91
913.3917	91
913.3919	91
913.3922	91
914.0003	421
914.0004	421
914.0005	421
914.0006	421
914.0008	421
914.0025	421
914.0026	421
914.0027	421
914.0030	421
914.0031	421
914.0032	421
914.0035	421
914.0036	421
914.0037	421
914.0040	421
914.0041	421
914.0042	421
914.0080	421
914.0081	421
914.0082	421
914.0083	421
914.0084	421
914.0085	421
914.0086	421
914.0087	421
914.0088	421
914.0089	421
914.0090	421
914.0091	421
914.0092	421
914.0093	421
914.0094	421
914.1290	120

item	page
914.1296	120
914.1300	418
914.1490	77
914.2000	418
914.3890	99
914.3893	188
914.3896	100
916.4050	116
916.4060	116
916.4061	116
916.4062	116
916.4063	116
916.4064	116
916.4065	116
916.4066	116
916.4067	116
916.4068	116
916.4069	116
916.4071	116
916.4072	116
916.4074	116
917.0610	68
917.0615	105
917.0620	68
917.0625	69
917.0630	69
917.0635	105
917.0779	84, 104, 124
917.1201	105
917.1202	105
917.1203	105
917.1204	105
917.1205	105
917.1206	105
917.1207	105
917.1208	105
917.1209	105
917.1210	105
917.1211	105
917.1212	105
917.1213	105
917.1214	105
917.1215	105
917.1216	105
917.1217	105
917.1218	105
917.1219	105
917.1220	105
917.1221	105
917.1222	105
917.1223	105
917.1224	105
917.1225	105
917.1226	105
917.1227	105
917.1228	105
917.1229	105
917.1230	105
917.1231	105
917.1232	105
917.1233	105
917.1234	105
917.1235	105
917.1236	105
917.1237	105
917.1238	106
917.1239	106
917.1240	105

item	page
917.1241	105
917.1242	105
917.1243	105
917.1244	105
917.1245	105
917.1246	105
917.1247	105
917.1248	105
917.1249	105
917.1250	117
917.1251	113
917.1252	105
917.1253	113
917.1254	105
917.1255	105
917.1256	105
917.1257	105
917.1258	105
917.1259	105
917.1261	107
917.1262	107
917.1263	107
917.1264	107
917.1265	107
917.1266	107
917.1267	107
917.1268	107
917.1269	107
917.1270	107
917.1271	107
917.1272	107
917.1273	107
917.1274	107
917.1275	107
917.1276	107
917.1277	107
917.1278	107
917.1279	107
917.1280	107
917.1281	107
917.1282	107
917.1283	107
917.1284	107
917.1285	107
917.1286	107
917.1287	107
917.1288	107
917.1289	107
917.1291	113
917.1292	113
917.1293	113
917.1294	113
917.1295	113
917.1296	113
917.1297	113
917.1298	113
917.1299	113
917.1301	109
917.1302	109
917.1303	110
917.1304	113
917.1305	110
917.1311	109
917.1316	110
917.1317	110
917.1318	110
917.1319	110
917.1320	110

item	page
917.1321	110
917.1322	110
917.1323	110
917.1324	110
917.1325	110
917.1326	110
917.1327	110
917.1329	105
917.1330	105
917.1331	111
917.1332	111
917.1333	112
917.1334	112
917.1335	112
917.1336	112
917.1340	105
917.1341	105
917.1342	105
917.1343	105
917.1344	105
917.1345	105
917.1346	105
917.1347	105
917.1348	105
917.1349	105
917.1350	105
917.1351	105
917.1352	105
917.1353	105
917.1354	105
917.1355	105
917.1356	105
917.1357	105
917.1358	105
917.1359	105
917.1360	105
917.1361	106
917.1362	106
917.1363	106
917.1364	106
917.1365	106
917.1366	106
917.1367	106
917.1368	106
917.1369	106
917.1370	106
917.1371	106
917.1372	106
917.1373	106
917.1374	106
917.1375	106
917.1376	106
917.1377	106
917.1378	106
917.1379	106
917.1380	106
917.1381	106
917.1382	106
917.1383	106
917.1384	106
917.1385	106
917.1386	106
917.1387	106
917.1388	109
917.1389	109
917.1390	109
917.1391	109
917.1392	109
917.1393	109
917.1394	109
917.1395	109
917.1396	109
917.1397	109
917.1398	109
917.1399	109
917.1404	68
917.14045	68
917.1405	68
917.14055	68
917.1406	68
917.1407	68
917.1408	68
917.1409	68
917.1410	68
917.1411	68
917.1412	68
917.1413	68
917.1414	68
917.1415	70
917.1421	70
917.1422	70
917.1426	68
917.1427	68
917.1428	68
917.1429	68
917.1430	68
917.1431	68
917.1432	68
917.1433	68
917.1434	71
917.1435	71
917.1440	71
917.1441	71
917.1442	71
917.1443	71
917.1444	71
917.1450	75
917.1461	69
917.1462	69
917.1463	69
917.1464	69
917.1465	69
917.1466	69
917.1467	69
917.1468	69
917.1469	69
917.1470	69
917.1471	69
917.1472	69
917.1473	69
917.1474	69
917.1475	69
917.1476	69
917.1477	69
917.1478	69
917.1479	69
917.1480	69
917.1481	69
917.1482	69
917.1483	69
917.1490	72
917.1491	72
917.1492	72
917.1493	72
917.1494	72
917.1495	72
917.1496	72
917.1497	72
917.1498	72
917.1499	68
917.1515	68
917.1516	68
917.1517	68
917.1518	68
917.1519	68
917.1520	68
917.1521	68
917.1522	68
917.1523	68
917.1524	68
917.1525	68
917.1526	68
917.1527	68
917.1528	68
917.1531	68
917.1532	68
917.1533	68
917.1534	68
917.1535	68
917.1536	68
917.1537	68
917.1538	68
917.1539	68
917.1541	72
917.1542	72
917.1543	72
917.1544	72
917.1545	72
917.1546	72
917.1565	69
917.1566	69
917.1567	69
917.1568	69
917.1569	69
917.1570	69
917.1571	69
917.1572	69
917.1573	69
917.1574	69
917.1601	68
917.1604	69
917.16045	69
917.1605	69
917.16055	69
917.1606	69
917.1607	69
917.1608	69
917.1609	69
917.1610	69
917.1611	69
917.1612	69
917.1613	69
917.1697	110
917.1698	110
917.1699	110
917.1750	107
917.1790	113
917.3801	88
917.3802	89
917.3803	89
917.3804	90
917.3805	90
917.3806	88
917.3807	88
917.3808	88
917.3809	88
917.3810	88
917.3811	88
917.3812	88
917.3813	88
917.3814	88
917.3815	88
917.3816	88
917.3817	88
917.3818	88
917.3819	88
917.3820	88
917.3821	88
917.3822	88
917.3823	90
917.3824	88
917.3825	90
917.3826	90
917.3827	90
917.3828	89
917.3829	89
917.3830	89
917.3831	89
917.3832	89
917.3833	89
917.3834	89
917.3835	89
917.3836	89
917.3837	89
917.3838	89
917.3839	89
917.3840	89
917.3841	89
917.3842	89
917.3843	89
917.3844	89
917.3845	89
917.3846	89
917.3847	89
917.3848	89
917.3849	89
917.3850	97
917.3851	90
917.3852	90
917.3854	90
917.3855	90
917.3856	90
917.3857	93
917.3860	93
917.3861	93
917.3862	93
917.3863	93
917.3864	93
917.3868	93
917.3869	93
917.3870	88
917.3871	88
917.3872	88
917.3873	88
917.3874	88
917.3875	88
917.3876	88
917.3877	88
917.3878	88
917.3879	88
917.3880	88
917.3881	88
917.3882	88
917.3940	89
917.3941	89
917.3942	89
917.3943	89
917.3944	89
917.3945	89
917.3946	89
917.3947	89
917.3948	89
917.3949	89
917.3951	89
917.3962	93
917.3963	93
917.3964	93
917.3965	93
917.3966	93
917.3967	93
917.3968	93
917.3970	90
917.3971	90
917.3972	90
917.3973	90
917.3974	90
917.3975	90
917.3976	90
917.3977	90
917.3978	90
917.3979	90
917.3980	90
917.3981	90
917.3982	90
917.3983	90
917.3984	90
917.3985	90
917.3986	90
917.3987	90
917.3988	90
917.3989	90
917.3990	90
917.3991	90
917.4024	121
917.4030	78
917.4031	101
917.4052	81
918.0007	76, 98, 118
918.0009	76, 98, 119
918.0100	87, 125
918.0106	74, 117, 128
918.0150	87, 126
918.0200	87, 125
918.0250	103
918.0300	126
918.0310	126
918.0320	88
918.0330	88
918.0340	104
918.0350	105
918.0601	90
918.0602	91
918.0607	100
918.0608	89
918.0610	68
918.0611	89
918.0612	106
918.0613	78
918.0615	69
918.0620	68

item	page
918.0623	121
918.0625	121
918.0627	101
918.0630	69
918.0635	121
918.0640	79
918.0645	73
918.0646	79
918.0650	106
918.0655	107
918.0660	107
918.0661	101
918.0678	82, 122
918.0690	86, 124
918.0694	83, 123
918.0699	83, 102
918.0702	83, 123
918.0724	84, 103, 123
918.0772	103
918.0830	120
918.0846	101
918.0847	79
918.1200	119
918.1201	119
918.1202	118
918.1203	118
918.1204	119
918.1205	109
918.1206	109
918.1207	109
918.1208	106
918.1209	106
918.1210	106
918.1211	106
918.1212	106
918.1213	106
918.1214	106
918.1215	106
918.1216	106
918.1217	106
918.1218	106
918.1219	106
918.1220	106
918.1221	106
918.1222	106
918.1223	106
918.1224	106
918.1225	106
918.1226	106
918.1227	106
918.1228	106
918.1229	106
918.1230	106
918.1231	106
918.1232	106
918.1233	106
918.1234	106
918.1235	106
918.1236	106
918.1237	106
918.1238	106
918.1239	106
918.1240	106
918.1241	106
918.1242	106
918.1243	106
918.1244	106
918.1245	106
918.1246	106
918.1247	106
918.1248	106
918.1249	106
918.1250	117
918.1252	106
918.1254	106
918.1255	106
918.1256	106
918.1257	106
918.1258	106
918.1260	106
918.1261	117
918.1263	118
918.1264	119
918.1266	116
918.1267	119
918.1269	106
918.1270	120
918.1271	116
918.1272	106
918.1273	106
918.1274	118
918.1276	108
918.1277	108
918.1278	108
918.1279	118
918.1280	108
918.1281	108
918.1282	108
918.1283	106
918.1284	107
918.1285	107
918.1286	107
918.1287	107
918.1288	107
918.1289	107
918.1290	120
918.1291	119
918.1292	119
918.1293	119
918.1294	108
918.1295	108
918.1297	119
918.1298	107
918.1301	106
918.1302	106
918.1303	106
918.1304	106
918.1305	106
918.1306	106
918.1307	106
918.1308	106
918.1309	106
918.1310	106
918.1311	106
918.1312	106
918.1313	106
918.1314	106
918.1315	106
918.1316	107
918.1317	112
918.1318	106
918.1319	106
918.1320	106
918.1321	106
918.1322	106
918.1323	106
918.1324	106
918.1325	106
918.1326	106
918.1327	107
918.1328	107
918.1329	107
918.1330	111
918.1331	107
918.1332	107
918.1333	107
918.1334	107
918.1335	110
918.1336	111
918.1337	107
918.1338	107
918.1339	107
918.1340	115
918.1341	107
918.1342	107
918.1343	107
918.1344	107
918.1345	107
918.1346	107
918.1347	107
918.1348	107
918.1349	114
918.1351	107
918.1352	107
918.1353	107
918.1354	107
918.1355	107
918.1356	107
918.1357	107
918.1358	114
918.1359	107
918.1361	107
918.1362	107
918.1363	107
918.1364	107
918.1366	107
918.1371	107
918.1373	107
918.1375	107
918.1376	107
918.1378	107
918.1379	107
918.1381	107
918.1383	107
918.1384	107
918.1385	112
918.1386	113
918.1387	107
918.1388	107
918.1389	107
918.1390	109
918.1391	109
918.1392	109
918.1393	120
918.1394	107
918.1396	107
918.1397	107
918.1398	107
918.1400	77
918.1401	76
918.1402	76
918.1403	76
918.1404	68
918.14045	68
918.1405	68
918.14055	68
918.1406	68
918.1407	68
918.1408	68
918.1409	68
918.1410	68
918.1411	68
918.1412	68
918.1413	68
918.1414	68
918.1415	72
918.1416	70
918.1417	71
918.1418	69
918.1419	69
918.1421	74
918.1422	74
918.1423	69
918.1424	68
918.14245	68
918.1425	68
918.14255	68
918.1426	68
918.1427	68
918.1428	68
918.1429	68
918.1430	68
918.1431	68
918.1432	68
918.1433	68
918.1434	77
918.1436	70
918.1437	71
918.1438	71
918.1439	71
918.1440	70
918.1441	73
918.1442	73
918.1443	73
918.1444	73
918.1445	73
918.1446	73
918.1448	71
918.1449	97
918.1450	75
918.1451	75
918.1452	76
918.1453	76
918.1454	76
918.1455	76
918.1458	76
918.1460	72
918.1461	71
918.1462	71
918.1463	71
918.1464	71
918.1465	71
918.1466	71
918.1467	72
918.1468	70
918.1469	70
918.1470	72
918.1471	72
918.1472	72
918.1473	72
918.1474	72
918.1475	72
918.1476	72
918.1477	71
918.1478	71
918.1479	71
918.1480	71
918.1481	71
918.1482	71
918.1483	71
918.1484	71
918.1485	71
918.1486	70
918.1487	70
918.1488	70
918.1489	70
918.1490	77
918.1491	70
918.1492	71
918.1493	78
918.1494	71
918.1495	188
918.1501	74
918.1502	69
918.1503	69
918.1504	69
918.1505	75
918.1506	69
918.1507	69
918.1508	69
918.1509	69
918.1510	77
918.1511	68
918.1512	68
918.1513	68
918.1514	68
918.1515	68
918.1516	68
918.1517	68
918.1518	68
918.1519	68
918.1520	68
918.15205	68
918.1521	68
918.1522	68
918.1523	68
918.1524	68
918.1525	68
918.1526	68
918.1527	68
918.1528	68
918.1529	68
918.1530	68
918.1531	71
918.1532	71
918.1533	71
918.1534	71
918.1535	71
918.1541	69
918.1542	69
918.1543	69
918.1544	69
918.1545	73
918.1546	69
918.1547	69
918.1548	69
918.1549	69
918.1550	95
918.1551	69
918.1552	69

item	page
918.1553	69
918.1554	69
918.1555	69
918.1556	69
918.1557	69
918.1558	71
918.1559	69
918.1561	69
918.1562	69
918.1563	69
918.1575	73
918.1576	73
918.1577	73
918.1578	73
918.1579	73
918.1580	73
918.1581	73
918.1582	70
918.1583	70
918.1584	70
918.1585	70
918.1586	70
918.1587	70
918.1588	70
918.1589	69
918.1591	69
918.1592	69
918.1593	77
918.1595	188
918.1596	69
918.1597	69
918.1598	69
918.1599	69
918.1601	69
918.1602	69
918.1603	69
918.1604	110
918.1605	110
918.1606	110
918.1607	110
918.1608	110
918.1609	110
918.1610	110
918.1611	69
918.1612	110
918.1613	69
918.1614	110
918.1615	69
918.1616	69
918.1617	110
918.1618	69
918.1619	110
918.1620	112
918.1621	112
918.1622	112
918.1623	112
918.1624	112
918.1625	112
918.1626	112
918.1627	112
918.1628	112
918.1629	112
918.1630	112
918.1631	110
918.1632	112
918.1633	110
918.1635	109
918.1636	109

item	page
918.1637	109
918.1640	112
918.1641	112
918.1642	112
918.1643	112
918.1644	112
918.1645	112
918.1646	112
918.1647	112
918.1648	112
918.1649	112
918.1650	112
918.1651	112
918.1652	76
918.1653	76
918.1654	111
918.1655	111
918.1656	111
918.1657	111
918.1658	111
918.1659	111
918.1660	111
918.1661	119
918.1662	111
918.1663	119
918.1664	111
918.1665	111
918.1666	107
918.1667	111
918.1668	107
918.1669	111
918.1670	71
918.1671	114
918.1672	114
918.1673	114
918.1674	114
918.1675	114
918.1676	114
918.1677	114
918.1678	107
918.1679	107
918.1680	110
918.1681	110
918.1682	110
918.1683	107
918.1684	107
918.1685	109
918.1686	109
918.1687	109
918.1688	110
918.1689	110
918.1690	110
918.1691	114
918.1692	114
918.1693	114
918.1694	114
918.1695	114
918.1696	114
918.1697	114
918.1698	107
918.1699	114
918.1701	110
918.1702	110
918.1703	110
918.1704	110
918.1705	110
918.1706	110
918.1707	110

item	page
918.1708	110
918.1709	110
918.1711	107
918.1712	107
918.1713	107
918.1714	107
918.1715	107
918.1716	107
918.1717	107
918.1718	107
918.1719	107
918.1720	113
918.1721	113
918.1722	113
918.1723	113
918.1724	113
918.1725	113
918.1726	113
918.1727	113
918.1728	113
918.1729	113
918.1730	113
918.1731	107
918.1732	113
918.1733	108
918.1734	107
918.1735	107
918.1736	107
918.1737	107
918.1738	107
918.1739	109
918.1740	113
918.1741	113
918.1742	113
918.1743	113
918.1744	113
918.1745	113
918.1746	113
918.1747	113
918.1748	113
918.1749	113
918.1750	113
918.1752	115
918.1753	117
918.1754	117
918.1756	109
918.1757	110
918.1758	110
918.1759	113
918.1761	108
918.1762	108
918.1763	108
918.1764	108
918.1765	108
918.1766	108
918.1767	108
918.1768	108
918.1769	108
918.1771	111
918.1772	111
918.1773	111
918.1774	111
918.1775	111
918.1776	111
918.1777	111
918.1778	111
918.1779	111
918.1780	115

item	page
918.1781	115
918.1782	115
918.1783	115
918.1784	115
918.1785	115
918.1786	115
918.1787	115
918.1788	115
918.1790	109
918.1791	109
918.1792	109
918.1793	109
918.1794	109
918.1795	109
918.1796	109
918.1797	114
918.1801	128
918.1802	131
918.1805	129
918.1806	115
918.1807	115
918.1808	115
918.1809	115
918.1810	115
918.1811	115
918.1812	115
918.1813	115
918.1814	115
918.1815	115
918.1816	118
918.1817	118
918.1818	115
918.1890	113
918.1895	115
918.3010	205
918.3105	203
918.3106	203
918.3110	203
918.3111	203
918.3115	203
918.3116	203
918.3150	204
918.3151	204
918.3155	204
918.3156	204
918.3160	204
918.3161	204
918.3205	203
918.3206	203
918.3210	203
918.3211	203
918.3215	203
918.3216	203
918.3250	204
918.3251	204
918.3255	204
918.3256	204
918.3260	204
918.3261	204
918.3305	203
918.3306	203
918.3310	203
918.3311	203
918.3315	203
918.3316	203
918.3320	203
918.3321	203
918.3350	204

item	page
918.3351	204
918.3355	204
918.3356	204
918.3360	204
918.3361	204
918.3365	204
918.3366	204
918.3405	203
918.3406	203
918.3410	203
918.3411	203
918.3415	203
918.3416	203
918.3420	203
918.3421	203
918.3450	204
918.3451	204
918.3455	204
918.3456	204
918.3460	204
918.3461	204
918.3465	204
918.3466	204
918.3505	203
918.3506	203
918.3510	203
918.3511	203
918.3515	203
918.3516	203
918.3520	203
918.3521	203
918.3525	203
918.3526	203
918.3530	203
918.3531	203
918.3535	203
918.3536	203
918.3550	204
918.3551	204
918.3555	204
918.3556	204
918.3560	204
918.3561	204
918.3565	204
918.3566	204
918.3570	204
918.3571	204
918.3575	204
918.3576	204
918.3580	204
918.3581	204
918.3605	203
918.3606	203
918.3610	203
918.3611	203
918.3615	203
918.3616	203
918.3620	203
918.3621	203
918.3625	203
918.3626	203
918.3630	203
918.3631	203
918.3635	203
918.3636	203
918.3650	204
918.3651	204
918.3655	204

item	page
918.3656	204
918.3660	204
918.3661	204
918.3665	204
918.3666	204
918.3670	204
918.3671	204
918.3675	204
918.3676	204
918.3680	204
918.3681	204
918.3700	99
918.3701	99
918.3706	89
918.3707	89
918.3708	90
918.3709	90
918.3710	90
918.3711	90
918.3712	90
918.3713	90
918.3714	90
918.3715	90
918.3716	90
918.3717	90
918.3718	90
918.3719	90
918.3720	90
918.3721	90
918.3722	90
918.3723	90
918.3724	90
918.3725	90
918.3726	90
918.3727	90
918.3728	90
918.3729	90
918.3731	90
918.3732	90
918.3733	90
918.3734	90
918.3735	90
918.3736	90
918.3737	90
918.3738	90
918.3739	90
918.3741	90
918.3742	91
918.3743	91
918.3744	91
918.3745	91
918.3746	91
918.3747	91
918.3748	91
918.3749	91
918.3751	91
918.3752	91
918.3753	91
918.3754	91
918.3755	91
918.3756	91
918.3757	91
918.3758	91
918.3759	91
918.3761	91
918.3762	91
918.3763	91
918.3764	91
918.3765	91
918.3766	91
918.3767	91
918.3768	94
918.3769	98
918.3771	98
918.3772	94
918.3773	96
918.3800	100
918.3801	98
918.3802	98
918.3803	98
918.3804	92
918.3805	92
918.3806	92
918.3807	97
918.3808	89
918.3809	89
918.3810	89
918.3811	89
918.3812	89
918.3813	89
918.3814	89
918.3815	89
918.3816	89
918.3817	89
918.3818	89
918.3819	89
918.3820	89
918.3821	89
918.3822	89
918.3824	89
918.3826	99
918.3828	89
918.3829	89
918.3830	89
918.3831	89
918.3832	89
918.3833	89
918.3834	89
918.3835	89
918.3836	89
918.3837	89
918.3838	89
918.3839	89
918.3840	89
918.3841	89
918.3842	89
918.3845	98
918.3851	92
918.3852	92
918.3853	92
918.3854	92
918.3855	92
918.3856	96
918.3857	96
918.3858	96
918.3859	96
918.3860	96
918.3861	93
918.3862	93
918.3863	93
918.3864	93
918.3865	93
918.3866	93
918.3867	93
918.3868	92
918.3869	92
918.3870	94
918.3871	94
918.3872	94
918.3873	94
918.3874	94
918.3875	94
918.3876	94
918.3877	92
918.3878	92
918.3879	94
918.3880	94
918.3881	94
918.3882	94
918.3883	94
918.3884	94
918.3885	94
918.3886	94
918.3887	94
918.3888	94
918.3889	94
918.3890	99
918.3891	92
918.3892	92
918.3895	100
918.3896	98
918.3897	98
918.3898	98
918.3901	89
918.3902	89
918.3903	89
918.3904	89
918.3905	89
918.3906	89
918.3907	89
918.3908	89
918.3909	89
918.3910	89
918.3911	89
918.3912	89
918.3913	89
918.3914	93
918.3915	93
918.3916	93
918.3917	93
918.3918	93
918.3919	93
918.3920	93
918.3921	93
918.3923	89
918.3924	89
918.3925	89
918.3926	89
918.3927	89
918.3928	89
918.3929	89
918.3930	97
918.3931	96
918.3935	98
918.3936	89
918.3937	89
918.3939	94
918.3940	95
918.3941	95
918.3942	95
918.3943	95
918.3944	95
918.3945	95
918.3946	95
918.3947	95
918.3948	95
918.3949	95
918.3950	95
918.3951	89
918.3955	91
918.3958	98
918.3960	93
918.3961	93
918.3962	93
918.3963	93
918.3964	93
918.3965	93
918.3966	93
918.3967	93
918.3968	93
918.3969	96
918.3970	95
918.3971	91
918.3972	91
918.3973	91
918.3974	91
918.3975	91
918.3976	91
918.3977	91
918.3978	91
918.3979	91
918.3980	91
918.3981	91
918.3982	91
918.3983	96
918.3984	96
918.3985	96
918.3986	92
918.3987	92
918.3988	97
918.3990	92
918.3991	92
918.3992	92
918.3993	99
918.3997	100
918.4001	95
918.4002	95
918.4003	95
918.4004	95
918.4005	95
918.4006	95
918.4007	95
918.4008	95
918.4009	95
918.4011	95
918.4012	95
918.4013	95
918.4014	95
918.4015	95
918.4016	95
918.4017	95
918.4018	95
918.4019	95
918.4051	115
918.4052	115
918.4053	116
918.4054	116
918.4351	116
918.4355	70
918.4410	108
918.4420	108
918.4500	195
918.4500D	195
918.4520	194
918.4520D	194
918.4600	194
919.0007	76, 99, 119
919.0123	119
919.0143	76
919.0383	99
919.1201	119
919.1203	119
919.1206	119
919.1250	118
919.1402	76
919.1404	76
919.1406	76
919.1450	75
919.3801	99
919.3804	99
919.3806	99
919.3850	97
920.0002	78, 120
920.0406	42
920.0408	42
920.0410	42
920.0412	42
920.0414	42
920.0416	42
920.0417	42
920.0418	42
920.0419	42
920.0420	42
920.0421	42
920.0422	42
920.0424	42
920.0425	42
920.0426	42
920.0427	42
920.0430	42
920.0448	42
920.0450	42
920.1290	120
920.1490	77
920.2000	215
920.2050	215
920.2100	216
920.2150	216
920.2200	218
920.2250	218
920.2300	216
920.2350	216
920.2400	218
920.2450	219
920.2500	220
920.2520	220
920.2540	220
920.2550	221
920.2570	221
920.2590	222
920.3890	99
930.1004	206
930.1005	206
930.1006	206
930.1007	206
930.1008	206
930.1010	206
930.1012	206
930.2010	206
930.2015	206

item	page
930.2020	206
930.2025	206
930.2027	206
930.2030	206
930.2040	206
930.2045	206
930.2050	206
930.2055	206
930.2060	206
930.2110	207
930.2115	207
930.2120	207
930.2125	207
930.2127	207
930.2130	207
930.2140	207
930.2145	207
930.2150	207
930.2155	207
930.2160	207
930.3005	206
930.3006	206
930.3008	206
930.3010	206
930.3012	206
930.3015	206
930.3016	206
930.3017	206
930.3018	206
930.3019	206
930.3020	206
930.3021	206
930.3022	206
960.1110	290
960.1150	290
960.1151	290
960.1152	290
960.1153	290
960.1154	290
960.1155	290
960.1156	290
960.1157	290
960.1160	290
960.1161	290
960.1162	290
960.1163	290
960.1164	290
960.1165	290
960.1166	290
960.1167	290
960.1168	290
960.1169	290
960.1170	290
960.1200	290
960.1210	290
960.1215	290
970.0010	605
970.0020	603
970.0030	602
970.0040	611
970.0050	609
970.0060	604
970.0070	602
970.0080	603
970.0090	601
970.0100	601
970.0110	602
970.0120	606
970.0130	610
970.0140	611
970.0150	609
970.0160	612
970.0180	609
970.0190	612
970.0200	612
970.0210	604
970.0220	607
970.0230	601
970.0240	607
970.0250	600
970.0260	610
970.0270	600
970.0280	600
970.0290	600
970.0300	600
970.0310	602
970.0320	602
970.0330	603
970.0340	611
970.0350	610
970.0360	603
970.0370	605
970.0380	607
970.0390	608
970.0400	608
970.0410	605
970.0420	605
970.0430	606
970.0440	606
970.0450	606
970.0460	608
970.0470	608
970.0480	607
970.0490	607
970.0500	606
970.0510	608
970.0520	604
970.0530	609
970.0540	601
970.0550	604
970.0560	605
970.0570	601
975.1004	207
975.1005	207
975.1006	207
975.1007	207
975.1008	207
975.1010	207
975.1012	207
975.2010	207
975.2015	207
975.2020	207
975.2025	207
975.2027	207
975.2030	207
975.2040	207
975.2045	207
975.2050	207
975.2055	207
975.2060	207
975.2075	207
975.2110	207
975.2115	207
975.2120	207
975.2125	207
975.2127	207
975.2130	207
975.2140	207
975.2145	207
975.2150	207
975.2155	207
975.2160	207
975.3005	207
975.3006	207
975.3008	207
975.3010	207
975.3012	207
975.4040	207
975.4045	207
975.4050	207
975.4055	207
980.1070	386
980.1085	336, 350
980.1090	331, 334, 336
980.1095	386
980.1096	386
980.1097	386
980.1098	386
980.1100	386, 398
980.1101	398
980.1102	398
980.1103	398
980.1104	398
980.1105	398
980.1106	398
980.1107	398
985.0003	582
985.0012	582
985.0013	582
985.0021	582
985.0024	582
985.0172	592
985.0173	592
985.0174	592
985.0175	592
985.0650	594
985.0651	594
985.0652	594
985.0653	594
985.0654	594
985.0660	594
985.0661	594
985.0662	594
985.0663	594
985.0664	594
985.0670	594
985.0671	594
985.0672	594
985.0673	594
985.0674	594
985.0741	594
985.0742	594
985.0743	594
985.0751	593
985.0752	593
985.0753	593
985.0754	593
985.0755	593
985.1110	585
985.1111	585
985.1112	585
985.1113	585
985.1114	585
985.1115	585
985.1116	585
985.1117	585
985.1118	585
985.1119	585
985.1120	585
985.1121	585
985.1122	585
985.1123	585
985.7000	584
985.7001	584
985.7002	584
985.7003	584
985.7019	584
985.7020	584
985.7021	584
985.7022	584
985.7026	584
985.7027	584
985.7028	584
985.7029	584
985.7034	584, 588
985.7035	584, 588
985.7036	584, 588
985.7037	584, 588
985.7038	584, 588
985.7039	584, 588
985.7040	584, 588
985.7041	584, 588
985.7050	583
985.7051	583
985.7055	583
986.0011	592
986.0012	592
986.0013	592
986.0014	592
986.0015	592
986.0021	592
986.0022	592
986.0023	592
986.0024	592
986.0025	592
986.0031	592
986.0032	592
986.0033	592
986.0034	592
986.0035	592
986.0041	593
986.0042	593
986.0043	593
986.0044	593
986.0045	593
986.0051	593
986.0052	593
986.0053	593
986.0054	593
986.0055	593
986.0061	593
986.0062	593
986.0063	593
986.0064	593
986.0065	593
986.0071	593
986.0072	593
986.0073	593
986.0074	593
986.0075	593
986.0081	593
986.0082	593
986.0083	593
986.0084	593
986.0085	593
986.0091	593
986.0092	593
986.0093	593
986.0094	593
986.0095	593
986.0101	593
986.0102	593
986.0103	593
986.0104	593
986.0105	593
986.0111	593
986.0112	593
986.0113	593
986.0114	593
986.0115	593
986.0121	594
986.0122	594
986.0123	594
986.0124	594
986.0125	594
986.0131	592
986.0132	592
986.0133	592
986.0134	592
986.0135	592
986.0141	592
986.0142	592
986.0143	592
986.0144	592
986.0145	592
995.6500	253
997.1210	525
997.1214	525
997.1215	524
997.1216	525
997.1217	524
999.0120	437
999.0125	437

PRE-TENSIONING FORCE AND TIGHTENING VALUES FOR REGULAR TYPE SCREW HEADS

M (screws ma:)	S1(6 pt.)	S2 (Ø screw head)	fine hreads	stress area	friction coeffi-cient	quality of setscrews (headless screws) metric standard threads											
						4.8		5.8		6.8		8.8		10.9		12.9	
						pre-tensioning force	torque	pre-tensioning force	torque	pre-tensioning force	torque	pre-tensioning force	torque	pre-tensioning force	torque	pre-tensioning force	torque
	mm	mm	mm	mm˝		N	Nm	N	Nm	N	Nm	N	Nm	N	Nm	N	Nm
M2	1,5	4	0,40	2,07	0,10	488,0	0,15	610,6	0,19	732,7	0,23	976,9	0,31	1373,8	0,43	1648,6	0,52
					0,14	449,5	0,19	561,9	0,23	674,3	0,28	899,0	0,37	1264,3	0,52	1517,1	0,63
M2,5	2	5	0,45	3,39	0,10	813,5	0,31	1016,9	0,39	1220,2	0,47	1627,0	0,63	2288,0	0,88	2745,6	1,06
					0,14	749,9	0,38	937,4	0,48	1124,9	0,58	1499,8	0,77	2109,1	1,08	2531,0	1,30
M3	2,5	5,5	0,50	5,03	0,10	1219,9	0,54	1524,9	0,68	1829,9	0,82	2439,9	1,09	3431,0	1,53	4117,2	1,84
					0,14	1125,9	0,60	1407,4	0,83	1688,9	1,00	2251,9	1,34	3166,7	1,88	3800,0	2,26
M3,5	-	6	0,60	6,78	0,10	1638,2	0,84	2047,8	1,05	2457,3	1,26	3276,4	1,68	4607,5	2,36	5528,9	2,84
					0,14	1511,3	1,03	1889,2	1,28	2267,0	1,54	3022,6	2,05	4250,6	2,89	5100,7	3,47
M4	3	7	0,70	8,78	0,10	2115,4	1,25	2644,3	1,56	3173,1	1,88	4230,8	2,50	5949,6	3,52	7139,5	
					0,14	1950,9	1,53	2438,7	1,91	2926,4	2,29	3901,9	3,06	5487,0	4,30	6584,4	
M5	4	8	0,80	14,2	0,10	3461,6	2,46	4327,0	3,08	5192,3	3,70	6923,1	4,93	9735,7	6,93	11682,8	8,32
					0,14	3196,8	3,02	3996,0	3,78	4795,2	4,53	6393,7	6,04	8991,1	8,50	10789,3	10,20
M6	5	10	1	20,1	0,10	4874,7	4,24	6093,4	5.30	7312,1	6,35	9749,4	8,47	13710,1	11,92	16452,2	14,30
					0,14	4499,1	5,19	5623,9	6.48	6748,6	7,78	8998,2	10.37	12653,7	14,59	15184,4	17,51
M7	-	11	1	28,9	0,10	7134,5	6,97	8918,2	8,71	10701,8	10,45	14269,1	13,94	20065,9	19,60	24079,1	23,52
					0,14	6599,6	8,60	8249,5	10,76	9899,4	12,90	13199,2	17,21	18561,4	24,20	22273,6	29,04
M8	6	13	1,25	36,6	0,10	89447,1	10,20	11183,9	12,75	13420,7	15,30	17894,2	20,41	25163,7	28,70	30196,5	34,44
					0,14	8265,6	12,54	10332,0	15,67	12398,4	18,80	16531,2	25,07	23247,0	35,26	27896,5	42,31
M10	8	16	1,50	58	0,10	14244,5	20,11	17805,6	25,14	21366,8	30,16	28489,0	40,22	40062,7	56,56	48075,3	67,87
					0,14	13167,4	24,76	16459,2	30,95	19751,1	37,14	26334,8	49,52	37033,3	69,64	44439,9	83,56
M12	10	18	1,75	84,2	0,10	20766,6	34,43	25958,3	43,03	31149,9	51,64	41533,2	68,86	58406,1	96,83	70087,3	116,20
					0,14	19204,0	42,42	24005,0	53,03	28806,0	63,63	38408,0	84,84	54011,2	119,31	64813,5	143,17
M14	12	21	2	115	0,10	28389,9	54,77	35487,4	68,46	42584,9	82,15	56779,8	109,53	79846,6	154,03	95816,0	184,84
					0,14	26261,2	67,56	32826,5	84,45	39391,8	101,34	52522,4	135,13	73859,6	190,02	88631,5	228,03
M16	14	24	2	157	0,10	39242,1	85,14	49052,7	106,43	58863,2	127,72	78484,3	170,29	110368,5	239,47	132442,2	287,36
					0,14	36364,2	105,80	45455,3	132,26	54546,3	158,71	72728,5	211,61	102274,4	297,58	122723,3	357,09
M18	14	27	2,50	192	0,10	47533,0	117,48	59416,3	146,85	71299,6	176,22	95066,1	234,96	133686,7	330,41	160424,1	396,49
					0,14	43986,1	145,16	54982,7	181,45	65979,2	217,74	87972,3	290,32	123711,0	402,26	148453,2	489,92
M20	17	30	2,50	245	0,10	61238,0	166,08	76547,5	207,61	91857,0	249,13	122476,0	332,17	172231,9	467,11	206678,2	560,54
					0,14	56747,1	206,39	70933,9	257,98	85120,6	309,58	113494,2	412,78	156601,2	580,47	191521,5	696,56
M22	17	34	2,50	303	0,10	76305,2	227,22	95381,5	284,02	114457,8	340,82	152610,4	454,43	214608,3	639,05	257530,0	766,85
					0,14	70791,9	283,79	88489,8	354,74	106187,8	425,69	141583,7	567,58	199102,1	798,16	238922,5	957,80
M24	19	36	3	353	0,10	88232,4	287,16	110290,5	358,94	132348,6	430,73	176464,9	574,31	248153,7	807,63	297784,4	969,15
					0,14	81761,8	356,84	102202,2	446,05	122642,7	535,26	163523,6	713,68	229955,1	1003,61	275946,1	1204,33
M27	19	41	3	459	0,10	115778,8	420,04	144723,5	525,05	173668,2	630,06	231557,6	840,08	325627,9	1181,36	390753,4	1417,63
					0,14	107441,5	525,08	134301,9	656,35	161162,2	787,62	214883,0	1050,16	302179,2	1476,79	362615,0	1772,15
M30	22	46	3,50	561	0,10	140999,5	572,83	176249,4	716,03	211499,3	859,24	281999,0	1145,65	396561,1	1611,08	475873,4	1933,29
					0,14	130770,6	714,49	163463,3	893,11	196155,9	1071,73	261541,2	1428,97	367792,3	2009,49	441350,8	2411,39
M33	24	50	3,50	694	0,10	175618,1	774,65	219522,6	968,32	263427,1	1161,98	351236,2	15549,31	493925,8	2178,72	592711	2614,46
					0,14	163058,0	970,43	203822,5	1213,03	244587,0	1455,64	326115,9	1940,86	458600,5	2729,33	550320,6	3275,19
M36	27	55	4	817	0,10	206081,7	998,60	257602,2	1248,25	309122,6	1497,89	412163,5	1997,19	579604,8	2808,55	695525,8	3370,26
					0,14	191241,8	1248,41	239052,3	1560,51	286862,7	1872,61	382483,6	2496,81	537867,6	3511,14	645441,1	4213,37
M39	-	60	4	976	0,10	247520,0	1291,81	309400,0	1614,77	371279,9	1937,72	495039,9	2583,63	696149,8	3633,23	835379,8	4359,88
					0,14	229902,6	1620,96	287378,3	2026,20	344853,9	2431,44	459805,2	3241,92	646601,0	4558,96	775921,3	5470,75
M42	32	65	4,5	1120	0,10	283225,0	1601,25	354031,2	2001,57	424837,4	2401,88	566449,9	3202,51	796570,1	4503,53	955884,2	5404,23
					0,14	262939,0	2005,46	328673,8	2506,83	394408,5	3008,20	525878,0	4010,93	739516,0	5640,37	887419,2	6768,44
M45	-	70	4,5	1310	0,10	332751,5	2005,51	415939,4	2506,89	499127,3	3008,26	665503,0	4011,02	935863,6	5640,50	1123036,0	6768,60
					0,14	309151,8	2519,55	386439,7	3149,43	463727,7	3779,32	618303,6	5039,09	869489,3	7086,23	1043387,0	8503,47
M48	36	75	5	1470	0,10	372429,3	2406,51	465536,6	3008,14	558644,0	3609,77	744858,6	4813,03	1047457,0	6768,32	1256949,0	8121,98
					0,14	345862,9	3018,11	432328,7	3772,64	518794,4	4527,17	691725,8	6036,23	972739,4	8488,45	1167287,0	10186,14
M52	-	80	5	1760	0,10	448108,9	3099,96	560136,1	3874,95	672163,4	4649,93	896217,8	6199,91	1260306,0	8718,63	1512368,0	10462,36
					0,14	416499,0	3900,52	520623,8	4875,65	624748,5	5850,78	832998,0	7801,04	1171404,0	10970,21	1405684,0	13164,25
M56	41	85	5,5	2030	0,10	516202,9	3838,14	645253,6	4797,68	774304,4	5757,21	1032406,0	7676,29	1451821,0	10794,78	1742185,0	12953,73
					0,14	479683,4	4824,40	599604,2	6030,50	719525,1	7236,60	959366,8	9648,80	1349110,0	13568,63	1618931,0	16282,36
M60	-	90	5,5	36,6	0,10	602498,5	4754,64	753123,1	5943,30	903747,8	7131,96	1204997,0	9509,28	1694527,0	13372,43	2033432,0	1604691
					0,14	560267,5	5992,71	700334,4	7490,88	840401,2	8989,06	1120535,0	11985,42	1575752,0	16854,49	1890903,0	16282,36
M64	46	95	6	2680	0,10	683339,5	5746,71	854174,4	7182,71	1025009,0	8619,25	1366679,0	11492,34	1921892,0	16161,10	2306271,0	19393,32
					0,14	635299,9	7235,13	794124,9	9043,92	952949,8	10852,70	1270600,0	14470,27	1786781,0	20348,82	2144137,0	24418,58
M68	-	100	6	3060	0,10	782799,9	6939,64	978499,8	8674,55	1174200,0	10409,46	1565600,0	13879,28	2201625,0	19517,74	2641950,0	23421,29
					0,14	728201,8	8758,24	910252,2	10947,80	1092303,0	13137,36	1456404,0	17516,48	2048068,0	24632,55	2457681,0	29559,06

PRE-TENSIONING FORCE AND TIGHTENING VALUES FOR FINE THREADS

M (screws ma·)	S1(6 pt.)	S2 (Ø screw head)	fine threads	stress area	friction coeffi-cient	quality of setscrews (headless screws) metric fine threads											
						4.8		5.8		6.8		8.8		10.9		12.9	
						pre-tensioning force	torque	pre-tensioning force	torque	pre-tensioning force	torque	pre-tensioning force	torque	pre-tensioning force	torque	pre-tensioning force	torque
	mm	mm	mm	mm		N	Nm	N	Nm	N	Nm	N	Nm	N	Nm	N	Nm
M8	6	13	1	39,2	0,10	9798,1	10,87	12247,6	13,59	14697,1	16,31	19596,1	21,75	27557,1	30,58	33068,5	36,70
					0,14	9079,5	13,53	11349,4	16,91	13619,3	20,29	18159,1	27,05	25536,2	38,04	30643,4	45,65
M10	8	16	1,25	61,2	0,10	15296,9	21,13	12247,6	26,41	22945,3	31,69	30593,8	42,25	43022,5	59,42	51627,0	71,30
					0,14	14175,0	26,27	11349,4	32.84	21262,6	39,41	28350,1	52,55	39867,3	73,89	47840,8	88,67
M10	8	16	1	64,5	0,10	16383,6	22,12	20479,5	27,66	24575,4	33,19	32767,2	44,25	46078,8	62,23	55294,6	74,67
					0,14	15221,6	27,80	19027,0	34,75	22832,5	41,70	30443,3	55,61	42810,8	78,20	51373,0	93,84
M12	10	18	1,50	88,1	0,10	22020,7	35,83	27525,9	44,79	33031,0	53,75	44041,4	71,67	61933,2	100,78	74319,8	120,94
					0,14	20405,8	44,53	25507,2	55,66	30608,7	66,79	40811,6	89,06	57391,3	125,24	68869,5	150,29
M12	10	18	1,25	92,1	0,10	23333,7	37,26	29167,1	46,57	35000,6	55,88	46667,4	74,51	65626,1	104,78	78751,3	125,74
					0,14	21669,2	46,70	27086,5	58,38	32503,8	70,06	43338,4	93,41	60944,6	131,36	73133,5	157,63
M14	10	21	1,50	125	0,10	31610,0	59,04	39512,5	73,80	47415,0	88,57	63220,0	118,09	88903,1	166,06	106683,7	199,27
					0,14	29345,9	73,92	36682,4	92,40	44018,9	110,89	58691,9	147,85	82535,4	207,91	99042,5	249,49
M16	14	24	1,50	167	0,10	42581,3	89,78	53226,6	112,33	63871,9	134,67	85162,5	179,56	119759,8	252,51	143711,8	303,02
					0,14	39587,8	113,06	49484,7	141,32	59381,6	169,59	79175,5	226,12	111340,6	317,98	133608,7	381,57
M18	14	27	2	204	0,10	51457,2	124,03	64321,5	155,03	77185,8	186,04	102914,4	248,06	144723,3	348,83	173668,0	418,59
					0,14	47751,7	155,02	59689,6	193,78	71627,5	232,53	95503,3	310,05	134301,6	436,00	161161,9	523,20
M18	14	27	1,50	216	0,10	55415,1	130,17	69268,9	162,72	83122,7	195,26	110830,3	260,35	155855,1	366,12	187026,1	439,34
					0,14	51577,6	164,67	64472,0	205,84	77366,4	247,01	103155,2	329,35	145062,1	463,15	174074,5	555,77
M20	17	30	2	258	0,10	65534,1	173,72	81917,7	217,16	98301,2	260,59	131068,3	347,45	184314,8	488,60	221177,8	586,32
					0,14	60886,2	218,17	76107,8	272,71	91329,3	327,26	121772,4	436,34	171242,5	613,61	205491,0	736,33
M20	17	30	1,50	272	0,10	70114,7	181,58	87643,3	226,97	105172,0	272,36	140229,3	363,15	197197,5	510,68	236637,0	612,82
					0,14	65319,1	230,55	81648,4	288,19	97978,6	345,82	130638,1	461,10	183709,9	648,42	220451,9	788,10
M22	17	34	2	318	0,10	81220,8	236,88	101526,0	307,53	121831,2	369,04	162441,5	492,05	228433,4	691,94	274120,1	830,33
					0,14	75533,9	298,75	94417,4	391,76	113300,9	470,11	151067,8	626,82	212439,1	881,46	254927,0	1057,75
M22	17	34	1,50	333	0,10	86164,2	246,02	107705,3	385,70	129246,4	462,84	172328,5	617,12	277075,0	867,83	290804,3	1041,40
					0,14	80331,8	313,41	100414,7	487,92	120497,7	585,50	160663,6	780,67	225933,2	1097,82	271119,8	1371,38
M24	19	36	2	384	0,10	98515,6	308,56	123144,5	399,52	147773,4	479,43	197031,1	639,23	277075,0	898,92	332490,0	1078,71
					0,14	91693,3	390,33	114616,6	510,15	137539,9	612,18	183386,5	816,24	257887,3	1147,84	309464,8	1377,41
M24	-	36	1,50	401	0,10	104079,4	319,62	130099,2	399,52	156119,0	479,43	208158,7	639,23	292723,2	898,92	351267,9	1078,71
					0,14	97096,0	408,12	121370,1	510,15	145644,1	612,18	194192,1	816,24	273082,6	1147,84	327699,1	1377,41
M27	19	41	2	496	0,10	127922,3	448,43	159902,9	560,54	191883,5	672,65	255844,7	896,87	359781,6	1261,22	431737,9	1513,46
					0,14	119185,0	569,67	148981,3	712,09	178777,5	854,51	238370,1	1139,34	335207,9	1602,20	402249,5	1922,64
M30	22	46	2	621	0,10	160817,5	623,80	201021,8	779,75	214226,2	935,70	321635,0	1247,60	452299,2	1754,43	542759,0	2105,32
					0,14	149957,0	795,14	187446,3	993,93	224935,5	1192,72	299914,0	15092,29	421754,2	2236,34	506105,0	2683,61
M33	24	50	2	761	0,10	197716,9	835,81	247146,1	1044,76	296575,4	1253,75	395433,8	1671,62	556078,8	2350,72	667294,5	2820,87
					0,14	184490,1	1068,24	230612,6	1335,30	276735,1	1602,36	368980,2	2136,49	518878,4	3004,43	622654,0	3605,32
M36	27	55	3	865	0,10	221916,8	1048,15	277396,0	1310,18	332875,1	1572,22	443833,5	2096,29	624140,9	2947,91	748969,0	3537,49
					0,14	206548,9	1326,13	258186,2	1657,55	309823,4	1989,19	413097,9	2652,26	580918,9	3729,74	697102,7	4475,68
M39	-	60	3	1030	0,10	265219,6	1351,70	331524,5	1689,63	397829,5	2027,56	530439,3	2703,41	745930,2	3801,67	895116,2	4562,00
					0,14	247027,0	1715,15	308783,8	2143,94	370540,4	2572,72	494054,1	3430,30	694763,5	4823,86	833716,1	5788,63
M42	32	65	3	1210	0,10	312529,3	1709,52	390661,6	2136,90	468793,9	2564,28	625058,5	3419,04	878988,6	4808,02	1054786,0	5769,62
					0,14	291268,7	2174,59	364085,9	2718,24	436903,1	3261,89	582537,4	4349,18	819193,3	6116,04	983031,9	7339,24
M45	-	70	3	1400	0,10	362551,7	2118,52	453189,7	2648,14	543827,6	3177,77	725103,5	4237,03	1019677,0	5958,33	1223612,0	7149,99
					0,14	338067,8	2700,72	422584,7	3375,90	507101,7	4051,08	676135,5	5401,43	950815,6	7595,77	1140979,0	9114,92
M48	25	75	3	1600	0,10	415279,0	2581,68	519098,7	3227,11	622918,5	3872,53	830558,0	5163,37	1167972,0	7260,99	1401567,0	8713,18
					0,14	387415,3	3297,46	484269,2	4121,83	581123,0	4946,20	774830,6	6594,93	1089606,0	9274,12	1307527,0	11128,94
M52	-	80	3	1900	0,10	494405,2	3299,14	618006,5	4123,92	741607,8	4948,71	988810,4	6598,28	1390515,5	9278,83	1668618,0	11134,60
					0,14	461482,7	4222,62	576853,3	5278,28	692224,0	6333,94	922965,3	8445,25	1297920,0	11876,13	1557504,0	14251,36
M56	41	85	4	2140	0,10	552738,4	4008,26	690923,0	5010,32	829107,5	6012,39	1105477,0	8016,51	1554577,0	11273,22	1865492,0	13527,87
					0,14	515137,2	5097,95	643921,5	6372,43	772705,8	7646,92	1030274,0	10195,89	1448823,0	14337,98	1738588,0	17205,57
M60	-	90	4	2480	0,10	642235,1	4950,24	802793,9	6187,80	963352,7	7425,36	1284470,0	9900,49	1806286,0	13922,56	2167544,0	16707,07
					0,14	598863,8	6309,01	748579,8	7886,27	898295,7	9463,52	1197728,0	12618,02	1684304,0	17744,10	2021165,0	21292,92
M64	46	95	4	2850	0,10	739716.3	6039,07	924645,4	7548,84	1109574,0	9058,60	1479433,0	12078,14	2080452,0	16984,88	2496543,0	20381,86
					0,14	690084,3	7710,76	862605,3	9638,45	1035126,0	11566,14	1380169,0	15421,52	1940862,0	21686,51	2329034,0	26023,81
M68	-	100	4	3240	0,10	842588,5	7263,31	1053236,0	9079,14	1263883,0	10894,97	1685177,0	14526,62	2369780,0	20428,06	2843736,0	24513,68
					0,14	786380,1	9288,98	982975,1	11611,23	1179570,0	13933,47	1572760,0	18577,96	2211694,0	26125,26	2654033,0	31350,31

COMPARATIVE TABLE METRIC, AMERICAN AND BRITISH DIMENSIONS

metric dimensions										
key widths				thread						
				metric dimensions to DIN ISO 272				ISO R272 1968		french standard
specified s ze = order size (mm)	minimum size (mm) to DIN 475/2 / ISO 691	maximum size (mm) to DIN 475/2, series 1	maximum size (mm) to DIN 475/2, series 2	standard hexagon	large hexagon	screw with fla ge	nut with fla ge	standard hexagon	small hexagon	NFE27-111-1930
1,5										
2,0	2,02	2,08								
2,5	2,52	2,58								
3	3,02	3,08		1,0						
3,2	3,22	3,28		1,6				1,6		
3,5	3,52	3,60								
4	4,02	4,12		2				2		2,5
4,5	4,52	4,62								
5	5,02	5,12		2,5				2,5		3
5,5	5,52	5,62		3				3		
6	6,03	6,15								3,5
7	7,03	7,15		4		5		4		4+4,5
8	8,03	8,15	8,18	5		6	5	5		5
9	9,03	9,15	9,18							5,5
10	10,04	10,19	10,24	6		8	6	6		6
11	11,04	11,19	11,24	7				7		
12	12,04	12,24	12,30						8	7
13	13,04	13,24	13,30	8		10	8	8		
14	14,05	14,27	14,35						10	8
15	15,05	15,27	15,35			12	10			
16	16,05	16,27	16,35	10						9
17	17,05	17,30	17,40	10				10	12	10
18	18,05	18,30	18,40	12	ZK:	14	12			
					M12					
19	19,06	19,36	19,46					12	14	11
20	20,06	20,36	20,46							
20,8	20,86	21,16	21,26							
21	21,06	21,36	21,46	14	12	16	14			12
22	22,06	22,36	22,46					14	16	
23	23,06	23,36	23,46							14
24	24,06	24,36	24,46	16	14		16	16	18	
25	25,06	25,36	20,46							
26	26,08	26,48	26,58		ZK: M18					16
27	27,08	27,48	27,58	18	16	20		18	20	
28	28,08	28,48	28,58							
29	29,08	29,48	29,58							18
30	30,08	30,48	30,58	20	18		20	20	22	
32	32,08	32,48	32,58					22	24	20
33	33,08	33,48	33,58							
34	34,10	34,6	34,70	22	20					
35	35,10	35,60	35,70							22
36	36,10	36,60	36,70	24	22			24	27	
38	38,10	38,60	38,70							24
41	41,10	41,60	41,70	27	24			27	30	
42	42,10	42,60	42,70							27
46	46,10	46,60	46,70	30	27			30	33	30
50	50,10	50,60	50,70	33	30			33	36	33
54	54,10	54,60	54,70							36
55	55,10	55,72	55,92	36	33			36	39	
58	58,12	58,72	58,92							
60	60,12	60,72	60,92	39	36			39		
63	63,12	63,72	63,92							42
65	65,12	65,72	65,92	42	39			42		
67	67,12	67,72	67,92							45

COMPARATIVE TABLE METRIC, AMERICAN AND BRITISH DIMENSIONS

american dimensions													english dimensions			
key widths			thread										thread		key widths	
			ISO R272 1962		United Standard		American Standard 18.2.1972									
							nuts			bolts + screws						
specified size = order size AF"	decimal - inch	decimal - metric	bolts	nuts	normal series BS 176B	heavy series BS 176B	finished hick series	heavy series	regular square series	finished and egular bolt series	hexagon head cap screws	finished and h avy bolt series	specified s ze = order size	BS 916, BS 1082	decimal - inch	decimal - metric
1/16	.0625	1,59														
5/64	.0781	1,98														
3/32	.0938	2,38														
7/64	.1094	2,78											10BA		.117	2,97
1/8	.1250	3,18	Nr.2										9BA		.131	3,33
9/64	.1406	3,57														
5/32	.1563	3,97		Nr. 0, 1									8BA		.152	3,86
3/16	.1875	4,76	Nr. 3, 4, 5	Nr. 2, 3									7BA		.172	4,37
13/64	.2031	5,16											6BA		.193	4,90
7/32	.2188	5,56											5BA		.220	5,59
15/64	.2344	5,95								Nr. 10			4BA		.248	6,30
1/4	.2500	6,35	Nr. 6, 8	Nr. 4									1/16	3/32	.256	6,50
17/64	.2656	6,75														
9/32	.2813	7,14								Nr. 10			3BA		.282	7,16
5/16	.3125	7,94	Nr. 10, 12	Nr. 5, 6									3/32	1/8	.297	7,54
													2BA		.324	8,23
11/32	.3438	8,73		Nr.8									1/8	3/16	.340	8,64
													1BA		.365	9,27
3/8	.3750	9,52		Nr.10												
13/32	.4062	10,32											0BA	1/4	.413	10,49
7/16	.4375	11,11	1/4	Nr.12 1/4	1/4		1/4	1/4		1/4			3/16	1/4	.445	11,30
1/2	.5000	12,70	5/16	5/16	5/16		5/16		1/4	5/16			1/4	5/16	.525	13,33
17/32	.5313	13,49														
9/16	.5625	14,29	3/8	3/8	3/8		3/8	5/16	5/16	3/8						
19/32	.5938	15,08											5/16	3/8	.600	15,24
5/8	.6250	15,87	7/16		7/16			3/8		7/16						
21/32	.6563	16,67														
11/16	.6875	17,46		7/16			7/16		3/8							
													3/8	7/16	.710	18,03
3/4	.7500	19,05	1/2	1/2	1/2		1/2	7/16	7/16	1/2						
25/32	.7813	19,84														
13/16	.8125	20,64	9/16		9/16			1/2		9/16			7/16	1/2	.820	20,83
7/8	.8750	22,22		9/16		1/2	9/16	9/16	1/2			1/2				
													1/2	9/16	.920	23,37
15/16	.9375	23,81	5/8	5/8	5/8		5/8		9/16	5/8						
31/32	.9688	24,61														
1	1.0000	25,40						5/8								
													9/16	5/8	1.010	25,65
1.1/16	1.0625	26,99				5/8			5/8			5/8				
													5/8	11/16	1.100	27,94
1.1/8	1.1250	28,57	3/4	3/4	3/4		3/4	3/4		3/4						
1.3/16	1.875	30,16											11/16	3/4	1.200	30,48
1.1/4	1.2500	31,75				3/4			3/4			3/4				
1.5/16	1.3125	33,34	7/8	7/8	7/8		7/8	7/8		7/8			3/4	7/8	1.300	33,02
1.3/8	1.3750	34,92											13/16	15/16	1.390	35,31
1.7/16	1.4375	36,51				7/8			7/8			7/8				
1.1/2	1.5000	38,10	1	1	1		1	1		1			7/8	1	1.480	37,59
1.9/16	1.5625	39,69														
1.5/8	1.6250	41,28				1			1			1				
1.11/16	1.6875	42,86	1.1/8	1.1/8	1.1/8		1.1/8	1.1/8		1.1/8			1		1.670	42,42
1.3/4	1.7500	44,45														
1.13/16	1.8125	46,04				1.1/8			1.1/8			1.1/8	1.1/8	1.1/4	1.860	47,24
1.7/8	1.8750	47,62	1.1/4	1.1/4	1.1/4		1.1/4	1.1/4		1.1/4						
1.15/16	1.9375	49,21														
2	2.0000	50,80				1.1/4										
2.1/16	2.0625	52,39	1.3/8	1.3/8	1.3/8		1.3/8	1.3/8		1.3/8			1.1/4	1.3/8	2.050	52,07
2.1/8	2.1250	53,98														
2.3/16	2.1875	55,56					1.3/8		1.3/8			1.3/8				
2.5/16	2.3125	58,74														
2.3/8	2.3750	60,32				1.1/2			1.1/2			1.1/2				
2.7/16	2.4375	61,91					1.5/8	1.5/8		1.5/8			1.1/2	1.5/8	2.410	61,21
2.1/2	2.5000	63,50														

COMPARATIVE TABLE METRIC, AMERICAN AND BRITISH DIMENSIONS

metric dimensions										
key widths				thread						
				metric dimensions to DIN ISO 272				ISO R272 1968		french standard
specified s ze = order size	minimum size (mm) to DIN 475/2 / ISO 691	maximum size (mm) to DIN 475/2, series 1	maximum size (mm) to DIN 475/2, series 2	standard hexagon	large hexagon	screw with fla ge	nut with fla ge	standard hexagon	small hexagon	NFE27-111-1930
70	70,12	70,72	70,92	45				45		
71	71,12	71,72	71,92							48
75	75,15	75,85	76,15	48				48		
77	77,15	77,85	78,15							52
80	80,15	80,85	81,15	52				52		56
82	82,15	82,85	82,15							
85	85,15	85,85	86,15	56				56		
88	88,15	88,85	88,15							60
90	90,15	90,85	91,15	60				60		
94	94,15	94,85	94,15							64
95	95,15	95,85	96,15	64				64		
100	100,15	100,85	101,15	68				68		68
105	105,20	106,00	106,40	72				72		72
110	110,20	111,00	111,40	76				76		76
115	115,20	116,00	116,40	80				80		
116	116,20	117,00	117,40							80
120	120,20	121,00	121,40	85				85		
125	125,20	126,00	126,40							
130	130,20	131,00	131,40	90				90		
135	135,20	136,00	136,40	95				95		
140	140,20	141,00	141,40							
145	145,20	146,00	146,40	100				100		
150	150,25	151,25		105				105		
155	155,25	156,25		110				110		
160	160,25	161,25								
165	165,25	166,25						115		
170	170,25	171,25								
175	175,25	176,25						120		
180	180,25	181,25						125		

PROFILE DIMENSION TABLE FOR TX-SCREWS

dimensions for internal TX-screws and internal safety TX-screws with pin	
TX / TXB	mm
TX / TXB 5	1,42
TX / TXB 6	1,67
TX / TXB 7	1,99
TX / TXB 8	2,31
TX / TXB 9	2,50
TX / TXB 10	2,74
TX / TXB 15	3,27
TX / TXB 20	3,86
TX / TXB 25	4,43
TX / TXB 27	4,99
TX / TXB 30	5,52
TX / TXB 40	6,65
TX / TXB 45	7,82
TX / TXB 50	8,83
TX / TXB 55	11,22
TX / TXB 60	13,25
TX / TXB 70	15,42

dimensions for external TX-screws	
E / TXE	mm
E / TXE 4	3,86
E / TXE 5	4,75
E / TXE 6	5,74
E / TXE 7	6,22
E / TXE 8	7,52
E / TXE 10	9,42
E / TXE 11	9,98
E / TXE 12	11,17
E / TXE 14	12,90
E / TXE 16	14,76
E / TXE 18	16,70
E / TXE 20	18,49
E / TXE 24	22,16

COMPARATIVE TABLE METRIC, AMERICAN AND BRITISH DIMENSIONS

american dimensions													english dimensions			
key widths			thread										thread		key widths	
			ISO R272 1962		United Standard		American Standard 18.2.1972									
							nuts			bolts + screws						
specified size = order size AF"	decimal - inch	decimal - metric	bolts	nuts	normal series BS 176B	heavy series BS 176B	finished hick series	heavy series	regular square series	finished and egular bolt series	hexagon head cap screws	finished and h avy bolt series	specified s ze = order size	BS 916, BS 1082	decimal - inch	decimal - metric
2.9/16	2.5625	65,09							1.5/8			1.5/8	1.5/8	1.3/4	2.580	65,53
2.5/8	2.6250	66,67	1.3/4	1.3/4	1.3/4		1.3/4	1.3/4		1.3/4						
2.3/4	2.7500	69,85				1.3/4			1.3/4			1.3/4	1.3/4	2	2.760	70,1
2.13/16	2.8125	71,44					1.7/8	1.7/8		1.7/8						
2.7/8	2.8750	73,03														
2.15/16	2.9375	74,61							1.7/8			1.7/8				
3	3.0000	76,20	2	2	2		2	2		2						
3.1/8	3.1250	79,37				2			2			2	2	2.1/4	3.150	80,01
3.1/4	3.2500	82,55														
3. 3/8	3.3750	85,72					2.1/4	2.1/4		2.1/4						
3.1/2	3.5000	88,90							2.1/4			2.1/4		2.1/2	3.550	90,17
3.5/8	3.6250	92,08														
3.3/4	3.7500	95,25					2.1/2	2.1/2		2.1/2				2.3/4	3.890	98,80
3.7/8	3.8750	98,42							2.1/2			2.1/2				
4	4.0000	101,60														
4.1/8	4.1250	104,77					2.3/4	2.3/4		2.3/4				3	4.180	106,17
4.1/4	4.2500	107,95							2.3/4			2.3/4				
4.1/2	4.5000	114,30					3	3		3				3.1/4	4.530	115,06
4.5/8	4.6250	117,47							3			3				
4.7/8	4.8750	123,82								3.1/4				3.1/2	4.850	123,19
5	5.0000	127,00							3.1/4							
5.1/4	5.2500	133,35							3.1/2	3.1/2				3.3/4	5.180	131,57
5.3/8	5.3750	136,52							3.1/2							
														4	5.550	140,97
5.5/8	5.6250	142,87							3.3/4	3.3/4						
5.3/4	5.7500	146,05							3.3/4							
6	6.0000	152,40							4	4						
									4					4.1/2	6.380	162,05
														5	7.300	185,42

CONVERSION TABLES FOR TORQUE WRENCHES

conversion factors								
	SI unit			metric unit		USA / GB unit		
unit	cNm	dNm	Nm	cmkg	mkg	ft.lb.	in.lb	in.oz
1 cNm	1,0000	0,1000	0,0100	0,1020	0,0010	0,0074	0,0885	1,4161
1 dNm	10,0000	1,0000	0,1000	1,0197	0,0102	0,0738	0,8851	14,1612
1 Nm	100,0000	10,0000	1,0000	10,1972	0,1020	0,7376	8,8508	141,6123
1 cmkg	9,8067	0,9807	0,0981	1,0000	0,0100	0,0723	0,8680	13,8874
1 mkg	980,6650	98,0665	9,8067	100,0000	1,0000	7,2330	86,7964	1388,7422
1 ft.lb	135,5818	13,5581	1,3558	13,8255	0,1383	1,0000	12,0000	192,0000
1 in.lb	11,2985	1,1298	0,1130	1,1521	0,0115	0,0833	1,0000	16,0000
1 in.oz	0,7062	0,0706	0,0071	0,0720	0,0007	0,0052	0,0625	1,0000

conversion Nm to mkg						1 Nm = 0,10197 mkg				
Nm	0	1	2	3	4	5	6	7	8	9
0	0,00	0,10	0,20	0,31	0,41	0,51	0,61	0,71	0,82	0,92
10	1,02	1,12	1,22	1,33	1,43	1,53	1,63	1,73	1,84	1,94
20	2,04	2,14	2,24	2,35	2,45	2,55	2,65	2,75	2,86	2,96
30	3,06	3,16	3,26	3,37	3,47	3,57	3,67	3,77	3,87	3,98
40	4,08	4,18	4,28	4,38	4,49	4,59	4,69	4,79	4,89	5.00
50	5,10	5,20	5,30	5,40	5,51	5,61	5,71	5,81	5,91	6,02
60	6,12	6,22	6,32	6,42	6,53	6,63	6,73	6,83	6,93	7,04
70	7,14	7,24	7,34	7,44	7,55	7,65	7,75	7,85	7,95	8,06
80	8,16	8,26	8,36	8,46	8,57	8,67	8,77	8,87	8,97	9,08
90	9,18	9,28	9,38	9,48	9,59	9,69	9,79	9,89	9,99	10,10
100	10,2	10,3	10,4	10,5	10,6	10,71	10,81	10,91	11,01	11,11

conversion mkg to Nm						1 mkg = 9,80665 Nm				
mkg	0	1	2	3	4	5	6	7	8	9
0	0	9,81	19,61	29,42	39,23	49,03	58,84	68,65	78,45	88,26
10	98,07	107,87	117,68	127,49	137,29	147,10	156,91	166,71	176,52	186,33
20	196,13	205,94	215,75	225,55	235,36	245,17	254,97	264,78	274,59	284,39
30	294,2	304,01	313,81	323,62	333,43	343,23	353,04	362,85	372,65	382,46
40	392,27	402,07	411,88	421,69	431,49	441,30	451,11	460,91	470,72	480,53
50	490,33	500,14	509,95	519,75	529,56	539,37	549,17	558,98	568,79	578,59
60	588,4	598,21	608,01	617,82	627,63	637,43	647,24	657,05	666,85	676,66
70	686,47	696,27	706,08	715,89	725,69	735,50	745,31	755,11	764,92	774,73
80	784,53	794,34	804,15	813,95	823,76	833,57	843,37	853,18	862,99	872,79
90	882,6	892,41	902,21	912,02	921,83	931,63	941,44	951,25	961,05	970,86
100	980,67	990,47	1000,28	1010,08	1019,89	1029,70	1039,50	1059,12	1059,12	1068,92

conversion Nm to ft.lb.						1 Nm = 0,73756 ft.lb.				
Nm	0	1	2	3	4	5	6	7	8	9
0	0,00	0,74	1,48	2,21	2,95	3,69	4,43	5,16	5,90	6,64
10	7,38	8,11	8,85	9,59	10,33	11,06	11,80	12,54	13,28	14,01
20	14,75	15,49	16,23	16,96	17,7	18,44	19,18	19,91	20,65	21,39
30	22,13	22,86	23,60	24,34	25,08	25,81	26,55	27,29	28,03	28,76
40	29,50	30,24	30,98	31,72	32,45	33,19	33,93	34,67	35,40	36,14
50	36,88	37,62	38,35	39,09	39,83	40,57	41,3	42,04	42,78	43,52
60	44,25	44,99	45,73	46,47	47,2	47,94	48,68	49,42	50,15	50,89
70	51,63	52,37	53,10	53,84	54,58	55,32	56,05	56,79	57,53	58,27
80	59,00	59,74	60,48	61,22	61,96	62,69	63,43	64,17	64,91	65,64
90	66,38	67,12	67,86	68,59	69,33	70,07	70,81	71,54	72,28	73,02
100	73,76	74,49	75,23	75,97	76,71	77,44	78,18	78,92	79,66	80,39

conversion ft.lb. to Nm						1 ft.lb. -> 1,35581 Nm				
ft.lb.	0	1	2	3	4	5	6	7	8	9
0	0,00	1,36	2,71	4,07	5,42	6,78	8,13	9,49	10,85	12,20
10	13,56	14,91	16,27	17,63	18,98	20,34	21,69	23,05	24,40	25,76
20	27,12	28,47	29,83	31,18	32,54	33,90	35,25	36,61	37,96	39,32
30	40,67	42,03	43,39	44,74	46,10	47,45	48,81	50,16	51,52	52,88
40	54,23	55,59	56,94	58,30	59,66	61,01	62,37	63,72	65,08	66,43
50	67,79	69,15	70,50	71,86	73,21	74,57	75,93	77,28	78,64	79,99
60	81,35	82,70	84,06	85,42	86,77	88,13	89,48	90,84	92,20	93,55
70	94,91	96,26	97,62	98,97	00,33	101,69	103,04	104,40	105,75	07,11
80	108,46	109,82	111,18	12,53	13,89	115,24	116,60	117,96	119,31	20,67
90	122,02	123,38	124,73	26,09	27,45	128,80	130,16	131,51	132,87	34,23
100	135,58	136,94	138,29	39,65	41,00	142,36	143,72	145 07	146,43	47 78

CONVERSION TABLES FOR TORQUE WRENCHES

conversion in.lb. to Nm						1 Nm = 8,85077 in.lb.				
Nm	0	1	2	3	4	5	6	7	8	9
0	0,00	8,85	17,70	26,55	35,40	44,25	53,10	61,96	70,81	79,66
10	88,51	97,36	106,21	115,06	123,91	132,76	141,61	150,46	159,31	168,16
20	177,02	185,87	194,72	203,57	212,42	221,27	230,12	238,97	247,82	256,67
30	265,52	274,37	283,22	292,08	300,93	309,78	318,63	327,48	336,33	345,18
40	354,03	362,88	371,73	380,58	389,43	398,28	407,14	415,99	424,84	433,69
50	442,54	451,39	460,24	469,09	477,94	486,79	495,64	504,49	513,34	522,20
60	531,05	539,90	548,75	557,60	566,45	575,30	584,15	593,00	601,85	610,70
70	619,55	628,40	637,26	646,11	654,96	663,81	672,66	681,51	690,36	699,21
80	708,06	716,91	725,76	734,61	743,46	752,32	761,17	770,02	778,87	787,72
90	796,57	805,42	814,27	823,12	831,97	840,82	849,67	858,52	867,38	876,23
100	885,08	893,93	902,78	911,63	920,48	929,33	938,18	947,03	955,88	964,73

conversion Nm to in.lb.						1 in.lb. -> 0,11298 Nm				
in.lb.	0	1	2	3	4	5	6	7	8	9
0	0,00	0,11	0,23	0,34	0,45	0,56	0,68	0,79	0,90	1,02
10	1,13	1,24	1,36	1,47	1,58	1,69	1,81	1,92	2,03	2,15
20	2,26	2,37	2,49	2,60	2,71	2,82	2,94	3,05	3,16	3,28
30	3,39	3,50	3,62	3,73	3,84	3,95	4,07	4,18	4,29	4,41
40	4,52	4,63	4,75	4,86	4,97	5,08	5,20	5,31	5,42	5,54
50	5,65	5,76	5,87	5,99	6,10	6,21	6,33	6,44	6,55	6,67
60	6,78	6,89	7,00	7,12	7,23	7,34	7,46	7,57	7,68	7,80
70	7,91	8,02	8,13	8,25	8,36	8,47	8,59	8,70	8,81	8,93
80	9,04	9,15	9,26	9,38	9,49	9,60	9,72	9,83	9,94	10,06
90	10,17	10,28	10,39	10,51	10,62	10,73	10,85	10,96	11,07	11,19
100	11,30	11,41	11,52	11,64	11,75	11,86	11,98	12,09	12,20	12,31

Tightening forces and fastening torque values
for metric screws

Reference values for thread friction coefficient μ smallest values)

screw thread / nut thread				steel				
				blackened or coated with zinc phosphate				
				press rolled	cut by turning	ground	cadmium plated 6 µm	galvanised 6 µm
steel	rolled		lightly oiled	0,14	0,10	0,16	0,10	0,10
	ground			0,16	0,10	0,16	0,10	0,10
	rolled and ground	zinc phosphate		0,14		0,10		
	cut by turning			0,10				
	cut by turning			0,10		0,10	0,10	0,10
	cadmium plated						0,14	
	galvanised							0,10
	cadmium plated		dry	0,10		0,10	0,14	
	galvanised			0,10		0,10		0,14

Reference values for under head friction coefficient μ smallest values)

screw head or nut caps / work-piece with sealing run				steel				
				blackened or coated with zinc phosphate				
				pressed	turned	ground	cadmium plated 6 µm	galvanised 6 µm
steel	planed milled turned		lightly oiled	0,10		0,10	0,10	0,10
	planed milled turned	zinc phos-phate		0,10				
	ground			0,14		0,10		
	ground			0,16	0,10	0,16	0,10	0,10
	cadmium plated	6 µm		0,10	0,10	0,10	0,14	
	galvanised		dry	0,10	0,10	0,10		0,16
	cadmium plated			0,10		0,10	0,16	
	galvanised		lightly oiled	0,10		0,10		
	planed milled turned			0,10		0,10	0,10	0,10
	ground			0,16	0,10	0,16	0,10	0,10

Tightening forces and fastening torque values
Tightening forces Fsp and fastening torque values Msp for screws having standard metric threads in accordance with DIN 13, page 43 (M1.6-M2.5-M3 to M39) or page 1 (M1.7-M2-M2.3-M2.6) and head cap dimensions such as DIN 912, 931, 934, 6912, 7984, 7990.

The tabulated values Fsp and Msp are based on the SI unit N (Newton).

1N=0,102 kp, 1 Ncm = 0,102 kpcm,
1Nm = 0,102 kpm, 1 kp = 9,81 N,
1kpcm = 9,81 Ncm, 1 kpm = 9,81 Nm.

The tightening forces, Fsp, given in the table on the left, yield a 90% utilisation of the screw yield strength σ0,2 (DIN 267) with the comparative tension σ red depending on the respective thread friction coefficient μ. he tightening force table can be used to see the screw and its quality that is required for a certain thread friction in order to apply a specific orce of assembly, FM (Fsp≥FM). The fastening torque values, Msp, are calculated from the tightening forces, Fsp, assuming that μ=μK=μges. The fastening torque, Msp, for 90% utilisation of the yield strength for a screw having specific dimensions and quali y, is determined using the table given on the right side depending on the underhead friction (μK), without taking any value of thread friction into consideration that is different from that given here. In order to arrive at the nominal torque value, half the dispersion value of the torque wrench under consideration must be subtracted from the fastening torque, Msp, found in the table. The calculation of values in the table and notes on their use are in accordance with VDI 2230.

thread friction coeffi cient μ	tightening force Fsp [N]				thread	under head friction coeffic - ent μK	fastening torque Msp [N•cm]			
	6,9	8,8	10,9	12,9			6,9	8,8	10,9	12,9
0,10 0,14 0,16	475 440 420	565 520 495	795 730 700	955 875 840	M 1,6	0,10 0,14 0,16	12,5 15 16	14,5 18 19	21 25 27	25 30 32
0,10 0,14 0,16	560 520 495	665 610 585	935 860 825	1120 1030 990	M 1,7	0,10 0,14 0,16	15,5 19 20	18,5 22 24	26 31 34	31 38 40
0,10 0,14 0,16	790 730 700	940 865 825	1320 1210 1160	1590 1460 1400	M 2	0,10 0,14 0,16	26 31 34	30 37 40	43 52 56	51 62 67
0,10 0,14 0,16	1140 1050 1010	1350 1250 1190	1900 1750 1680	2280 2100 2020	M 2,3	0,10 0,14 0,16	41 51 54	49 60 65	69 84 91	83 101 109
0,10 0,14 0,16	1320 1220 1170	1570 1450 1380	2210 2030 1950	2650 2440 2340	M 2,5	0,10 0,14 0,16	52 64 69	62 76 82	88 107 115	105 128 138
0,10 0,14 0,16	1460 1350 1290	1730 1600 1530	2440 2250 2150	2930 2700 2580	M 2,6	0,10 0,14 0,16	59 73 78	70 86 93	99 121 130	119 145 156
0,10 0,14 0,16	2020 1860 1790	2390 2210 2120	3370 3110 2980	4040 3730 3580	M 3	0,10 0,14 0,16	92 113 122	109 134 145	154 189 205	184 225 245
0,10 0,14 0,16	2710 2500 2400	3210 2960 2840	4520 4170 4000	5420 5000 4790	M 3,5	0,10 0,14 0,16	142 173 187	168 205 220	235 290 310	285 345 375
0,10 0,14 0,16	3500 3230 3100	4150 3830 3670	5830 5380 5160	7000 6460 6190	M 4	0,10 0,14 0,16	210 260 280	250 305 330	350 430 465	425 515 555
0,10 0,14 0,16	5720 5280 5070	6780 6260 6010	9540 8810 8450	11450 10550 10150	M 5	0,10 0,14 0,16	415 510 550	490 605 650	690 850 915	830 1020 1100
							fastening torque Msp [N•cm]			
0,10 0,14 0,16	8080 7450 7150	9570 8830 8470	13450 12400 11900	16150 14900 14300	M 6	0,10 0,14 0,16	7,1 8,7 9,4	8,5 10,5 11,0	12,0 14,5 15,5	14,5 17,5 19,0
0,10 0,14 0,16	11800 10900 10450	14000 12950 12400	19650 18200 17450	23600 21800 20900	M 7	0,10 0,14 0,16	11,5 14,5 15,5	14,0 17,0 18,5	19,5 24,0 26,0	23,0 29,0 31,0
0,10 0,14 0,16	14800 13700 13150	17550 16200 15550	24700 22800 21900	29600 27400 26300	M 8	0,10 0,14 0,16	17,0 21,0 23,0	20,0 25,0 27,0	29,0 35,0 38,0	34,0 42,0 46,0
0,10 0,14 0,16	23600 21800 20900	27900 25800 24800	39300 36300 34900	47200 43600 41800	M 10	0,10 0,14 0,16	34,0 42,0 46,0	41,0 50,0 54,0	57,0 71,0 76,0	69,0 85,0 92,0
0,10 0,14 0,16	34400 31800 30500	40700 37700 36100	57300 53000 50800	68700 63500 61000	M 12	0,10 0,14 0,16	59,0 73,0 79,0	70,0 87,0 94,0	99 122 132	119 147 159
0,10 0,14 0,16	47200 43600 41900	55900 51700 49600	78600 72700 69800	94300 87300 83800	M 14	0,10 0,14 0,16	94 117 126	112 138 150	157 195 210	189 235 250
0,10 0,14 0,16	64800 60100 57700	76800 71200 68400	108000 100000 96100	129500 120000 115500	M 16	0,10 0,14 0,16	144 179 194	170 210 230	240 300 325	285 360 385
0,10 0,14 0,16	78900 73000 70100	93500 86500 83000	131500 121500 117000	157500 146000 140000	M 18	0,10 0,14 0,16	199 245 265	235 290 315	330 410 445	395 490 530
0,10 0,14 0,16	101500 93900 90100	120000 111000 107000	169000 156500 150000	202500 187500 180500	M 20	0,10 0,14 0,16	280 350 375	330 410 445	465 580 625	560 695 755
0,10 0,14 0,16	126500 117500 112500	150000 139000 133500	211000 195500 188000	253000 235000 225000	M 22	0,10 0,14 0,16	375 470 510	445 555 605	625 785 850	755 940 1020
0,10 0,14 0,16	146000 135000 130000	173000 160000 154000	243000 225000 216000	292000 270000 260000	M 24	0,10 0,14 0,16	480 560 650	570 710 770	800 1000 1080	965 1200 1300
0,10 0,14 0,16	192000 178000 171000	227000 211000 203000	320000 297000 285000	384000 356000 342000	M 27	0,10 0,14 0,16	710 890 965	840 1050 1140	1180 1480 1610	1420 1780 1930
0,10 0,14 0,16	233000 216000 208000	276000 256000 246000	389000 361000 346000	466000 433000 416000	M 30	0,10 0,14 0,16	965 1200 1310	1140 1430 1550	1610 2010 2180	1930 2410 2610
0,10 0,14 0,16	291000 270000 259000	344000 320000 307000	484000 450000 432000	581000 539000 518000	M 33	0,10 0,14 0,16	1300 1630 1770	1540 1940 2100	2170 2720 2950	2600 3270 3540
0,10 0,14 0,16	341000 316000 304000	404000 375000 360000	568000 527000 507000	682000 633000 608000	M 36	0,10 0,14 0,16	1680 2100 2300	1990 2490 2700	2790 3500 3790	3350 4200 4550
0,10 0,14 0,16	410000 380000 366000	485000 451000 433000	663000 634000 610000	819000 761000 731000	M 39	0,10 0,14 0,16	2170 2720 2960	2570 3220 3500	3610 4540 4930	4330 5440 5910

Conversion table from inches to millimetres

Conversion example from mm to inches: 69,850 mm = 2.3/4”
Conversion example from inches to mm: 4.1/2” = 114,300 mm

inch	mm	1	2	3	4	5	6	7	8	9
		millimetres								
0	0	25,400	50,800	76,200	101,600	127,000	152,400	177,800	203,200	228,600
1/64	0,397	25,797	51,197	76,597	101,997	127,397	152,797	178,197	203,597	228,997
1/32	0,794	26,194	51,594	76,994	102,394	127,794	153,194	178,594	203,994	229,394
3/64	1,191	26,591	51,991	77,391	102,791	128,191	153,591	178,991	204,391	229,791
1/16	1,588	26,988	52,388	77,788	103,188	128,588	153,988	179,388	204,788	230,188
5/64	1,984	27,384	52,784	78,184	103,584	128,984	154,384	179,784	205,184	230,584
3/32	2,381	27,781	53,181	78,581	103,981	129,381	154,781	180,181	205,581	230,981
7/64	2,778	28,178	53,578	78,978	104,378	129,778	155,178	180,578	205,978	231,378
1/8	3,175	28,575	53,975	79,375	104,775	130,175	155,575	180,975	206,375	231,775
9/64	3,572	28,972	54,372	79,772	105,172	130,572	155,972	181,372	206,772	232,172
5/32	3,969	29,369	54,769	80,169	105,569	130,969	156,369	181,769	207,169	232,569
11/64	4,366	29,766	55,166	80,566	105,966	131,366	156,766	182,166	207,566	232,966
3/16	4,762	30,162	55,562	80,962	106,362	131,762	157,162	182,562	207,962	233,362
13/64	5,159	30,559	55,959	81,359	106,759	132,159	157,559	182,959	208,359	233,759
7/32	5,556	30,956	56,356	81,756	107,156	132,556	157,956	183,356	208,756	234,156
15/64	5,953	31,353	56,753	82,153	107,553	132,953	158,353	183,753	209,153	234,553
1/4	6,35	31,750	57,150	82,550	107,950	133,350	158,750	184,150	209,550	234,950
17/64	6,747	32,147	57,547	82,947	108,347	133,747	159,147	184,547	209,947	235,347
9/32	7,144	32,544	57,944	83,344	108,744	134,144	159,544	184,944	210,344	235,744
19/64	7,541	32,941	58,341	83,741	109,141	134,541	159,941	185,341	210,741	236,141
5/16	7,938	33,338	58,738	84,138	109,538	134,938	160,338	185,738	211,138	236,538
21/64	8,334	33,734	59,134	84,534	109,934	135,334	160,734	186,134	211,534	236,934
11/32	8,731	34,131	59,531	84,931	110,331	135,731	161,131	186,531	211,931	237,331
23/64	9,128	34,528	59,928	85,328	110,728	136,128	161,528	186,928	212,328	237,728
3/8	9,525	34,925	60,325	85,725	111,125	136,525	161,925	187,325	212,725	238,125
25/64	9,922	35,322	60,722	86,122	111,522	136,922	162,322	187,722	213,122	238,522
13/32	10,319	35,719	61,119	86,519	111,919	137,319	162,719	188,119	213,519	238,919
27/64	10,716	36,116	61,516	86,916	112,316	137,716	163,116	188,516	213,916	239,316
7/16	11,112	36,512	61,912	87,312	112,712	138,112	163,512	188,912	214,312	239,712
29/64	11,509	36,909	62,309	87,709	113,109	138,509	163,909	189,309	214,709	240,109
15/32	11,906	37,306	62,706	88,106	113,506	138,906	164,306	189,706	215,106	240,506
31/64	12,303	37,703	63,103	88,503	113,903	139,303	164,703	190,103	215,503	240,903
1/2	12,7	38,100	63,500	88,900	114,300	139,700	165,100	190,500	215,900	241,300
33/64	13,097	38,497	63,897	89,297	114,697	140,097	165,497	190,897	216,297	241,697
17/32	13,494	38,894	64,294	89,694	115,094	140,494	165,894	191,294	216,694	242,094
35/64	13,891	39,291	64,691	90,091	115,491	140,891	166,291	191,691	217,091	242,491
9/16	14,288	39,688	65,088	90,488	115,888	141,288	166,688	192,088	217,488	242,888
37/64	14,684	40,084	65,484	90,884	116,284	141,684	167,084	192,484	217,884	243,284
19/32	15,081	40,481	65,881	91,281	116,681	142,081	167,481	192,881	218,281	243,681
39/64	15,478	40,878	66,278	91,678	117,078	142,478	167,878	193,278	218,678	244,078
5/8	15,875	41,275	66,675	92,075	117,475	142,875	168,275	193,675	219,075	244,475
41/64	16,272	41,672	67,072	92,472	117,872	143,272	168,672	194,072	219,472	244,872
21/32	16,669	42,069	67,469	92,869	118,269	143,669	169,069	194,469	219,869	245,269
43/64	17,066	42,466	67,866	93,266	118,666	144,066	169,466	194,866	220,266	245,666
11/16	17,462	42,862	68,262	93,662	119,062	144,462	169,862	195,262	220,662	246,062
45/64	17,859	43,259	68,659	94,059	119,459	144,859	170,259	195,659	221,059	246,459
23/32	18,256	43,656	69,056	94,456	119,856	145,256	170,656	196,056	221,456	246,856
47/64	18,653	44,053	69,453	94,853	120,253	145,653	171,053	196,453	221,853	247,253
3/4	19,05	44,450	69,850	95,250	120,650	146,050	171,450	196,850	222,250	247,650
49/64	19,447	44,847	70,247	95,647	121,047	146,447	171,847	197,247	222,647	248,047
25/32	19,844	45,244	70,644	96,044	121,444	146,844	172,244	197,644	223,044	248,444
51/64	20,241	45,641	71,041	96,441	121,841	147,241	172,641	198,041	223,441	248,841
13/16	20,638	46,038	71,438	96,838	122,238	147,638	173,038	198,438	223,838	249,238
53/64	21,034	46,434	71,834	97,234	122,634	148,034	173,434	198,834	224,234	249,634
27/23	21,431	46,831	72,231	97,631	123,031	148,431	173,831	199,231	224,631	250,031
55/64	21,828	47,228	72,628	98,028	123,428	148,828	174,228	199,628	225,028	250,428
7/8	22,225	47,625	73,025	98,425	123,825	149,225	174,625	200,025	225,425	250,825
57/64	22,622	48,022	73,422	98,822	124,222	149,622	175,022	200,422	225,822	251,222
29/32	23,019	48,419	73,819	99,219	124,619	150,019	175,419	200,819	226,219	251,619
59/64	23,416	48,816	74,216	99,616	125,016	150,416	175,816	201,216	226,616	252,016
15/16	23,812	49,212	74,612	100,012	125,412	150,812	176,212	201,612	227,012	252,412
61/64	24,209	49,609	75,009	100,409	125,809	151,209	176,609	202,009	227,409	252,809
31/32	24,606	50,006	75,406	100,806	126,206	151,606	177,006	202,406	227,806	253,206
63/64	25,003	50,403	75,803	101,203	126,603	152,003	177,403	202,803	228,203	253,603

Tightening torque values for wheel nuts and screws of passenger cars

manufacturer	type	N•m
Alfa Romeo	Alfa 145	83 - 103
	Alfa 146	83 - 103
	Alfa 147	83 - 103
	Alfa 155	73 - 90
	Alfa 156	98
	Alfa 164	95 - 105
	Alfa 166	86
	Alfa 33	88 - 108
	GTV	83 - 103
	Spider	83 - 103
Audi	100	120
	A2	120
	A3	120
	A4	120
	A5	120
	A6	120
	A8	120
	Audi 200	110
	Audi 80	110
	Audi Quattro	110
	Cabriolet	110
	Coupé	110
	S3	120
	S8	120
	TT	120
	1	120
BMW	3	90 - 110
	5	90 - 110
	7(> 01)	140
	M5	100
	X3	140
	X5	140
	Z3	100 - 110
	Z4	120
Chrysler	Caravan	129
	Jeep Grand Cherokee (97-01)	115 - 150
	Jeep Wrangler (93-96)	102
	Jeep Wrangler (96-02)	109 - 150
	Jepp Cherokee (97-01)	115 - 150
	Neon (94-99)	109 - 150
	Neon (99-02)	115 - 155
	PT Cruiser	115 - 155
	Stratus	109 - 150
	Voyager (01-02)	110 - 135
	Voyager (87-90)	129
Citroên	AX	90
	AX GTI	90
	AX Sport	90
	AX10	90
	AX11	90
	AX14	90
	Berlingo	85
	C15E	70
	C25	180
	C1	100
	C2	80 - 100
	C3	80 - 100
	C4	80 - 100
	C5	80 - 100
	C6	80 - 100
	C8	100
	Dispatch	100
	GT	90
	Saxo	85
	Xiantia	90
	XM	90
	Xsara	85
	ZK	90
Daewoo	Applause	88 - 118
	Charade	89 - 118
	Cuore	88 - 118
	Esoeri	80
	Grand Move	88 - 118
	Hi-Jet	89 - 118
	Korando	80 - 120
	Lanos	80
	Leganza	100
	Matiz	90 - 110
	Move	88 - 118
	Musso	80 - 120
	Nexia	80
	Nubria	80
	Sirion	89 - 118
	Sportrak	90 - 120
	Tacuma	108
Daewoo	Terios	88 - 118
	YRV	88 - 118
Fiat	Coupé	98
	Croma	98
	Ducato	160
	Ducato Maxi	180
	Scudo	100
	Stilo	98
	Talento	160
	remaining models	86
	Ulysee	100
Ford	Cougar	128
	Escort	100

manufacturer	type	N•m
Ford	Estate (95-00)	100
	Explorer	135
	Fiesta (90-93)	70 - 100
	Fiesta (94-02)	85
	Focus (98-02)	85
	Galaxy (01-02)	170
	KA	85
	Maverick (01-02)	133
	Mondeo (96-00)	85
	Probe	88 - 117
	Puma	85
	Scorpio	85
	Sierra	88 - 117
	Transit (02)	200
	Transit 100 (91-00)	75 - 95
	Transit 130	155 - 180
	Transit 150	155 - 180
	Transit 80 (91-00)	75 - 95
Honda	all models	108 - 110
Hyundai	H1	120 - 140
	H200	120 - 140
	Pony (bis 90)	70 - 80
	S-Coupé (90-92)	88 - 108
	Stellar	70 - 80
	remaining models	90 - 110
Jaguar	S-Type	128
	XJ12	88 - 102
	XJ6	65 - 85
	XJ8	66 - 82
	XJR	88 - 102
	XJ-S	66 - 82
	X-Type (01-02)	68 - 92
Kia	Besta	90 - 120
	Carens	88 - 118
	Clarius	88 - 118
	Mentor	88 - 118
	Pride	88 - 118
	Sedona	88 - 108
	Sephia	88 - 118
	Sportage	88 - 108
Lada	Niva	88 - 91
	Riva	70 - 78
	Samara	70 - 78
Lancia	Dedra	98
	Kappa	98
	remaining models	86
Land Rover	Defender	100 - 120
	Discovery (> 98)	140
	Discovery (< 98)	129
	Freelander	115
	Range Rover (> 94)	108
Lexus	all models	103
Mazda	121 (> 95)	85
	323 (> 98)	90 - 117
	626 (> 97)	80 - 115
	Demio	87 - 117
	E-Series	90 - 120
	MPV (> 99)	89 - 117
	MX-5 (> 98)	90 - 117
	MX-6 (> 94)	89 - 117
	Premacy	80 - 117
	Tribute	133
	Xedos (> 94)	89 - 117
	Xedos 9	88 - 127
Mercedes	510	160 - 180
	200GE	190
	230GE	190
	508D	160 - 180
	814 DA	250
	CL (99-02)	150
	MB 100D	140
	M	150
	S (98-02)	150
Mercedes	Sprinter (95-02)	180 +20
	remaining models	110
	V-Klasse (95-02)	175
Mini	Mini Cooper	90 - 110
	Mini One	90 - 110
Mitsubishi	3000 GT (93-01)	120 - 140
	Carisma	98 - 117
	Colt	98
	Eclipse (96-02)	117 - 137
	Galant (97-02)	98
	L200	120 - 140
	Lancer (96-02)	98
	Shogun Pajero	100 - 120
	Shogun Pinin	98
	Space Runner (98-02)	98
	Space Star	98 - 117
	Space Wagon (98-02)	98
Nissan	Almera (02)	98 - 118
	Maxima (00-02)	98 - 118
	Micra (92-02)	98 - 117
	Patrol GR	118 - 147
	Pick-Up	118 - 147
	Serena (96-02)	98 - 118
	Terrano II	118 - 147
	X-Trail	98 - 117

manufacturer	type	N•m
Opel	Agila	85
	Frontera-B (99-02)	120
	remaining models	110
Peugeot	106	85
	206	85
	306	80
	307	90
	406	90
	605	90
	607	90
	806	100
	Boxer	160 - 180
	Estate	85
	Expert	100
Porsche	all models	130
Renault	Clio	90
	Clio Sport	105
	Espace	100
	Kangoo	90
	Laguna	100
	Master	155
	Megane	90
	R5	80
	Safrane	90
	Scenics RX 4	105
	Trafic 00-02)	142
	Twingo	90
Rover	25	110
	45	110
	75 Tourer	125
	MG	110
	MG ZT-T	125
	Mini Cooper	57
Saab	9-3	110
	9-5	120
	900 (93-98)	90 - 110
	9000 (89-97)	105 - 125
Seat	Alhambra	140
	Arosa	110
	Cordoba	110
	Ibiza	110
	Inca	110
	Leon	120
	Toledo (99-02)	120
Skoda	Fabia	120
	Octavia	120
Subaru	all models	78 - 98
Suzuki	Alto	70 - 110
	Baleono	85
	Grand Vitara	95
	Ignes	85
	Jimny	95
	Liana	85
	Super Carry (99-02)	85
	Swift	80
	Vitara	80 - 100
	Wagon R	85
Toyota	4 Runner	103
	Avensis	103
	Camry	103
	Carina	103
	Celica	103
	Corolla	103
	Hi-Ace Power Van (96-02)	102
	Land Cruiser Amazon (98-02)	209
	Land Cruiser Colorado	110
	MR2	103
	Paseo	103
	Picnic	103
	Prado (96-02)	110
	Previa	103
	RAV4	103
	Supra	103
	Yaris	103
Volkswagen	Beetle	120
	Caddy	110
	Golf	110
	LT (96-02)	180
	Lupo	110
	Passat (96-02)	120
	Polo	110
	Sharan (01-02)	170
	Touareg	160
	Touran	120
	Transporter (96-02)	180
Volvo	C70	110
	S40	110
	S60 (02)	140
	S70	110
	S80	140
	V40 (98-02)	110
	V70 (00-02)	140
	V70 (97-02)	110

All information subject to change - please observe the manufacturer's specifi ations for alloy rims!

Fastening torque values for wheel screws of commercial vehicles (LCV + HGV) having standard rims

manufacturer	thread	fastening torque bolt centring	(N•m) hub centring	Trilex
Auwärter	M20 x 1,5	350	450	
	M22 x 1,5	350	600	
Bedford	M22 x 1,5	510 - 580	550 - 600	
	7/8"-11 BSF	510 - 580	550 - 600	
DAF	M18 x 1,5		340 - 400	270 - 300
	M20 x 1,5	280 - 350	450 - 520	320 - 350
	M22 x 1,5		700	
	M22 x 2	380 - 460		
DaimlerChrysler	M14 x 1,5	170	170*	M16:200
	M18 x 1,5	250	250*	M18x2:300
	M20 x 1,5	300	300	M20x2:350
	M22 x 1,5	450	600	
Faun	M18 x 1,5	290 - 320		
	M20 x 1,5	370 - 400		
	M22 x 1,5	430 - 460		
Iveco	M18 x 1,5		335 - 410	
	M20 x 1,5		440 - 540	
	M22 x 1,5	380 - 450	580 - 650	
EVO-Bus, Setra	M18 x 1,5	300		
	M20 x 1,5	400		
	M22 x 1,5		600	
MAN	M18 x 1,5		390	
	M20 x 1,5		475	
	M22 x 1,5		575	
RVI	M22 x 1,5		450 - 550	
Scania	7/8"-11 BSF	450 - 550	540 - 660	
Steyr-Daimler-Puch	M20 x 1,5		450 - 500	
	M22 x 1,5		550 - 600	
Volvo	M20 x 1,5		520 - 580	
	M22 x 1,5		570 - 630	
	7/8"-14 UNF		640 - 700	
VW Transporter T2,T5	M14 x 1,5	180		
VW T4 bis 12/95	M14 x 1,5	160		
VW T4 ab 01/96	M14 x 1,5	180		
VW LT28, 31	M14 x 1,5	200		
VW LT35, 40, 45, 50	M18 x 1,5		320	
trailer	M14 x 1,5	110 - 120		
	M18 x 1,5	270	320	
	M20 x 1,5	350	450	
	M22 x 1,5	450 - 500	630 - 650	
	M22 x 2	430		

*) with spring ring and fl t strip nuts 10 N-m = 1 Kpm

All information subject to change - please observe the manufacturer's specifi ations for alloy rims!

TIGHTENING TORQUE:	THE TIGHTENING TORQUE VALUES SPECIFIED BY THE WHEEL RIM MANUFACTURERS MUST BE OBSERVED.
FASTENING SCREWS:	THE WHEEL NUTS MUST BE TIGHTENED CROSS-WISE.
WHEEL ASSEMBLY:	THE HUBS AND WHEELS OF ALL MOTOR VEHICLES ARE PROTECTED AGAINST RUST WITH THE HELP OF A PRIMER COAT AND PRIMARILY PROVIDED WITH ONE TOP COAT. BASED ON EXPERIENCE, THESE COATS YIELD SOMEWHAT DURING THE FIRST FEW KILOMETRES OF DRIVING. EVEN SCREWS AND NUTS NEED SOME TIME IN ORDER TO SETTLE DOWN. HENCE, IT IS ESSENTIAL TO CHECK THE WHEEL NUTS FOR TIGHTNESS AND TO RETIGHTEN THEM AFTER TIGHTENING THEM WITH A TORQUE WRENCH AND AFTER DRIVING THE FIRST 50 KM.

Tightening torques for normal and fine threads

thread M	NORMAL THREADS									
	pre-tensioning force (kN)					tightening torque (N•m)				
	quality class in accordance with DIN 267									
	4.6	5.6	8.8	10.9	12.9	4.6	5.6	8.8	10.9	12.9
M 4x0,70	1,29	1,71	3,9	5,7	6,7	1,02	1,37	3	4,4	5,1
M 5x0,80	2,1	2,79	6,4	9,3	10,9	2	2,7	5,9	8,7	10
M 6x1,00	2,96	3,94	9	13,2	15,4	3,5	4,6	10	15	18
M 8x1,25	5,42	7,23	16,5	24,2	28,5	8,4	11	25	36	43
M 10x1,50	8,64	11,5	26	38,5	45	17	22	49	72	84
M 12x1,75	12,6	16,8	38,5	56	66	29	39	85	125	145
M 14x2,00	17,3	23,1	53	77	90	46	62	135	200	235
M 16x2,00	23,8	31,7	72	106	124	71	95	210	310	365
M 18x2,50	28,9	38,6	91	129	151	97	130	300	430	500
M 20x2,50	37,2	49,6	117	166	194	138	184	425	610	710
M 22x2,50	46,5	62	146	208	243	186	250	580	830	970
M 24x3,00	53,6	71,4	168	239	280	235	315	730	1050	1220
M 27x3,00	70,6	94,1	221	315	370	350	470	1100	1550	1800
M 30x3,50	85,7	114,5	270	385	450	475	635	1450	2100	2450
M 33x3,50	107	142,5	335	480	560	645	865	2000	2800	3400
M 36x4,00	125,5	167,5	395	560	680	1080	1440	2600	3700	4300
M 39x4,00	151	201	475	670	790	1330	1780	3400	4800	5600

thread M	FINE THREADS					
	pre-tensioning force (kN)			tightening torque (N•m)		
	quality class in accordance with DIN 267					
	8.8	10.9	12.9	8.8	10.9	12.9
M 8 x 1,00	18,1	26,5	31	27	40	47
M 10 x 1,25	28,5	41,5	48,5	54	79	93
M 12 x 1,25	43	64	74	96	140	165
M 12 x 1,50	40,5	60	70	92	135	155
M 14 x 1,50	58	86	100	150	220	260
M 16 x 1,50	79	116	136	230	340	290
M 18 x 1,50	106	152	177	350	490	580
M 20 x 1,50	134	191	224	480	690	800
M 22 x 1,50	166	236	275	640	920	1070
M 24 x 2,00	189	270	315	810	1160	1350
M 27 x 2,00	245	350	410	1190	1700	2000
M 30 x 2,00	309	440	515	1610	2300	2690

INFO:

PRE-TENSIONING FORCES AND TIGHTENING TORQUES FOR SETSCREWS (HEADLESS SCREWS) MADE OF STEEL HAVING BOLT HEAD DIMENSIONS AS SPECIFIED IN DIN 912, 931, 933, 934 / ISO 4762, 4014, 4017, 4032 ...*

THE VALUES GIVEN IN THE TABLE CONSIDER

- A) FRICTION COEFFICIENT GES = 0.14*
- B) UTILISATION OF THE MINIMUM YIELD STRENGTH = 90 %
- C) TORQUE WHILE TIGHTENING

(* THE FRICTION COEFFICIENT VALUE, MGES = 0.14 IS GENERALLY ASSUMED FOR SCREWS AND NUTS IN COMMERCIALLY AVAILABLE DESIGNS.)

*ADDITIONAL LUBRICATION OF THE THREAD CHANGES THE FRICTION COEFFICIENCONSIDERABLY AND LEADS TO UNCERTAIN PULLING CONDITIONS! CALCULATIONS HAVE BEEN MADE IN THE FOLLOWING EXAMPLE USING A FRICTION COEFFICIENT GES = 0.14. THERE ARE DIFFERENT VALUES OF FRICTION COEFFICIENT OR VARIATIONS DEPENDING ON THE PULLING METHOD AND TOOL DEPLOYED. ALL SPECIFICATIONS ARE TENTATIVE REFERENCE VALUES

torque and conversion factors

	mN•m	cN•m	N•m	ozf•in	lbf•in	lbf•ft	gf•cm	kgf•cm (kp•cm)	kgf•m (kp•m)
mN•m	1	0,1	0,001	0,142	0,009	0,0007	10,2	0,01	0,0001
cN•m	10	1	0,01	1,416	0,088	0,007	102	0,102	0,001
N•m	1000	100	1	141,6	8,851	0,7376	10197	10,2	0,102
ozf•in	7,062	0,706	0,007	1	0,0625	0,005	72	0,072	0,0007
lbf•in	113	11,3	0,113	16	1	0,083	1152,1	1,152	0,0115
lbf•ft	1356	135,6	1,3558	192	12	1	13826	13,83	0,138
gf•cm	0,098	0,01	0,0001	0,014	0,0009	0,00007	1	0,001	0,00001
kgf•cm (kp•cm)	98,07	9,807	0,098	13,89	0,868	0,072	1000	1	0,01
kgf•m (kp•m)	9807	980,7	9,807	1389	86,8	7,233	100000	100	1

example:

	mN•m	cN•m	N•m	ozf•in	lbf•in	lbf•ft	gf•cm	kgf•cm (kp•cm)	kgf•m (kp•m)
mN•m	1	0,1	0,001	0,142	0,009	0,0007	10,2	0,01	0,0001
cN•m	10	1	0,01	1,416	0,088	0,007	102	0,102	0,001
N•m	1000	100	1	141,6	8,851	**0,7376**	10197	10,2	0,102
ozf•in	7,062	0,706	0,007	1	0,0625	0,005	72	0,072	0,0007
lbf•in	113	11,3	0,113	16	1	0,083	1152,1	1,152	0,0115
lbf•ft	1356	135,6	1,3558	192	12	1	13826	13,83	0,138
gf•cm	0,098	0,01	0,0001	0,014	0,0009	0,00007	1	0,001	0,00001
kgf•cm (kp•cm)	98,07	9,807	0,098	13,89	0,868	0,072	1000	1	0,01
kgf•m (kp•m)	9807	980,7	9,807	1389	86,8	7,233	100000	100	1

Conversion of 40 N•m to lbf•ft 40 N•m x 0.7376 = 29.504 lbf•ft

DRILLING / TECHNICAL INFORMATION: GUIDELINES FOR DRILLING SPEEDS, FEED RATE AND COOLING

The table provides approximate values. According to drilling depth and thickness of the material, an increase or reduction in the cutting speed feed rate or cutting fluid ould be reccomended The values for -v- and -s- indicated value apply to drilling depths until 5 x d (d = drilling diameter) In drilling depths over 5 x d until 8 x d then -v- and -s- should be reduced around 20% to 30%. In general in drilling depths over 5 x d the hole should be cleaned!

material grade	cooling	cutting rate of 0 m/min	s=feed rate n=speed	twist drill diameter D [mm]							
				1*	2	5	8	16	25	40	63
				feed rates s		[mm/U] and medium speed n [U/mi]					
non alloyed steel up to 500 N/m²	oil and water emulsion	30-40	s n	hand 11100	0,05 5600	0,12 2200	0,2 1400	0,3 700	0,4 450	0,4 280	0,5 180
non alloyed steel 500-700 N/m²		25-30	s n	hand 8800	0,05 4400	0,12 1750	0,2 1100	0,3 550	0,4 350	0,4 220	0,5 140
non alloyed steel above 700 N/m²		20-25	s n	hand 7200	0,04 3600	0,1 1400	0,15 900	0,25 445	0,3 285	0,3 180	0,4 114
alloyed steel 700-900 N/m²		12-15	s n	hand 4300	0,03 2150	0,08 860	0,12 540	0,2 270	0,25 170	0,32 110	0,36 68
alloyed steel 900-1100 N/m²		8-15	s n	hand 3650	Hand 1840	0,06 735	0,001 455	0,2 230	0,3 145	0,3 90	0,3 60
alloyed steel above 1100 N/m²	cutting oil	5-8	s n	hand 2100	Hand 1050	0,04 415	0,06 260	0,1 130	0,12 83	0,16 52	0,18 33
rust steady, acid steady steels (highly Cr, Ni alloy)		5-10	s n	hand 2400	Hand 1200	0,05 480	0,1 300	0,15 150	0,2 95	0,2 60	0,3 38
high tensile steel (high Co, Cr, Mo, Ni, W alloy)		4-8	s n	hand 1900	0,02 950	0,06 380	0,09 240	0,15 120	0,2 76	0,24 48	0,27 30
sprung steel band (high Si alloy)	cutting oil	3-6	s n	Hand 1430	Hand 720	0,04 285	0,06 180	0,1 90	0,12 57	0,16 36	0,18 23
manganese steel (Mn 10%, C 05%)	without cooling the material must be heated to 300	2-5	s n	Hand 1300	Hand 650	0,05 255	0,08 160	0,1 80	0,15 50	0,2 32	0,2 20
cast steel up to GS-52	oil and water emulsion	20-25	s n	Hand 7200	0,03 3600	0,9 1400	0,14 900	0,24 445	0,3 285	0,38 180	0,43 114
cast steel above GS-52		12-20	s n	Hand 5100	0,03 2550	0,08 1020	0,12 640	0,02 320	0,25 200	0,32 130	0,36 80
cast iron up to GG-26	compressed air	18-25	s n	Hand 6800	0,06 3400	0,16 1350	0,24 860	0,4 430	0,5 275	0,6 170	0,7 110
cast iron above GG-26		5-15	s n	Hand 3200	0,05 1600	0,14 635	0,2 400	0,35 200	0,45 130	0,5 80	0,6 50
malleable cast iron (GTW/GTS)	compressed air (oil and water emulsion)	18-25	s n	Hand 6800	0,07 3400	0,12 1400	0,2 850	0,4 430	0,5 275	0,6 170	0,6 110
refined opper	oil and water emulsion (compressed air)	50-80	s n	Hand 2100	0,005 10500	0,15 4100	0,25 2600	0,4 1300	0,5 830	0,5 520	0,5 330
brass, tough (MS 63)	oil and water emulsion (cutting oil)	40-30	s n	Hand 16000	0,05 8000	0,15 3200	0,25 2000	0,4 1000	0,5 640	0,6 400	0,7 250
brass, alloy (MS 58) Bronze, soft (gun metal, Rg)	cutting oil	20-30	s n	Hand 8000	0,04 4000	0,1 1600	0,15 1000	0,25 500	0,32 320	0,42 200	0,46 125
bronze, hard (Bz; Aternabronze)		10-20	s n	Hand 4800	0,04 2400	0,1 960	0,15 600	0,25 300	0,32 190	0,42 120	0,46 75
copper nickel alloy (e.g. nickel bronze approx. 67% Ni)	cutting oil	5-15	s n	Hand 3200	0,02 1600	0,06 635	0,09 400	0,15 200	0,2 130	0,24 80	0,27 50
Aluminium	oil and water emulsion	50-120	n	Hand 3200	0,02 1600	0,06 635	0,09 400	0,15 200	0,2 130	0,24 80	0,27 50
nickel alloy aluminium (e.g. piston alloy)		20-44	s n	Hand 9600	0,04 4800	0,1 1900	0,15 1200	0,25 600	0,32 380	0,4 240	0,45 150

* when the diameter is below 1 mm the cutting speed should be reduced.

1 SPANNERS
2 SOCKETS AND ACCESSORIES
3 TORQUE TOOLS
4 BITS
5 ALLEN KEYS
6 SCREWDRIVERS
7 PLIERS
8 PRECISION TOOLS
9 MEASURING AND TESTING EQUIPMENT
10 PULLERS
11 VIDEOSCOPE TECHNOLOGY
12 PNEUMATIC TOOLS
13 CORDLESS BATTERY TOOLS
14 LIGHTING TOOLS
15 WORKSHOP EQUIPMENT
16 TOOL CABINETS / FOAM TOOL ASSORTMENTS
17 MACHINING TOOLS / BRUSHES AND FILES
18 CUTTING AND SCARPING TOOLS
19 HAMMERS
20 STRIKING TOOLS
21 INDUSRIAL SAFETY / WORKWEAR
22 DIN AND VARIOUS CONSUMABLE ASSORTMENTS
i INDEX

PAGE 24 - 63 1

PAGE 64 - 145 2

PAGE 146 - 181 3

PAGE 182 - 209 4

PAGE 210 - 225 5

PAGE 226 - 241 6

PAGE 242 - 275 7

PAGE 276 - 291 8

PAGE 292 - 307 9



PAGE 308 - 357 10

PAGE 358 - 367 11

PAGE 368 - 391 12

PAGE 392 - 401 13

PAGE 402 - 413 14

PAGE4 14 - 431 15

PAGE 432 - 495 16

PAGE 496 - 535 17

PAGE 536 - 547 18

PAGE 548 - 559 19

PAGE 560 - 577 20

PAGE 578 - 595 21

PAGE 596 - 613 22

PAGE 614 - 673 i

KS TOOLS®

INNOVATION IS OUR MISSION!