




optibelt **SUPER TX M=S**


CLASSIC V-BELTS


raw edged, cog formed
in accordance with DIN 2215 and ISO 4184



DIMENSIONS	
ZX/X10	597–1522 mm
AX/X13	605–3380 mm
BX/X17	610–3390 mm
CX/X22	1058–3408 mm

V-GROOVED PULLEYS
all standard pulleys,
special pulleys on request




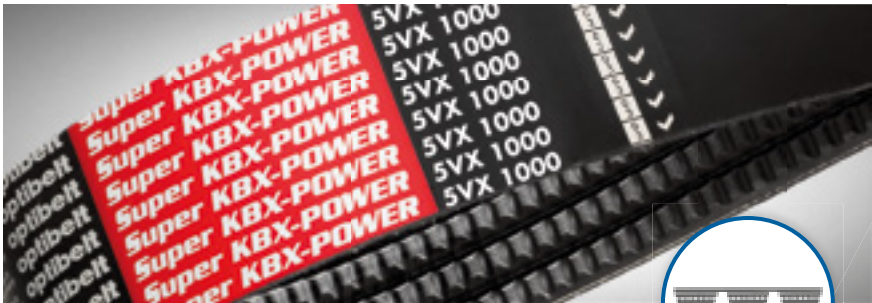

optibelt **SUPER KBX-POWER**

HIGH PERFORMANCE KRAFTBANDS

raw edged, cog formed



DIMENSIONS	
XPZ	on request
XPA	on request
XPB	on request
3VX/9JX	50–140 inch
5VX/15JX	50–140 inch

KRAFTBAND PULLEYS
all standard pulleys,
special pulleys on request

