



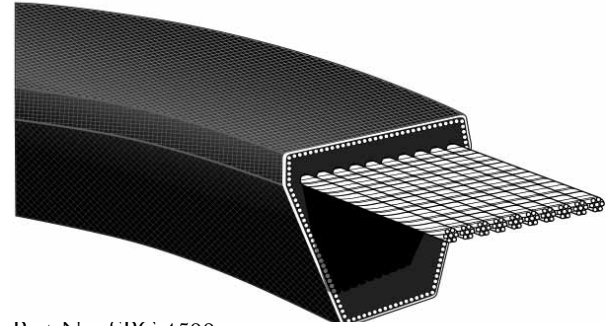

TORQUE FLEX® WEDGE (ISO)

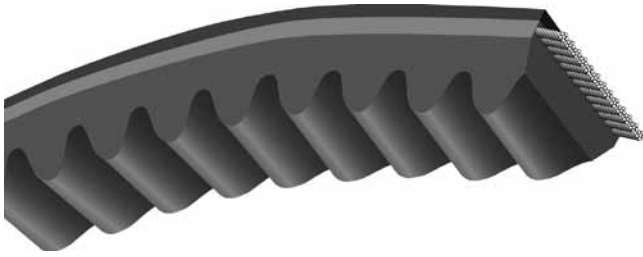

V-BELT

Part No: XPB 2650
 XPB 16 mm Top Width
 2650 2650 mm Datum Length

Part No: SPC 4500
 SPC 22 mm Top Width
 4500 4500 mm Datum Length

RAW EDGE CONSTRUCTION UP TO 3050 MM, ENVELOPE CONSTRUCTION FROM 3060 MM


APPLICATIONS

Narrow profile belts for compact, high power drives and high shock loading on short centers and small diameters. For designing compact, heavy-duty drives where space limitation is a factor.

KEY FEATURES & BENEFITS

- Greater power than the classical belt.
- Designed to fit ISO 4183 pulleys.
- Strong Vytacord (polyester) tensile members.
- High-grade engineered rubber.
- Oil, ozone and abrasion resistant.
- Temperature resistance: -20 °C to +70 °C.
- Matchmaker* to eliminate mismatch.
- Static conductive** (ISO 1813).

* Refer to Goodyear Engineered Products Matchmaker System (page 84).
 ** Refer to Static Conductive Belts section (page 85).



XPZ/SPZ

Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)
XPZ 512	512	XPZ 850	850	XPZ 1140	1140	XPZ 1470	1470	XPZ 2000	2000
XPZ 560	560	XPZ 862	862	XPZ 1150	1150	XPZ 1487	1487	XPZ 2037	2037
XPZ 562	562	XPZ 875	875	XPZ 1162	1162	XPZ 1490	1490	XPZ 2060	2060
XPZ 587	587	XPZ 887	887	XPZ 1180	1180	XPZ 1500	1500	XPZ 2120	2120
XPZ 600	600	XPZ 900	900	XPZ 1187	1187	XPZ 1512	1512	XPZ 2150	2150
XPZ 612	612	XPZ 912	912	XPZ 1200	1200	XPZ 1520	1520	XPZ 2160	2160
XPZ 615	615	XPZ 925	925	XPZ 1202	1202	XPZ 1537	1537	XPZ 2240	2240
XPZ 630	630	XPZ 937	937	XPZ 1212	1212	XPZ 1560	1560	XPZ 2287	2287
XPZ 637	637	XPZ 950	950	XPZ 1237	1237	XPZ 1562	1562	XPZ 2360	2360
XPZ 646	646	XPZ 957	957	XPZ 1250	1250	XPZ 1587	1587	XPZ 2410	2410
XPZ 662	662	XPZ 962	962	XPZ 1262	1262	XPZ 1600	1600	XPZ 2500	2500
XPZ 670	670	XPZ 987	987	XPZ 1270	1270	XPZ 1612	1612	XPZ 2540	2540
XPZ 687	687	XPZ 1000	1000	XPZ 1287	1287	XPZ 1637	1637	XPZ 2580	2580
XPZ 700	700	XPZ 1010	1010	XPZ 1312	1312	XPZ 1650	1650	XPZ 2650	2650
XPZ 710	710	XPZ 1012	1012	XPZ 1320	1320	XPZ 1662	1662	XPZ 2690	2690
XPZ 722	722	XPZ 1024	1024	XPZ 1337	1337	XPZ 1700	1700	XPZ 2800	2800
XPZ 737	737	XPZ 1037	1037	XPZ 1340	1340	XPZ 1737	1737	XPZ 2840	2840
XPZ 750	750	XPZ 1047	1047	XPZ 1362	1362	XPZ 1750	1750	XPZ 2900	2900
XPZ 762	762	XPZ 1060	1060	XPZ 1387	1387	XPZ 1762	1762	XPZ 3000	3000
XPZ 772	772	XPZ 1077	1077	XPZ 1400	1400	XPZ 1800	1800	SPZ 3150	3150
XPZ 787	787	XPZ 1080	1080	XPZ 1412	1412	XPZ 1837	1837	SPZ 3170	3170
XPZ 800	800	XPZ 1087	1087	XPZ 1415	1415	XPZ 1850	1850	SPZ 3350	3350
XPZ 812	812	XPZ 1112	1112	XPZ 1420	1420	XPZ 1900	1900	SPZ 3550	3550
XPZ 825	825	XPZ 1120	1120	XPZ 1437	1437	XPZ 1950	1950		
XPZ 837	837	XPZ 1137	1137	XPZ 1462	1462	XPZ 1987	1987		

TORQUE FLEX[®] WEDGE (ISO)

XPA/SPA

Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)
XPA 732	732	XPA 1055	1055	XPA 1382	1382	XPA 1832	1832	XPA 2632	2632
XPA 750	750	XPA 1060	1060	XPA 1400	1400	XPA 1850	1850	XPA 2650	2650
XPA 757	757	XPA 1082	1082	XPA 1415	1415	XPA 1857	1857	XPA 2682	2682
XPA 775	775	XPA 1107	1107	XPA 1420	1420	XPA 1882	1882	XPA 2732	2732
XPA 782	782	XPA 1120	1120	XPA 1432	1432	XPA 1900	1900	XPA 2782	2782
XPA 800	800	XPA 1132	1132	XPA 1450	1450	XPA 1957	1957	XPA 2800	2800
XPA 807	807	XPA 1150	1150	XPA 1457	1457	XPA 1982	1982	XPA 2832	2832
XPA 832	832	XPA 1180	1180	XPA 1482	1482	XPA 2000	2000	XPA 2882	2882
XPA 850	850	XPA 1190	1190	XPA 1490	1490	XPA 2032	2032	XPA 2932	2932
XPA 857	857	XPA 1200	1200	XPA 1500	1500	XPA 2057	2057	XPA 3000	3000
XPA 882	882	XPA 1207	1207	XPA 1532	1532	XPA 2120	2120	SPA 3150	3150
XPA 900	900	XPA 1220	1220	XPA 1550	1550	XPA 2160	2160	SPA 3182	3182
XPA 907	907	XPA 1232	1232	XPA 1557	1557	XPA 2182	2182	SPA 3282	3282
XPA 925	925	XPA 1250	1250	XPA 1582	1582	XPA 2240	2240	SPA 3350	3350
XPA 932	932	XPA 1257	1257	XPA 1600	1600	XPA 2282	2282	SPA 3382	3382
XPA 940	940	XPA 1272	1272	XPA 1632	1632	XPA 2300	2300	SPA 3482	3482
XPA 950	950	XPA 1282	1282	XPA 1650	1650	XPA 2360	2360	SPA 3550	3550
XPA 957	957	XPA 1300	1300	XPA 1700	1700	XPA 2432	2432	SPA 3650	3650
XPA 969	969	XPA 1307	1307	XPA 1732	1732	XPA 2482	2482	SPA 3750	3750
XPA 982	982	XPA 1320	1320	XPA 1750	1750	XPA 2500	2500	SPA 3870	3870
XPA 1000	1000	XPA 1332	1332	XPA 1757	1757	XPA 2532	2532	SPA 4000	4000
XPA 1007	1007	XPA 1357	1357	XPA 1800	1800	XPA 2582	2582	SPA 4250	4250
XPA 1032	1032	XPA 1367	1367	XPA 1820	1820	XPA 2607	2607	SPA 4500	4500

V - BELT

XPB/SPB

Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)
XPB 1250	1250	XPB 1700	1700	XPB 2410	2410	SPB 3350	3350	SPB 4750	4750
XPB 1260	1260	XPB 1720	1720	XPB 2430	2430	SPB 3450	3450	SPB 4820	4820
XPB 1270	1270	XPB 1750	1750	XPB 2500	2500	SPB 3550	3550	SPB 5000	5000
XPB 1280	1280	XPB 1800	1800	XPB 2530	2530	SPB 3650	3650	SPB 5070	5070
XPB 1320	1320	XPB 1850	1850	XPB 2580	2580	SPB 3675	3675	SPB 5300	5300
XPB 1340	1340	XPB 1900	1900	XPB 2600	2600	SPB 3750	3750	SPB 5380	5380
XPB 1400	1400	XPB 1950	1950	XPB 2650	2650	SPB 3800	3800	SPB 5500	5500
XPB 1410	1410	XPB 2000	2000	XPB 2680	2680	SPB 3870	3870	SPB 5600	5600
XPB 1450	1450	XPB 2020	2020	XPB 2700	2700	SPB 4000	4000	SPB 5680	5680
XPB 1465	1465	XPB 2060	2060	XPB 2800	2800	SPB 4060	4060	SPB 6000	6000
XPB 1500	1500	XPB 2120	2120	XPB 2840	2840	SPB 4120	4120	SPB 6300	6300
XPB 1510	1510	XPB 2150	2150	XPB 2900	2900	SPB 4250	4250	SPB 6700	6700
XPB 1525	1525	XPB 2180	2180	XPB 2990	2990	SPB 4310	4310	SPB 7100	7100
XPB 1560	1560	XPB 2240	2240	XPB 3000	3000	SPB 4370	4370	SPB 7500	7500
XPB 1590	1590	XPB 2280	2280	SPB 3070	3070	SPB 4500	4500	SPB 8000	8000
XPB 1600	1600	XPB 2300	2300	SPB 3150	3150	SPB 4560	4560	SPB 9000	9000
XPB 1650	1650	XPB 2360	2360	SPB 3170	3170	SPB 4620	4620		
XPB 1690	1690	XPB 2400	2400	SPB 3250	3250	SPB 4680	4680		

XPC/SPC

Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)	Belt reference	Datum length Ld (mm)
XPC 1700	1700	XPC 2800	2800	SPC 4250	4250	SPC 6300	6300	SPC 9500	9500
XPC 2000	2000	XPC 3000	3000	SPC 4500	4500	SPC 6700	6700	SPC 10000	10000
XPC 2120	2120	SPC 3150	3150	SPC 4750	4750	SPC 7100	7100	SPC 10600	10600
XPC 2240	2240	SPC 3350	3350	SPC 5000	5000	SPC 7500	7500	SPC 11200	11200
XPC 2360	2360	SPC 3550	3550	SPC 5300	5300	SPC 8000	8000	SPC 11800	11800
XPC 2500	2500	SPC 3750	3750	SPC 5600	5600	SPC 8500	8500	SPC 12500	12500
XPC 2650	2650	SPC 4000	4000	SPC 6000	6000	SPC 9000	9000		